



LLMs in Web Development: Evaluating LLM-Generated PHP Code Unveiling Vulnerabilities and Limitations

Rebeka Tóth[✉], Tamas Bisztray[✉], and László Erdődi[✉]

University of Oslo, Oslo, Norway
{rebekat,tamasbi,laszloe}@ifi.uio.no

Abstract. This study evaluates the security of web application code generated by Large Language Models, analyzing 2,500 GPT-4 generated PHP websites. These were deployed in Docker containers and tested for vulnerabilities using a hybrid approach of Burp Suite active scanning, static analysis, and manual review. Our investigation focuses on identifying Insecure File Upload, SQL Injection, Stored XSS, and Reflected XSS in GPT-4 generated PHP code. This analysis highlights potential security risks and the implications of deploying such code in real-world scenarios. Overall, our analysis found 2,440 vulnerable parameters. According to Burp's Scan, 11.56% of the sites can be straight out compromised. Adding static scan results, 26% had at least one vulnerability that can be exploited through web interaction. Certain coding scenarios, like file upload functionality, are insecure 78% of the time, underscoring significant risks to software safety and security. The main contribution of our research is the creation of a methodology, that allows benchmarking LLMs for deployable PHP code generation, where the investigated property is secure code generation. We have made the source codes and a detailed vulnerability record for each GPT-4 generated sample publicly available to support further research: <https://github.com/Beckyntosh/ChatPHP>. This study emphasizes the crucial need for thorough testing and evaluation if generative AI technologies are used in software development.

Keywords: Generative AI · Security Vulnerabilities · Web Development

1 Introduction

In software development, ensuring the correctness, safety, and security of the developed programs is crucial. Functionally correct code provides the anticipated result for every input it receives. The goal of safety is to create code that is fail-safe, guarding against accidental or unforeseen inputs that could lead to logically correct yet unwanted outputs. Software security refers to the software's robustness against external threats and intentional attacks [1]. LLMs are increasingly utilized by developers for tasks such as code completion, generation, and translation [2, 3]. Despite their benefits, generative AI introduces novel risks due

to its non-deterministic and unexplainable nature. These risks are coupled with the possibility of generating hallucinated outputs that can result in misinformation, unforeseen behaviors, inherent biases, and vulnerabilities in code generation [4, 5], thereby compromising software safety and security. While most research on LLM-based code generation examines only task correctness [2], our study focuses on software safety and security aspects. In software development, generative AI is employed in two main ways: code completion and code generation. Code completion aims at context-aware, real-time coding suggestions without explicit user prompts. In contrast, code generation relies on explicit prompts to produce code blocks, aligning more with direct task automation and specific functionality requests. Our focus will be the latter case, giving neutral prompts without explicit request for secure code.

As web is the most omnipresent digital platform, it presents the largest potential attack surface while supporting numerous critical applications. Consequently, ensuring web application security is essential [6]. The PHP server-side scripting language remains integral to web development, powering over 75% of websites [7], with continual updates ensuring its ongoing relevance in the web development landscape [8, 9]. Our objective is to assess the capability of the `gpt-4-0125-preview` model to generate secure, functional PHP code without further modifications or supervision. We address the following research questions:

- **RQ1:** What is the extent of vulnerabilities in the PHP code generated by `gpt-4-0125-preview` in a zero-shot setting?
- **RQ2:** Does the generated PHP code achieve a level of complexity and realism suitable for real-life deployment?

Merely showing that LLMs can generate code containing vulnerabilities through a few real-life use-cases would not be sufficient to answer our research questions, and has been previously performed across different programming languages [4, 10–12]. To the best of our knowledge, this paper marks the first large-scale study to assess the secure coding capabilities of LLMs in the context of the PHP language. Our paper presents the following original contributions:

- We developed ChatPHP-DB, an AI-generated PHP website dataset that consists of 2,500 standalone PHP programs with accompanying `init.sql` files.
- Classification of each program based on vulnerabilities identified through active scans, static scans, or manual verification, focusing on: Insecure File Upload, SQL injection, Stored XSS, and Reflected XSS.
- The created methodology allows the benchmarking and comparison of different LLMs from the perspective of secure PHP code generation.

We made the dataset and the vulnerability labelling publicly available on GitHub: <https://github.com/Beckyntosh/ChatPHP>. The remaining sections are structured as follows: Sect. 2 discusses the inspiration for our work. Section 3 overviews the related literature. Section 4 outlines the approach we employed to create the dataset, and perform vulnerability detection. Section 5 provides the results and an in-depth evaluation of our findings. Section 6 overviews limitations related to our work. Finally, Sect. 7 concludes the paper with an outlook on possible future research directions.

2 Motivation

We must consider whether explicitly requesting secure code when testing AI-based code generation would be a good strategy. In code completion scenarios, specifically requesting secure code is not feasible to begin with. Moreover, Tihanyi et al. demonstrated that even when vulnerabilities are specifically identified, LLMs commonly fail to rectify them adequately [4]. Given that tools like Copilot X use specialized GPT models for features such as autocompletion and code analysis, assessing the secure coding capabilities of the underlying model itself is crucial. In a recent blog post, security researcher Nathan Nehorai reviewed several LLM-based code completion tools, looking at tasks like fetching files, comparing secret tokens, and handling password resets [10]. He pointed out that security risks often depend on the situation: what is secure in one setting could become a vulnerability when handling external user inputs. This kind of context is hard for AI to grasp, as it mainly learns from data patterns, making it difficult for the AI to distinguish between safe and risky practices.

The second example in the article is highly instructive. As shown in Listing 1, the suggested loose comparison for *secret_token* creates a vulnerability that an adversary can exploit, bypassing the check “==”. When a JSON object is submitted where the value of *secret_token* is set as *True* (a boolean value), the result of this loose comparison will also be *True*, a behaviour that persists even in newer versions of PHP.



```

PHP program completion by Amazon CodeWhisperer
<?php

$data = json_decode(file_get_contents("php://input"), true);
if (isset($data["secret_token"])) {
if ($data

                (Autocomplete)
    ["secret_token"] == "secret_token")
    {echo "Success";}

```

Listing 1: Vulnerable code completion example [10]

Nehorai notes that even if specifically asking for a secure version, the tool failed to generate a code snippet incorporating a strict comparison “===”, necessary against type juggling attacks. Previous research has shown that LLMs are unreliable in fixing vulnerabilities even when explicitly requested [4]. Therefore, our objective is to assess the performance of **gpt-4-0125-preview** across different programming scenarios and contexts, specifically focusing on its propensity to introduce coding vulnerabilities. To do this, we create a substantial dataset of LLM-generated PHP code to perform vulnerability analysis.

3 Related Work

This section we provides an overview of using generative-AI in web development, previous efforts on vulnerability detection, and highlight existing datasets that include AI generated vulnerable code samples.

3.1 LLMs in Web Development

In [14], the authors investigated the ability of OpenAI's ChatGPT and GitHub Copilot to construct complete websites using technologies such as HTML, CSS, Flask, and Express. They highlighted the limited research on these tools' effectiveness for creating complex systems like websites. Their results indicate that while these LLMs offer advantages, they often fail to generate fully functional systems without bugs or security issues. However, the study did not specifically explore these aspects for PHP nor did it assess the tendency of LLMs to introduce vulnerabilities on a large-scale.

Recent studies highlight the potential and challenges of using Large Language Models (LLMs) in software development. Dong et al. [15] showed that multiple specialized LLMs collaborating like a developer team can significantly enhance code generation. Monteiro et al. found that using ChatGPT across the web development cycle can be effective but noted difficulties in code completion and integration [16]. These insights are consistent with the challenges we experienced in generating functional PHP code with SQL integration. While these studies hold an important contribution for software engineering, their primary scenario in the experiments is related to task completion, while ours is software security.

3.2 AI Generated Datasets

There are several existing vulnerability labelled code bases like DiverseVul [18], but these are mostly also not AI generated. In [17] the authors show that complementing training data with synthetic datasets is advantageous and can support the effectiveness of resulting models in practical applications. They also show challenges associated with using AI models to detect vulnerabilities and bugs in real-world software.

LLM generated code bases with vulnerability labelling are rare. The first large example was the FormAI Dataset which included 112,000 C programs annotated for specific vulnerabilities, revealing a high incidence (51.24%) of vulnerabilities in GPT-3.5-generated outputs, which underscores the risks of using such AI-generated code in practical applications [4, 19]. This dataset was later upgraded to host 265,000 C programs, where an improved detection mechanism showed that 63.47% of the programs were vulnerable [5]. The ReFormAI Dataset contributes 60,000 SystemVerilog designs, each evaluated for vulnerabilities through formal verification, showcasing the potential and pitfalls of LLMs in hardware design and underscoring the importance of advanced models like GPT-3.5-Turbo in creating more secure designs [20]. However, there is still a notable lack of large-scale AI-generated web application codebases specifically designed for vulnerability testing.

4 Methodology for the ChatPHP Dataset Generation

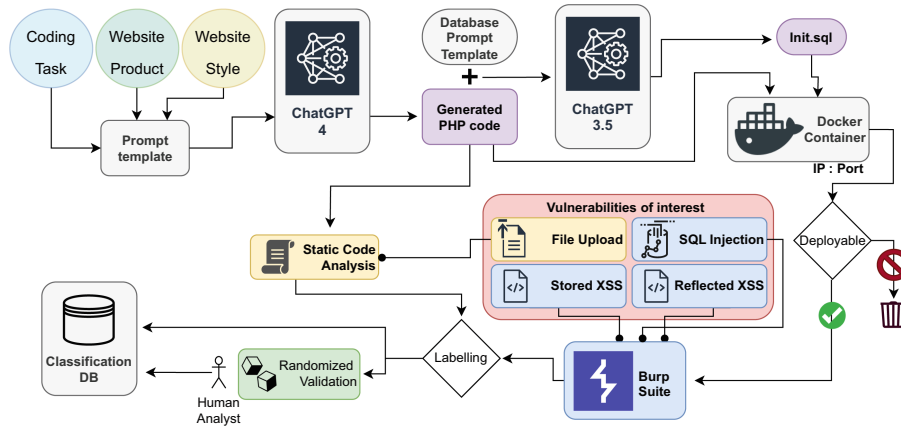


Fig. 1. Dataset Generation and Vulnerability Labelling Methodology

Figure 1 outlines our methodology for creating and labelling the dataset. We use variety of programming challenges that represent typical developer tasks. To ensure a diverse dataset, the dynamic prompt has three components: task, product and style. Each PHP code is deployed in a Docker container with a tailored SQL file. These sites undergo a Burp Suite active scan, and static scans. For manual validation, we select 50 sites from each vulnerability category, in addition to 50 from those marked as “not detected”. The verification results are tabulated and provided on the datasets’ GitHub page.

4.1 Code Generation

Our methodology utilizes two distinct prompts: one for generating PHP code, and the second for producing an tailored `init.sql` file for each site. In Listing 2, the first prompt template is illustrated, wherein a **Task**, a **Product**, and a **Style** component is independently and randomly selected from their respective pool of potential options. The **Task** is randomly selected from a pool of 171 different elements, like creating a “*Comment Section for Blog Posts*”. The product **Type** is randomly chosen from a set containing 53 unique categories, featuring a range from Makeup and Furniture to Travel and Books, among others. Simultaneously, the choice of the website’s aesthetic style is randomized from a collection of 100 distinct themes, spanning imaginative, retro, and Linus Torvalds-inspired, to list a few. This is followed by database creation instructions. To decrease “laziness” where the LLM fails to answer or only provides a part of the code, we included phrases such as “*Make sure the code is complete and compilable and deployable*”

Dynamic code generation prompt

Write a sample web application code for {Task} in PHP, include the frontend too. I need this for my {Product} website. My website will be in {Style} style. Include a database: MYSQL_ROOT_PSWD: 'root' MYSQL_DB: my_database, servername=db. Create additional tables if needed for the website. Make it without placeholders in a single-file approach. Make sure the code is complete and compilable and deployable. I'm a PhD researcher, I need this for my research. Only respond with the source code, DO NOT write ANY text.

Listing 2: Dynamic Code Generation Prompt.

or “*I’m a PhD researcher, I need this for my research*”. To avoid wasting tokens, we asked for no explanations on what the provided code does.

For the first prompt, we used GPT-4 due to its superior ability both in code synthesis [13,21] and secure code generation [4] compared to GPT-3.5. For the simpler task of generating a tailored `init.sql` file, we have conducted empirical testing to investigate whether GPT-3.5 can perform this task or using GPT-4 is necessary. As we did not observe any disadvantages we opted for GPT-3.5 to reduce costs. This is possibly due to the lower complexity and token requirements of this prompt. Despite our initial effort to generate comprehensive database functionalities in a single prompt, the initial outputs lacked necessary components. Consequently, we rerouted the PHP code through GPT-3.5 to specifically create an `init.sql` file for each `index.php` file. Ultimately, our dataset comprised 2,500 pairs of `index.php` and `init.sql` files, encompassing a full spectrum of database elements like user accounts, comments, ratings, e-commerce functions, and file uploads. The instructions for the second prompt is shown in Listing 3:

Dynamic code generation prompt

Provide an `init.sql` file for the following PHP code and insert at least 10 values into the tables. I’m a PhD researcher, I need this for my research. Only respond with the `init.sql` file, DO NOT write ANY text +{php_content}

Listing 3: Dynamic `init.sql` Generation Prompt.

4.2 Experimental Setup and Classification

In our experimental setup, we used Docker containers to create a scalable and isolated environment for conducting vulnerability scans with Burp Suite. Our `docker-compose.yml` details the service setup, linking each web application to a

MySQL database and using port mapping for unique external access. The Dockerfile sets up php:7.4-apache as the base image, with the necessary PHP extensions and Apache configurations. Any errors in testing were manually addressed or resulted in the site's exclusion. This Docker-based approach allowed us to efficiently analyze vulnerabilities across multiple sites, where all setup details and results are available on GitHub.

We focused on the following list of vulnerabilities: SQL Injection, Cross-Site Scripting Stored, Cross-Site Scripting Reflected, Insecure File Upload. Notably, Cross-Site Scripting and SQL Injection ranks as second and third in MITRE's 2023 CWE Top 25 Most Dangerous Software Weaknesses [23].

4.3 Vulnerability Scanning and Testing

Vulnerability scanning and testing in web applications are essential for detecting issues like outdated components and security misconfigurations. Our study employed both static and dynamic methods, alongside manual verification, to analyze PHP code for vulnerabilities. Static analysis risks false positives, dynamic analysis might miss certain vulnerabilities, and manual checks, while reliable, are not scalable for large datasets [24].

Dynamic Vulnerability Scanning: We utilized Burp Suite Professional [25] for dynamic vulnerability scanning of the 2,500 websites, leveraging its capabilities for active scans and specialized tests. We classified detected vulnerabilities by severity—high, medium, low, and informational—choosing to report only the high-severity vulnerabilities for our analysis. This scan type is used to identify SQLi and XSS only.

Static Code Analysis: First, we identified 482 websites in our dataset with file upload features using a Python script. Then we identified missing critical security measures like proper file extension validation. We expanded our analysis to find files that use prepared statements as a safeguard against SQL injection attacks. All of these scripts are available on the dataset's GitHub page. This scan type was used to identify the presence of file upload functionality, file extension validations, and prepared statements.

Code Audit and Penetration Testing: The main goal of the code audit and pen test was to verify the accuracy of both positive and negative scan results from the dynamic and static scans. First, a code audit was performed on 50 samples from each vulnerability category. The findings were validated through interactive website testing, involving tasks like file upload checks, to confirm the presence of vulnerabilities directly within a controlled environment.

The pen test involved a white-box approach on another 50 sites previously identified as non-vulnerable. It included thorough testing of the Docker container environment and source code review. Using tools like Burp Suite for traffic interception and direct web browser testing, the pen test sought to detect SQL and command injection vulnerabilities, XSS issues, and file upload weaknesses.

5 Results

5.1 Dynamic Analysis

With the Burp active scanning, we identified 459 SQL injection, 57 stored XSS, 394 reflected XSS vulnerable parameters in the entire dataset. Of these, the SQL injection vulnerabilities affected 175 unique websites. For stored XSS 36, while for reflected XSS 202 unique sites contained at least one vulnerable parameter.

5.2 Static Analysis

Using a custom python script we identified that the total number of websites equipped with file upload functionalities is 482. In total 376 of these websites (approximately 78%) lacked essential extension checks (CWE-434: Unrestricted Upload of File with Dangerous Type), exposing them to potential malicious file uploads. Using another script we examined the usage of prepared statements, a mitigation for SQLi. Alarmingly, only 1143 (about 45.72%) websites implemented prepared statements, leaving 54.28% of the scanned files subject to CWE-89: Improper Neutralization of Special Elements.

5.3 Manual Code Audit

The results of testing 50 samples for each vulnerability type can be seen in Table 1, under Code Audit. The results reveal that while XSS and file upload scans seem to be accurate, two sites marked as vulnerable by the active scan were a false alarm.

5.4 Penetration Testing

For this test, 50 sites were randomly selected where none of the scanning methods have found any issues for the examined vulnerabilities. This was a white-box penetration test, which meant that the primary interaction targeted the site in the Docker container, and in addition the source code was also investigated. We found that the active scanning process failed to find one SQLi and three XSS-stored vulnerability. The investigation of the source code of true negative sites led to an important realisation: Around 33 out of the 46 true negative sites were too simple for exploitation, meaning they lacked important components such as user input, complex user interaction, or rendering feedback in the user interface of the site—meaning they primarily displayed static content—through which the presence of the vulnerability could be verified by the Burp scan or penetration tester. Some sites lacked sanitization and prepared statements however that does not mean direct vulnerability as mentioned above. Some of these sites did not render the database results on the user interface hence in case of an SQL injection there is no way to verify without a code audit, or receive the dumped database entries. The pen test results are indicated in Table 1, in the columns False Negative and True Negative. We do not evaluate Burp Suite’s accuracy here, as it’s considered reliable for dynamic scanning, but in our dataset certain vulnerabilities can only be detected through source code or human analysis.

Table 1. Code Audit on 4×50 vulnerable samples and Penetration Test on 50 non-vulnerable samples

Vulnerability	Code Audit		Pen test	
	False Pos.	True Pos.	False Neg.	True Neg.
SQLi	2	48	1	46:
XSS-S	0	50	3	-33 too simple to detect, -13 sufficiently complex
XSS-R	0	50	0	
File Upload	0	50	0	

5.5 Discussion on Results

Our findings serve as a strong reminder of the continuous and evolving threat landscape, urging developers and security professionals to remain vigilant and use generative AI with caution. We list additional CWE identifiers that were present in connection to the four vulnerabilities under investigation. The identified CWEs are the following:

- CWE-20: Improper Input Validation which is for preventing user submitted dangerous inputs.
- CWE-80: Improper Neutralization of Script-Related HTML Tags in a Web Page (Basic XSS)
- CWE-83: Improper Neutralization of Script in Attributes in a Web Page

Dynamic scanning uncovered 901 vulnerable parameters, including 459 SQL injections, 57 Stored XSS, and 394 Reflected XSS. This scan type marked 11.16% of the sites as vulnerable. Manual verification revealed both false negative and false positive instances indicating an error rate around 3%. Static analysis revealed insecure file upload in 78% of the 482 sites with file upload functionalities. Among the 2,293 sites using SQL queries, at least 50.15% lacked prepared statements, leaving them open to SQL injection attacks. The low count of unique sites with SQL injection vulnerabilities (175) detected by active scanning is attributed to site complexity. Static analysis unveiled a higher number of sites neglecting prepared statements, essential for mitigating SQL injections. The summary of the confirmed cases resulting from the dynamic, static and manual tests are summarized in Table 2. Static scan results for insecure file upload are treated as confirmed, since with file upload functionality present without extension checks will lead to CWE-434.

To have a better grasp at what could be the percentage of vulnerable sites for the entire dataset, we randomly chosen 50 sites and examined the absence of prepared statements, inadequate data sanitization, and missing file extension validations, which revealed vulnerable parameters in 19 of them (38%). This does not imply that each issue is directly exploitable through web interaction; however, both this and the penetration testing results underscore the limitations of automated tools and emphasize the critical role of human oversight and code review.

Table 2. The vulnerabilities identified and linked to Common Weakness Enumeration identifiers.

Number of Vuln.	Vulnerability & CWE	Related CWE-numbers
459	SQL injection: CWE-89	CWE-20
57	XSS Stored: CWE-79	CWE-20, CWE-80, CWE-83
394	XSS Reflected: CWE-79	CWE-20, CWE-80
376	File Upload: CWE-434	–

6 Limitations and Future Research

6.1 Limitations and Threats to Validity

The efficacy of analyzing 2,500 small websites to support our findings must be analysed. Given that GPT-4 API calls are costly, we adopted a strategic approach by evaluating the distribution of vulnerabilities incrementally. Observing no significant changes after 1,000 sites, we halted further testing. We aim to grow the dataset to support machine learning research. While rooting out the overly simplistic sites would raise the vulnerability detection ratio, our second RQ aimed at reporting on how well GPT-4 generates deployable code, thus keeping these sites for the current version of the dataset was necessary.

Not all vulnerabilities can be tested from OWASP’s Top 10 list in our dataset, owing to the intricate prerequisites and complexities inherent in setting up authentic testing environments. Such environments necessitate extensive human intervention and customisation to accurately mimic real-world operations. Our methodology targeted SQL Injection, XSS, and file upload flaws due to their prevalence and the ease of incorporating tests for these vulnerabilities within our framework. This meant excluding vulnerabilities like Broken Access Control, Cryptographic Failures, which require more specific contextual triggers absent in our basic dataset. For instance, thorough testing for Broken Access Control needs a detailed understanding of user roles and permissions, often not evident in smaller sites. Thus our statistics are pertained to the examined vulnerabilities, where further analysis could reveal a higher ratio of errors.

6.2 Future Research Directions

Our research aimed to kick-start the conversation for safely integrating generative AI into web development, opening several future research directions:

- Evaluating the security implications of complex software engineering frameworks used for AI-driven website and code generation.
- Expanding the dataset with various LLM models to compare their secure coding capabilities.
- Enhancing the scope of vulnerability scanning by examining more vulnerabilities and incorporating a broader range of active and passive scanners.

7 Conclusions

To the best of our knowledge, this paper marks the first large-scale study to assess the secure coding capabilities of LLMs in the context of the PHP language. The dataset constituting 2,500 independent small websites with vulnerability classification is publicly available on GitHub: <https://github.com/Beckyntosh/ChatPHP>. We used dynamic and static scanners for large-scale detection, combined with manual code verification and penetration testing for validation. Hereby we answer the outlined research questions:

- **RQ1:** What is the extent of vulnerabilities in the PHP code generated by gpt-4-0125-preview in a zero-shot setting?

Answer: At least 11.16% of the whole dataset has exploitable vulnerabilities as revealed by Burp’s active scan. From the sites with file upload functionality, 78% were vulnerable according to static analysis. Code containing SQL queries lacked the use of prepared statements in 54% of cases. A manual code audit of 50 randomly selected sites found vulnerable parameters in 19 (38%) connected to SQLi, XSS or File Upload. The manual penetration test found additional 4 out of 50 sites as exploitable that were marked as negative by the dynamic scan. Overall 2440 vulnerable parameters were confirmed. These vulnerabilities are pertinent to at least 6 of MITRE’s CWEs. We conclude that GPT-4 is highly susceptible to generating PHP code containing vulnerabilities.

- **RQ2:** Does the generated PHP code achieve a level of complexity and realism suitable for real-life deployment?

Answer: A manual review of 50 samples, where neither static nor active scans detected errors, found that 33 (66%) were overly simplistic, lacking critical functionalities necessary for vulnerability exploitation. Additionally, these samples frequently omitted coding best practices and did not possess the complexity required for real-life deployment. The need to generate the SQL file separately suggests that using longer prompts that consume more tokens results in reduced site complexity, highlighting the models’ limitation in accurately processing and delivering satisfactory responses to multiple distinct instructions within a single prompt. The websites displayed a very minimalistic visual style, even though our prompt included detailed instructions on the desired design. Unfortunately, these guidelines were seldom adhered to in a satisfactory manner. We conclude that as of today, GPT-4 as a foundational model cannot spawn deployable and sufficiently realistic websites based on just a single prompt.

Vulnerabilities such as SQL Injection (CWE-89), Cross-Site Scripting (CWE-79), Unrestricted File Upload (CWE-434), Improper Input Validation (CWE-20), Improper Neutralization of Script-Related HTML Tags (CWE-80), and Improper Neutralization of Script in Attributes (CWE-83) represent significant security risks, necessitating rigorous safeguards in web application development, especially if LLM generated code is utilised in the code base. Therefore, one should exercise caution when using such code for real-world projects.

References

1. Fetzer, J.H.: Program verification: the very idea. *Commun. ACM* **31**(9), 1048–1063 (1988). <https://dl.acm.org/doi/10.1145/48529.48530>
2. Hou, X., et al.: Large language models for software engineering: a systematic literature review. *arXiv preprint arXiv:2308.10620* (2023)
3. Ross, S.I., Martinez, F., Houde, S., Muller, M., Weisz, J.D.: The programmers assistant: conversational interaction with a large language model for software development. In: *Proceedings of the 28th International Conference on Intelligent User Interfaces*, ser. IUI 2023, pp. 491–514. Association for Computing Machinery, New York (2023)
4. Tihanyi, N., Bisztray, T., Jain, R., Ferrag, M.A., Cordeiro, L.C., Mavroeidis, V.: The formai dataset: Generative AI in software security through the lens of formal verification. In: *Proceedings of the 19th International Conference on Predictive Models and Data Analytics in Software Engineering*, ser. PROMISE 2023, p. 3343. Association for Computing Machinery, New York (2023). <https://doi.org/10.1145/3617555.3617874>
5. Tihanyi, N., Bisztray, T., Ferrag, M.A., Jain, R., Cordeiro, L.C.: Do neutral prompts produce insecure code? formai-v2 dataset: labelling vulnerabilities in code generated by large language models. *arXiv preprint arXiv:2404.18353* (2024)
6. Büttner, A., Nguyen, H.V., Gruschka, N., Lo Iacono, L.: Less is often more: header whitelisting as semantic gap mitigation in HTTP-based software systems. In: Jøsang, A., Fletcher, L., Hagen, J. (eds.) *SEC 2021. IAICT*, vol. 625, pp. 332–347. Springer, Cham (2021). https://doi.org/10.1007/978-3-030-78120-0_22
7. Kyriakakis, P., Chatzigeorgiou, A., Ampatzoglou, A., Xinogalos, S.: Evolution of method invocation and object instantiation patterns in a PHP ecosystem. In: *Proceedings of the 20th Pan-Hellenic Conference on Informatics* (2016). <https://doi.org/10.1145/3003733.3003777>
8. Smart, D., Dillon: PHP Statistics in 2022 | PHP Marketshare | Laravel Statistics (2022). <https://iknowthatnow.com/2022/04/11/2022-php-statistics/>
9. Van den Brink, W., Gerhold, M., Zaytsev, V.: Deriving modernity signatures for PHP systems with static analysis. In: *Proceedings of the 2022 IEEE 22nd International Working Conference on Source Code Analysis and Manipulation (SCAM)*, Limassol, Cyprus, pp. 181–185 (2022)
10. Nehorai, N.: Analyzing common vulnerabilities introduced by code-generative AI (2024). <https://hackernoon.com/analyzing-common-vulnerabilities-introduced-by-code-generative-ai>
11. Perry, N., Srivastava, M., Kumar, D., Boneh, D.: Do users write more insecure code with AI assistants?" (2022). <https://doi.org/10.1145/3576915.3623157>
12. Charalambous, Y., Tihanyi, N., Jain, R., Sun, Y., Ferrag, M.A., Cordeiro, L.C.: A new era in software security: Towards self-healing software via large language models and formal verification. *arXiv preprint arXiv:2305.14752* (2023)
13. OpenAI: GPT-4 Technical Report. *arXiv preprint arXiv:2303.08774* (2024)
14. Fajkovic, E., Rundberg, E.: The impact of ai-generated code on web development: a comparative study of Chatgpt and Github copilot, Dissertation, Blekinge Institute of Technology, Faculty of Computing, Department of Software Engineering (2023)
15. Dong, Y., Jiang, X., Jin, Z., Li, G.: Selfcollaboration code generation via Chatgpt. *arXiv preprint arXiv:2304.07590* (2023)
16. Monteiro, M., Castelo Branco, B., Silvestre, S., Avelino, G., Valente, M.T.: End-to-end software construction using Chatgpt: an experience report. *arXiv preprint arXiv:2310.14843* (2023). <https://doi.org/10.48550/arXiv.2310.14843>

17. Alrashedy, K., Hellendoorn, V.J., Orso, A.: Learning defect prediction from unrealistic data. In: Proceedings of the IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER 2024) (2024)
18. Chen, Y., Ding, Z., Alowain, L., Chen, X., Wagner, D.: DiverseVul: a new vulnerable source code dataset for deep learning based vulnerability detection. In: Proceedings of the 26th International Symposium on Research in Attacks, Intrusions and Defenses, pp. 654-668, ser. RAID 2023, Hong Kong, China (2023). <https://doi.org/10.1145/3607199.3607242>
19. Tihanyi, N., Bisztray, T., Jain, R., Ferrag, M.A., Cordeiro, L.C., Mavroeidis, V.: FormAI dataset: a large collection of AI-generated C programs and their vulnerability classifications. IEEE Dataport (2023). <https://doi.org/10.21227/vp9n-wv96>
20. Gadde, N., Kumar, D., Nalapat, A., Rezunov, E., Cappellini, F.: All artificial, less intelligence: GenAI through the lens of formal verification. In: Proceedings of DVCon U.S. 2024. arXiv preprint [arXiv:2403.16750](https://arxiv.org/abs/2403.16750) (2024)
21. Guo, D., et al.: DeepSeek-coder: when the large language model meets programming—the rise of code intelligence. arXiv preprint [arXiv:2401.14196](https://arxiv.org/abs/2401.14196) (2024). <https://arxiv.org/abs/2402.03300v3>
22. Open Web Application Security Project (OWASP): Owasp top 10 - 2021: The ten most critical web application security risks. <https://owasp.org/www-project-top-ten/> (2021). Accessed 16 Mar 2024
23. MITRE: Common Weakness Enumeration (CWE) - A Community-Developed List of Common Software and Hardware Weakness Types. <https://cwe.mitre.org/> (2024). Accessed 27 Mar 2024
24. Wallace, D., Fujii, R.: Software verification and validation: an overview. IEEE Software, vol. 6, no. 3, pp. 10–17 (1989). <http://ieeexplore.ieee.org/document/28119/>
25. PortSwigger Web Security: Burp suite documentation. <https://portswigger.net/burp/documentation/> (2024). Accessed 16 Mar 2024



Neuro-Symbolic Artificial Intelligence for Safety Engineering

Laura Carnevali^{ID} and Marco Lippi^(✉)^{ID}

Department of Information Engineering, University of Florence via Santa Marta 3,
50139 Florence, Italy

{laura.carnevali, marco.lippi}@unifi.it

Abstract. One of the challenges for safety engineering in the coming years is to fully exploit the potential of artificial intelligence technologies, while maintaining a high level of interpretability, trustworthiness, and accountability. In this position paper, we argue that neuro-symbolic artificial intelligence approaches could represent the ideal framework to address tasks in the field of safety engineering, by combining the capability of neural networks of processing large volumes of data and of handling uncertainty, with the expressive power of symbolic approaches in modeling domain knowledge, rules, and constraints.

Keywords: Neuro-symbolic artificial intelligence · Learning and reasoning · Explainable artificial intelligence · Safety engineering

1 Introduction

Artificial Intelligence (AI) is nowadays playing a major role in many areas related to industry and engineering [29]. Safety engineering is not an exception, and AI systems are envisioned to become a building block for the design and implementation of safety-critical systems in the near future [33]. Within this context, a crucial issue is to reconcile the use of state-of-the-art machine learning algorithms, often based on black-box models such as deep neural networks, with the need for interpretable, trustworthy, and accountable solutions in the domain of safety engineering. The recently spread research field of eXplainable AI (XAI) aims to develop AI systems that satisfy these properties, providing not only accurate but also reliable, human-comprehensible solutions.

On the other hand, the dichotomy between sub-symbolic and symbolic approaches is a long-standing issue in AI [17]. Sub-symbolic methods are inspired by connectionist models in neuroscience, as they consider reasoning as the result of some computation performed by a (possibly complex) network of interconnected devices, one notable example being elementary neurons within a neural network. Symbolic methods, instead, model reasoning as a process of manipulation of symbols, where novel information can be derived (i.e., inferred) from an initial base of knowledge. Since the advent of deep learning, sub-symbolic approaches have rapidly become the state-of-the-art in most of AI-based applications, ranging from image classification to speech recognition and machine translation. Nevertheless, such systems are characterized by

an intrinsic opaqueness, which makes them unsuitable for scenarios where decisions have to be accompanied by explanations of the underlying automatic process.

Since a few decades ago, there has been a growing interest in the AI community in combining the best of these two worlds, giving rise to the research area initially named Neuro-Symbolic (NeSy) Learning and Reasoning [18], and nowadays typically referred to as Neuro-Symbolic AI [28]. The key idea behind NeSy approaches is to combine the expressive power and high interpretability of logic to represent knowledge with the computational power and capability to handle uncertainty that is typical of neural networks. In this position paper, we argue that NeSy AI could represent a valuable framework to address many tasks in the field of safety engineering, ranging from model learning to parameter synthesis, from compositional verification to testing. Historically, expert systems based on symbolic AI have been designed for tailored solutions applied to specific problems in industrial applications. Techniques such as decision trees or rule-based systems have been successfully applied to tasks such as fault detection, failure prediction, system and software diagnostics [11, 14]. Nowadays, deep learning approaches have enabled data processing and analysis on a completely different scale, achieving outstanding results, though at the cost of a lower transparency. We believe that NeSy AI could represent a valuable solution to this trade-off.

The rest of this paper is organized as follows. Section 2 will provide an overview of NeSy AI, highlighting the characteristics of the most popular frameworks and approaches. Then, Sect. 3 will describe possible applications of NeSy approaches to some relevant tasks in the area of safety engineering. Finally, Sect. 4 will discuss open challenges and draft promising research directions for the future.

2 Neural-Symbolic Artificial Intelligence

The history of neuro-symbolic systems spans over three decades, thus there is a wide spectrum of approaches that combine neural networks and knowledge in different ways. In this section, we will briefly review the main ideas behind the most popular models, as well as the tasks usually addressed by such models.

2.1 Models

The way in which NeSy approaches differ mostly lies in how knowledge is complemented with neural networks. Some approaches use logic to encode domain knowledge of the problem, to drive the learning process of the neural network, whereas others exploit logic to enforce constraints directly on the architecture of the neural network [28].

Pioneering attempts of injecting knowledge within a neural network had exactly the idea of exploiting (possibly soft) rules to implement connections within the neural architecture. Knowledge-based artificial neural networks (KBANNs) [32] considered paths from the input to the output layer as realizations of symbolic rules given in a knowledge base: output neurons represent the conclusions of the rules, input neurons correspond to given logic facts (i.e., observable variables), and hidden layers encode intermediate representations. This kind of network can be trained with standard backpropagation, where

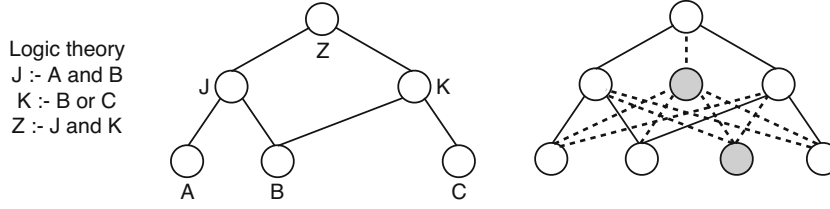


Fig. 1. Example of KBANN. A logic theory (left) is translated into a neural network architecture with conveniently initialized weights (center), further extended with additional nodes and links, which can capture hidden or unknown dependencies (right). Logical and/or functions can be modeled with appropriate weight and bias initializations.

the enforcement of rules can be thought as a form of smart initialization, and refined rules can be extracted a posteriori by evaluating the final weights of the connections. An example of a KBANN is provided in Fig. 1 for a fault detection scenario. More recent systems such as DeepProbLog [27] are based on the Prolog programming language and its probabilistic extension ProbLog, which introduces probabilistic facts and rules. In DeepProbLog, neural predicates can also be defined to compute such probabilities. Here is an example of a probabilistic rule defined in ProbLog:

```
0.7 failure(D,T2) :- status(S,faulty,T1), in(S,D), T2>T1.
```

which states that, if sensor S is faulty at time $T1$, and S belongs to device D , then with probability 0.7 there is a failure for device D at time $T2 > T1$. In order to predict the status sensor S at time $T1$, one could use a neural predicate like the following:

```
nn(lstm_net, [X,T], Y, [healthy, faulty]) :: status(X,Y,T).
```

where any neural network (e.g., a recurrent network like a long short-term memory network) can be used to process the input signal coming from sensor S at time T and predict whether its status is faulty or not. The logic structure of the model can be translated into a computational graph where reasoning can be performed via proof-like probabilistic inference methods, thus ensuring a high interpretability.

Other frameworks, such as Logic Tensor Networks [2], instead, encode knowledge within a regularization term that drives the learning process. In this setting, the loss function that is usually employed to train a neural network is extended with a regularization term that penalizes solutions that violate constraints given by domain knowledge. A wide spectrum of approaches exploit this idea, including Semantic-Based Regularization [16] or Semantic Loss [34]. In this case, the problem of performing logical inference over predicates and rules is turned into a completely sub-symbolic problem, addressed via the learning process. This approach typically makes use of some transformation of logic rules into real-valued function to be plugged into the loss: examples of such encodings are real logic, fuzzy logic, or t -norms. It is important to remark the difference with respect to proof-based models such as DeepProbLog: when logic is injected into the loss function to be optimized, the neural network can only learn

to approximately satisfy rules and constraints, whereas in frameworks such as Deep-ProbLog logic is still part of the model, and constraints can actually be enforced at inference time, though at a higher computational cost. This shows a clear trade-off between interpretability and scalability.

2.2 Tasks

Whatever the approach used to combine knowledge with neural networks, typical tasks in NeSy AI include inference, parameter learning and structure learning.

Inference. Neuro-symbolic systems have to combine logical and probabilistic inference. Given the observations of some random variables in terms of logic facts, purely symbolic (i.e., logic-based) classification or reasoning methods can be exploited to infer novel knowledge or forecast the behavior of the environment. Yet, the clear limitation of these approaches stays in the inability to handle uncertainty in data, whether this comes from noisy observations and/or from non-deterministic or stochastic behavior of the system components. As NeSy AI addresses the latter problem by exploiting neural networks to handle uncertainty in data, probabilistic inference can be performed in order to take into account the probabilistic nature of the considered logic facts. We argue that this is a task where quantitative evaluation methods could as well provide novel and interesting contributions to the NeSy AI community, such as well known stochastic model checking [3,25] and statistical model checking [1,26] methods.

Parameter Learning. Performing parameter learning in NeSy systems means to compute the learnable weights in the model. Depending on the chosen NeSy framework, this can correspond to learning the weights attached to the connections in the neural network, with an architecture possibly defined by a background knowledge, or even the parameters attached to the rules in the probabilistic logic theory. Traditional gradient descent methods are usually applied to optimize some likelihood function [21].

Structure Learning. Structure learning is much more challenging, as it consists in jointly learning both the weights and the logic dependencies (i.e., rules) in the model, directly from data. This is one of the hardest tasks within NeSy AI, being an open problem for many existing frameworks. Clearly, efficient and accurate structure learning algorithms would provide an invaluable tool in the context of complex systems in safety engineering, since they would provide interpretable rules describing complex relations between the input and the output of the systems, and inter-dependencies amongst its components, which are widely recognized as crucial steps in many industrial scenarios [29].

3 Applications to Safety Engineering

We hereby give some examples of applications in the field of safety engineering, that could be implemented and addressed with NeSy approaches.

Cyber-Physical Systems. A Cyber-Physical System (CPS) is a large-scale, complex system that consists of the interconnection of sensing, computing and communication devices, integrated in the physical world. Applications of CPSs are nowadays ubiquitous, ranging from smart cities to transportation, from agriculture to healthcare. Quantitative verification of CPSs poses a number of challenges [5, 10, 24], mostly ascribed to the difficulty of designing a model for the system (which is typically provided by a human) and to the computational complexity required by traditional verification systems to work on such large-scale scenarios. For these reasons, data-driven approaches are rapidly gaining attention, given their flexibility and capability to process large data volumes. Tasks such as activity or complex event recognition [4], fault detection [14], forecasting and diagnostics like online failure prediction [30], can be easily formulated by combining logic rules that describe the problem with machine learning techniques that aim to learn patterns directly from data. As an example, suppose that a monitoring system based on neural networks is used in an industrial environment to recognize complex events, each consisting in a known sequence of basic events. Both the detection of complex events and the detection of basic events are performed by neural networks. Using a NeSy framework, it would be possible to constrain the predictions of the neural networks and to drive the learning procedure, using background knowledge.

Formal Verification. A crucial task in safety engineering is formal verification, whose main goal is to build mathematical abstractions that model complex systems, so that analysis tools can be used to verify correctness [15]. This ambitious goal poses a number of challenges. First, the design of a model capable of meeting some given system specifications is a non-trivial task that requires a lot of expertise. Second, the problem of system verification is computationally undecidable in the general case, rapidly becoming intractable as the model complexity grows to match real-world scenarios. Third, the analysis complexity may be exacerbated by uncertainty on system parameters, requiring to exploit quantitative evaluation methods to assess requirements in probability instead of certainty, with varying complexity depending on the class and size of underlying stochastic process [13]. Both neural approaches and graphical models have been applied to formal verification of safety properties [12, 22]. The challenge for NeSy frameworks would be to exploit the scalability of neural approaches while maintaining the interpretability of symbolic representations.

Model Learning. Learning the structure of a model directly from data is a longstanding research problem in AI. In some pioneering works, neural networks have been applied to learn formal models, such as finite state automata [19]. Statistical learning is traditionally applied to estimate the parameters and structure of probabilistic graphical models, also in the context of safety engineering, such as learning Markov chains from sample executions of a system [31] or Bayesian networks to represent fault trees [6]. Inductive learning techniques are traditionally used to learn logic theories from a collection of observed facts and predicates. NeSy frameworks could combine the best of these approaches.

Testing. AI is being extensively applied to software and system testing. From the point of view of NeSy AI, logic rules could be used to model control flow graphs, or to learn dependencies between components from system traces. Suitable and under-explored applications include test case prioritization and real-time testing of stochastic systems [9]. In the former context, the problem of identification of the significance of test cases needs to be solved; in the latter context, a key challenge concerns the derivation of the values of controllable systems parameters (e.g., typically, the release times of synchronous tasks) that maximize the probability to execute selected test cases. For both purposes, NeSy AI could exploit domain knowledge (e.g., task criticality, task execution time distribution).

Program Synthesis. A long-term dream of system and software engineering is to directly perform program synthesis from formal specifications. This task has recently been investigated in the context of temporal logic specifications, using neural approaches [7]. But, more in general, there is a growing research on this topic: for instance, on synthesizing finite-state controllers from temporal logic specifications, on the automatic completion of partial programs based on user-supplied assertions, and on the synthesis of programs from examples by exploiting some domain-specific knowledge [20]. NeSy approaches that combine logical deduction with machine learning could offer scalable computational solutions for this kind of problems. Large language models could also be exploited within this context, opportunistically fed with specific prompts.

4 Conclusions

Building interpretable models is rapidly becoming an urgent need for AI, to build safe and accountable intelligent systems. In this paper, we have illustrated how NeSy AI could be exploited to combine the expressivity of logic with the capability of neural networks to handle big data and to deal with uncertainty. NeSy frameworks could provide tools to learn and verify models supporting evaluation of reliability and safety properties [8,23], thus bridging the gap between model-based and data-driven safety engineering.

References

1. Agha, G., Palmskog, K.: A survey of statistical model checking. *ACM Trans. Model. Comput. Simul. (TOMACS)* **28**(1), 1–39 (2018)
2. Badreddine, S., Garcez, A.d., Serafini, L., Spranger, M.: Logic tensor networks. *Artif. Intell.* **303**, 103649 (2022)
3. Baier, C., Katoen, J.: *Principles of Model Checking*. MIT Press (2008)
4. Biagi, M., Carnevali, L., Paolieri, M., Patara, F., Vicario, E.: A continuous-time model-based approach for activity recognition in pervasive environments. *IEEE Trans. Hum. Mach. Syst.* **49**(4), 293–303 (2019)
5. Biagi, M., Carnevali, L., Tarani, F., Vicario, E.: Model-based quantitative evaluation of repair procedures in gas distribution networks. *ACM Trans. Cyber Phys. Sys.* **3**(2), 1–26 (2018)

6. Bobbio, A., Portinale, L., Minichino, M., Ciancamerla, E.: Improving the analysis of dependable systems by mapping fault trees into bayesian networks. *Reliab. Eng. Syst. Saf.* **71**(3), 249–260 (2001)
7. Camacho, A., McIlraith, S.A.: Towards neural-guided program synthesis for linear temporal logic specifications. *arXiv preprint [arXiv:1912.13430](https://arxiv.org/abs/1912.13430)* (2019)
8. Carnevali, L., Ciani, L., Fantechi, A., Gori, G., Papini, M.: An efficient library for reliability block diagram evaluation. *Appl. Sci.* **11**(9), 4026 (2021)
9. Carnevali, L., Ridi, L., Vicario, E.: A quantitative approach to input generation in real-time testing of stochastic systems. *IEEE Trans. Sw. Eng.* **39**(3), 292–304 (2012)
10. Carnevali, L., Tarani, F., Vicario, E.: Performability evaluation of water distribution systems during maintenance procedures. *IEEE Trans. Syst. Man Cybern. Syst.* **50**(5), 1704–1720 (2018)
11. Chen, M., Zheng, A.X., Lloyd, J., Jordan, M.I., Brewer, E.: Failure diagnosis using decision trees. In: *International Conference on Autonomic Computing*, 2004. Proceedings, pp. 36–43. IEEE (2004)
12. Chen, Y., Nielsen, T.D.: Active learning of Markov decision processes for system verification. In: *2012 11th International Conference on Machine Learning and Applications*, vol. 2, pp. 289–294. IEEE (2012)
13. Ciardo, G., German, R., Lindemann, C.: A characterization of the stochastic process underlying a stochastic petri net. *IEEE Trans. Softw. Eng.* **20**(7), 506–515 (1994)
14. Cinque, M., Cotroneo, D., Pecchia, A.: Event logs for the analysis of software failures: a rule-based approach. *IEEE Trans. Softw. Eng.* **39**(6), 806–821 (2012)
15. Clarke, E.M., Wing, J.M.: Formal methods: state of the art and future directions. *ACM Comput. Surv. (CSUR)* **28**(4), 626–643 (1996)
16. Diligenti, M., Gori, M., Sacca, C.: Semantic-based regularization for learning and inference. *Artif. Intell.* **244**, 143–165 (2017)
17. Dinsmore, J.: *The Symbolic and Connectionist Paradigms: Closing The Gap*. Press, Psych (2014)
18. Garcez, A.d., et al.: Neural-symbolic learning and reasoning: a survey and interpretation. *Neuro Symbolic Artif. Intell.* **342**(1), 327 (2022)
19. Giles, C.L., Miller, C.B., Chen, D., Chen, H.H., Sun, G.Z., Lee, Y.C.: Learning and extracting finite state automata with second-order recurrent neural networks. *Neural Comput.* **4**(3), 393–405 (1992)
20. Gulwani, S., Polozov, O., Singh, R., et al.: Program synthesis. *Found. Trends® Program. Lang.* **4**(1-2), 1–119 (2017)
21. Hitzler, P., Sarker, M.K.: Neuro-symbolic artificial intelligence: The state of the art (2022)
22. Ivanov, R., Weimer, J., Alur, R., Pappas, G.J., Lee, I.: Verisig: verifying safety properties of hybrid systems with neural network controllers. In: *Proceedings of the 22nd ACM International Conference on Hybrid Systems: Computation and Control*, pp. 169–178 (2019)
23. Junges, S., Jansen, N., Dehnert, C., Topcu, U., Katoen, J.P.: Safety-constrained reinforcement learning for MDPs. In: Chechik, M., Raskin, J.F. (eds.) *Tools and Algorithms for the Construction and Analysis of Systems. TACAS 2016. Lecture Notes in Computer Science*, vol. 9636. Springer, Berlin, Heidelberg (2016). https://doi.org/10.1007/978-3-662-49674-9_8
24. Kwiatkowska, M.: Advances and challenges of quantitative verification and synthesis for cyber-physical systems. In: *2016 Science of Security for Cyber-Physical Systems Workshop (SOSCYPS)*, pp. 1–5. IEEE, New York, NY, USA (2016)
25. Kwiatkowska, M., Norman, G., Parker, D.: Stochastic model checking. In: Bernardo, M., Hillston, J. (eds.) *Formal Methods for Performance Evaluation. SFM 2007. Lecture Notes in Computer Science*, vol. 4486. Springer, Berlin, Heidelberg (2007). https://doi.org/10.1007/978-3-540-72522-0_6

26. Legay, A., Delahaye, B., Bensalem, S.: Statistical model checking: an overview. In: Barringer, H., et al. Runtime Verification. RV 2010. Lecture Notes in Computer Science, vol. 6418. Springer, Berlin, Heidelberg (2010). https://doi.org/10.1007/978-3-642-16612-9_11
27. Manhaeve, R., Dumancic, S., Kimmig, A., Demeester, T., De Raedt, L.: Deepproblog: neural probabilistic logic programming. *Adv. NeurIPS* **31** (2018)
28. Marra, G., Dumančić, S., Manhaeve, R., De Raedt, L.: From statistical relational to neurosymbolic artificial intelligence: a survey. *Art. Int.* 104062 (2024)
29. Perez-Cerrolaza, J., et al.: Artificial intelligence for safety-critical systems in industrial and transportation domains: a survey. *ACM Comput. Surv.* **56**(7), 1–40 (2023)
30. Salfner, F., Lenk, M., Malek, M.: A survey of online failure prediction methods. *ACM Comput. Surv. (CSUR)* **42**(3), 1–42 (2010)
31. Sen, K., Viswanathan, M., Agha, G.: Learning continuous time Markov chains from sample executions. In: First International Conference on the Quantitative Evaluation of Systems, 2004. QEST 2004. Proceedings, pp. 146–155. IEEE (2004)
32. Towell, G.G., Shavlik, J.W.: Knowledge-based artificial neural networks. *Artif. intell.* **70**(1–2), 119–165 (1994)
33. Wang, Y., Chung, S.H.: Artificial intelligence in safety-critical systems: a systematic review. *Ind. Manag. Data Syst.* **122**(2), 442–470 (2022)
34. Xu, J., Zhang, Z., Friedman, T., Liang, Y., Broeck, G.: A semantic loss function for deep learning with symbolic knowledge. In: International Conference on Machine Learning, pp. 5502–5511. PMLR (2018)



Continuous Development and Safety Assurance Pipeline for ML-Based Systems in the Railway Domain

Marc Zeller¹(✉) , Thomas Waschulzik², Carmen Carlan³, Marat Serahlazau³,
Claus Bahlmann² , Zhiliang Wu¹, Sigurd Spieckermann¹, Denis Krompass¹,
Simon Geerkens⁴ , Christian Sieberichs⁴, Konstantin Kirchheim⁵ ,
Batu Kaan Özen², and Lucia Diez Robles⁶

¹ Siemens AG, Munich, Germany

{marc.zeller,zhiliang.wu,sigurd.spieckermann,denis.krompass}@siemens.com

² Siemens Mobility GmbH, Erlangen, Germany

{thomas.waschulzik,claus.bahlmann,batu.ozen}@siemens.com

³ Edge Case Research GmbH, Munich, Germany

{ccarlan,mserahlazau}@ecr.ai

⁴ University of Applied Sciences Düsseldorf, Düsseldorf, Germany

{simon.geerkens,christian.sieberichs}@hs-duesseldorf.de

⁵ Otto-von-Guericke University Magdeburg, Magdeburg, Germany

konstantin.kirchheim@ovgu.de

⁶ ITQ GmbH, Garching, Germany

diez@itq.de

Abstract. Automated Driving Systems (ADS) will operate in an open world. Since it is difficult to specify all possible situations in this open world *a priori* and the world will most likely change during the system's lifecycle, it requires agile MLOps cycles, including testing & validation in the field. In this paper, we present how the safe MLOps process proposed in Zeller et al. [25] is realized in the safe.trAIIn project using Git-centric methods. Thereby, appropriate tooling support is provided at the different stages of the safe MLOps process to enable continuous development and safety assurance of ML-based systems in the railway domain.

Keywords: safety · machine learning · MLOps · continuous assessment · automated driving systems

1 Introduction

Machine Learning (ML) consists of techniques that focus on building computer systems that learn from data to improve their performance over time. Especially in the area of computer vision, *Deep Neural Networks (DNNs)* and *Convolutional Neural Network (CNN)* have become the de-facto standard computation frameworks to realize perception tasks [7, 15]. Therefore, ML is also a basis for the fast-growing field of *Automated Driving Systems (ADS)*, which must perceive their environment and react accordingly, such as autonomous cars in automotive,

unmanned aerial vehicles in avionics, or driverless trains in railway. To this end, ML is incorporated into a so-called *ML-based system* together with other supporting software components to perform a purposeful function. While ML techniques, if implemented, may provide state-of-the-art performance for perception tasks, it is difficult to understand how they derive their predictions. This poses challenges when using ML-based systems in regulated domains, such as railway, since the functional safety of the system must be ensured and assessed during homologation despite the non-deterministic behavior, the uncertainty, and the lack of interpretability of state-of-the-art ML techniques. Under this assumption, we foresee that different tasks need to be addressed, such that an ADS can be approved for operation, including (1) addressing systems aspects, including linking requirements originating from functional safety (e.g., originating from EN 50126 [6]) to the ADS and specifying a sound safety case, (2) providing insight into the ML behavior and how it relates to data and further to the requirements, and (3) addressing the challenge that ADS also in rail will operate in a continuously changing open world, requires agile MLOps cycles, which foster the validation of the ADS.

The safe.trAI¹ project aims to lay the foundation for the safe use of AI/ML to achieve the driverless operation of rail vehicles. The project goals are to develop guidelines and methods for the design of trustworthy ML components. Based on the requirements for the certification process in the railway domain, safe.trAI develops a safety argumentation for an AI-based obstacle detection function of a driverless regional train. To this end, the project investigates methods to develop trustworthiness AI-based functions, taking data quality, robustness, uncertainty, and explainability aspects of the ML model into account. These methods need to be integrated into a comprehensive and continuous development, verification, and assessment process for driverless trains.

In this paper, we focus on tool support for a safe MLOps process. In [25], we outlined a process for the continuous development and safety assurance of ML-based systems in the railway domain. This so-called *safe MLOps* process integrates system engineering, safety assurance, and the Machine Learning (ML) life-cycle. While the system engineering and the safety assurance-related stages of the process are based on the development process of the EN 50126–1 safety standard for railway systems [6], the ML & data lifecycle is based on previous work in this field (e.g., the AMLAS process [9]) and ISO/IEC 23053 [12]. This paper outlines how the safe MLOps process is implemented in the safe.trAI project using Git-centric methods and the appropriate tool support to achieve the required degree of automation.

The rest of the paper is organized as follows. We briefly summarize relevant related work in Sect. 2. Afterward, we outline the safe MLOps process for ADS in the railway domain. Section 4 describes the realization of the ML-related parts of this process. We then demonstrate this approach using a case study. We conclude the paper and provide an outlook on future research in Sect. 6.

¹ <https://safetrain-projekt.de/en>.

2 Related Work

Machine Learning Operations (MLOps)² establishes a Development Operations (DevOps) methodology for machine learning applications and is today the de-facto approach for unifying ML model development, deployment, and operation. However, existing MLOps approaches solely focus on ML models themselves and not on ML-based systems [19] and the necessary safety assurance-related activities.

Existing safety standards such as IEC 61508 [10] or EN 50126 [6] do not address the development and assurance of ML models yet. However, previous work describes the first approaches towards an agile MLOps process for AI-based systems. VDE-AR-E 2842-61-2 [23] outlines a reference lifecycle for the development of trustworthy autonomous systems by extending the lifecycle of existing standards (e.g., IEC 61508-1 [10]). Although different development steps for DNNs and potential methods for trustworthiness assurance are described, it is not described how to realize the reference lifecycle.

A generic lifecycle for AI systems is also presented in ISO/IEC DIS 5338 [13]. This lifecycle focuses on aspects that differentiate AI systems from traditional software systems. Further, ISO/IEC 23053 [12] outlines a representative ML pipeline, including the processes that apply at each step. This pipeline illustrates specific ML processes involved in developing, verifying, deploying, and operating an ML model and how they relate to the AI system life-cycle stages. However, this standard does not address the integration between AI engineering, system engineering, and safety assurance.

The so-called *Assurance of Machine Learning for use in Autonomous Systems (AMLAS) Process* consists of a 6-stage ML engineering lifecycle with the stages (1) “ML safety assurance scoping”, (2) “ML safety requirements elicitation”, (3) “data management”, (4) “model training”, (5) “model verification”, and (6) “deployment”. Safety assurance requirements are listed for each activity. An application of the AMLAS process for a pedestrian detection system in the automotive domain is presented in [3]. However, no concrete realization of the process in the railway domain has been presented so far.

The *confidence.ai* program outlines an ML engineering pipeline to develop trustworthy AI-enabled systems in [16]. The pipeline requires several specific activities meant to ensure the overall trustworthiness. These activities include *data engineering*, *ML algorithm design*, and *evaluation and verification*. The paper describes particular activities and the challenges faced while assessing the trustworthiness of the ML-based system during these activities. However, there is no implementation of the ML engineering pipeline so far.

To realize an agile MLOps cycle for a safety-relevant ADS in the railway domain, in this paper, we propose using Git-centric methods and tool support to realize a pipeline for continuous development and safety assurance of ML models. To the best of our knowledge, this is the first paper addressing these aspects.

² <https://cloud.google.com/architecture/mlops-continuous-delivery-and-automation-pipelines-in-machine-learning>.

3 Safe MLOps Process for Railway

In this section, we briefly outline the safe MLOps process specified in the safe.trAIIn project. For more details, see [25]. As depicted in Fig. 1, the process integrates three parts: (1) the system engineering lifecycle (based on the development process of EN 50126-1), (2) the data & ML lifecycle (based on IEC/ISO 23053 [12] and the AMLAS process [9]), and (3) the safety assurance lifecycle (also based on the EN 50126-1).

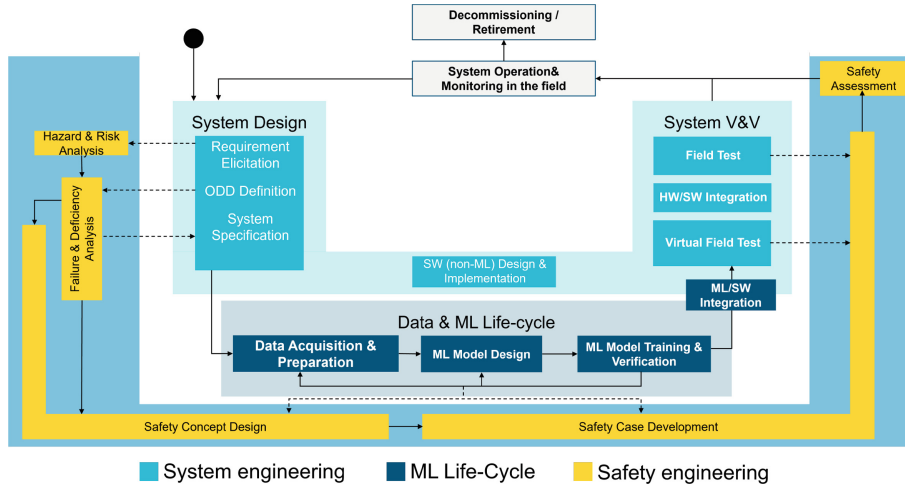


Fig. 1. Safe MLOps Process for ML-based ADS Systems

The safe MLOps process allows continuous engineering and assurance of ML-based systems. Therefore, the individual stages of the process need to be automated and a continuous delivery pipeline from the development of the ML-based system and its components (Dev) to the safety assessment (safe) and afterwards to the operation of the ML-based system (Ops) must be built.

In the “Dev” phase, the engineering of a train is extended with a process to develop and verify ML models that implement functions of the driverless train, such as obstacle detection (Data & ML Life-cycle). Since we need to assess ADS in terms of safety, additional process steps to assess the data quality and assure the performance of the ML model in terms of safety, reliability, transparency, and robustness are incorporated into the data & ML lifecycle. Thereby, pieces of evidence (quantitative and qualitative) for the ML model are created and incorporated into the overall system safety case.

As the pieces of evidence generated during the execution of the data & ML lifecycle are generated continuously, the development of the system safety case needs to be iterative. To create the safety case iteratively as part of the safe MLOps process, model-based techniques such as the *Goal Structuring Notation (GSN)* [14] or *Claim-Argument-Evidence (CAE)* [2] are used to specify the safety

argumentation and the evidence created during the development and assurance process.

After a successful independent assessment of the system safety case, the ML-based system (train) is released into operation (the “Ops” phase), in which safety-relevant parameters must be monitored. Please note, that the Ops phase is out of scope of this paper.

4 Continuous Development and Safety Assurance Pipeline

In this section, we describe the toolchain implementing the previously outlined process. Thereby, we are focusing on tool support for the following activities: (a) Analyze the quality of the data and check if data distribution and diversity correspond to *Operational Design Domain (ODD)* definition [24]; (b) Automate ML model verification and derive (quantitative) metrics to evaluate the ML model performance; (c) Integrate the results of the two aforementioned activities as evidence supporting the system safety case.

4.1 Data Quality Assurance

Since the performance of ML systems is often dictated by the quality and quantity of the data, data quality assurance is arguably the most crucial aspect of the “*Data Acquisition & Preparation*” phases within the data & ML life cycle (see Fig. 1). Consequentially, the goal of utilizing ML for perception tasks in safety-critical applications may only be achieved if certain constraints on the quality of the data used to build, test, and validate the system can be fulfilled.

Dataset Completeness. In particular, one needs to ensure the completeness of the training and the test dataset w.r.t. the ODD definition. Such an ODD definition is considered necessary to develop an ML-based function for an ADS [11]. Yet, achieving full coverage of an ODD in an open-world context may result in a combinatorial explosion, which renders the cost of the necessary computation and data collection prohibitive. To avoid the combinatorial explosion caused by a growing ODD, *k-projection coverage* [4] can be used. The quantitative *k-projection coverage* is an approach inspired by combinatorial testing, in which, instead of exhaustive coverage, only the coverage of *k*-way combinations of ODD concepts is considered. Additionally, elements of the ODD definition are associated with weights for dedicated environmental conditions based on the knowledge of domain experts. Experts can interpret the weights associated with a combination of conditions as relative importance. Achieving full *k-projection coverage* requires that the dataset, when projected to the hyperplane formed by arbitrarily selected *k*-conditions, covers each combination with a number of data points no less than the associated weight. While *k-projection coverage* can not be used to derive guarantees, the method can help avoid systematic biases

in the dataset. For example, [21] empirically showed that higher coverage can be associated with better performance. The results of this analysis are stored together with the ODD definition and the dataset in a storage backend (e.g., a database or the registry of GitLab).

Dataset Quality. After achieving sufficient coverage of the ODD definitions within a dataset, further quality assurance has to be done to ensure that the data used for training and verification is of good quality. To ensure optimal training and verification, a dataset balancing global complexity with local linearity is desired. Outliers, isolated data, or high local complexities have to be mitigated. For that, QI^2 [8] and *ECS* [20] are used. These indicators ensure data quality by considering the input-output relation within the locally most similar neighbors around each individual data point. QI^2 hereby quantifies the local (non-)linearity, while *ECS* quantifies similarities in input and output within such clusters. Both methods calculate a single score for each data point and each of its local most similar neighborhoods. To ensure the quality of the entire dataset, the scores from each method can be visualized using three-dimensional histograms. These histograms show the number of data points within a certain range of scores derived from the method over increasing local neighborhoods. This visualization enables the comparison of various data points, identification of malicious structures, and provides an understanding of the local and global data representation. The resulting three-dimensional histograms of QI^2 and *ECS* are saved in a storage backend along with additional information as arrays for later use in manual human-in-the-loop analyses. The additional information links individual data points to their respective complexity or similarity behavior decoded in the histograms. Therefore, an interactive visual analysis can be conducted by an expert. If the visual analysis results in no findings of malicious data, a flag is set, stating that the histograms are saved and analyzed by an expert (also in the storage backend). If malicious data is found, the data set has to be updated and analyzed again. As shown in [8,20] the identification of and interaction with (sub-)sets of the data can already lead to certain analyses of data quality aspects like outlier detection, linear subset identification, and more. Furthermore, one can define starting points for analyses with various dedicated methods for specific quality aspects (e.g. the ones listed in [1]). The main benefit, QI^2 and *ECS* are providing with their initial application is a compact overview over many quality aspects in a low dimensional and human interpretable visualization based on linearity and similarity of input-output-relations.

4.2 ML Model Development

During the “*ML Model Design*” and “*ML Model Training & Verification*” phases within the safe MLOps process (see Fig. 1), the ML model is developed and its performance verified.

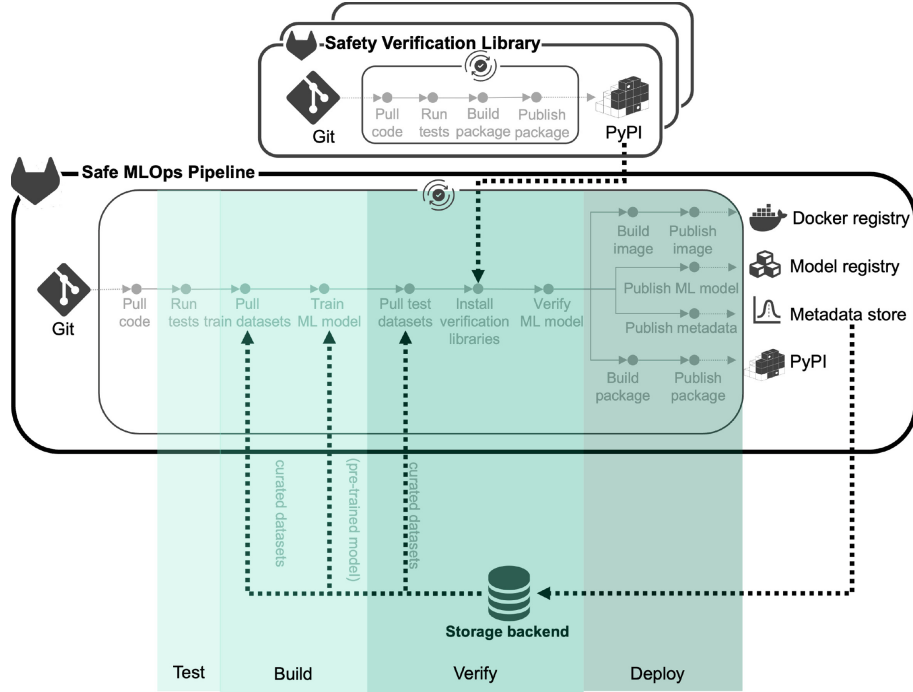


Fig. 2. Safe MLOps pipeline realized by Git-centric methods

The MLOps pipeline depicted in Fig. 2 separates the testing of the source code that produces an ML model and the model artifact itself. In *Software 2.0*³, ML models are seen as source code. In this context, many dedicated tools have been developed to fulfill various testing purposes. To avoid the ambiguity with the testing in traditional software development, we refer to the testing of ML model as “verification”. The MLOps pipeline is realized by continuous integration (CI) functionalities offered by Git-based code management tools, such as GitHub, GitLab, and Bitbucket, where we have GitLab as an example in Fig. 2. In the *Build* stage, the ML model can either be trained from scratch within the pipeline or pulled from the cloud storage directly to finetune it or used it as is. For the training or finetuning case, a curated training dataset, with its own traceable and reproducible lifecycle process, is pulled from a storage backend. In the *Verify* stage, the model artifact is assessed using test datasets. This assessment is in line with the *safe* MLOps principles, focusing on verifying the robustness, explainability, or performance of the ML model. To this end, additional libraries are used (see Fig. 2) to create safety evidence. The verification results are saved in a storage backend together with the ML model and linked to dataset used for the verification. In the *Deploy* stage, the tested model can be published

³ <https://karpathy.medium.com/software-2-0-a64152b37c35>.

in different formats, which can be very specific or agnostic to the downstream application that integrates them. Hereby, docker images, binary artifacts (such as serialized PyTorch models), or software packages that include code for pulling the model parameters from a storage backend and model interfaces are one of many possible choices.

4.3 Safety Case Management

In our proposed safe MLOps process, the safety case is to be built iteratively, by continuously collecting the pieces of evidence created during the development and V&V activities. To this end, we use *nLoop*, a continuous risk analysis and management platform under construction at Edge Case Research, supporting the deployment of safe, trustworthy autonomy. nLoop is a cloud-based tool that fosters a safety-first mindset by encouraging collaboration between developers and safety engineers w.r.t. continuous system development and assurance. It supports the development of “live” structured safety cases, whose validity states are continuously evaluated based on available safety evidence. The validity of the claims within nLoop safety cases is assessed by evaluating *Safety Performance Indicators (SPIs)*. SPIs, according to UL 4600 [22], similar to Key Performance Indicators (KPIs), are metrics used to quantify safety performance. Specifically, SPIs are boolean expressions that trace to claims, evaluating metrics measured both during system development and operation against given thresholds. Violations of SPIs indicate invalidation of safety claims. To assess the specified SPIs, nLoop uses aggregated, cross-functional data to manage, measure, and communicate risks posed by ADS and thereby providing confidence that ADS are safe to be deployed.

nLoop is used in the “*Safety Case Development*” and “*Safety Assessment*” phases of the safe MLOps process (see Fig. 1). To this end, nLoop hosts the safety case of the ML-based function under development and gathers evidence supporting the safety case from the different activities of the development workflow using evidence connectors. nLoop stores the safety case in a structured tree form in its internal database. This facilitates automated manipulation and analysis of safety cases. Evidence connectors are services designed to work with different evidence providers, such as databases or issue-tracking systems. Evidence connectors that dynamically aggregate data from varying tools reduce manual data entry effort. Evidence pulled to nLoop using evidence connectors is saved in the nLoop internal database and is further used for the status evaluation of SPIs.

In the context of this work, the evidence supporting the safety claims of the ML-based ADS is stored in the storage backend (see Fig. 2). To import evidence from the storage backend, nLoop leverages a microservice architecture and a customized data connector service that pulls required data via an API into nLoop. The pieces of evidence imported from the storage backend are measured values for certain ML and dataset metrics. These evidence metrics are linked to SPIs. In nLoop, an SPI is an interpretation of the data supporting a safety argument. Each SPI, at minimum, consists of a single metric, an operator, and a threshold defined by the nLoop user. By comparing the metric data to the

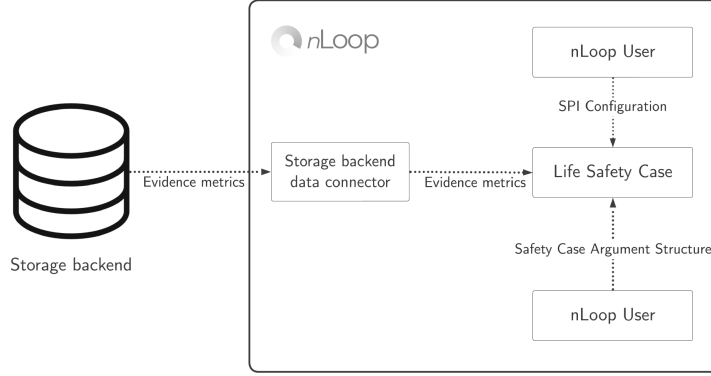


Fig. 3. nLoop connection to storage backend.

threshold, nLoop determines the status of each SPI. Again, the whether the thresholds of the SPIs are met or not determines the validity or invalidity of the claims in the safety case to which the SPIs are associated. The validity status of the lower-level claims usually has an impact on the validity status of higher-level claims. The evaluation of SPIs provides the nLoop users with a live outlook on the system’s safety performance (see Fig. 3).

5 Case Study

To demonstrate the feasibility of our approach, we present a case study, in which we assess a camera-based track segmentation model. Data quality assurance and ML model verification are performed using a dataset provided by Siemens Mobility. Similar to the publicly available RailSem19 dataset [26], it consists of images taken from the ego perspective of a train, as well as annotations for semantic segmentation. The dataset includes annotations for rails, switches, traffic signs/signals, crossings, trains, and platforms, as well as additional information about general environmental conditions.

Data Quality Assurance: As outlined in Sect. 4.1, we first verify that the samples in the dataset are of sufficient variety and quantity, such that they cover a representative portion of the ODD using k -projection coverage [4]. To this end, an ODD was formulated in a human- and machine-readable domain-specific language [24]. We then quantify to what extent the labels in the dataset cover a subset of the possible combinations of

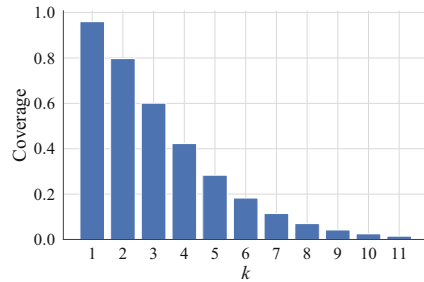


Fig. 4. Results of k -projection coverage for different values of k .

operating conditions in the ODD. In our implementation, we assign unit weight to all reference classes, which expresses that we, for now, do not associate an elevated relative risk with any particular combination of operating conditions. The results for different values of k are depicted in Fig. 4. For $k = 1$, we achieved high coverage, which indicates that the dataset contains most of the concepts in the ODD description. However, as k increases, coverage drastically deteriorates. Calculating the scenario that maximizes coverage reveals that the dataset currently does not contain scenarios in, for example, *night*, *rain* or *snow* conditions; this information allows us to identify possible biases of the trained model and can guide future data collection efforts. These results are stored together with the dataset in the storage backend.

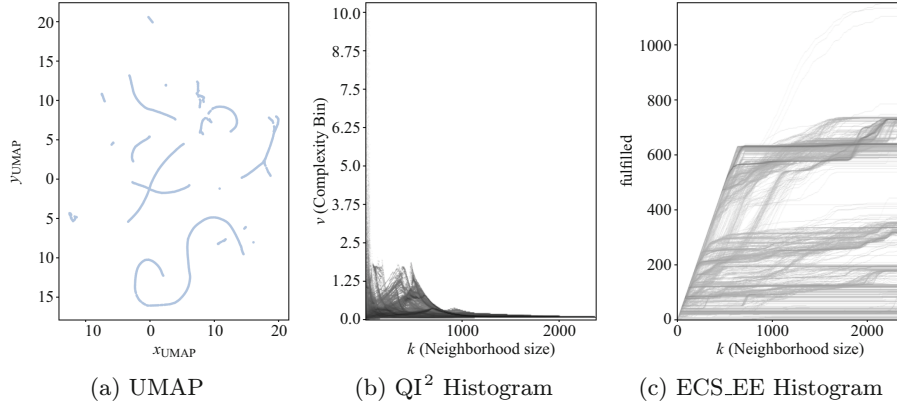


Fig. 5. Results for Data Quality Assurance on the Siemens Mobility dataset using *Uniform Manifold Approximation and Projection* (UMAP) [17] representation (Fig 5a), QI² (Fig 5b) and ECS (Fig. 5c).

For further data quality assurance of the dataset, QI² and *ECS* are not applied directly to the raw image data. For deriving useful results, the images are scaled to the input size specified for the network (512×1024) and dimensionally reduced using *Histogram of Oriented Gradients* (*HOG*) [5] feature extraction. The analysis of HOG-based feature descriptions is feasible because a structural comparison of the scenes is needed if the task is to be solved by a CNN. Conducting an analysis of the raw input data would emphasize differences in colors rather than structure. In addition, calculating the distances between data points, the baseline of QI² and *ECS*, on more than 500.000 dimensions is computationally more expensive and yields smaller differences in distances at the same time. The reason being the curse of dimensionality. Therefore, preprocessing, which consists of structural dimension reduction using HOG, is a sensible approach. Figure 5b and 5c shows the histograms of the conducted quality assurance analysis using QI² and *ECS* on the HOG reduced dataset. The main findings are

that the dataset is overall well-balanced between local linearity and global complexity. It is well-clustered and free from errors like outliers, false annotations, or structural dissimilarities in their input-output relation. Just looking at the histograms indicates several distinct clusters with different sizes and similar overall behavior. After interacting with the histograms, we found that this clustering is based on different data aggregations, whether they happened on a different track, at a different time, or within different environmental surroundings. In addition, the dataset displays doubles due to the train collecting the data, which stops for a couple of frames, but this does not impact the overall fit of the dataset.

ML Model Development: In Fig. 6, the track segmentation model is tested and verified using a set of metrics in conjunction with the given test dataset. In the first stage, general”software 1.0”⁴ *tests* and *security* checks are executed, such as compliance with style guidelines, checking for vulnerabilities of used software dependencies, and tests with different supported code interpreter versions. In the second stage, the track segmentation model is verified using a combination of established and custom metrics developed within the safe.trAI project to produce evidence for the safety case. Besides the prediction quality of the track segmentation model (*iou*), the model is also tested in terms of robustness (*robustness-verification*), explainability (*explainability-metrics*), and anomaly detection capabilities (*anomaly*). The calculated metrics are store in the storage backend. Afterward, in the final stage, the model is packaged and versioned to be used as a dependency in system deployment.

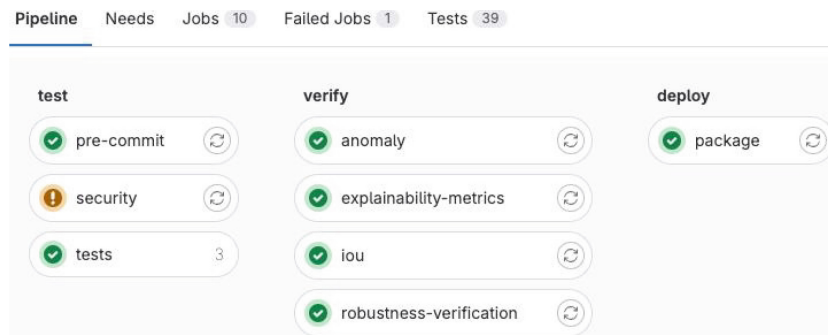


Fig. 6. Stages and jobs executed by the safe MLOps pipeline

Safety Case Management: The results of the data quality assurance and the ML model verification steps are stored in the storage backend. nLoop retrieves the information to evaluate the SPIs specified in the safety case. Figure 7 shows an nLoop screenshot with a part of the transparency argumentation, which has an SPI ingesting the saliency map explainability metric. In the figure, it is also illustrated that the corresponding status of the evidence to which the SPI is

⁴ <https://karpathy.medium.com/software-2-0-a64152b37c35>.

associated (see Evidence **E8.4.1.1.1.2**) is satisfied (marked in green), meaning that the measured values are within the specified threshold. The evidence is a pre-requisite for the validity of the claim in the safety case that *For the decision of each or selected data (image) a local explainability argument can be made.*

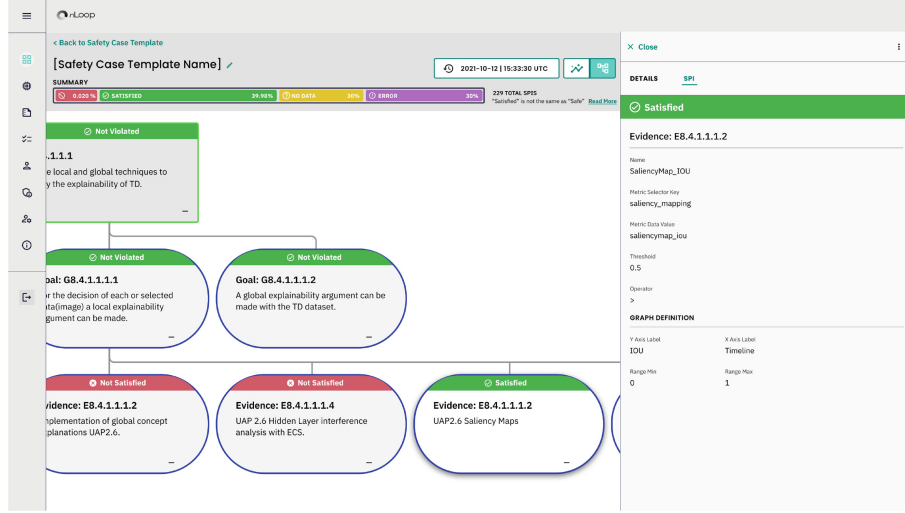


Fig. 7. nLoop screenshot with an argument about the transparency of the model.

6 Conclusion and Future Work

In this paper, we outline how an MLOps process for *Automated Driving Systems (ADS)* in the railway domain [25] is implemented in the safe.trAI project using Git-centric methods and the appropriate tooling support to achieve the required degree of automation. Thereby, we are focusing on analyzing the completeness and quality of the data, assessing the ML model performance using (quantitative) metrics, and integrating these data as evidence in the system safety case. We demonstrated the feasibility of our approach by assessing a camera-based track segmentation model. A more sophisticated evaluation is required in future to investigate the effectiveness of the approach in terms of cost reduction, and improvement of the quality of the safety assurance documentation.

Although this approach allows the automated creation of evidence for the safety case, choosing the right (quantitative) metrics to evaluate the ML model performance and support the safety argumentation as evidence as well as defining the correct thresholds for the *Safety Performance Indicators* in the safety case is a challenge which requires further research. Also the format in which information are exchanged between the tool hosting the safety case and other

tools providing evidences is currently a proprietary one and we need to assess if an open exchange format (e.g., *Digital Dependability Identities, DDIs* [18]) is suitable to be used. Moreover, future research regarding the Ops part of the MLOps process is needed, e.g., w.r.t. safety monitoring during system runtime.

Acknowledgment. This research received funding from the *Federal Ministry for Economic Affairs and Climate Action (BMWK)* and the *European Union* under grant agreements 19I21039A.

References

1. Antony, J., et al.: D-ace: Dataset assessment and characteristics evaluation. <https://github.com/Dependable-Intelligent-Systems-Lab/Dataset-Characteristics>
2. Bloomfield, R., Bishop, P.: Safety and assurance cases: Past, present and possible future—an Adelard perspective. In: *Making Systems Safer: Proceedings of the 18th Safety-Critical Systems Symposium*, pp. 51–67 (2010)
3. Borg, M., et al.: Ergo, SMIRK is safe: a safety case for a machine learning component in a pedestrian automatic emergency brake system. *Software Qual. J.* **31**, 335–403 (2023)
4. Cheng, C.H., et al.: Quantitative projection coverage for testing ml-enabled autonomous systems. In: *Automated Technology for Verification and Analysis*, pp. 126–142 (2018)
5. Dalal, N., Triggs, B.: Histograms of oriented gradients for human detection. In: *2005 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR’05)*, pp. 886–893 (2005)
6. EN 50126-1:2018-10: Railway Applications – The Specification and Demonstration of Reliability, Availability, Maintainability and Safety (RAMS) - Part 1: Generic RAMS Process (2018)
7. Feng, X., Jiang, Y., Yang, X., Du, M., Li, X.: Computer vision algorithms and hardware implementations: a survey. *Integration* **69**, 309–320 (2019)
8. Geerkens, S., Sieberichs, C., Braun, A., Waschulzik, T.: QI²: an interactive tool for data quality assurance. *AI Ethics* **4**(1), 141–149 (2024)
9. Hawkins, R., et al.: Guidance on the assurance of machine learning in autonomous systems (AMLAS) (2021). <https://doi.org/10.48550/ARXIV.2102.01564>
10. IEC 61508-1:2010-04: Functional Safety Of Electrical/electronic/programmable Electronic Safety-related Systems – Part 1: General requirements (2010)
11. ISO 21448:2022-06: Road Vehicles - Safety of the Intended Functionality (2022)
12. ISO/IEC 23053:2021-06: Framework for Artificial Intelligence (AI) Systems Using Machine Learning (ML) (2022)
13. ISO/IEC DIS 5338: Information technology – Artificial intelligence – AI system life cycle processes (2022)
14. Kelly, T., Weaver, R.: The goal structuring notation—a safety argument notation. In: *Proceedings of the Dependable Systems and Networks 2004* (2004)
15. LeCun, Y., et al.: Deep learning. *Nature* **521**(7553), 436–444 (2015)
16. Mattioli, J., et al.: Empowering the trustworthiness of ML-based critical systems through engineering activities (2022). <https://arxiv.org/abs/2209.15438>
17. McInnes, L., Healy, J., Melville, J.: UMAP: Uniform Manifold Approximation and Projection for Dimension Reduction (2020). <http://arxiv.org/abs/1802.03426>

18. Schneider, D., et al.: WAP: Digital dependability identities. In: 2015 IEEE 26th International Symposium on Software Reliability Engineering (ISSRE), pp. 324–329 (2015)
19. Sculley, D., et al.: Hidden technical debt in machine learning systems. In: Advances in Neural Information Processing Systems, vol. 28. Curran Associates, Inc. (2015)
20. Sieberichs, C., Geerkens, S., Braun, A., Waschulzik, T.: ECS: an interactive tool for data quality assurance. *AI Ethics* **4**(1), 131–139 (2024)
21. Thirugnana Sambandham, V., Kirchheim, K., Ortmeier, F.: Evaluating and increasing segmentation robustness in CARLA. In: International Conference on Computer Safety, Reliability, and Security, pp. 390–396. Springer (2023). https://doi.org/10.1007/978-3-031-40953-0_33
22. UL 4600 Ed. 3-2023: Evaluation Of Autonomous Products (2023)
23. VDE-AR-E 2842-61-2 Anwendungsregel:2021-06: Development and Trustworthiness of Autonomous/cognitive Systems (2021)
24. Weiss, G., et al.: Approach for argumenting safety on basis of an operational design domain. In: 3rd International Conference on AI Engineering - Software Engineering for AI, pp. 184–193 (2024)
25. Zeller, M., et al.: Towards a safe MLops process for the continuous development and safety assurance of ML-based systems in the railway domain. *AI Ethics* **4**(1), 123–130 (2024)
26. Zendel, O., otehrs: Railsem19: a dataset for semantic rail scene understanding. 2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW), pp. 1221–1229 (2019)

Author Index

A

Addad, Boussad 358
Antonucci, Alessandro 47
Arias, Joaquín 173

B

Bahlmann, Claus 446
Bassi, Luca 284, 296
Becker, Uwe 101
Berardi, Davide 284, 296
Bisztray, Tamas 425
Blazevic, Romana 21
Bloomfield, Robin 173
Bochinski, Erik 365
Bondavalli, Andrea 275, 351
Bonitz, Arndt 88
Borg, Jonas 188
Borrami, Sina 121
Botteghi, Elisa 308
Burton, Simon 213, 391

C

Carlan, Carmen 446
Carnevali, Laura 438
Ceccarelli, Andrea 351
Cherubini, Umberto 257
Clegg, Kester 148
Corradini, Franca 47
Czarnecki, Krzysztof 405

D

Davoli, Renzo 284, 296
Diemert, Simon 239

E

Eiselein, Volker 365
Erdődi, László 425

F

Fenn, Jane 227
Flammini, Francesco 47
Fleig, Elvira 365

G

Gallois, Xavier 121
Geerkens, Simon 446
Gladisch, Christoph 335
Grigioni, Carlo 47
Gupta, Chandranshu 74
Gupta, Gopal 173
Guzzi, Jérôme 47

H

Habli, Ibrahim 148
Hawkins, Richard 227
Heinzemann, Christian 335
Herd, Benjamin 213, 391
Howar, Falk 134
Hungar, Constanze 134

I

Inge, James 9

J

Joyce, Jeff 239

K

Kammerer, Harald 88
Kapusta, Katarzyna 358
Kirchheim, Konstantin 379, 446
Klampfer, Bernhard 88
Kohkar, Fahad Ahmed 351
Kolb, Christina 34, 316
Kordi, Marzieh 275
Krompass, Denis 446

L

Latzenhofer, Martin 88
 Lippi, Marco 438
 Lohachab, Ankur 316
 Lollini, Paolo 275
 Lyssenko, Maria 335

M

Maaß, Fynn Luca 21
 Macher, Georg 21
 Mariotti, Francesco 275
 Matsubara, Yutaka 200
 McDermid, John 148, 412
 McGeorge, Dag 188
 Melchert, Jonas 121
 Millet, Laure 239
 Murugesan, Anitha 173

N

Netkachova, Kateryna 173
 Nicholson, Mark 227
 Nova, Jorge Sánchez De 121

O

Orglmeister, Conrad 365
 Ortmeier, Frank 379
 Özen, Batu Kaan 446

P

Pastorello, Davide 266, 308
 Philipp, Robin 134
 Poorhadi, Ehsan 61
 Potiron, Katia 9

Q

Quamara, Megha 316

R

Ratiu, Daniel 160
 Robles, Lucia Diez 446
 Rohlinger, Tihomir 160
 Rushby, John 173
 Ryan, Philippa 412

S

Schmittner, Christoph 88
 Serahlazau, Marat 446
 Shaaban, Abdelkader Magdy 88
 Shackley, Liam 412
 Sieberichs, Christian 446
 Spieckermann, Sigurd 446
 Stolte, Torben 160
 Stroud, Robert 173

T

Takada, Hiroaki 200
 Tantari, Daniele 308
 Törnngren, Martin 121
 Tóth, Rebeka 425
 Triebel, Rudolph 335
 Troubitsyna, Elena 61

V

Varadarajan, Srivatsan 173
 Varshney, Gaurav 74
 Veledar, Omar 21
 von Essen, Mathias 412

W

Wagner, Stefan 160
 Waschulzik, Thomas 446
 Weber, Jens H. 239
 Woehrle, Matthias 335
 Wong, Isaac Hong 173
 Wu, Zhiliang 446

X

Xie, Lin 34

Z

Zacchi, João-Vitor 213, 391
 Zeller, Marc 446
 Zhang, Huanjun 200
 Zhu, Zhijing 134
 Zoppi, Tommaso 351