

Input graph

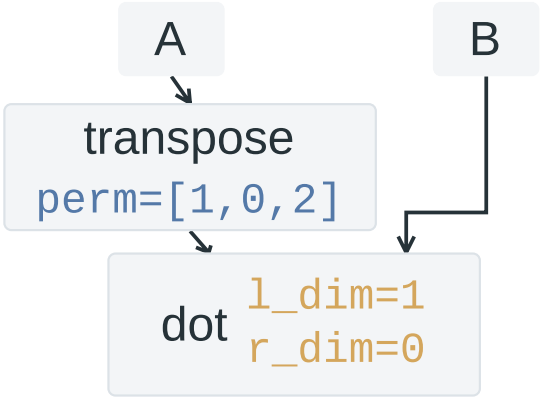

Rewritten graph

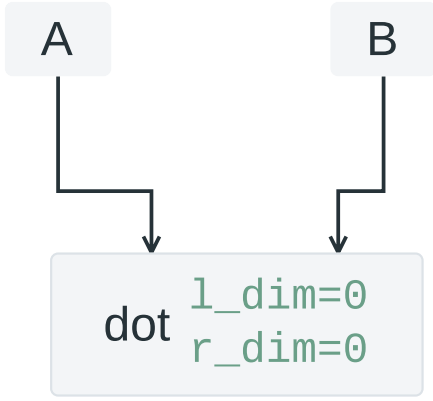

Rule

```
(d: dot (tr: transpose A) B)
=> (out: dot A B)
derive {
  out.attrs = f_transform(d.attrs, tr.attrs)
}
```

Attribute binding table

Record	Attributes	Origin
tr.attrs	perm = [1,0,2]	Captured
d.attrs	l_dim=1, r_dim=0	Captured
out.attrs	l_dim=0, r_dim=0	Derived

f_transform