

Input graph

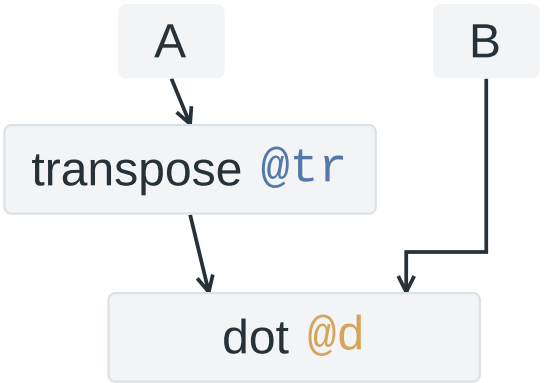

Rewritten graph

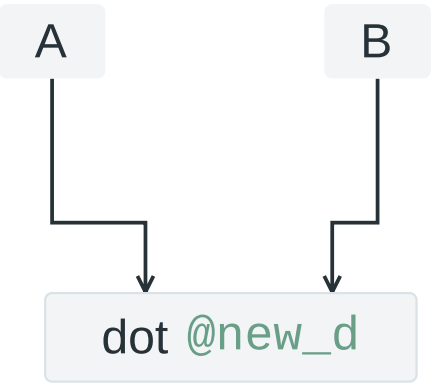

Rule

```
(dot[@d] (transpose[@tr] A) B)
=> (dot[@new_d] A B)
derive {
  @new_d = f_transform(@d, @tr);
}
```

Attribute binding table

Binding	Attributes	Origin
@tr	perm = [1,0,2]	Captured
@d	l_dim = 1, r_dim = 0	Captured
@new_d	l_dim = 0, r_dim = 0	Derived

f_transform