1 Security	empower

Face recognition device background docking protocol interface document (Based on the HTT P communication)

Documentation, version 4.7

Released on 2020-07-23

1

update log

edition	date updated	explain
V 1.0	2019-08-05	The initial version
	2019-8-22	Add a search device interface
	2019-08-23	Modify the query employee interface field, the query the record interface field, export the record interface field, modify the HTTP error form, the state code is 206
V 2.0	2020-03-04	Modify and import employees, delete employees, upload clock records, and query the interface paths and parameter information of device parameter settings Add the import visitor authorization, upload the visitor access record, upload the device initialization parameter information, and verify the device online status interface
	2020-03-06	Add the punch card machine record upload interface and the device restart interface. Improve other information, such as whether non-employees store identification records, time field upload format.
	2020-03-09	Improve equipment parameters, add temperature threshold (maximum and minimum value), temperature compensation value and face threshold
	2020-0311	The new fields are as follows: Employee Information and visitor Information Add image format fields to indicate how the image is acquired Face recognition threshold is added to the employee information Request validation online status add time interval field Add time limit, working status management field Device parameters Add wired network, wireless network, hotspot, device side account password field Device restart updates to special management and add restore factory settings, server path information fields New server path change result feedback interface
V 3.0	2020-0312	Visitors import the QR code pictures changed to a QR code string.
	2020-0317	New devices upload local registered employee information, upload employee update information, and upload employee delete information interface Device parameter interface is added to the current device time field Import the employee interface and add a new result feedback interface
	2020-0319	Modify the device local upload data format, including local

		registration, local modification, and local deletion
	2020-03-20	Modify the parameter setting field type, such as volume: int Parameter settings to add the system synchronization time, body temperature screening field Add a screenshot of the data format transfer instance
V 4.4	2020-03-30	Increase the employee import failure error code feedback
V 4.6	2020-04-28	Modify the system volume range to 0100 System parameters are issued to increase the equipment QR code picture address Modify the temperature alignment threshold maximum and minimum value fields
V 4.7	2020-0513	System parameter interface add firmware package MD 5 field parameterFirmwareMd 5 add 2.9.1 interface add field opendoor control relay open
V 4.8	2020-08-29	Clocking record increase temperature unit field, support background setting time zone function

catalogue

1.RESTful API Design background.....4
2 Interface description.....4
2.1 The device actively uploads the clock records to the cloud in real time.....4
2.2 The device actively triggers the cloud to import the employee authorization information....6
2.3 Import the result feedback of the employee authorization information.....8
2.42.3. The device actively triggers the cloud to obtain and delete employee information.....10
2.5 The device uploads the initial parameter information of the current device.....12
2.6 The device actively triggers the cloud to obtain the parameter information to be set by the device.....14
2.7 Verify the online status of the device.....17
2.8 Special management of device request server (restart, restore factory settings).....18
2.9 Device update server path result feedback.....19
3 Error code.....20
.13 Basic error code.....20
3.2 Employee Import Failure Error Code.....21

1.RESTful API Design background

RESTful API Is a set of protocols to regulate multiple forms of front-end and the same background interaction.

RESTful API The background is also the SERVER to provide the front end to call. The front end calls the API to initiate the HTTP request to the background, and the background response request feeds back the processing results to the front end. That is, the RESTful is a typical HTTP-based protocol.

Based on the above definition of RESTful API, it just solves the docking problem between the system and different systems of customers.

2. Interface description

The following notification message is the short connection HTTP request for the HTTP server.

2.1 The device actively uploads the clock records to the cloud in real time

Request mode: POST

Request address: http :// server IP :port /note /insertNote Face

.1.12 Request package


```
{
  "deviceId ":"xxx ",
  "employeeId ":"xxx ",
  "employeeName ":"xxx ",
  "notePity ":0.65,
  "noteTime ":"2020-03-20 14:20:00",
  "noteImg ":"xxx ",
  "noteImgName ":"xxx ",
  "noteLiveMax ":"xxx ",
  "noteLiveMi n ":"xxx ",
  "notePass ":0,
  "notetemptype ":0,
  "humTemp ":36.8,
  "noteWay ":0
}
```


.1.22 Description of the request parameters

parameter name	type	Whether must	description

vesting instrument

de v iceId	strin g	yes	equipment ID
e mployeeId	st ring	yes	employee ID
employeeName	st ring	deny	Employee name

notePi ty	floa t	deny	similarity
n oteTime	st ring	yes	Clocking time (year-month-day time: minutes: seconds, for example: "2020-03-06 16:45:20")
n oteImg	st ring	deny	Identify snap pictures (base 64 code)
n o teImgName	st ring	deny	Picture name
note LiveMax	st ring	deny	The largest picture name of the ccard
n o teLiveMin	st ring	deny	Minimum picture name of the living body punch card
note Pass	i nt	deny	Whether the card is passed (if the device only makes the record after the success, then this field can be deleted)
notetemptyp e	i nt	deny	0: Default ° C, 1: ° F
hum T emp	floa t	deny	Anthropometric temperature
no teWay	i nt	yes	0: Brush your face, 1: punch in

.1.32 Return results

```
{
    "success ": 0,
    "msg ": "xxx "
}
```

.1.42. Description of the outcome parameters

parameter name	type	Whether must	description
success	int	yes	Non-0: failed
ms g	string	deny	Misinformation description, see Chapter 3 for details
da ta	JSON array	deny	Content was empty and the query failed

2.1.5 instance

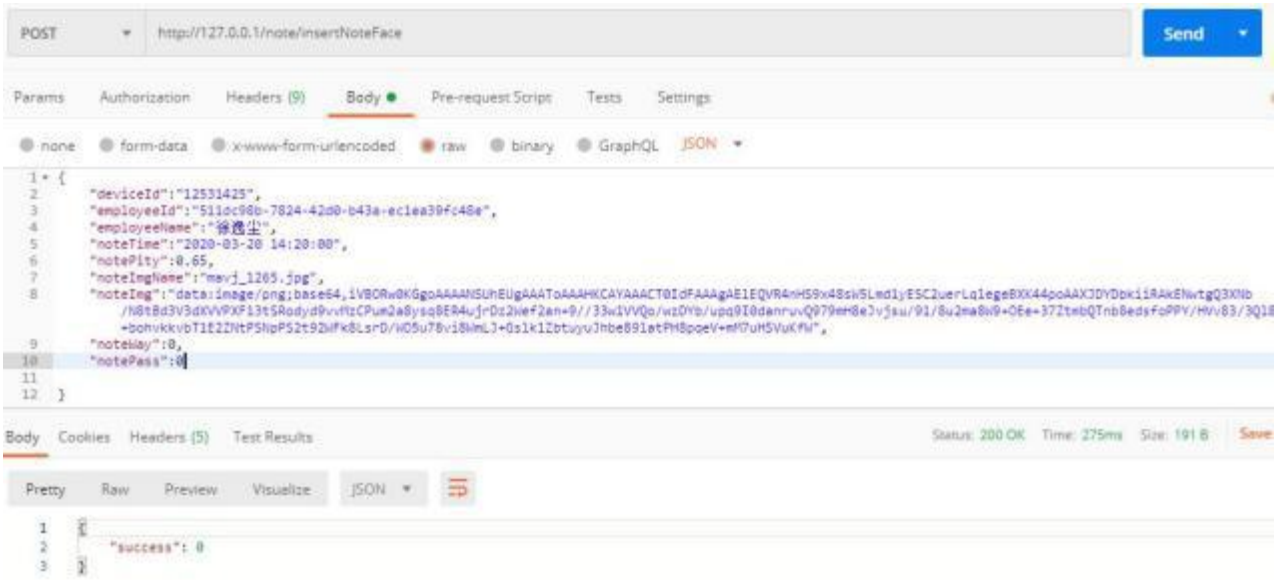

2.2 The device actively triggers the cloud to import the employee authorization information

Request mode: POST

Request address: http :// server IP :port /devicePass /select PassInfo

.2.12 Request package

```
{
  "deviceId ":"xxx ",
  "last _employee _number ":"xxx "
}
```

.2.22 Description of the request parameters

parameter name	type	Whether must	description
de v iceId	st ring	yes	Device Id (available device MAC address, product serial number)
last _employee _number	S tring	deny	Current last id value (background as required)
need Base 64	I nt	deny	Whether base 64 transcoding is needed for employee import photo (not yet used)

.2.32 Return results

```
{
        "success ":0,
        "passInfo ": [
        {
            "employeeId  ":"01",
            "employeeName": "Zhang San",
            "employeeGrouPId ":"xxxxx ",
            "employeeGroupName ":"xxxxx ",
            "employeePhotoWay ":"xxxxx ",
            "employeePhoto ":"xxxxx ",
            "employeeIc ":"xxxxx ",
            "employeePhone ":"xxxxx ",
            "employeeIdentity ":"xxxxx ",
            "employeeAddress ":"xxxxx ",
            "devicePassBean ":{
                    "devicePassStart  ":"xxxxx ",
                    "devicePassEnd ":"xxxxx ",
                    "devicePassTimeOver ":0,
                    "devicePassNumber ":1
            }
        },
        {
            "employeeId  ":"02",
```

```
            "employeeName": "Li Si",
            "employeeGrouPId ":"xxxxx ",
            "employeeGroupName ":"xxxxx ",
            "employeePhotoWay ":"xxxxx ",
            "employeePhoto ":"xxxxx ",
            "employeeIc ":"xxxxx ",
            "employeePhone ":"xxxxx ",
            "employeeIdentity ":"xxxxx ",
            "employeeAddress ":"xxxxx ",
            "devicePassBean ":{
                "devicePassStart  ":"xxxxx ",
                "devicePassEnd ":"xxxxx ",
                "devicePassTimeOver ":0,
                "devicePassNumber ":1
            }
        }
        ]
}
```


.2.42. Description of the outcome parameters

parameter name			type	Whether must	description
su c cess			i nt	yes	Non-0: failed
msg			st ring	deny	Misinformation description, see Chapter 3 for details
passIn f o Array	e mployeeId		st ring	yes	Employee ID (character <32 bits)
	e mployeeName		st ring	yes	Employee Name (character <32 bits)
	emp l oyeeGrouPId		st ring	deny	Personnel group Id
	e mployeeGroupName		st ring	deny	Name of the personnel group (or department)
	employeePhotoWa y		S t ring	yes	Photo format base: bse 64 code character, path: download path
	employeePhot o		st ring	yes	photograph
	e mployeeIc		st ring	deny	IC card number
	employeePhone		st ring	deny	contact way
	emp loyeeShold		floa t	deny	Face recognition threshold, 0: not set, other: threshold size
	em p loyeeIdentity		st ring	deny	ID card information
	emp l oyeeAddress		st ring	deny	address message
	d eviceP a ssBean	devicePassStart	st ring	yes	Access Start time (year-month-day time: minutes: seconds, e. g.: "2020-03-06 16:45:20")
		d evicePassEnd	st ring	yes	Pass End time (year-month-day time: minutes: seconds, e. g.: "2020-03-06 16:45:20")

vesting instrument

		devicePassTimeOver	int	yes	0: Travel time is not limited 1: According to the passage time limit
		devicePassNumber	int	yes	0 Unlimited traffic times, other: pass times

.2.52 instance

POST http://192.168.1.42:8080/devicePass/selectPassInfo

Pretty Raw Preview Visualize JSON


```
{
    "success": 0,
    "passInfo": [
        {
            "employeeId": "3984e6e56881f975",
            "employeeGroupId": "3df260f6-e7b3-4d3f-8615-dcd520c95eda",
            "employeeName": "est_12233432_男",
            "employeeSex": null,
            "employeeIc": null,
            "employeePhone": null,
            "employeeIdentity": null,
            "employeePhoto": "http://uniwin-face.oss-cn-shenzhen.aliyuncs.com/photo/hu123456/est_12233432_男.jpg",
            "employeePhotoWay": "path",
            "employeeShold": 0.0,
            "employeeRemarks": null,
            "employeeDescribe": null,
            "employeeAddress": null,
            "employeeTime": "2020-07-20 14:11:35",
            "employeeState": 0,
            "departmentId": null,
            "employeeRefirst": null,
            "employeeRecond": null,
            "companyId": "3b55a8f7-9e6b-4901-8433-f282c47ab9bb",
            "visitorLicensePlate": null,
            "visitorTogetherNumber": null,
            "visitorPerson": null,
            "visitorReason": null,
            "visitorTime": null,
            "visitorQrCode": null,
            "visitorSnapTime": null,
            "visitorVerification": 0,
            "devicePassBean": {
                "devicePassId": "1161",
                "deviceGroupId": "1424f046f0ff52d0",
                "employeeGroupId": "3df260f6-e7b3-4d3f-8615-dcd520c95eda",
                "devicePassStart": null,
                "devicePassEnd": null,
                "devicePassState": 0,
```


.32. Import the result feedback of the employee authorization information

Request mode: POST

Request address: http ://server IP :port /devicePass /setPassResult

.3.12 Request package

```
{
   "deviceId ":"xxx ",
   "successNumber ":16,
      "failNumber ":1,
      "failEmployeeId ":[
         "employeeId ":"xxx ",
         "errorCode ":12
      ]
}
```

.3.22 Parameter description

parameter name		Whether must	type	description
de v iceId		strin g	yes	equipment id
s uccessNumber		i nt	yes	The number of import success
f a ilNumber		i nt	yes	The number of import failures
failEmp l o yeeId array	e mployeeId	st ring	yes	Import of a failed employee id array
	e r rorCode	I nt	yes	Import failed reason code (specific description see error code)

.3.32 Return results

```
{
      "success ":0,
      "msg ":xxxxxx
}
```

.3.42. Description of the outcome parameters

parameter name	type	Whether must	description
su c cess	i nt	yes	Non-0: failed
msg	st ring	deny	Misinformation description, see Chapter 3 for details
da ta	JSON array	deny	Content was empty and the query failed

.3.42 instance

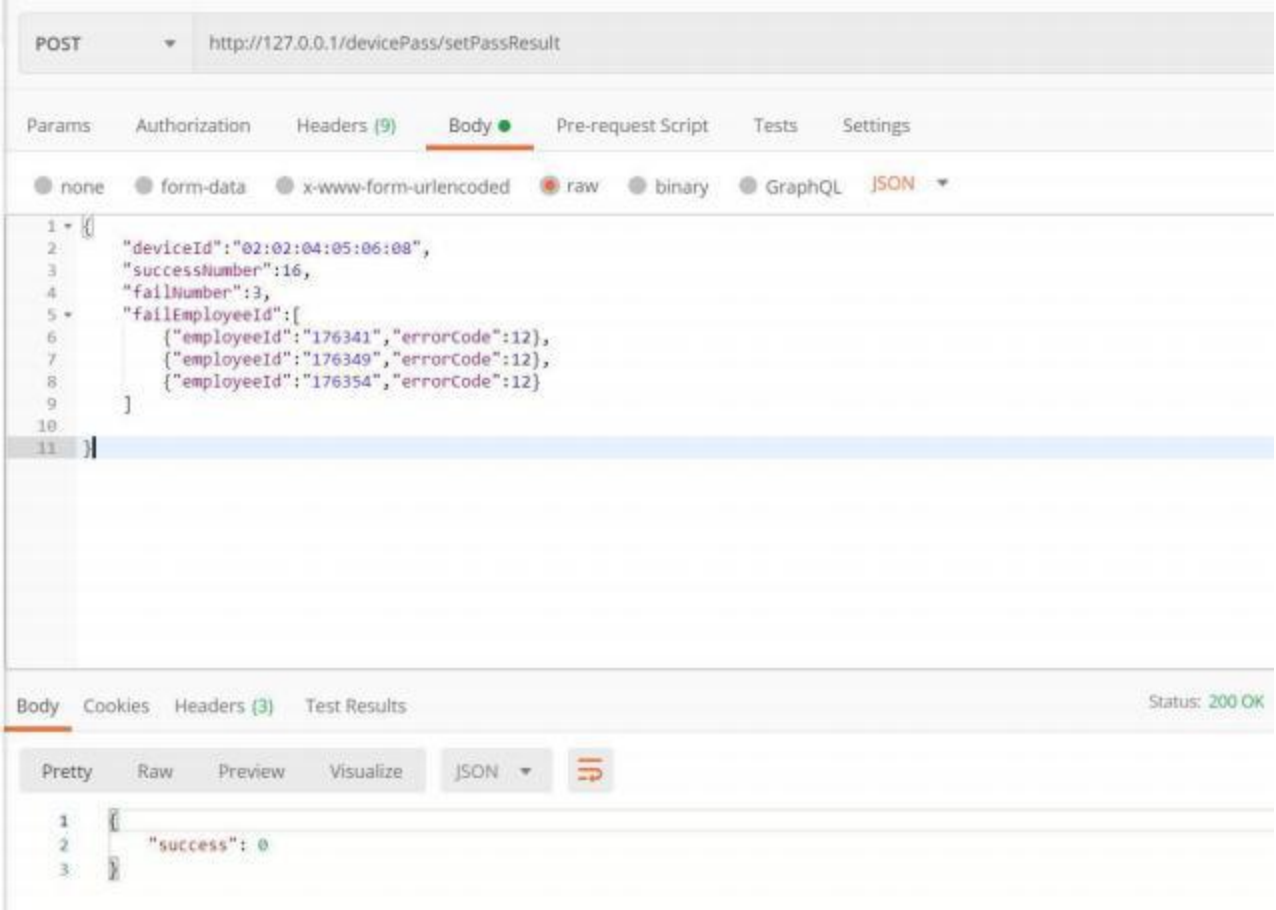

2.42.3. The device actively triggers the cloud to obtain and delete employee information

Request mode: POST

Request address: http ://server IP :port /devicePass /select DeleteInfo

.4.12 Request package

```
{
    "deviceId ":"xxxxx ",
}
```

.4.22 Parameter description

parameter name	type	Whether must	description
de v iceId	strin g	yes	equipment ID

.4.32 Return results

```
{
    "success ":0,
```

```
        "empty ":0,
        "deleteInfo ":[
            {
                "employeeId "::"xxxxxx "
            },
            {
                "employeeId "::"xxxxxx "
            }
        ]
}
```


.4.42. Description of the outcome parameters

parameter name		type	Whether must	description
su c cess		int	yes	Non-0: failed
msg		strin g	deny	Misinformation description, see Chapter 3 for details
empt y		int	yes	1: Empty all employee information 0: Delete by the specified id
delet e Info count group	e mployeeId	strin g	yes	employee Id
da ta		JSON array	yes	Content is empty and the query has failed

.4.42 instance

POST http://127.0.0.1/devicePass/selectDeleteInfo

Params Authorization Headers (9) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2     "deviceId":"122"
3 }
```

Body Cookies Headers (5) Test Results

Pretty Raw Preview Visualize JSON


```
1  {
2      "deleteInfo": [
3          {
4              "employeeId": "41069a7f-a09b-4912-a523-89570ff08c26"
5          },
6          {
7              "employeeId": "ee656b3e-f123-49f7-9223-b1b89cf45855"
8          }
9      ],
10     "success": 0
11 }
```

2.5 The device uploads the initial parameter information of the current device

Request mode: POST

Request address: http :// server IP :port /parameter /inertParameter

.5.12 Request package


```
{
        "deviceId ":"xxxxx ",
        "parameterVolume ":10,
        "parameterPreview ":2,
        "parameterMoreFace ":1,
        "parameterPolling ":5,
        "parameterLig htTimeout ":10,
        "parameterLig htSwitch ":1,
        "parameterLig htActive ":1,
        "parameterFaceThresho ld ":0.45,
        "parameterTempThresholdMax ":37.3,
        "parameterTempThresholdMi n ":28.5,
        "parameterSystemTime ":1584427174,
        "parameterSaveExternalvisitors ":1,
        "parameterMask ":1,
        "parameterCompensate ":850,
        "parameterLoginName ":"xxxxx ",
        "parameterLoginPassword ":"xxxxx ",
        "parameterNetworkSwitch ":1,
        "parameterNetwork IpActive ":1,
        "parameterNetwork IpUrl ":"xxxxx ",
        "parameterNetworkSubnet Mask ":"xxxxx ",
        "parameterNetworkGteway ":"xxxxx ",
        "parameterNetwork Dns ":"xxxxx ",
        "parameterWifiSwitch ":1,
        "parameterWifiName ":"xxxxx ",
        "parameterWifiPassWord ":"xxxxx ",
        "parameterHotspotSwitch ":0,
        "parameterHotspot Name ":"xxxxx ",
        "parameterHotspot Password ":"xxxxx ",
        "parameterFirmwareMsg ":"xxxxx ",
        "parameterFahrenheitSwitch ":0
}
```


.5.22 Parameter description

parameter name	type	Whether must	description
de v iceId	strin g	yes	equipment ID

param e terVolume	int	yes	Volume size (range 0-84)
parameterPrevie w	int	yes	In vivo detection, 1 on, 0 off
p arameterMoreFace	int	yes	Set the multiple-face detection value
param eterPolling	int	yes	Active trigger of cloud rotation training time (in seconds)
pa rameterLightTimeout	int	yes	White fill light lights out time
para m eterLightSwitch	int	yes	Fill light switch: 0: off, 1: on (automatic light is set with fill light on)
parameterLightActiv e	int	yes	Automatic lighting: 0: off, 1: on
parameterFaceThresho ld	floa t	yes	Face alignment threshold
p arameterTempThresholdMax	floa t	yes	Temperature alignment threshold (maximum value)
par a meterTempThresholdMin	floa t	yes	Temperature alignment threshold (minimum value)
p arameterTempPattern	int	yes	Temperature screening, 0 off, 1 on
p arameterSystemTime	lon g	yes	Synchronization system time (timestamp, e. g.: 1584427174 corresponds to 2020-0317 14:39:34)
p arameterSaveExternalvisitors	int	yes	Store non-employee identification records, 0: Not storage, 1: storage
parameterMas k	int	yes	1: Open the mask for detection, other: close
par ameterCompensate	int	yes	0~1000, the temperature compensation value
par a meterLoginName	strin g	yes	Device login account
p arameterLoginPassword	strin g	yes	Device login password
parameterNetworkSwitc h	int	yes	Wired network switch, 1: on, 0: off
parameterNetwork IpActive	int	yes	Wired network automatic ip, 1: on, 0: off
parameterNetwork IpUrl	strin g	yes	Wired Network Ip address ("/ / 192.168.0.110")
parameterNetworkSubnet Mask	strin g	yes	Wired network subnet mask ("/ / 255.255.255.0")
pa r ameterNetworkGteway	strin g	yes	Wired Network gateway ("/ / 192.168.0.1")
parameterNetwork Dns	strin g	yes	Dns (“//192.168.0.1”)
para meterWifiSwitch	int	yes	Wireless network switch, 1: on, 0: off
pa rameterWifiName	strin g	yes	Wireless network account
parameterWifiPassWor d	strin g	yes	Wireless network password
parameterHotspotSwitc h	int	yes	Hot spot switch, 1: on, 0: off
parameterHotspot Name	strin g	yes	Hot account
parameterHotspot Password	strin g	yes	Hot password
pa r ameterFirmwareMsg	strin g	yes	Firmware version information
para m eterFahrenheitSwitch	int	yes	Open temperature, 1: on, 0: off

.5.32 Return results

```
{
        "success ":0,
}
```

.5.42. Description of the outcome parameters

parameter name	type	Whether must	description
su c cess	int	yes	Non-0: failed
msg	strin g	deny	Misinformation description, see Chapter 3 for details

.5.42 instance

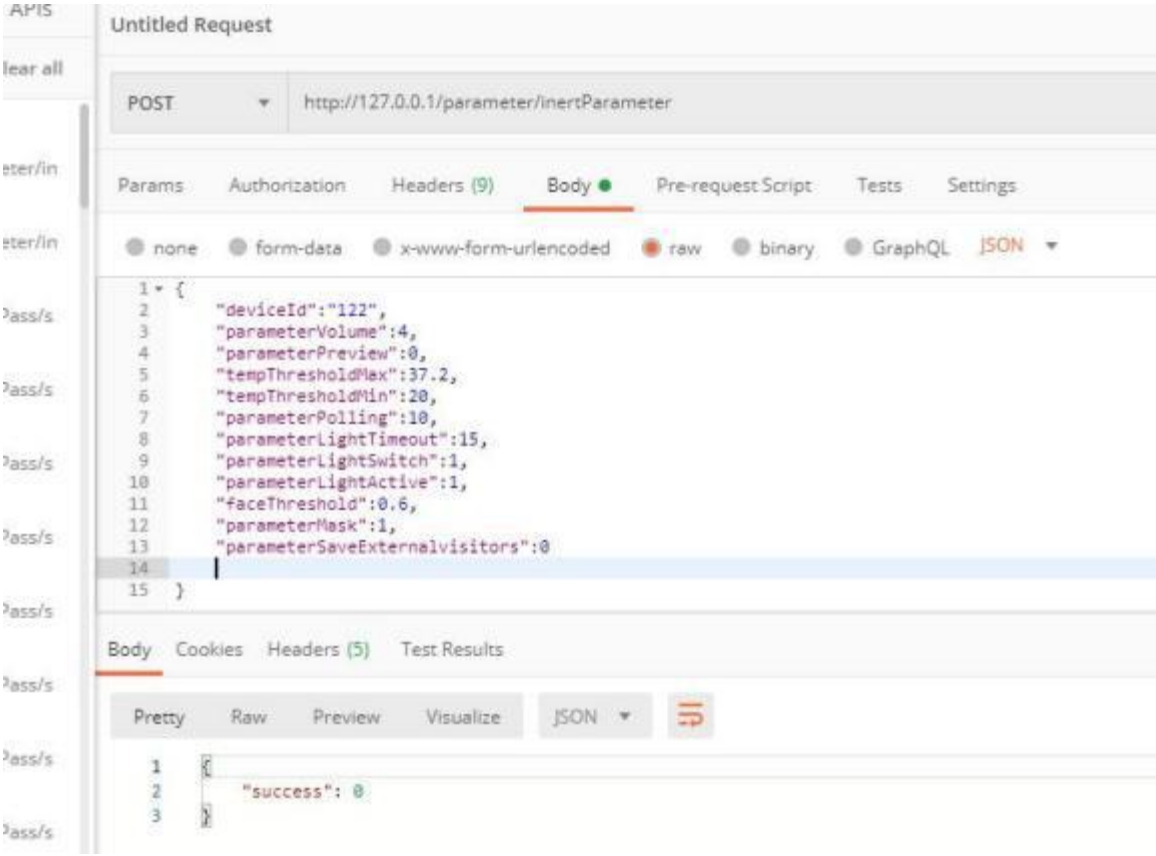

2.6 The device actively triggers the cloud to obtain the parameter information to be set by the device

Request mode: POST

Request address: http ://server IP :port /parameter /selectParameterInfo

.6.12 Request package

```
{
    "deviceId ":"xxxxx ",
}
```

.6.22 Parameter description

parameter name	type	Whether must	description

vesting instrument

de v iceId	strin g	yes	equipment ID

.6.32 Return results


```
{
        "success ":0,
        "msg ":"xxxxxx ",
        parameterInfo :{
            "parameterPreview ":2,
            "parameterMoreFace ":1,
            "parameterPolling ":5,
            "parameterLig  htSwitch ":1,
            "parameterLig  htActive ":1,
            "parameterLig  htTimeout ":10,
            "parameterFaceThresho  ld ":0.45,
            "parameterTempThresholdMax ":37.3,
            "parameterTempThresholdMi  n ":28.5,
            "parameterTempPattern ":0,
            "parameterSystemTime ":1584427174,
            "parameterMask ":1,
            "parameterCompensate ":850,
            "parameterLoginName  ":"xxxxx ",
            "parameterLoginPassword ":"xxxxx ",
            "parameterFirmwareMsg ":"xxxxx ",
            "parameterFirmwareMd 5":"xxxxx ",
            "parameterFirmwarePath ":"xxxxx ",
            "parameterQRCodePath ":"xxxxx ",
            "parameterTempSwitch ":1
            "parameterTimeZone ":"xxxxxxxxx "
    }
}
```


.6.42. Description of the outcome parameters

parameter name		type	Whether must	description
su c cess		i nt	yes	Non-0: failed
msg		strin g	deny	Misinformation description, see Chapter 3 for details
	param e terVolume	i nt	deny	Volume size (range: 0100)
	parameterPrevie w	i nt	deny	1: Open the biopsy preview 0: Close closed biopsy preview
	p arameterMoreFace	i nt	deny	Set the multiple face detection value (not realized)
	param eterPolling	i nt	deny	Active trigger of cloud rotation training time (in seconds)

	par a meterLightSwitch	i nt	deny	Light light switch: 0: off, 1: on
	parameterLightActiv e	i nt	deny	Automatic lighting: 0: off, 1: on

	pa rameterLightTimeout	i nt	deny	Set the time for the white flash to automatically flash out (in seconds)
	p arameterFaceThreshold	floa t	deny	Face alignment threshold
	param e terTempThreshol d Max	floa t	deny	Temperature alignment threshold (maximum value)
	param e terTempThreshol dMi n	floa t	deny	Temperature alignment threshold (minimum value)
paramete rInfo Key value to seal dr , javabea n perhaps H ashMap <>	parameterTempPatter n	i nt	deny	Temperature screening, 0 off, 1 on
	p arameterSystemTime	lon g	deny	Synchronization system time (timestamp, e. g.: 1584427174 corresponds to 2020-0317 14:39:34)
	parameterMas k	i nt	deny	1: Open the mask for detection, other: close
	par ameterCompensate	i nt	deny	0~1000, the temperature compensation value
	par a meterLoginName	strin g	deny	Device login account
	p arameterLoginPasswor d	strin g	deny	Device login password
	parameterFi rmwareMsg	strin g	deny	Firmware version information
	parameterFi rmwareMd 5	strin g	deny	Firmware package MD5 value
	parameterFi rmwarePath	S tring	deny	Firmware download path
	pa rameterQRCodePath	S tring	deny	The QR code picture address of the device, and this QR code will be displayed on the setting menu page (use on demand)
	p arameterTempSwitch	I nt	deny	Temperature measuring mode switch.0: Non-temperature measuring mode 1: Temperature measuring mode
	p a rameterTimeZone	S tring	deny	Device time zone settings

.6.52 instance

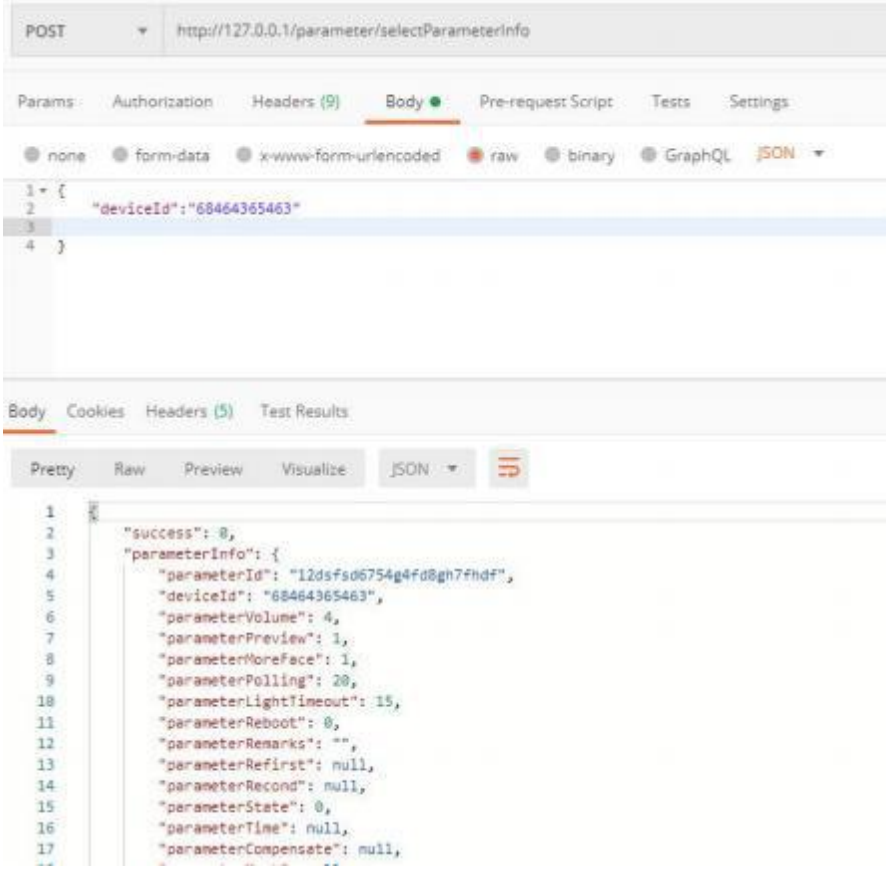

.72 Verify the online status of the device

Request mode: POST

Request address: http ://server IP :port /device /updateStateDevice

.7.12 Request package

```
{
    "deviceId ":"xxxxx ",
    "onlineTimeRequest ":10
}
```

.7.22 Parameter description

parameter name	type	Whether must	description
de v iceId	st ring	yes	equipment ID
onl i neTimeRequest	in t	yes	Request server time interval (10 seconds) (the background is selected as required)

.7.32 Return results

{
"success ":0,

```
    "msg ":"xxxxxx "
}
```

.7.42. Description of the outcome parameters

parameter name	type	Whether must	description
su c cess	i nt	yes	Non-0: failed
msg	st ring	deny	Misinformation description, see Chapter 3 for details

2.8 Special management of device request server (restart, restore factory settings)

Request mode: POST

Request address: http :// server IP :port /device /selectRestart

.8.12 Request package

```
{
    "deviceId ":"xxxxx "
}
```

.8.22 Parameter description

parameter name	type	Whether must	description
de v iceId	strin g	yes	equipment ID

.8.32 Return results

```
{
    "success ":0,
    "restart ":0,
    "severUpdate ":1,
    "severPath ":"xxxxx ",
    "recover ":0,
    "opendoor ":0
}
```

.8.42. Description of the outcome parameters

parameter name	type	Whether must	description
su c cess	i nt	yes	Non-0: failed
msg	st ring	deny	Misinformation description, see Chapter 3 for details
res tart	int	deny	0: No restart, 1: restart
s everUpdate	int	deny	0: Do not change the server path, 1: Update the server path information

se verPath	St ring	deny	Server path
recove r	int	deny	0: Normal, 1: restore factory settings
o p endoor	In t	deny	0: Not processing, 1: open the relay

.8.52 instance

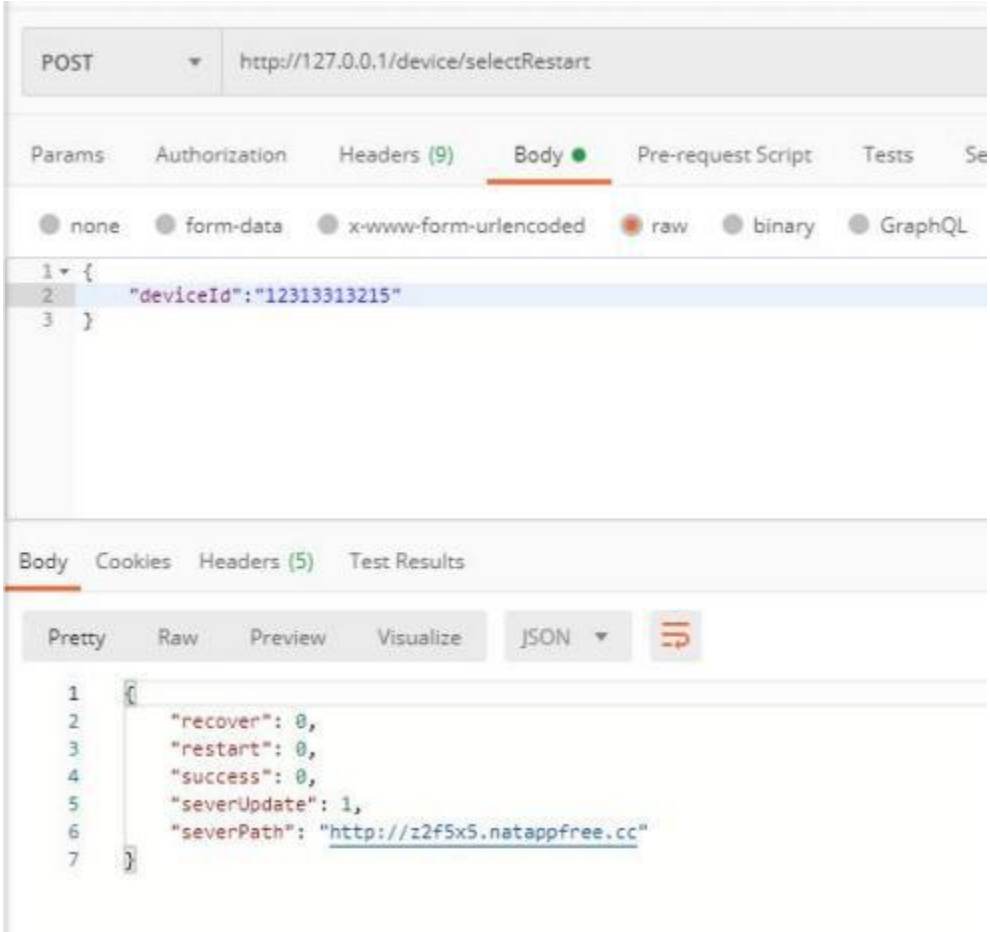

2.9 Device update server path result feedback

Request mode: POST

Request address: http :// server_IP :port /device /setPathNews

.9.12 Request package

```
{
        "success ":"xxxxx ",
        "deviceId ":"xxxxx ",
        "newServerPath ":"xxxxx "
}
```

.9.22 Parameter description

parameter name		type	wheth er or not must	description
success	success	i nt	yes	1: Success
	de v iceId	strin g	yes	equipment id
	newServerPat h	strin g	yes	New server path
be defeated	success	i nt	yes	0: Failure
	msg	st ring	deny	error message
	se verPath	st ring	yes	Current server path
	de v iceId	strin g	yes	equipment id

.9.32 Return results

```
{
        "success ":0,
        "msg ":"xxxxxx "

}
```

.9.42. Description of the outcome parameters

parameter name	type	Whether must	description
success	int	yes	0: Success
ms g	stri ng	deny	"OK": success
da ta	JSON array	deny	Content was empty and the query failed

3 Error code

.13 Basic error code

su c cess	msg	description
0	OK / PASS	success
- 1	F AIL	be defeated
1	USER IS EXIST	The administrator name already exists
2	PERSON _ INFO _DATA _ERROR	Personnel information error
3	PERSON _ INFO _NO _DETECT _FACE	The human face cannot be detected
4	PER SON _ INFO _FACE _FEATURE _ FAIL	Failed to extract the feature values
5	PERSON _ INFO _MULTIPLE _FACE	Multiple faces were detected

vesting instrument

6	PERSON _ INFO _FACE _SIZE _ ERROR	Face size does not meet the requirements
7	PERSON _ INFO _IMAGE _DECODE _ FAIL	Picture decoding error
8	PERSON INFO PIC COPY ERROR	Picture copy failed
9	PERSON_ INFO_PI C _ NO _ HAVE	No pictures

10	PERSON _ INFO _INSERT _DB _ERROR	The database registration has failed
11	PERSON _ INFO _FACE _QUALITY _TOO _LOW	The face quality is too low
12	PERSON _ INFO _FACE _SIMILARITY _TOO _HIGH	Face faces are too high
13	PERSON _ INFO _MORE _THAN _SINGLE _REG _LIMIT	Over the single registration upper limit
14	PERSON _ INFO _IMAGE _FORMAT _ERROR	The picture format does not meet the requirements
15	PERSON _ INFO _INTERNAL _ERROR	Internal program error
16	PERSON _ REGISTRATION _ERROR	Repeat registration for the personnel
17	PERSON _ MIS _RECOGNIZED	Misidentification
18	IS LASTEST VERSION	It is already the latest version
19	IS NOT VALIDATE FIRMWARE	Is not a valid firmware
20	IS NOT ENOUGH SPACE	There is not enough storage space
21	IS NOT LOGIN	not log in
22	IS _NOT _ENOUGH _ MEMORY	run out of memory
23	PW D _ ERROR	wrong password
24	SSID _TOO _LONG	SSID too long (over 31 characters)
25	PSK _TOO _LONG	The hotspot password is too long (more than 8 characters)
26	OPEN _ DOOR _TOO _OFTEN	Open the door too frequently

.23 Employee import failure error code

su c cess	msg	description
0	PERSON _ REG_OK	Import success
1	PERS ON _ REG _ REFUSE	The face was rejected
2	PERSON _ INFO _DATA _ERROR	Personnel information data error
3	PERSON _ INFO _NO _DETECT _FACE	Unable to detect the face
4	PER SON _ INFO _FACE _FEATURE _ FAIL	Face feature value extraction failed
5	PERSON _ INFO _MULTIPLE _FACE	Multiple faces were detected
6	PERSON _ INFO _FACE _SIZE _ ERROR	Image size is not satisfactory
7	PERSON _ INFO _IMAGE _DECODE _ FAIL	Image decoding failed
8	PERSON _ INFO _PIC _COPY _ERROR	Image copy error
9	PERSON INFO PIC NO HAVE	No images
10	PERSON INFO INSERT DB ERROR	Failed to write the person information to the database
11	PERSON _ INFO _FACE _QUALITY _TOO _LOW	Image quality is too low
12	PERSON _ INFO _FACE _SIMILARITY _TOO _HIGH	Face similarity is too high
13	PERSON _ INFO _MORE _THAN _SINGLE _REG _LIMIT	More than one registration limit
14	PERSON _ INFO _IMAGE _FORMAT _ERROR	The image format is not compliant
15	PERSON _ INFO _INTERNAL _ERROR	Application internal error

vesting instrument

16	PERSON _ REGISTRATION _ERROR	Duplicate registration error
17	PERSON _ MIS _RECOGNIZED	The human face is someone else
18	PERSON _ REG _COMPARE _RESULT _OK	Face registration check was performed successfully
19	PERSON _ REG _COMPARE _RESULT _FAIL	Face registration verification has failed
20	EMPLOYEE _JSON _STRUCT _ERROR	Json data parsing error