

Import TestPlan Results into TestLink

Purpose of the tool

If you want to log TestCases results in an “offline mode” (no access to TestLink web server during test Execution) or if you want to execute each TestCase in particular order, the easiest way is to use tables.

TestLink is able to use XML to import testcases Results. This document will explain how to export a TestPlan to use it into Excel and how to import TestCases Results into TestLink using XML files. Excel is used as editor to add or edit TestCases Results, then transformed via macro to XML file.

Version information

- **Excel Filename :** 03-ImportTestsPlanExecResultsIntoTestLink.xls
- **Applicable Excel Macro Version :** 20140827
- **Works with :**
 - ✓ TestLink 1.9.3
 - ✓ TestLink 1.9.4
 - ✓ TestLink 1.9.5
 - ✓ TestLink 1.9.6
 - ✓ TestLink 1.9.7
 - ✓ TestLink 1.9.8
 - ✓ TestLink 1.9.9
 - ✓ TestLink 1.9.10
 - ✓ TestLink 1.9.11

Summary

Purpose of the tool.....	1
Version information	1
Summary	1
Define a TestPlan in TestLink.....	2
Export a TestPlan from TestLink to XML file	2
Excel pattern overview	3
XML file generation	8
Execution Results Import into TestLink.....	10
Tips and problems	12

Define a TestPlan in TestLink

TestPlan must be defined in TestLink as explained in TestLink documentation (TestPlan creation, milestones definition, build definition, Add/remove TestCases in TestPlan).

Export a TestPlan from TestLink to XML file

In Test Execution section, a tree containing all TestCases to execute is displayed. In this view, the TestPlan can be exported.



Figure 1 : Access Tests Execution Section

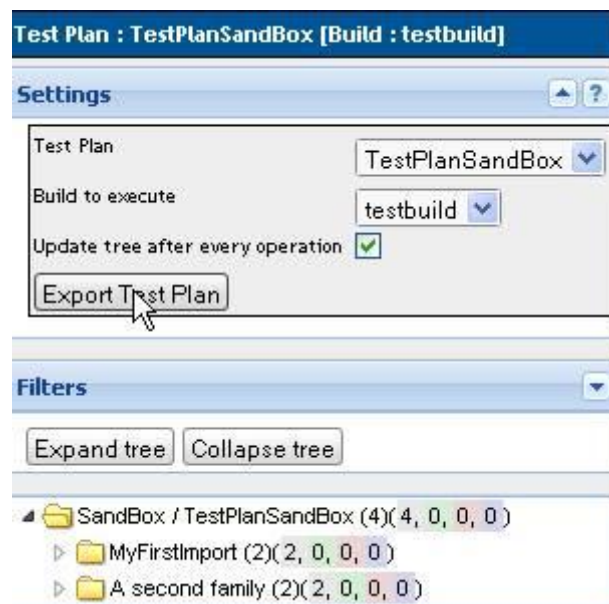


Figure 2 : Access to the export TestPlan button

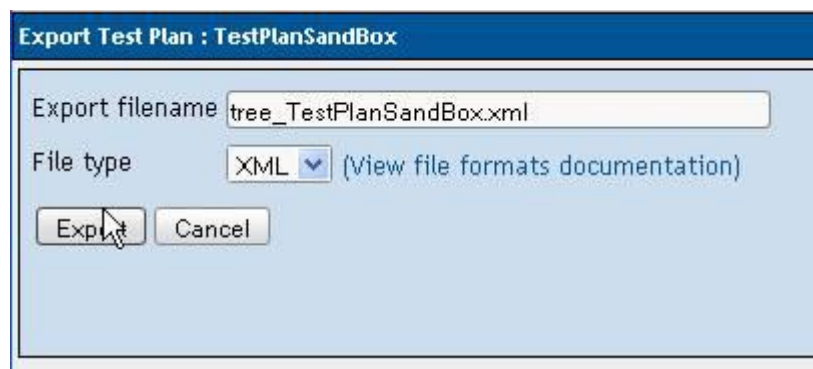


Figure 3 : Export the TestPlan as a XML file

Excel pattern overview

The Excel file used to log execution results of a TestPlan is named “03-ImportTestPlanExecResultsIntoTestLink.xls”. Excel Macros must be activated on this file to work properly.

TestPlan			Execution				
TestSuiteName	TestName	External ID	Result	Notes	Tester	Time Stamp	Related Bug ID

- The “Test Plan” section (yellow columns header) information are extracted from a TestPlan export from TestLink (XML format).
- The “Execution” section (blue columns header) should be used during Test Execution to log every element about the execution.
- All these information is used during XML file generation to provide results to TestLink.

Import a TestPlan into Excel file

- 1) Use the button “TestLink TestPlan Import”

TestPlan		
TestSuiteName	TestName	External ID

Figure 4 : Select Load a TestLink TestPlan button

- 2) Select the XML file to import.

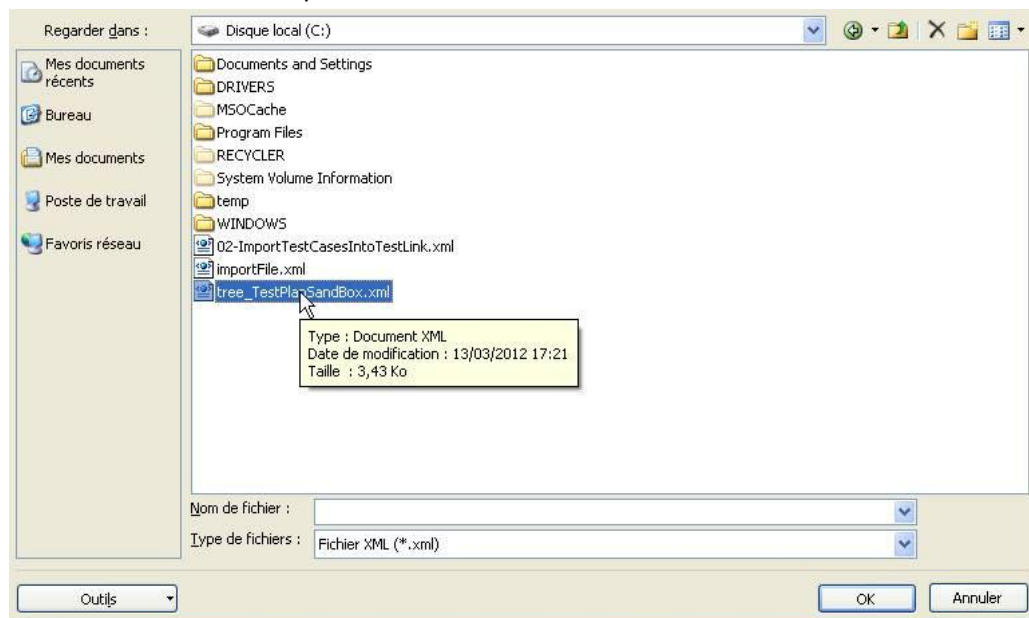


Figure 5 : Select the XML file to import in Excel

During import treatments, Excel prevents you that the XML scheme has to be created. Check the “don’t ask again” box to switch to a silent mode during next uses of the macro.

Import TestPlan Execution Into TestLink How To

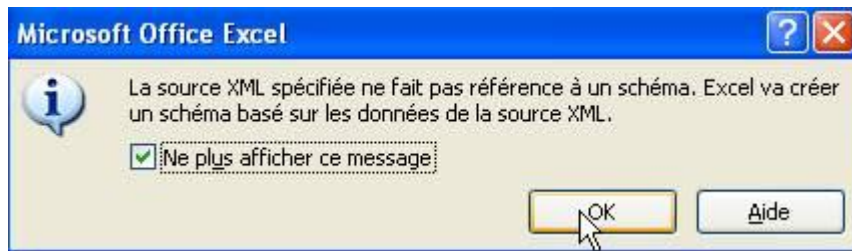


Figure 6 : XML source in Excel

The import process fills the Yellow columns headers of the Excel file

	TestLink Test Plan Import	TestPlan	
1	TestSuiteName	TestName	External ID
2	MyFirstImport	First Test case imported	123
3	MyFirstImport	Second test for fun	124
4	A second family	a test case included in family	125
5	A second family	an other test case included in family	126

Figure 7 : TestPlan data import

- Each TestName is a HTTP link to the TestCase content
- External ID is the technical way to link an exported TestCase in a XML TestPlan file and a TestCase in a XML TestPlan Result file. This information mustn't be modified.

Execution information in Excel file

Execution Notes is a comment that can be added for each TestCase.

	Execution					XML Result Generation
External ID	Result	Notes	Tester	TimeStamp	Related Bug ID	
123						
124						
125						
126						

Figure 8 : Execution Notes

An execution notes editor is available to help user to fill information about the testcase step by step in a formatted way. To access note editor, select the cell to fill and use the hotkey "Ctrl + E".

The result of the Note Editor is always written in the Column "Notes", on the row selected when the hotkey is used (even if the selected cell is changed during the Note Edition).

Figure 9 : Note Edition

External ID	Execution		XML Result Generation		
	Result	Notes	Tester	Time Stamp	Related Bug ID
123		[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action			
124					
125					
126					

Figure 10 : Notes execution content after validation

The step by step format is useful to know why a test has been evaluated as “Blocked” or “Failed”, because TestLink doesn’t log result by step approach.

Each TestCase Result should be chosen between “Passed”, “Blocked” and “Failed” values

External ID	Result	Notes	Execution		
			Tester	Time Stamp	Related Bug ID
123		[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action			
124	Passed				
125	Blocked				
126	Failed				

Figure 11 : TestCase Result selection

The Execution TimeStamp is automatically filled when you change Result Value, deleted if you delete Result Value

External ID	Result	Notes	Execution		
			Tester	Time Stamp	Related Bug ID
123	Blocked	[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action		2014-04-03 11:48:17	
124					
125					
126					

Figure 12 : TestCase Execution TimeStamp

Execution Tester must be the identifier of a user defined in TestLink database (login name). If nothing is filled, the user who imports the XML result file will be used as Execution Tester by TestLink.

External ID	Result	Notes	Execution		
			Tester	Time Stamp	Related Bug ID
123	Blocked	[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action	Mr.Bricodage	2014-04-03 11:49:13	
124					
125					
126					

Figure 13 : TestCase Execution Tester

The Related Bug ID column can be used to list existing Bug IDs related to a TestCase Execution. The cell can be empty or filled with one or more IDs.

The character ',' must be used between each Bug ID if more than one bug ID is filled. The use of carriage return inside the cell is possible but not mandatory.

External ID	Result	Notes	Execution		
			Tester	Time Stamp	Related Bug ID
123	Blocked	[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action	Mr.Bricodage	2014-04-03 11:49:13	151; 145,22
124					
125					
126					

Figure 14 : Bug ID related to a TestCase

A column is available to provide the Execution Duration of each testcase. This column is hidden by default. The execution duration must be provided in minutes.

Import TestPlan Execution Into TestLink How To

<div>XML Result Generation</div> <div>Execution</div>					
Result	Notes	Tester	TimeStamp	Related Bug ID	Duration

Figure 15 : TestCase Execution Duration

XML file generation

When all TestPlan Results have been filled in Excel, just click on 'XML Result Generation' button to execute the Excel Macro.

Execution					
External ID	Result	Notes	Tester	Time Stamp	Related Bug ID
123	Blocked	[TestCase] Test TestCase has to be reviewed : Step 1 and 3 can't be executed [Step 1 / Blocked] unable to access to the function [Step 2 / Passed] OK [Step 3 / Blocked] unable to make the step action	Mr.Bricodage	2014-04-03 11:49:13	151; 145,22

Figure 16 : XML file generation

If the file content has to be reviewed, a popup will appear explaining what's wrong

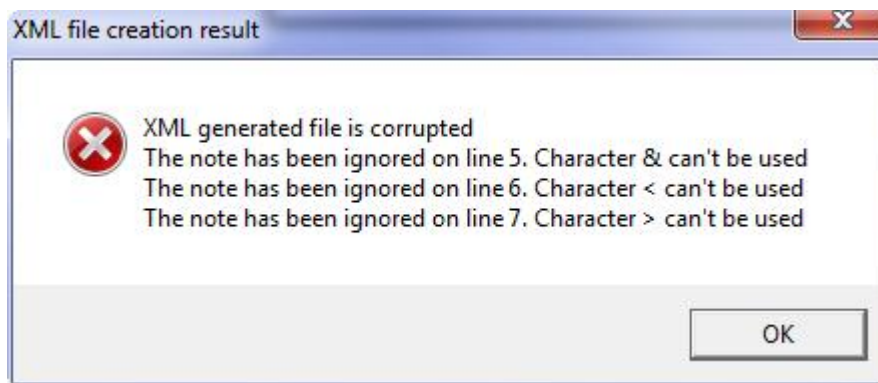


Figure 17 : XML file generation result KO

A log file containing all errors can be created if needed.

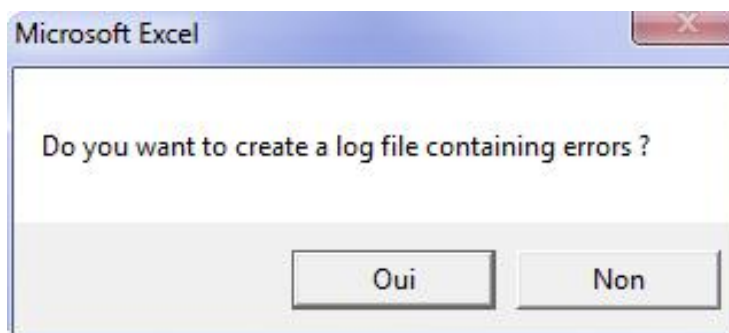


Figure 18 : Save the log file

The log file is created in the same Excel file folder, with the Excel file name (with a .log suffix).

If everything is OK with the file content, a popup will appear with the following text displayed

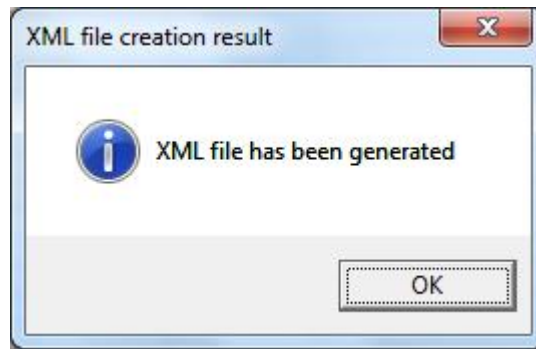


Figure 19 : XML file generation result OK

The XML file is created in the same Excel file folder, with the Excel file name (the .xls suffix is replaced by a .xml suffix).

Import Execution Results into TestLink

XML file generated by the macro must be used during the import process.

- 1) Select one testcase in the test Execution tree. The 'Import XML Result' Button is displayed in the right pane.

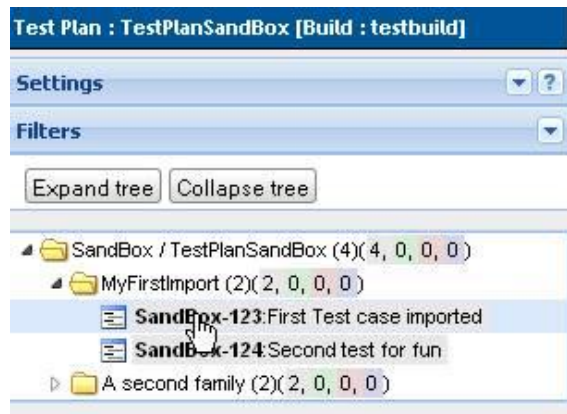


Figure 20 : Select one testcase to display import button

- 2) Select the import button

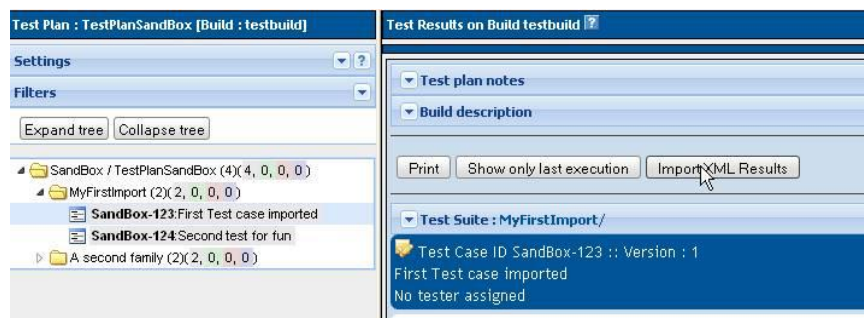


Figure 21 : Select 'import XML Results'

- 3) Configure the import options

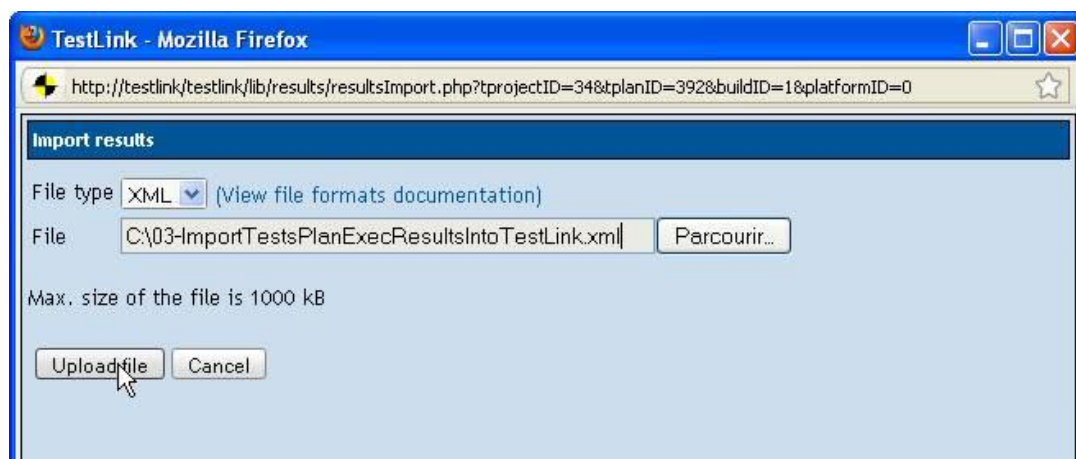


Figure 22 : Import Test Execution Result options

Import TestPlan Execution Into TestLink How To

4) Upload the file to import data

Import results
Import TestCase data : Test Case SandBox-123 - version 1 - Tester: admin - Result: passed - Execution Timestamp: '2012-03-13 17:31:25' - Imported!
Import TestCase data : Test Case SandBox-124 - version 1 - Tester: admin - Result: failed - Execution Timestamp: '2012-03-13 17:31:35' - Imported!
Import TestCase data : Test Case SandBox-125 - version 1 - Tester: admin - Result: blocked - Execution Timestamp: '2012-03-13 17:31:37' - Imported!
Import TestCase data : Test Case SandBox-126 - version 1 - Tester: admin - Result: passed - Execution Timestamp: '2012-03-13 17:31:32' - Imported!

Figure 23 : import Testcases result

Tips and problems

- **Load a TestPlan into Excel** is able only with Excel 2003 Pro, Excel 2007 and Excel 2010 (use a specific Excel function).
- The **XMLTestcases file encoding** depends of Excel version. In French version, the Excel generated file is not UTF-8 but ANSI. Encodage information is set to “ISO-8859-1” in XML file, allowing the use of Latin characters (like é, è or à used in French). If a “XML Loading Failed” is displayed during XML import in TestLink, check the file encoding.
- Each TestName is a **HTTP link to the TestCase** content. The HTTP link must be adapted with the TestLink environment. That can be done by updating the field “linkTo” in the Excel Macro Sub “ParseXMLTestPlan”.
- The BugID information has been tested and validated only with Mantis Bug Tracker.

Document Changelog

Excel File Version	Major Changes
20120314	Initial Release
20130218	Import has been successfully tested within TestLink 1.9.3, 1.9.4, 1.9.5 and 1.9.6
20130530	Import has been successfully tested within TestLink 1.9.7
20130916	Update How To information Add Note execution editor explanation
20140129	Update How To information Add Bug ID column explanation
20140403	Update How To information Explanation about export Log fonctionnality
20140415	Import has been successfully tested within TestLink 1.9.8 and 1.9.9 Add explanations about the new XML tag <execution_duration>
20140724	Import has been successfully tested within TestLink 1.9.10 Update How To information (Screenshots and Note Editor section)
20140827	Import has been successfully tested within TestLink 1.9.11 Remove the “prefix” section that is not needed

	anymore with TL 1.9.11
--	------------------------