Module 09 Lab - Ensemble Methods**Objective:** To learn how to use **ensemble methods**, which combine the predictions of several individual models to produce a final prediction that is more accurate and robust than any of the individual models alone.**In this lab, you will train and compare a single Decision Tree against a powerful ensemble method, the Random Forest.**

Part 1: The Wisdom of the Crowd**Concept:** The core idea behind ensemble methods is the "wisdom of the crowd." If you ask one person a difficult question, they might be wrong. But if you ask a large, diverse group of people the same question and average their answers, the result is often surprisingly accurate.Ensemble methods apply this to machine learning. Instead of relying on a single model, we build a "committee" of models and have them vote on the final prediction.Two popular ensemble techniques:* **Bagging (Bootstrap Aggregating):** Trains multiple models (e.g., Decision Trees) on different random subsets of the training data. The **Random Forest** is the most famous example.* **Boosting:** Trains models sequentially, where each new model focuses on correcting the errors made by the previous one. Examples include Gradient Boosting and AdaBoost.

Part 2: SetupWe will use the Iris dataset to classify flower species.

```
import pandas as pd
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
from sklearn.tree import DecisionTreeClassifier
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import accuracy_score
# Load and prepare data
iris = load_iris()
X = iris.data
y = iris.target
X_train, X_test, y_train, y_test = train_test_split(
    X, y, test_size=0.3, random_state=42
)
```

Part 3: A Single Decision TreeA single Decision Tree is prone to overfitting. It can create very specific rules that match the training data perfectly but don't generalize well.**Your Task:** Train a single `DecisionTreeClassifier` and evaluate its accuracy.

```
# --- ENTER YOUR CODE HERE ---#
single_tree = DecisionTreeClassifier(random_state=42)
single_tree.fit(X_train, y_train)
y_pred_tree = single_tree.predict(X_test)
accuracy_tree = accuracy_score(y_test, y_pred_tree)
print(f"Accuracy of a single Decision Tree: {accuracy_tree:.2%}")
```

```
Accuracy of a single Decision Tree: 100.00%
```

Part 4: The Random Forest Ensemble**Concept:** A Random Forest is an ensemble of many Decision Trees. It builds hundreds of trees, each trained on a random subset of the data and


using a random subset of the features. To make a prediction, it gets a vote from every tree in the "forest" and chooses the class that gets the most votes.This process of averaging the votes of many diverse trees makes the Random Forest much more robust and less prone to overfitting than a single tree.**Your Task:** Train a `RandomForestClassifier` and compare its accuracy to the single tree.

```
# --- ENTER YOUR CODE HERE ---#
# n_estimators is the number of trees in the forest.
random_forest = RandomForestClassifier(n_estimators=100, random_state=42)
random_forest.fit(X_train, y_train)
# 2. Make predictions and evaluate its accuracy
y_pred_rf = random_forest.predict(X_test)
accuracy_rf = accuracy_score(y_test, y_pred_rf)
print(f"Accuracy of the Random Forest: {accuracy_rf:.2%}")
```

```
Accuracy of the Random Forest: 100.00%
```

Part 5: Feature Importance**Concept:** A great benefit of tree-based ensembles like Random Forest is that they can tell you which features were most important for making accurate predictions.**Your Task:** Extract and plot the feature importances from your trained Random Forest model.

```
import matplotlib.pyplot as plt
import numpy as np
# --- ENTER YOUR CODE HERE ---#
# 1. Get the feature importances from the trained Random Forest model
importances = random_forest.feature_importances_
# 2. Create a bar plot to visualize them
feature_names = iris.feature_names
indices = np.argsort(importances)
plt.figure(figsize=(10, 6))
plt.title("Feature Importances from Random Forest")
plt.barh(range(len(indices)), importances[indices], color='b', align='center')
plt.yticks(range(len(indices)), [feature_names[i] for i in indices])
plt.xlabel('Relative Importance')
plt.show()
```

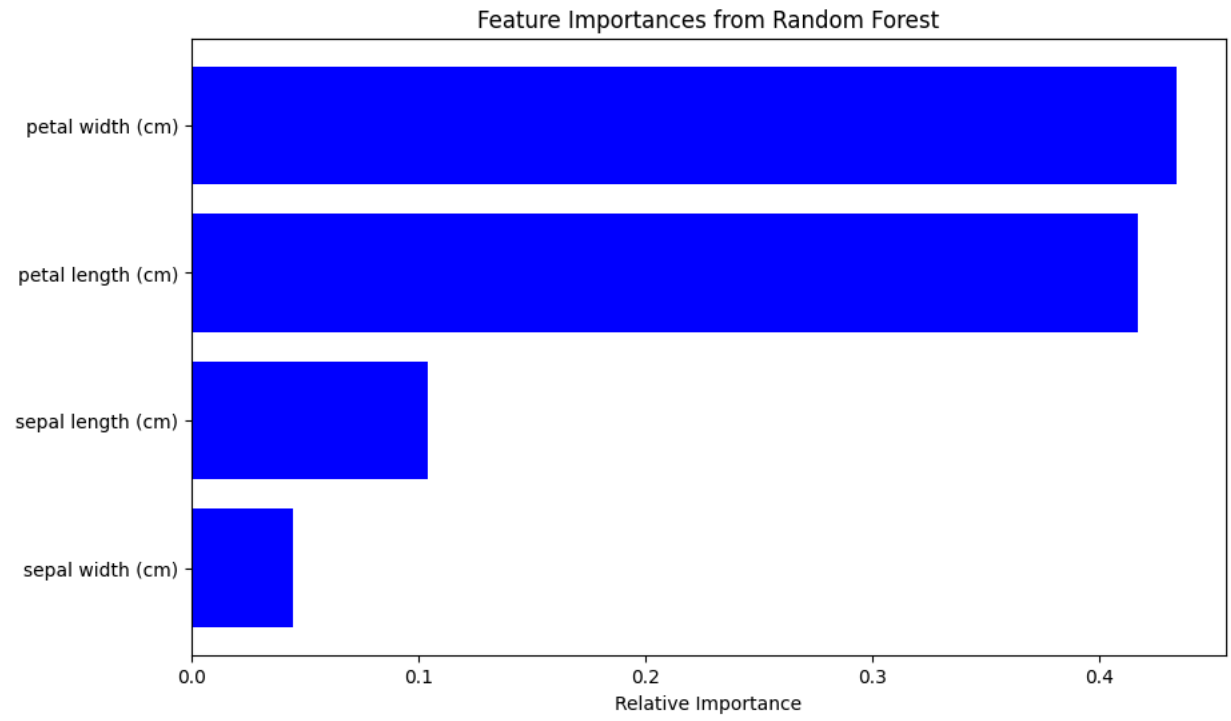

Close

```
## 📝 Knowledge Check**Instructions:** Answer the following questi
markdown cell.1.  **In your own words, what is the main idea behin
methods? Why is a "committee" of models often better than a single
**2.  **Which model performed better in this lab, the single Decis
the Random Forest? Is this what you expected? Why?**3.  **Looking
feature importance plot, which two features were most important fo
the iris flowers?** Does this match what you might expect from you
knowledge of flowers?
1. The main idea behind ensemble methods is combining multiple mod
better predictions instead of relying on just one. A group of mode
more reliable because they work together, helping reduce individua
and improvee overall accuracy.
2. Both the single Decision Tree and the Random Forest performed e
each achieving 100% accuracy. I expected the Random Forest to perf
because it combines multiple decision trees. However, the results
both models were able to classify the test data correctly.
3. Based on the feature importance graph, petal width and petal le
two most important features for classifying the iris flowers. This
to me because flowers can have different petal shapes and sizes, w
distinguish one species from another.
```

📝 Knowledge Check**Instructions:** Answer the following questions in this markdown cell.1. **In your own words, what is the main idea behind ensemble methods? Why is a "committee" of models often better than a single expert model?**2. **Which model performed better in this lab, the single Decision Tree or the Random Forest? Is this what you expected? Why?**3. **Looking at the feature importance plot, which two features were most important for classifying the iris flowers?** Does this match what you might expect from your own knowledge of flowers?

1. The main idea behind ensemble methods is combining multiple models to make better predictions instead of relying on just one. A group of models can be more reliable because they work together, helping reduce individual mistakes and improvee overall accuracy.
2. Both the single Decision Tree and the Random Forest performed equally well, each achieving 100% accuracy. I expected the Random Forest to perform better because it combines multiple decision trees. However, the results showed that both models were able to classify the test data correctly.
3. Based on the feature importance graph, petal width and petal length were the two most important features for classifying the iris flowers. This makes sense to me because flowers can have different petal shapes and sizes, which can help distinguish one species from another.