
(b) SARU | Subpixel-Adaptive Residual Upsampling

Low-resolution filtering + four subpixel-position weights

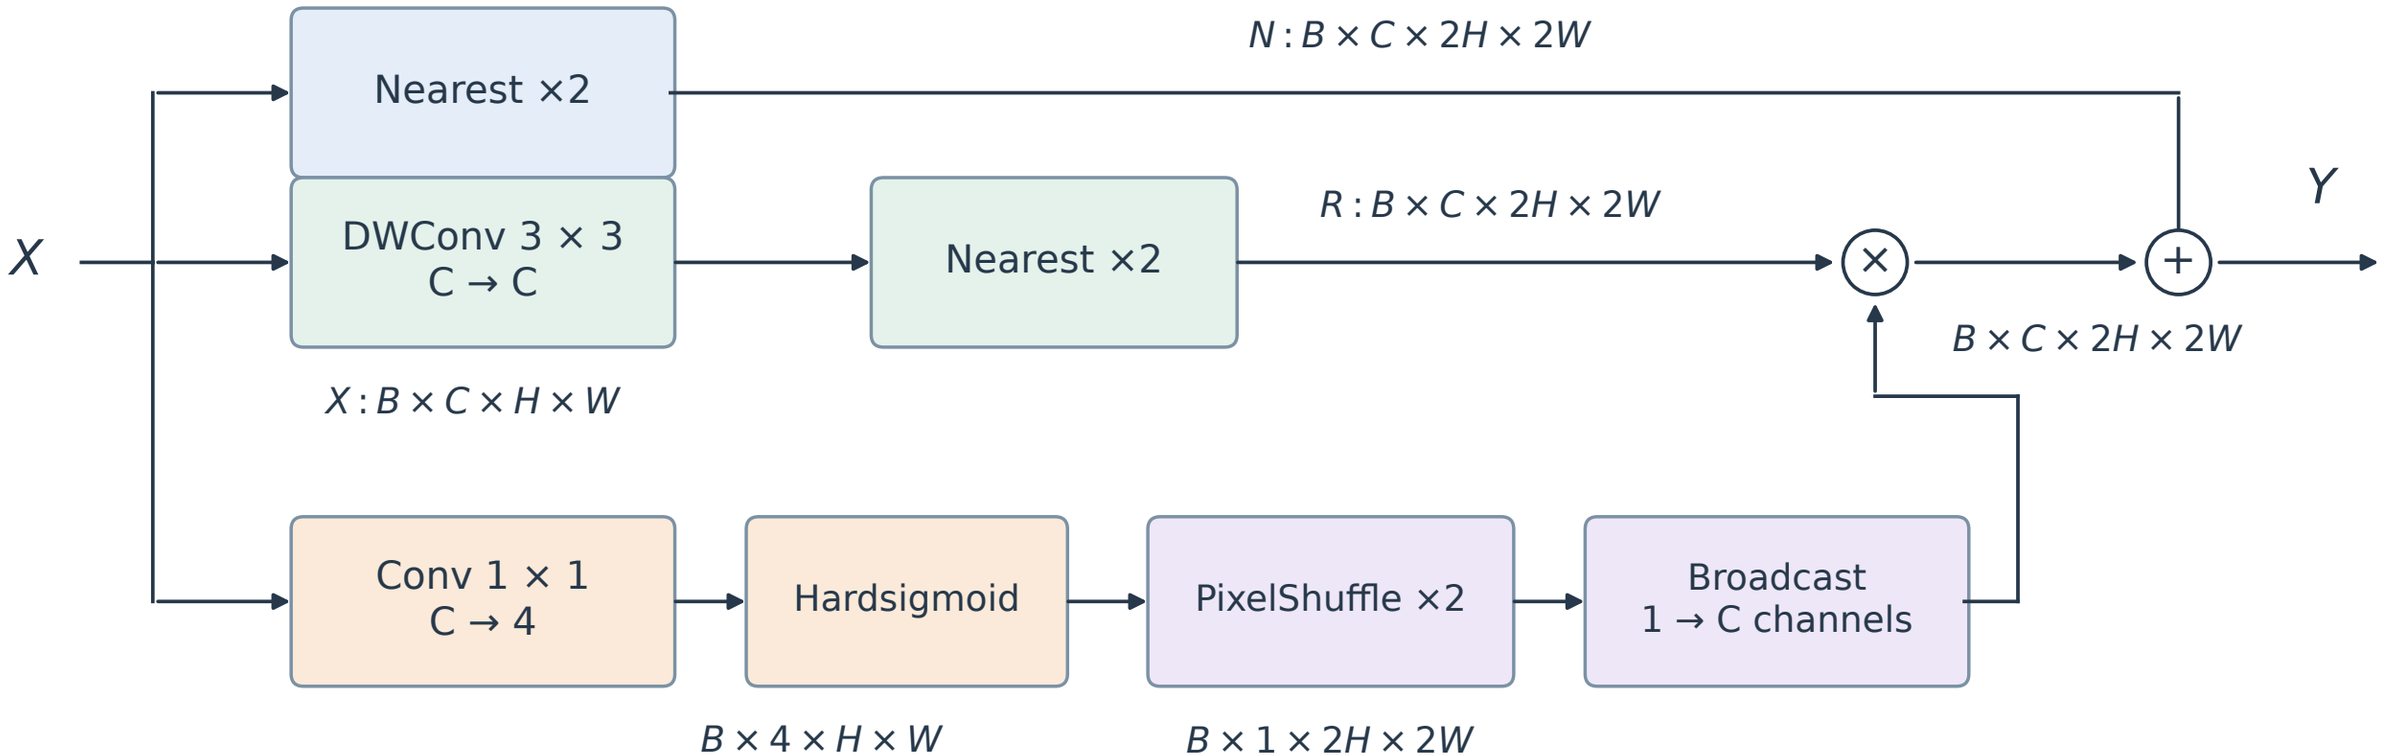

$$Y = \text{Nearest}_2(X) + \text{PS}_2(\text{HS}(\text{Conv}_{1\times1}(X))) \odot \text{Nearest}_2(\text{DWConv}_{3\times3}(X))$$