



# Kapitel 3: Virtualisierung

Franz Wimmer  
franz.wimmer@qaware.de

# Anforderungen an Cloud Computing



QAWARE

- Organisation der Ressourcen in einem Rechenzentrum
- Effiziente Nutzung der gegebenen Ressourcen zur Minimierung der Kosten
- Isolation der Ressourcen. Kunden sollen andere nicht sehen und auch nicht von ihnen beeinflusst werden. Seiteneffekte vermeiden. Security
- Entkopplung von der Hardware für mehr Flexibilität im Betrieb und Robustheit bei Ausfällen
- Ressourcen sollen flexibel vergeben werden. Steuerung mittels Software defined resources
- Lösung für diese Anforderungen ist Virtualisierung und macht Cloud Computing erst möglich.

# Virtualisierung

**Virtualisierung:** die Erzeugung von virtuellen Realitäten und deren Abbildung auf die physikalische Realität.

Zweck:

- **Multiplizität** □ Erzeugung mehrerer virtueller Realitäten innerhalb einer physikalischen Realität
- **Entkopplung** □ Bindung und Abhängigkeit zur Realität auflösen
- **Isolation** □ Physikalische Seiteneffekte zwischen den virtuellen Realitäten vermeiden



# Virtualisierungsarten

Virtualisierung ist stellvertretend für mehrere grundsätzlich verschiedene Konzepte und Technologien:

## Virtualisierung von Hardware-Infrastruktur

1. Emulation
2. Voll-Virtualisierung (Typ-2 Virtualisierung)
3. Para-Virtualisierung (Typ-1 Virtualisierung)

## Virtualisierung von Software-Infrastruktur

4. Betriebssystem-Virtualisierung (*Containerization*)
5. Anwendungs-Virtualisierung (*Runtime*)

# Virtualisierung und Cloud Computing

- Entkopplung von der Hardware für mehr Flexibilität im Betrieb und Robustheit bei Ausfällen.
- Normierung von Ressourcen-Kapazitäten auf heterogener und wechselnder Hardware („S-Instanz“, „XL-Instanz“).
- Zentrale Steuerung und Bereitstellung von Rechenressourcen über die mit Virtualisierung bereitgestellten Software-Defined-Resources.



QAWARE

# Virtualisierungsarten: Hardwarevirtualisierung

# Was wird virtualisiert?



Q|WARE

## ■ Prozessor

- Virtuelle Rechenkerne
- Dispatching von Prozessor-Befehlen auf echte Rechenkerne

## ■ Hauptspeicher

- Virtuelle Hauptspeicher-Partition
- Management der realen Repräsentation (im RAM, auf Festplatte, Ballooning)

## ■ Netzwerk

- Virtuelle Netzwerkschnittstellen und virtuelle Netzwerk-Infrastrukturen (VLAN)
- Brücken zwischen virtuellen und realen Netzwerken

## ■ Storage

- Virtuelle Festplatten-Laufwerke. Abbildung auf Dateien im realen Dateisystem. Volumen entweder vor-allokiert oder dynamisch wachsend.
- Virtuelle SANs (Storage Area Networks) über Aufteilung der Daten eines virtuellen Laufwerks auf viele Storage-Einheiten.

# Was wird virtualisiert?



QAWARE

- **Grafikkarte**

- z. B. Framebuffer (2D-Array mit Pixeldaten)
- 3D-Funktionalität (DirectX, OpenGL), siehe [https://en.wikipedia.org/wiki/GPU\\_virtualization](https://en.wikipedia.org/wiki/GPU_virtualization)
- Computing (KI, Simulationen) (Zunehmend wichtig für die Cloud)

- **Evtl. Peripherie wie USB, Maus, Keyboard**

- **Timer, Interrupt Controller**




# Klassischer Aufbau eines Betriebssystems mit Unterstützung der Rechnerarchitektur

## CPU User Mode

- Niedrigste Berechtigungsstufe
- Keine direkten Hardwarezugriffe
- Speicherschutz über die Memory Management Unit

## CPU Kernel Mode

- User Mode ruft Kernel über das System Call Interface (SCI) auf.
- Aktuell besteht das SCI bei Linux aus ca. 380 System Calls.
  - Höchste Berechtigungsstufe
  - Privileged CPU Instruktionen
- Zugriff auf Hardware mittels Treiber
- Übernimmt z. B. Dateisystemverwaltung und Scheduling der Anwendungen

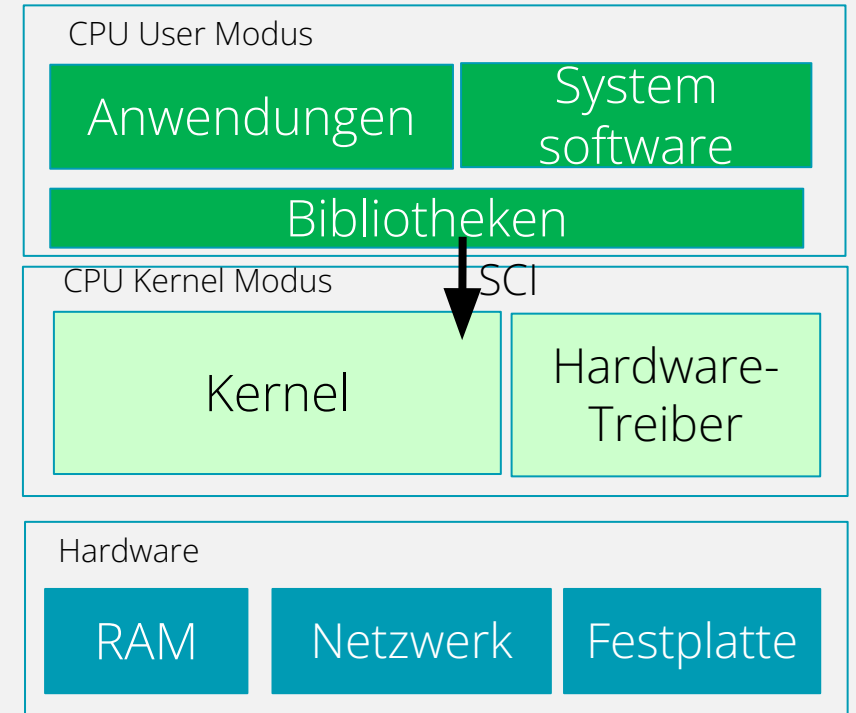


# Unterstützung durch die Hardware



- Software based virtualization
  - In dem klassischen Betriebsmodell hat nur der Usermodus die notwendigen Isolationseigenschaften. Der Kernelmodus kann hier emuliert werden. z. B. mittels “trap-and-emulate”. mit wenigstens 10% Performanceverlust.
- Hardware assisted virtualization
  - Oftmals wurden daher CPU Extensions entwickelt wie Intel-VT und AMD-V. Diese fügen einen neuen Prozessormodus (z. B. virtual execution mode) hinzu, bei dem sich das Gastbetriebssystem als mit vollen Privilegien arbeitend wahrnimmt, das Hostbetriebssystem jedoch geschützt bleibt
- Virtuelle Hauptspeicher-Partition im echten physikalischen Speicher. (Die Null verschiebt sich). Management der realen Repräsentation mittels der Management Memory Unit (MMU).
- Für die Durchreichung (Pass-Through) der Schnittstellen von echten Hardwaregeräten muss die Verschiebung der Null durch eine IOMMU (I/O Memory Management Unit) ausgeglichen werden.

# Hardware-Virtualisierung

- Durch Hardware-Virtualisierung werden die Ressourcen eines Rechnersystems aufgeteilt und von mehreren unabhängigen Betriebssystem-Instanzen genutzt.
- Anforderungen der Betriebssystem-Instanzen werden von der Virtualisierungs-Software (Virtual Machine Monitor, VMM) abgefangen und auf die real vorhandene Hardware umgesetzt.

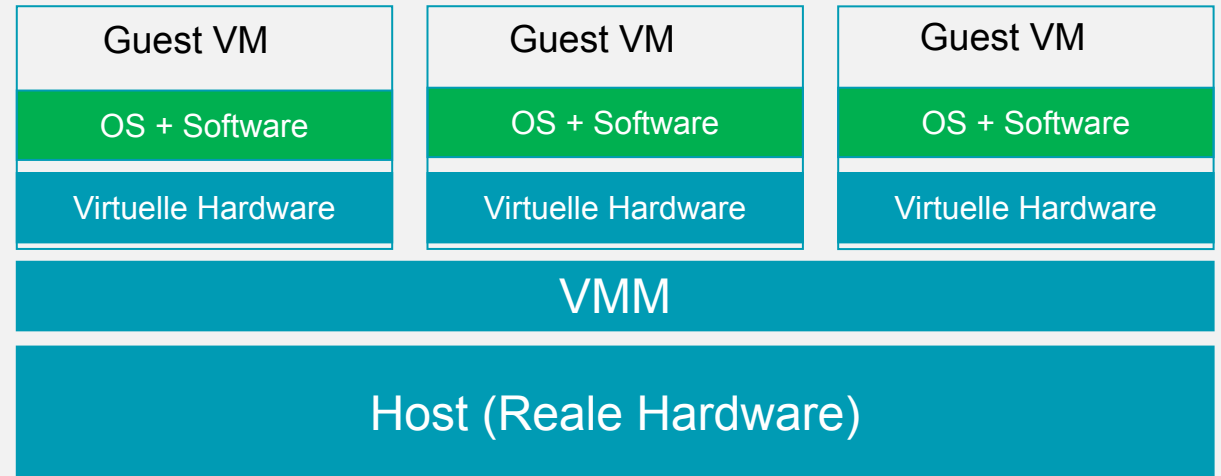

## Host

- Der Rechner, der eine oder mehrere virtuelle Maschinen ausführt und die dafür notwendigen Hardware-Ressourcen zur Verfügung stellt.

## Guest


- Eine lauffähige / laufende virtuelle Maschine

## VMM (Virtual Machine Monitor)

- Die Steuerungssoftware zur Verwaltung der Guests und der Host-Ressourcen

# Hardware-Virtualisierung: Voll-Virtualisierung

- Jedem Gastbetriebssystem steht ein eigener virtueller Rechner mit virtuellen Ressourcen wie CPU, Hauptspeicher, Laufwerken, Netzwerkkarten, usw. zur Verfügung
- Der VMM läuft hosted als Anwendung unter dem Host-Betriebssystem (Typ 2 Hypervisor)
- Der VMM verteilt die Hardwareressourcen des Rechners an die VMs
- Teilweise emuliert der VMM Hardware, die nicht für den gleichzeitigen Zugriff mehrerer Betriebssysteme ausgelegt ist (z.B. Netzwerkkarten, Grafikkarten)
- Leistungsverlust: 5-10%.

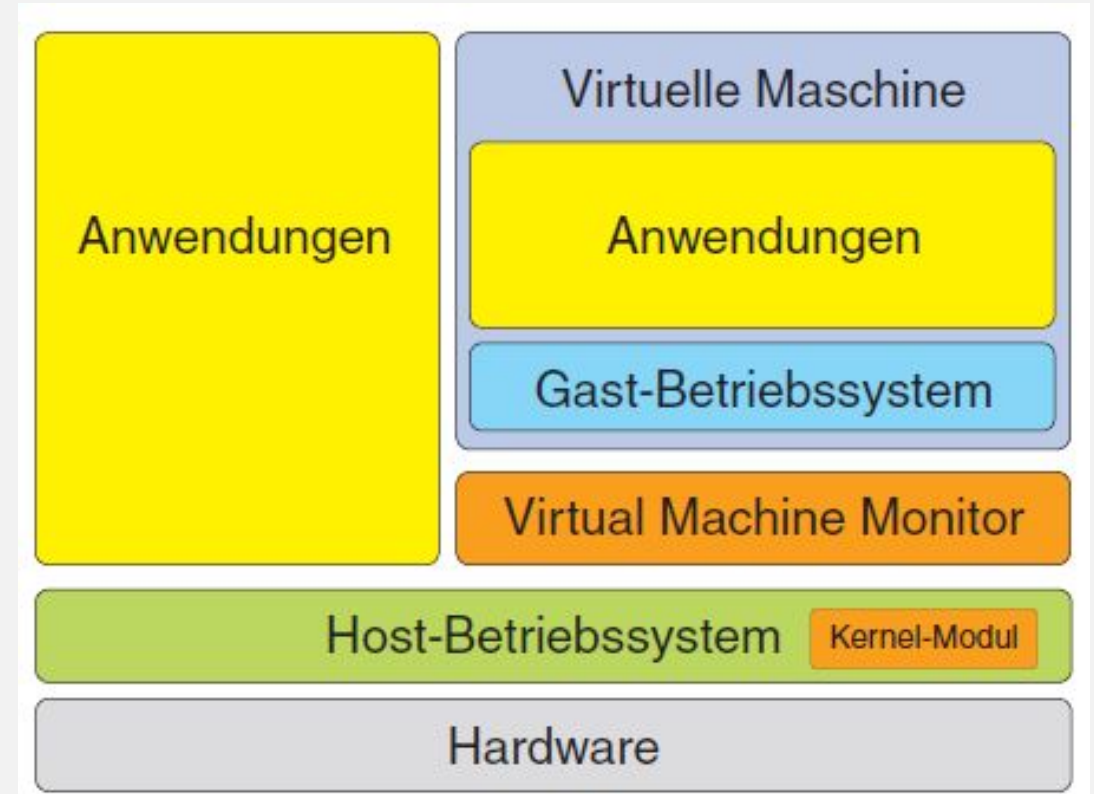

# Hardware-Virtualisierung: Para-Virtualisierung


Der Hypervisor läuft direkt auf der verfügbaren Hardware. Er entspricht somit einem Betriebssystem, das ausschließlich auf Virtualisierung ausgerichtet ist.

Das Gast-Betriebssystem muss um virtuelle Treiber ergänzt werden, um mit dem Hypervisor interagieren zu können.

- Dem Gast-Betriebssystem stehen keine direkt low-level virtualisierten Hardware-Ressourcen (CPU, RAM, ...) zur Verfügung sondern eine API zur Nutzung durch die virtuellen Treiber.
- Unterstützte Betriebssysteme und Hardware-Varianten aus Sicht des Gastes eingeschränkt pro Hypervisor-Implementierung.


Der Hypervisor nutzt die Treiber eines Host-Betriebssystems, um auf die reale Hardware zuzugreifen. Damit brauchen im Hypervisor nicht aufwändig eigene Treiber implementiert werden.

Leistungsverlust: 2-3%

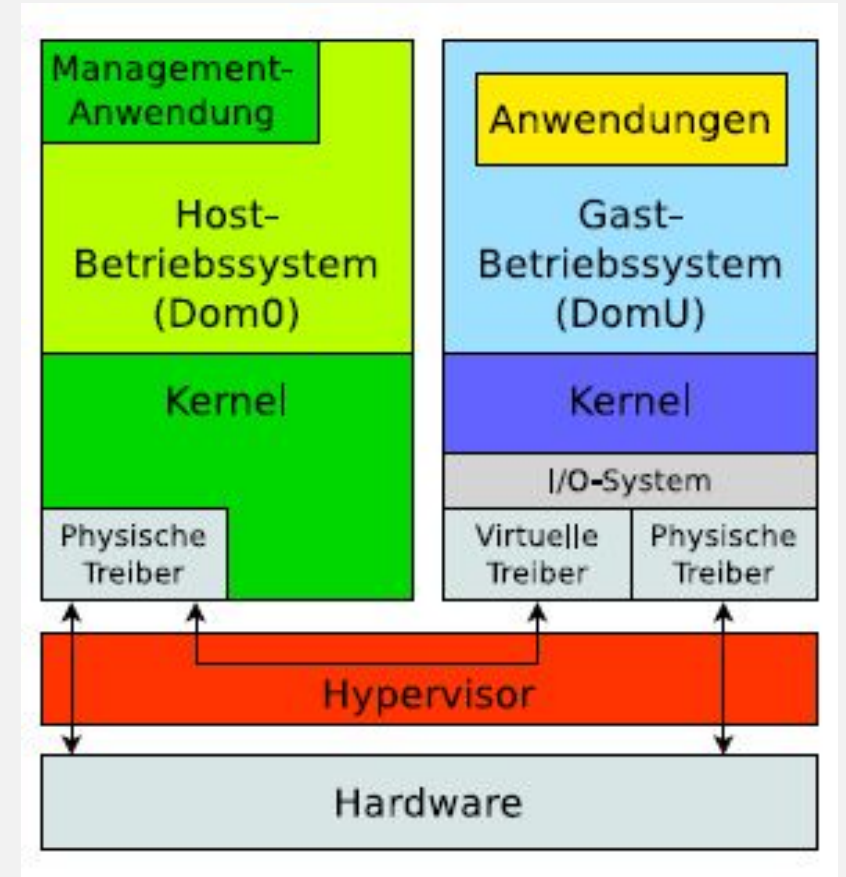

# Zur Vollständigkeit: Was ist Emulation und Anwendungs-Virtualisierung?

- Emulation: Bildet die Hardware eines nicht vorhandenen oder nicht kompatiblen Rechnersystems oder Teile eines entsprechenden Rechnersystems nach.
- Zweck u.A.: Alte Software konservieren.  
(Beispiel: Gameboy im Browser)

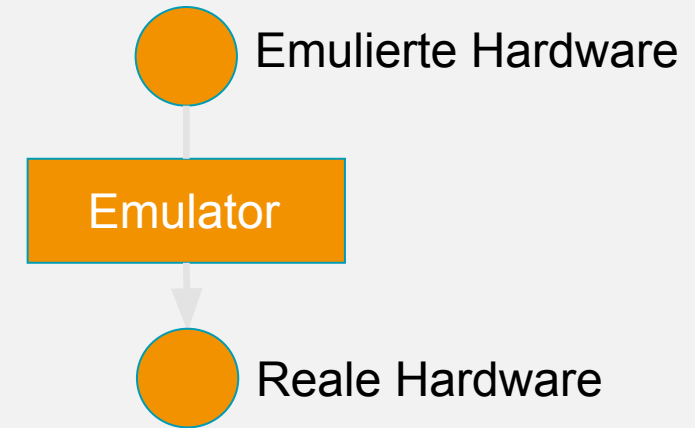

# Virtualisierung, aber performant





Q|WARE

- Emulationen erfüllen zwar viele Voraussetzungen für das Cloud Computing wie Isolation und Entkopplung, sind aber bei der Nachbildung einer ganzen Rechnerarchitektur sehr langsam und daher ungeeignet für den massenhaften produktiven Einsatz.
  - Hauptverantwortlicher dabei ist die CPU.
- Kann man die selben Ziele mit minimalem zusätzlichen Ressourcenaufwand erreichen?
  - Antwort: Ja, aber nur wenn die Gast-Rechnerarchitektur des virtualisierten Systems die gleiche ist wie die Host-Rechnerarchitektur.
  - x86 Host → x86 Guest

# Zur Vollständigkeit: Was ist Emulation und Anwendungs-Virtualisierung?

- Anwendungs-Virtualisierung: Stellt Anwendungen eine Programmierschnittstelle und eine Laufzeitumgebung (Runtime) zur Verfügung, die komplett vom darunter-liegenden Betriebssystem entkoppelt.  
Zweck u.A.: Portable Anwendungen.

- Beispiel: JVM

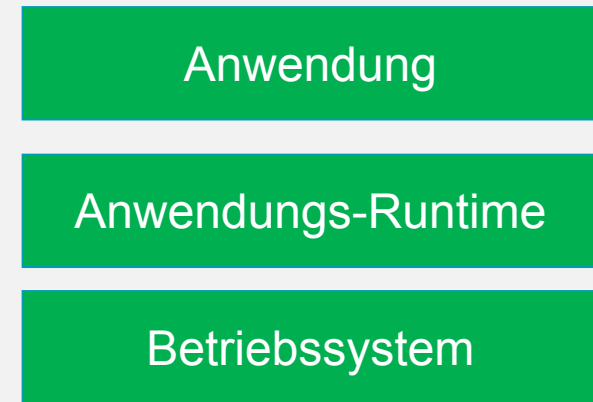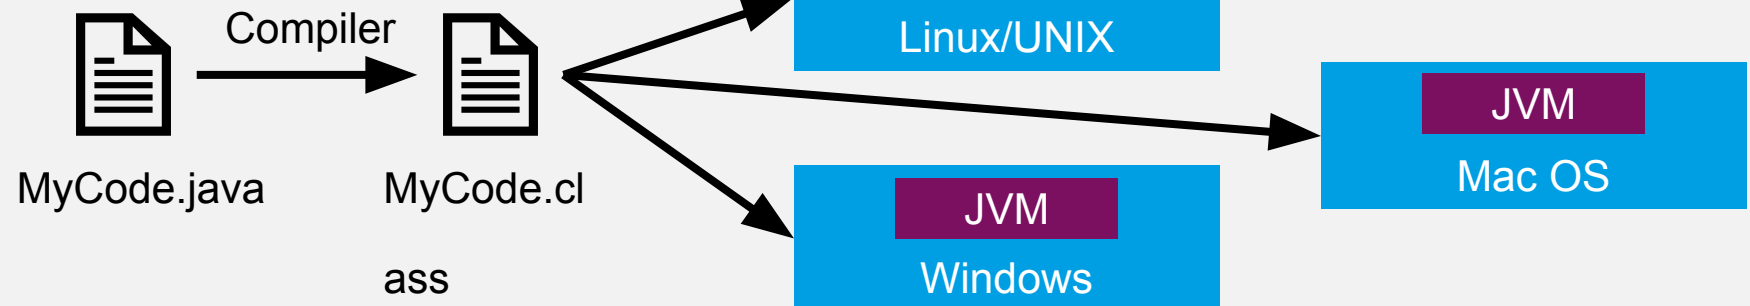



# Virtualisierung im Enterprise-Umfeld



Neben den bisher genannten Vorteilen bieten heutige VM Lösungen noch viele weitere Features:

- Ressourcenverwaltung im laufenden Betrieb
  - Memory Ballooning: Hauptspeicher dynamisch vergrößern
  - Änderung der Anzahl an virtuellen Rechenkernen
  - Änderung der Festplattengröße mit virtuellen SANs (Storage Area Networks)
- Live-Migration: Verschieben der laufenden physikalischen Maschine auf eine andere Hardware innerhalb von Millisekunden
  - CPU State
  - Speicher
  - Storage
  - Netzwerk
- Achtung: (Echten) Zufall zu erzeugen ist in einer VM noch schwieriger als mit realer Hardware (z. B. mittels Maus und Tastatureingaben).
- Hier bieten die Hypervisors Schnittstellen an um zusätzlichen Zufall zu erhalten.



QAWARE

# Hardware-Virtualisierung mit Vagrant und VirtualBox

# Hardware-Virtualisierung: Vagrant und VirtualBox



QA|WARE




+



Open Source Typ 2 Virtualisierungs-Software (Voll-Virtualisierung) für Windows, Linux, MacOS und Solaris.

Automationssoftware für virtuelle Umgebungen auf einem Rechner. Virtuelle Maschinen per Kommandozeile erstellen und steuern.

# Vagrant: Konzepte

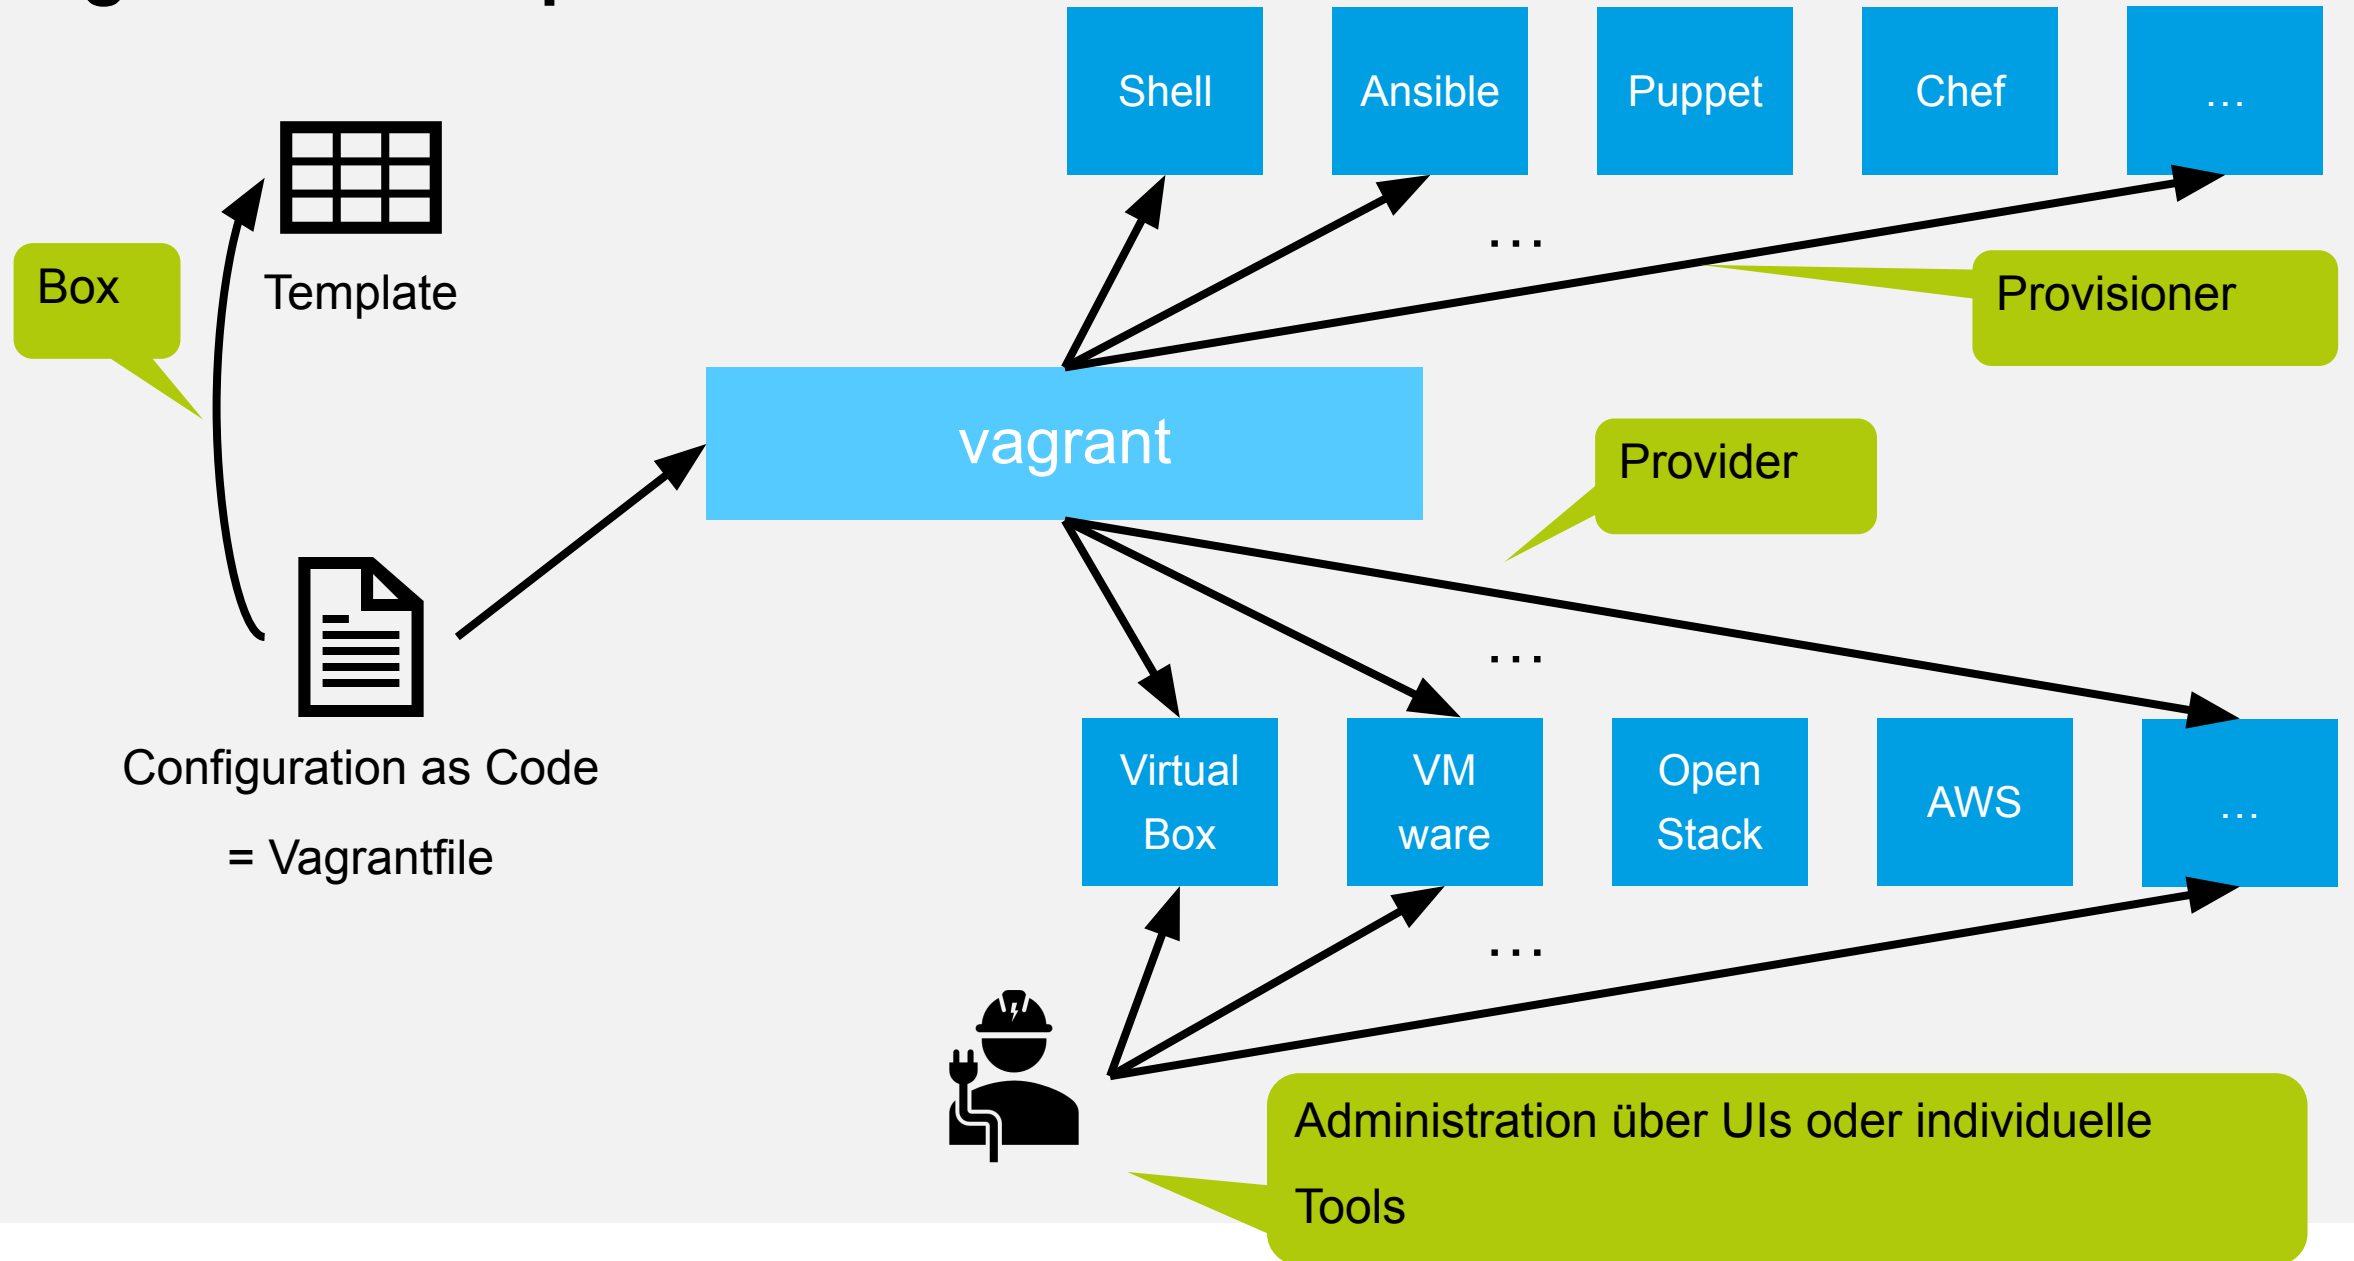



QAWARE

# Demo


# Vagrant: Eine schematische Übersicht.



QA|WARE

Rechner

Vagrant Umgebung



```
Eingabeaufforderung
Microsoft Windows [Version 6.3.9600]
(c) 2013 Microsoft Corporation. Alle Rechte vorbehalten.
C:\Users\Josef>vagrant
Usage: vagrant [options] <command> [<args>]

-v, --version          Print the version and exit.
-h, --help             Print this help.

Common commands:
box                   manages boxes: installation, removal, etc.
connect              connect to a remotely shared Vagrant environment
destroy              stops and deletes all traces of the vagrant machine
global-status        outputs status Vagrant environments for this user
halt                 stops the vagrant machine
help                 shows the help for a subcommand
init                 initializes a new Vagrant environment by creating a Vagrantfile
```

Konfig. lesen

Shell  
Kommandos

Box holen

Box speichern




API-Aufrufe




VirtualBox

Lokales  
Box-Re<sub>po</sub> `.vagrant.d/`

VirtualBox Images

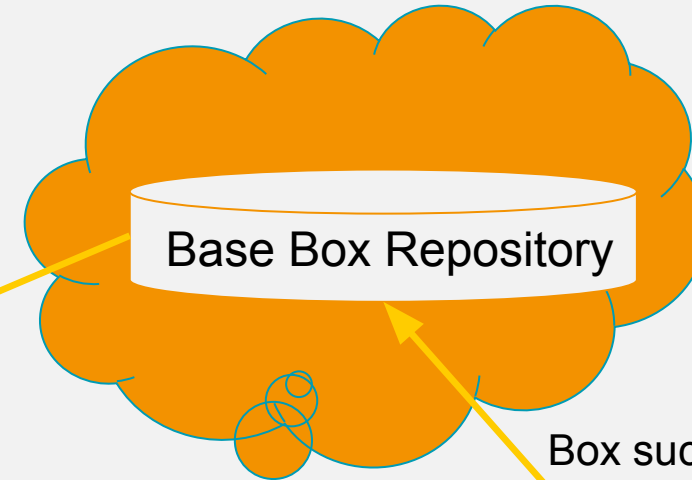

Box suchen

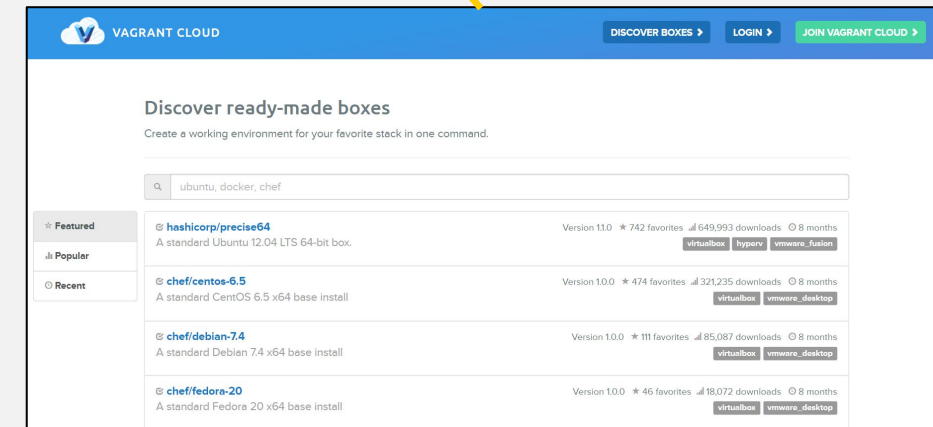

<https://vagrantcloud.com>

# Das Vagrantfile beschreibt die zu erstellende virtuelle Maschine.

```
# -*- mode: ruby -*-  
# vi: set ft=ruby :  
  
# Vagrantfile API/syntax version. Don't touch unless you know what you're doing!  
VAGRANTFILE_API_VERSION = "2"
```

Vagrantfiles werden in  
Ruby geschrieben

```
Vagrant.configure(VAGRANTFILE_API_VERSION) do |config|
```

```
  # My base box  
  config.vm.box = "chef/ubuntu-14.04"
```

Definition der Basis-Box

```
  # Define shell provisioning  
  config.vm.provision :shell, path: "bootstrap.sh"
```

Konfiguration der Provisionierung

```
  # Define docker provisioning  
  config.vm.provision "docker" do |d|  
    d.run "nginx1", image: "dockerfile/nginx", args: "-p 8080:80", daemonize: true  
    d.run "nginx2", image: "dockerfile/nginx", args: "-p 9080:80", daemonize: true  
    d.run "haproxy", image: "dockerfile/haproxy", args: "-p 80:80 --link nginx1:nginx1 --link nginx2:nginx2 -v /vagrant:/haproxy-override"  
  end
```

```
  # Configure VirtualBox  
  config.vm.provider "virtualbox" do |v|  
    v.memory = 1024  
    v.cpus = 4
```

Konfiguration des Virtualisierungs-Providers

```
end
```

```
  # Forward ports  
  config.vm.network :forwarded_port, host: 80, guest: 80  
  config.vm.network :forwarded_port, host: 8080, guest: 8080  
  config.vm.network :forwarded_port, host: 9080, guest: 9080
```

Konfiguration des Netzwerks

```
end
```

# Ein typischer Arbeitsablauf mit Vagrant.

#	Befehle auf Kommandozeile	Bedeutung
1	<code>md &lt;box-dir&gt;</code> <code>cd &lt;box-dir&gt;</code>	Verzeichnis für Vagrant Umgebung erstellen und dorthin wechseln
2	<code>vagrant init</code> [<box-name>] [<box-url>]	Eine Vagrant Umgebung initialisieren. Dabei wird zunächst nur eine Datei <i>Vagrantfile</i> erstellt und initial mit dem Namen und der URL der Box (falls angegeben) initialisiert.
3		Vagrantfile anpassen nach Bedarf (z.B. IP vergeben, Port-Mapping zwischen Host und Guest, Verzeichnis-Share zwischen Host und Guest, ...)
4	<code>vagrant up</code>	Startet die virtuelle Maschine (Box → virtuelle Maschine) und konfiguriert sie entsprechend dem Vagrantfile
5	<code>vagrant ssh</code>	Per SSH auf die virtuelle Maschine verbinden
6	<code>exit</code>	Die SSH Kommandozeile in der virtuellen Maschine verlassen
7	<code>vagrant halt</code>	Die virtuelle Maschine stoppen

Weitere nützliche Kommandos:

- `reload`: Startet eine VM neu und aktualisiert die Konfiguration entsprechend dem Vagrantfile
- `package`: Erstellt aus einer virtuellen Maschine wieder eine Box

Weitere Kommandos: <http://docs.vagrantup.com/v2/cli/index.html>



# Vagrant Befehle auf Kommandozeile



QA|WARE

- vagrant box add – allows you to install a box (or VM) to the local machine
- vagrant box remove – removes a box from the local machine
- vagrant box list – lists the locally installed Vagrant boxes
- vagrant init – initializes a project to use Vagrant
- vagrant up – starts up the vagrant VM
- vagrant suspend – saves the state of the current VM.
- vagrant resume – will load up the suspended VM.
- vagrant halt – will shut down the VM, saving configuration. (restart with 'up' command)
- vagrant destroy – will destroy the VM with all config changes.
- vagrant reload – apply Vagrant configuration changes (like port forwarding) without rebuilding the VM.
- vagrant status – tells you the current state of the Vagrant project's VM
- vagrant gem – install Vagrant plugins via RubyGems
- vagrant ssh – short cut to SSH into the running VM
- vagrant package – create a distribution of the VM you have running.
- vagrant <command> -help - Command that will provide man pages for a vagrant command.



QA|WARE

# Virtualisierungsarten: Betriebssystemvirtualisierung

# Hardwarevirtualisierer sind Schwergewichte



Q|WARE

- Jede VM inkludiert eine virtuelle Kopie eines kompletten Betriebssystems und benötigt signifikante RAM und CPU Ressourcen, die nur schwer dynamisch geändert werden können
- Softwareentwicklung mit VMs ist träger und komplexer
- Aufgrund der Größe der Images ist die Portabilität ein Problem.
- Kompatibilität mit anderen VM Lösungen nicht vorhanden. Wechsel zwischen Rechenzentren nicht einfach möglich.

# Linux Kernel Namespaces (Isolation durch Sichtbarkeit)

Ein Feature des Linux-Kernels, das die Sicht und den Zugriff auf das System einschränkt:

- Prozessraum / Prozess-Ids
- Netzwerk-Schnittstellen
- Host-Name
- Dateisystem-Mounts
- IPC (Inter-Prozess-Kommunikation)
- Benutzerkonten

Die Einschränkungen sind dabei für den isolierten Prozess transparent.

Namespaces können geschachtelt sein.

siehe [https://success.docker.com/KBase/Introduction\\_to\\_User\\_Namespaces\\_in\\_Docker\\_Engine](https://success.docker.com/KBase/Introduction_to_User_Namespaces_in_Docker_Engine)


# Linux Cgroups (Isolation durch Grenzen) /1

Ein Feature des Linux-Kernels, das maßgeblich durch Google entwickelt wurde

Gruppiert Prozesse zu Gemeinschaften mit definiertem und beschränktem Ressourcen-Zugriff auf:

- Prozessor
- Hauptspeicher
- I/O (insb. Netzwerk)
- Disk

# Betriebssystem-Virtualisierung

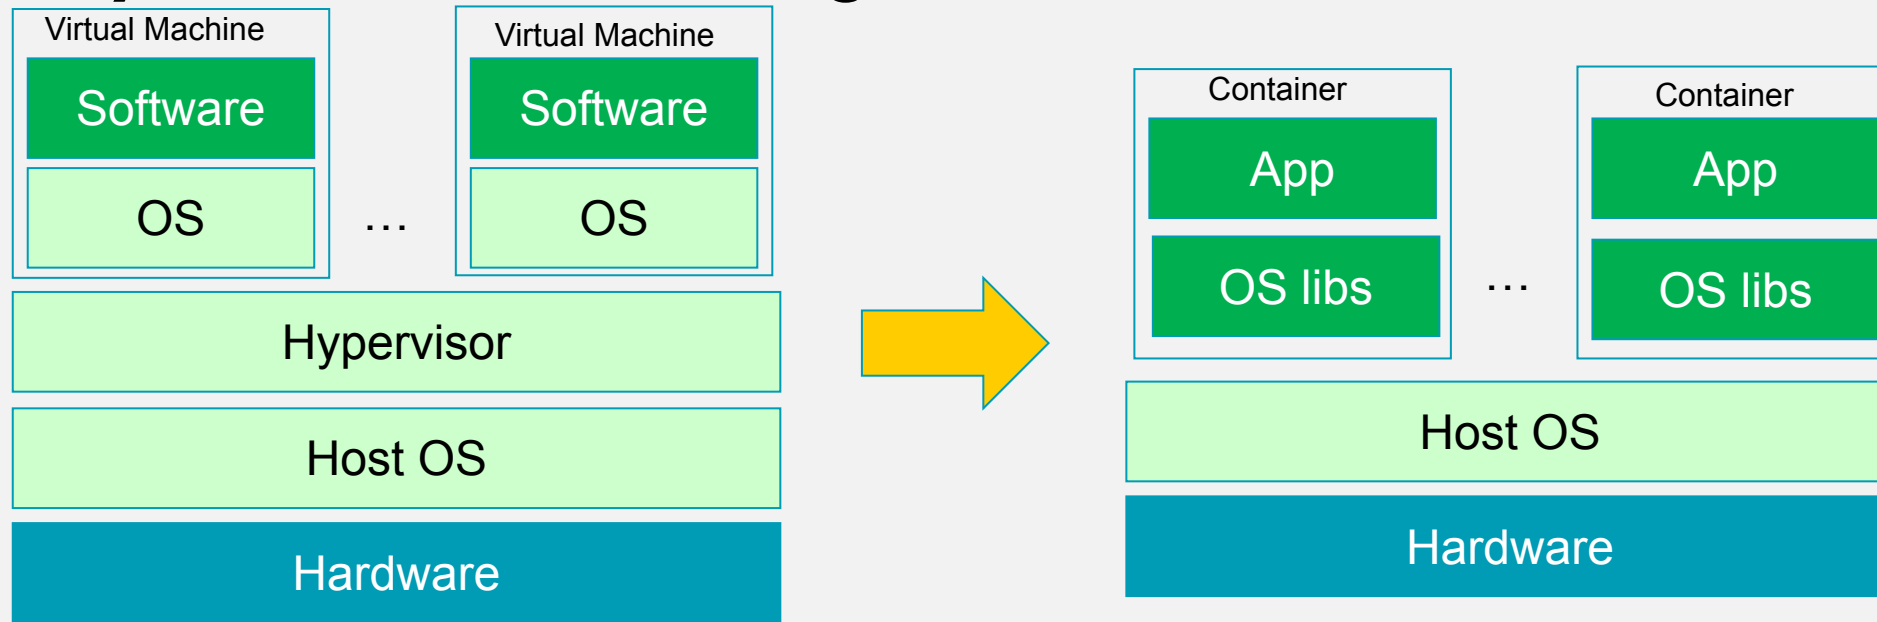


Leichtgewichtiger Virtualisierungsansatz: Es gibt keinen Hypervisor. Jede App läuft direkt als Prozess im Host-Betriebssystem. Dieser ist jedoch maximal durch entsprechende OS-Mechanismen isoliert (z.B. Linux LXC).

- Isolation des Prozesses durch Kernel Namespaces (bzgl. CPU, RAM und Disk I/O) und Containments
- Isoliertes Dateisystem
- Eigene Netzwerk-Schnittstelle

CPU- / RAM-Overhead in der Regel nicht messbar (~ 0%)


Startup-Zeit = Startdauer für den ersten Prozess

# Hardware- vs. Betriebssystem-Virtualisierung

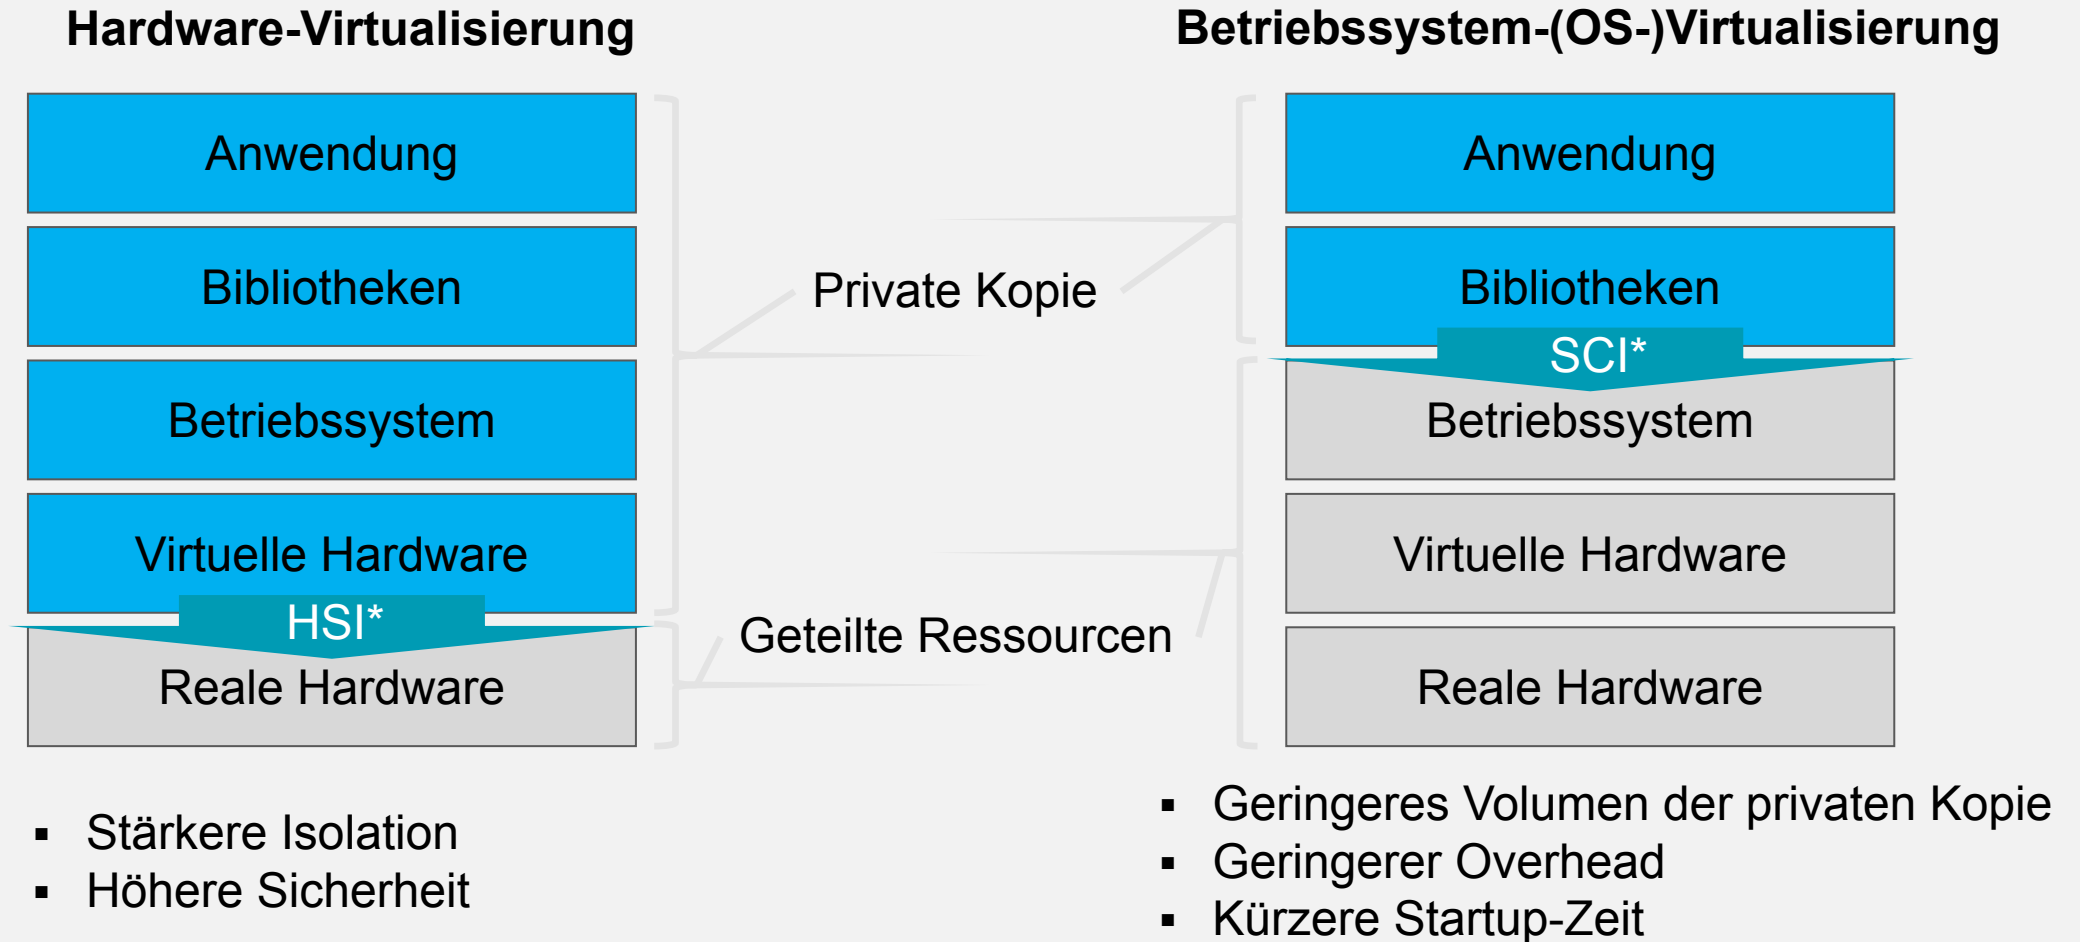

\*) HSI = Hardware Software Interface  
SCI = System Call Interface

# Containerisierung ist angekommen!



## Google Runs All Software In Containers

May 28, 2014 by Timothy Prickett Morgan



The overhead of full-on server virtualization is too much for a lot of hyperscale datacenter operators as well as their peers (some might say rivals) in the supercomputing arena. But the ease of management and resource allocation control that comes from virtualization are hard to resist and this has fomented a third option between bare metal and server virtualization. It is called containerization and Google recently gave a glimpse into how it is using containers at scale on its internal infrastructure as well as on its public cloud.

We are talking about billions of containers being fired up a week here, just so you get a sense of the scale.

<http://www.enterprisetech.com/2014/05/28/google-runs-software-containers>



# Beispielhafte Technologien




QA|WARE

## Hardware-Virtualisierung: Vagrant und VirtualBox



## Betriebssystem-Virtualisierung: Docker

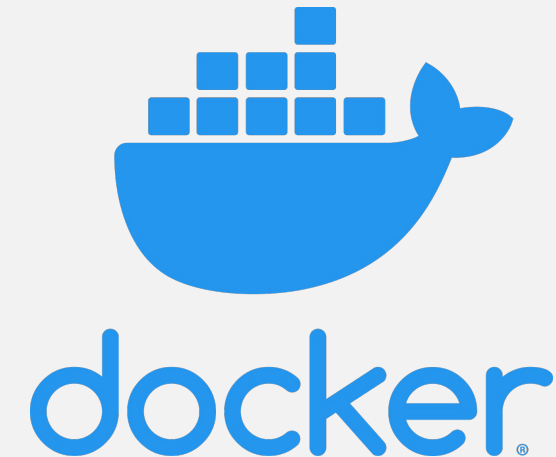



QA|WARE

# Betriebssystem-Virtualisierung mit Docker


# Containerization mit Docker



QA|WARE



<http://www.srf.ch/kultur/im-fokus/brasilien/favelas-im-wandel-die-armen-muessen-weichen>



Standard format for operations: start, stop, configure, wire, debug + software logistics.

# Docker

Docker ist eine Automationsumgebung für Betriebssystem-Virtualisierung.

Aktuell unterstützt Docker Linux als Host-Betriebssystem. Seit Windows Server 2016 steht nun auch eine Windows-Variante zur Verfügung.

Docker ist als Werkzeug eines Cloud-Anbieters entstanden und ist mittlerweile eines der sichtbarsten und aktivsten Open-Source-Ökosysteme.

In a Nutshell, docker...

... has had 19,640 commits made by 1,298 contributors representing 328,622 lines of code


... is mostly written in Go with an average number of source code comments

... has a young, but established codebase maintained by a very large development team with stable Y-O-Y commits


... took an estimated 88 years of effort (COCOMO model) starting with its first commit in January, 2013 ending with its most recent commit 3 days ago

<https://www.openhub.net/p/docker>

Languages




Lines of Code

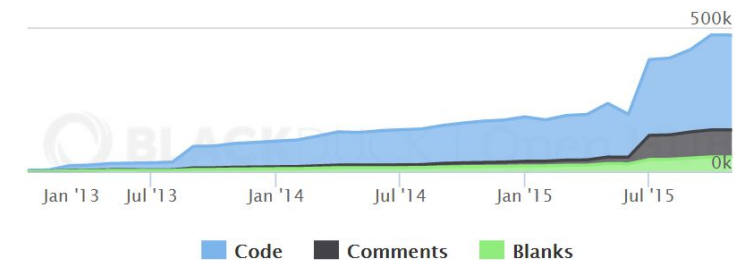


# Containerization mit Docker



QAWARE

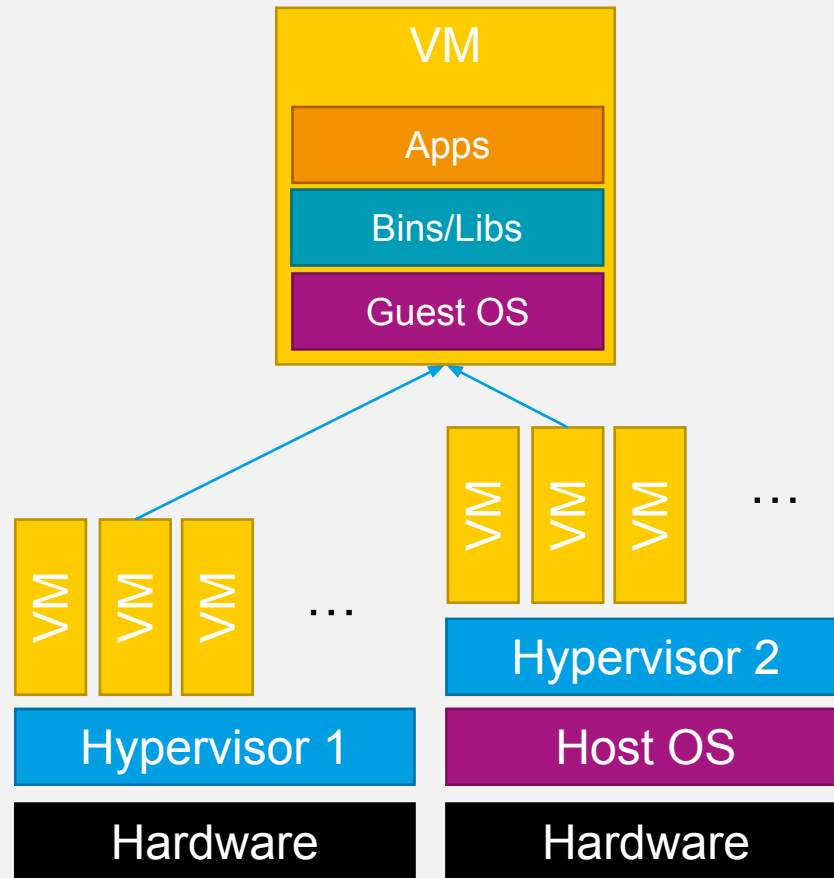

Type 1 / Type 2 Virtualization

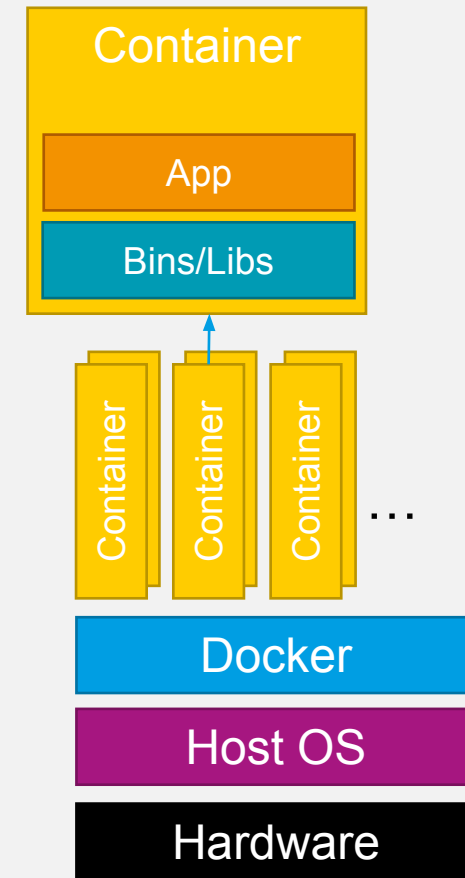


Containerization

# Im Zentrum von Docker stehen Images und Container.



QA|WARE

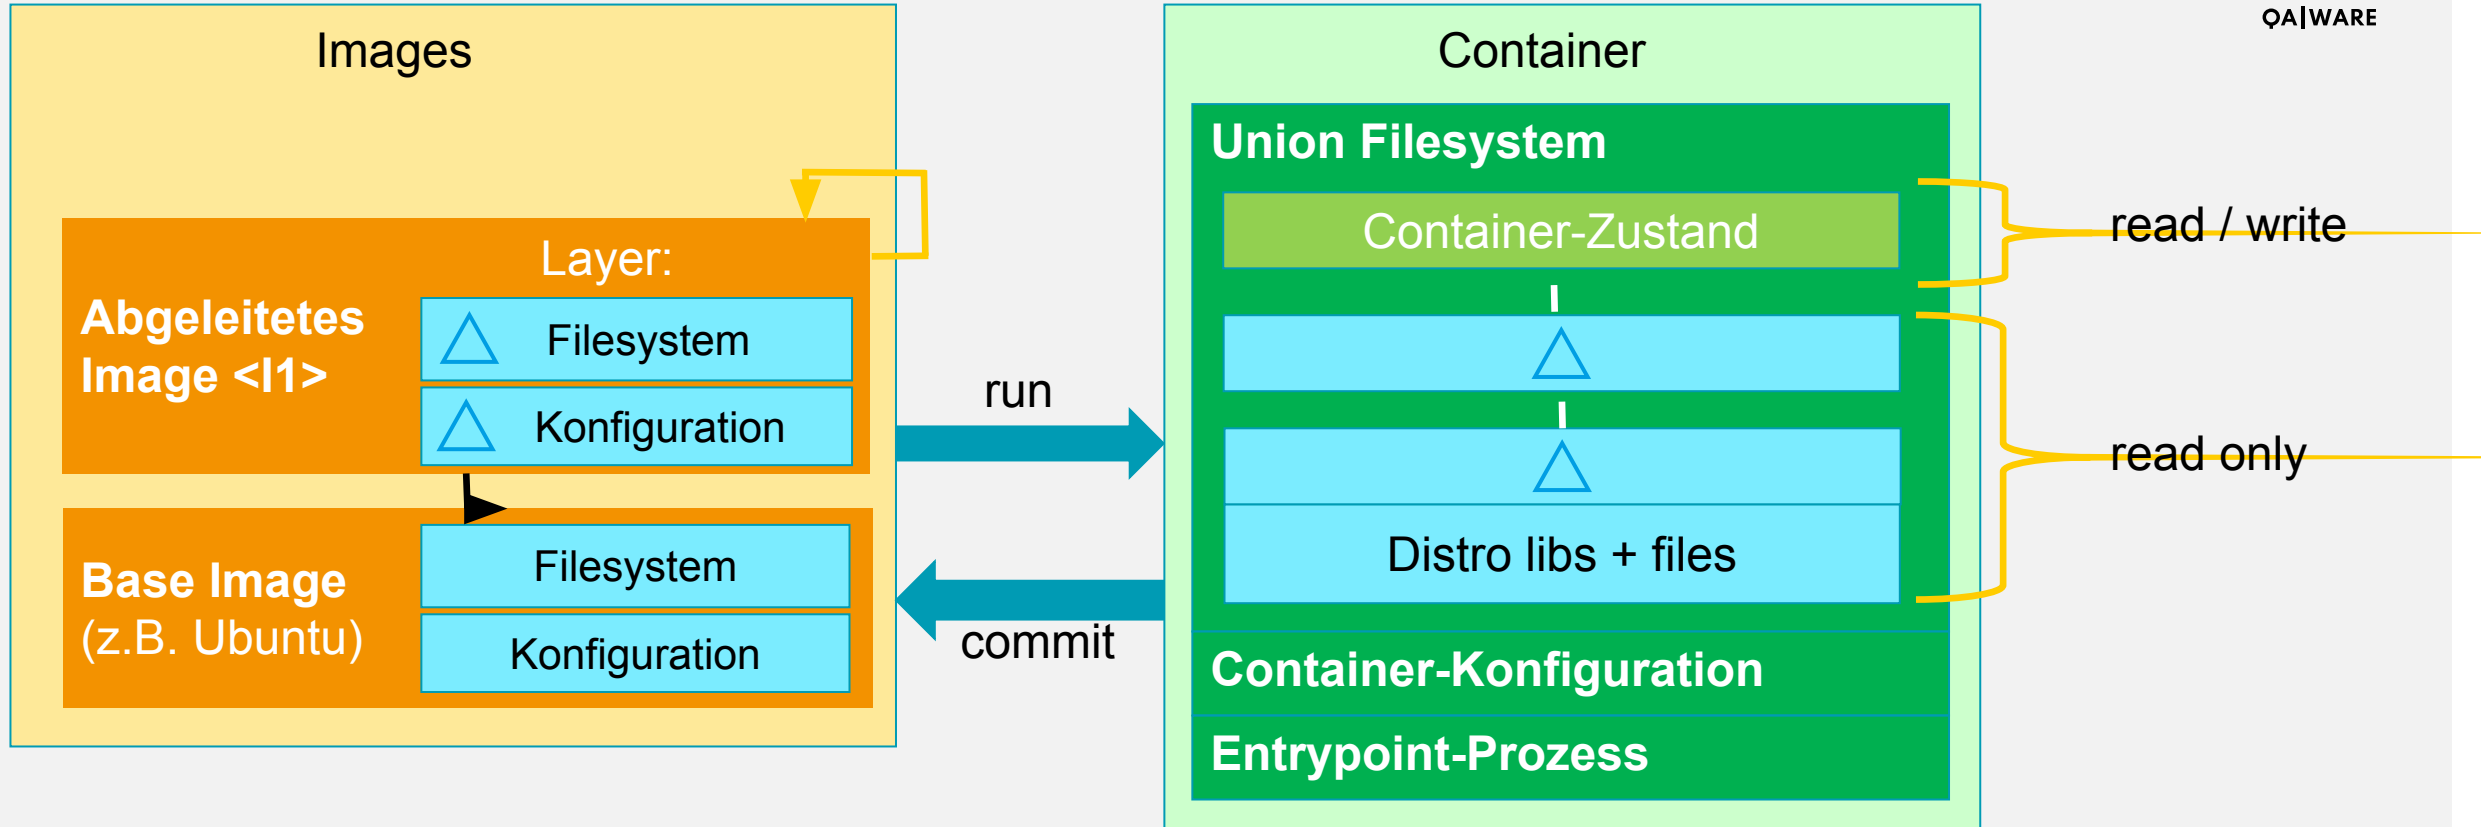

**Ruhender und transportierbarer Zustand**

**Laufender Zustand**

Ein Container läuft so lange wie sein Entrypoint-Prozess im Vordergrund läuft. Docker merkt sich den Container-Zustand.



QAWARE


# Demo



# Der Docker Workflow




QA|WARE

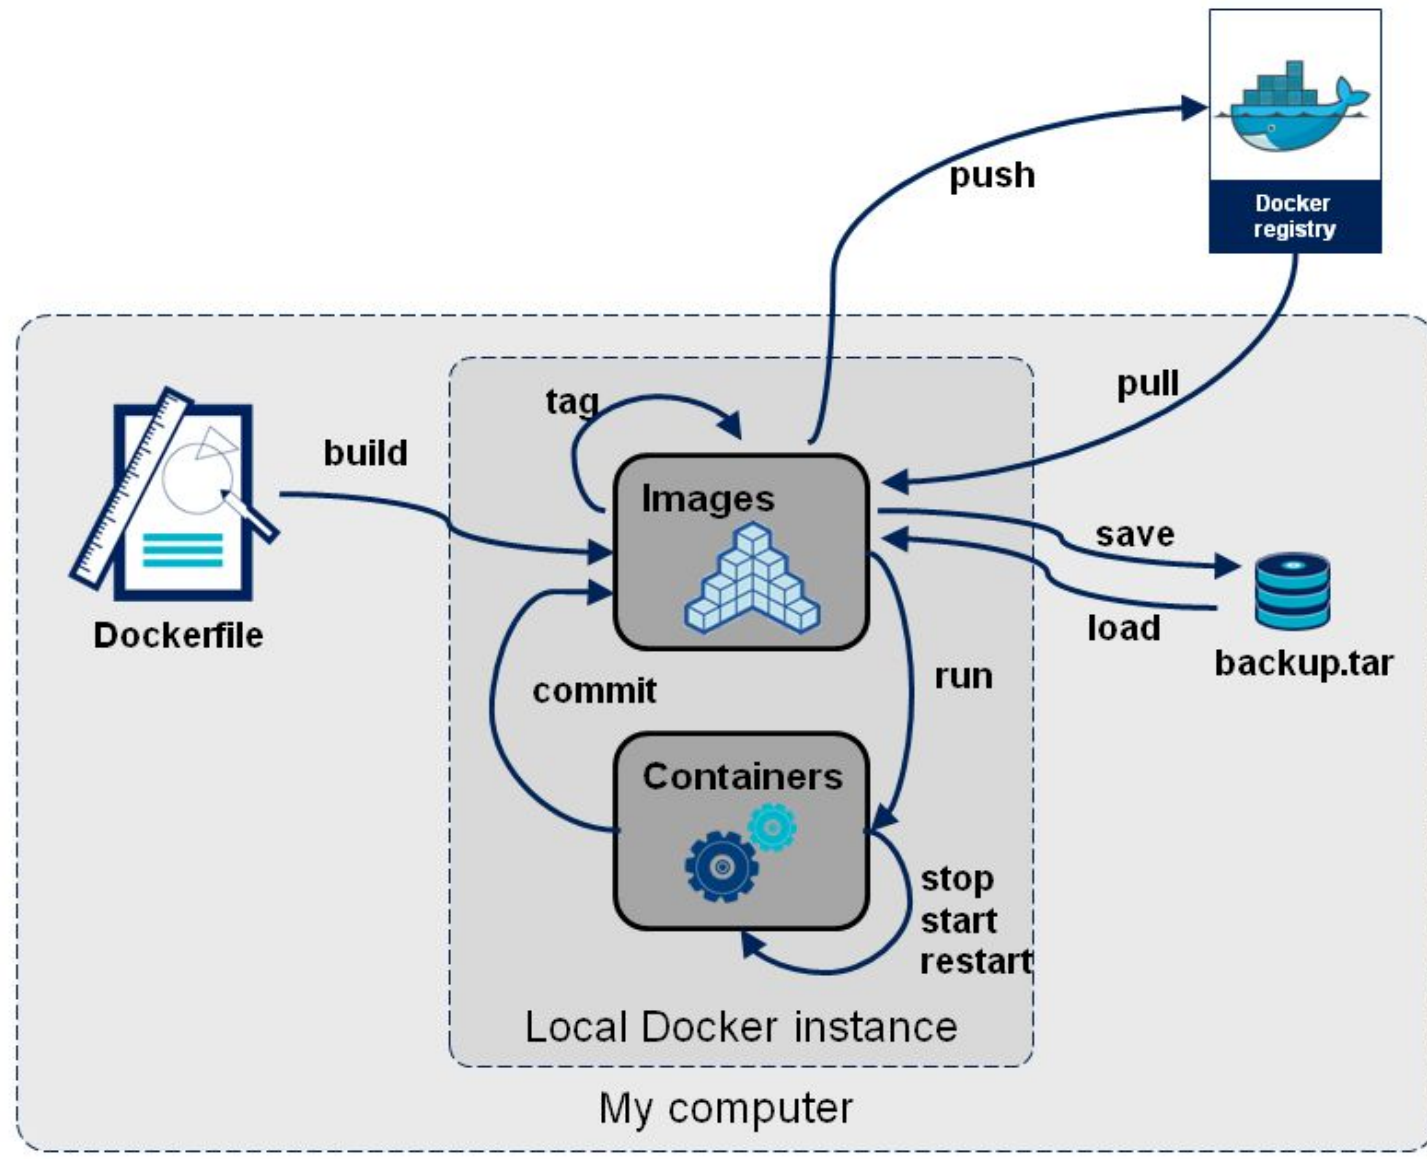



# Die Docker-Architektur.

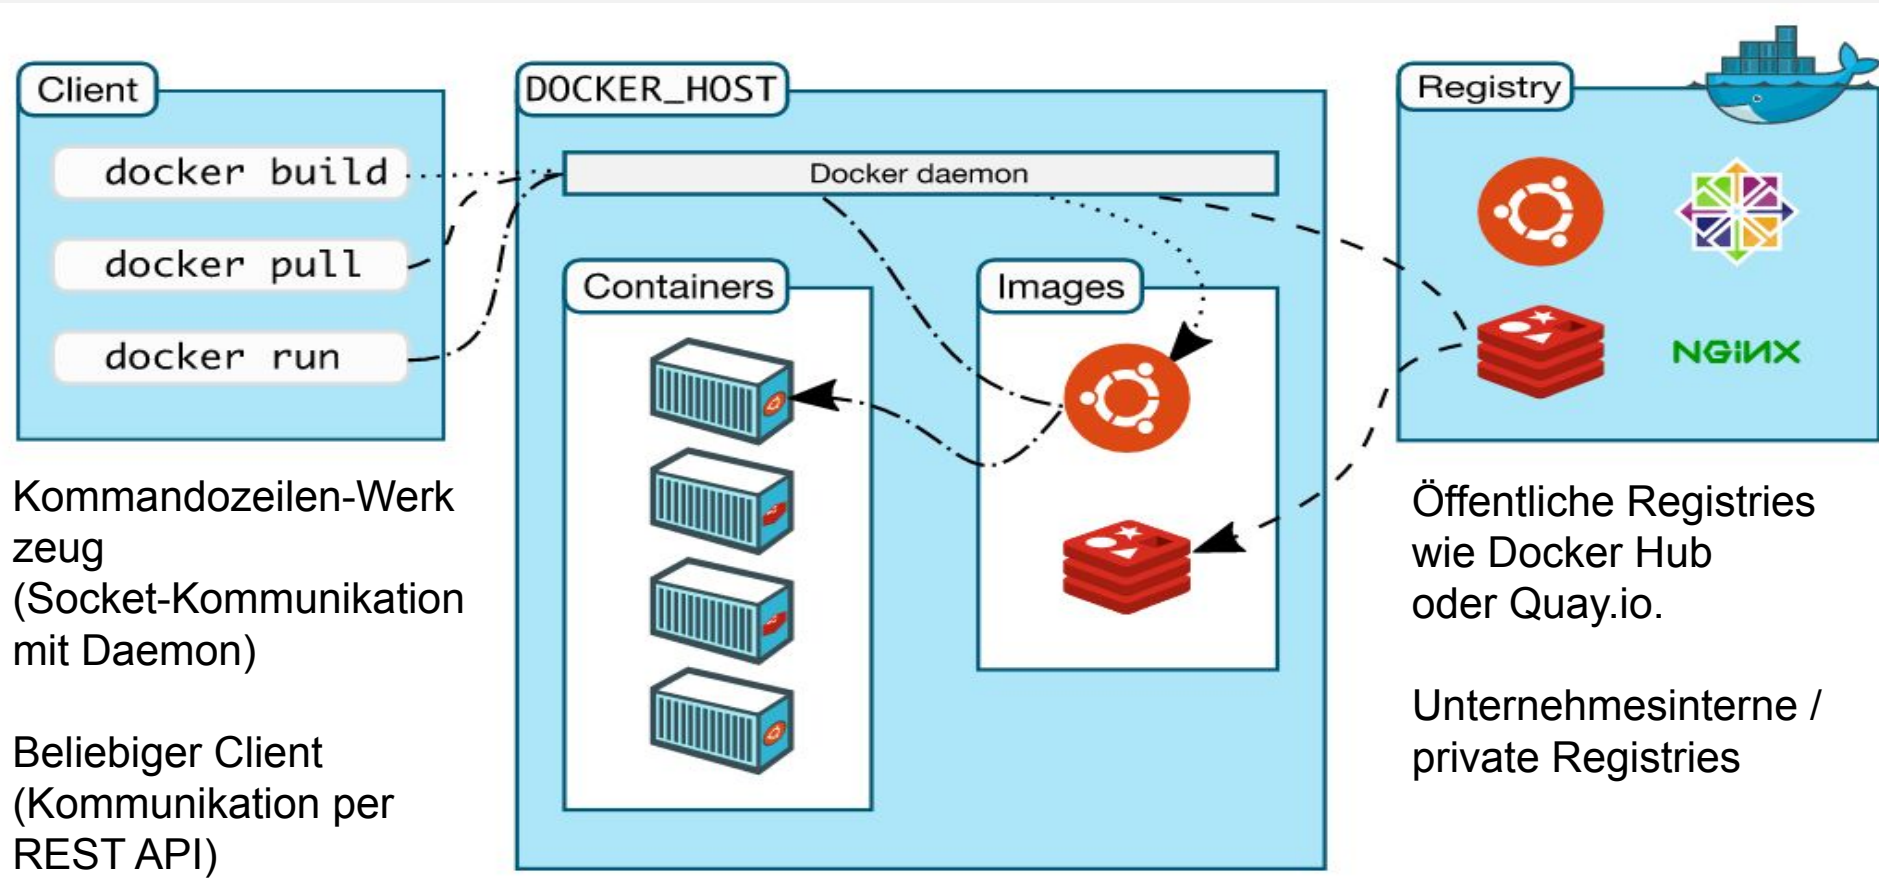


Der Docker-Daemon ist die zentrale Steuerungseinheit und läuft direkt als Prozess im Host-Betriebssystem. Er verwaltet alle lokalen Container und Images auf dem Host.

# Zusammenspiel zwischen Host und Docker Machine.




QA|WARE

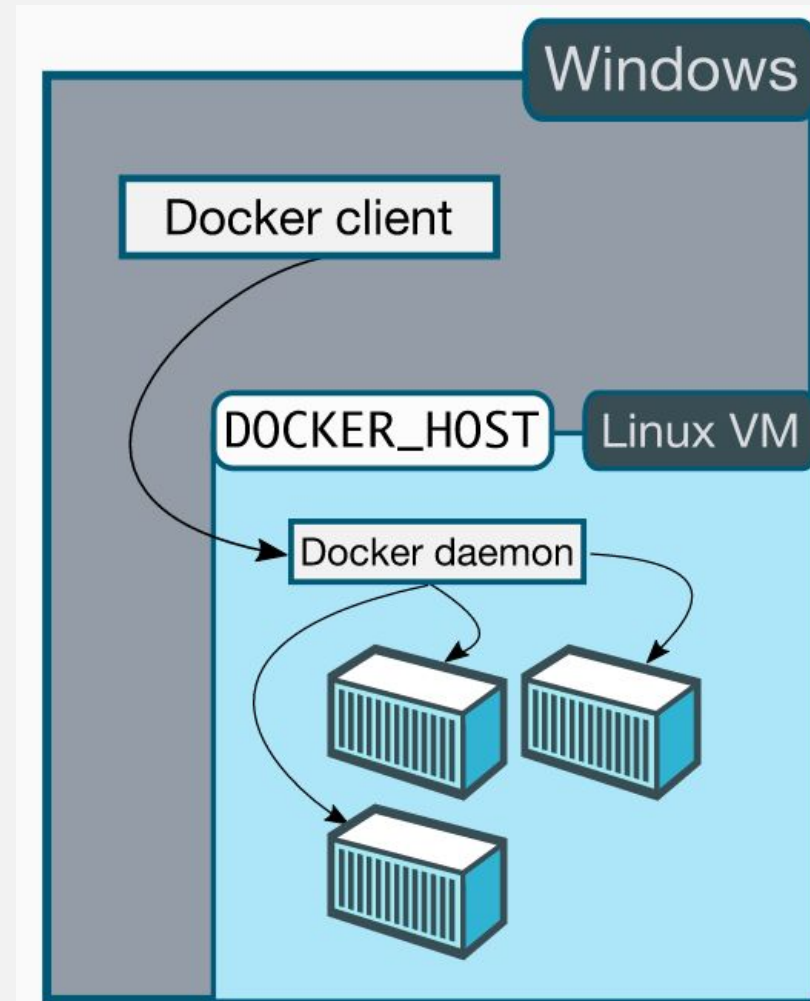

# hub.docker.com ist die öffentliche Standard-Registry für Docker-Images.



QAWARE



[Explore](#) [Help](#)







Q solr

Sign up

Log In

Repositories (555)

All

	<div>solr</div> <div>official</div>	280 STARS	100K+ PULLS	<div>&gt;</div> <div>DETAILS</div>
	<div>anapsix/solr</div> <div>public   automated build</div>	1 STARS	8.0K PULLS	<div>&gt;</div> <div>DETAILS</div>
	<div>apopelo/solr</div> <div>public   automated build</div>	1 STARS	1.6K PULLS	<div>&gt;</div> <div>DETAILS</div>
	<div>ckan/solr</div> <div>public   automated build</div>	1 STARS	896 PULLS	<div>&gt;</div> <div>DETAILS</div>
	<div>harisekhon/solr</div> <div>public   automated build</div>	0 STARS	6.6K PULLS	<div>&gt;</div> <div>DETAILS</div>
	<div>makuk66/docker-solr</div> <div>public   automated build</div>	81 STARS	50K+ PULLS	<div>&gt;</div> <div>DETAILS</div>

# Das Dockerfile definiert Aufbau und Inhalt des Image.

**FROM** qaware/alpine-k8s-ibmjava8:8.0-3.10

**LABEL** maintainer="QAware GmbH <qaware-oss@qaware.de>"

**RUN** mkdir -p /app

**COPY** build/libs/zwitscher-service-1.0.1.jar /app/zwitscher-service.jar

**COPY** src/main/docker/zwitscher-service.conf /app/

**ENV** JAVA\_OPTS -Xmx256m

**EXPOSE** 8080

**ENTRYPOINT** ["java", "-jar", "/app/zwitscher-service.jar"]

# Provisionierung von Images mit dem Dockerfile



QAWARE

Ein Dockerfile erzeugt auf Basis eines anderen Images ein neues Image. Dabei werden die folgenden Aktionen automatisiert:

- Konfiguration des Images und der daraus resultierenden Container
- Ausführung von Provisionierungs-Aktionen

Ein Dockerfile ist somit eine Image-Repräsentation alternativ zu einem physischen Image (Bauanteilung vs. Bauteil).

- Wiederholbarkeit beim Bau von Containern
- Automatisierte Erzeugung von Images ohne diese verteilen zu müssen
- Flexibilität bei der Konfiguration und bei den benutzten Software-Versionen
- Einfache Syntax und damit einfach einsetzbar

Befehl: `docker build -t <ziel_image_name> <Dockerfile>`

# Das Dockerfile definiert Aufbau und Inhalt des Image.

## My Image

Layer 8

Layer 7

Layer 6

Layer 5

Layer 4

Layer 3

Layer 2

Layer 1

Niemals „latest“ verwenden. Antipattern

**FROM** qaware/alpine-k8s-ibmjava8:8.0-3.10

**LABEL** maintainer="QAware GmbH <qaware-oss@qaware.de>"

**RUN** mkdir -p /app

**COPY** build/libs/zwitscher-service-1.0.1.jar /app/zwitscher-service.jar

**COPY** src/main/docker/zwitscher-service.conf /app/

**ENV** JAVA\_OPTS -Xmx256m

**EXPOSE** 8080

**ENTRYPOINT** ["java", "-jar", "/app/zwitscher-service.jar"]

# Dockerfile-Kommandos

Element	Meaning
FROM <image-name>	Sets to base image (where the new image is derived from)
MAINTAINER <author>	Document author
RUN <command>	Execute a shell command and commit the result as a new image layer (!)
ADD <src> <dest>	Copy a file into the containers. <src> can also be an URL. If <src> refers to a TAR-file, then this file automatically gets un-tared.
VOLUME <container-dir> <host-dir>	Mounts a host directory into the container.
ENV <key> <value>	Sets an environment variable. This environment variable can be overwritten at container start with the -e command line parameter of <b>docker run</b> .
ENTRYPOINT <command>	The process to be started at container startup
CMD <command>	Parameters to the entrypoint process if no parameters are passed with <b>docker run</b>
WORKDIR <dir>	Sets the working dir for all following commands
EXPOSE <port>	Informs Docker that a container listens on a specific port and this port should be exposed to other containers
USER <name>	Sets the user for all container commands

# Typische Kommandos eines Docker Workflows

Command	Action
<code>docker build -t &lt;image&gt; .</code>	Build Docker image with given tag in current directory
<code>docker images</code>	Prints all local images
<code>docker run</code> <code>-d</code> <code>-v &lt;volume mounts&gt;</code> <code>-p &lt;host-port&gt;:&lt;container-port&gt;</code> <code>&lt;image&gt; &lt;entrypoint process&gt;</code>	Run a Docker image: Creates and runs a container. <ul style="list-style-type: none"><li>▪ in background</li><li>▪ with host directory mounted into the container</li><li>▪ with port forwarding from host to container</li><li>▪ image name (and optional entrypoint process)</li></ul>
<code>docker run</code> <code>-ti</code> <code>&lt;image&gt; /bin/sh</code>	Run a Docker image and open a shell within the container <ul style="list-style-type: none"><li>▪ ... with forwarding of local terminal</li><li>▪ Image name and shell (or „/bin/bash“)</li></ul>
<code>docker ps -a</code>	Prints all containers (without <code>-a</code> = only running containers)
<code>docker commit &lt;container&gt; qaware/foo</code>	Store container as local image
<code>docker kill &lt;container&gt;</code> <code>docker rm &lt;container&gt;</code>	Terminate container (send SIGKILL to entrypoint process) Remove container
<code>docker rmi -f &lt;image&gt;</code>	Remove local image



# Hilfreiche Kommandos für Container Troubleshooting




QA|WARE

Command	Action
<code>docker inspect &lt;container&gt;</code>	Shows container metadata (e.g. IP)
<code>docker logs &lt;container&gt;</code>	Prints container syslog
<code>docker top &lt;container&gt;</code>	Prints all running processes within a container (like <code>ps -a</code> within the container)
<code>docker exec -ti &lt;container&gt; /bin/sh</code>	Connect terminal to running container
<code>docker stats &lt;container&gt;</code>	Shows container runtime statistics (e.g. CPU usage, IO intensity, ...)


# Die Docker Networking Modes.




QAWARE

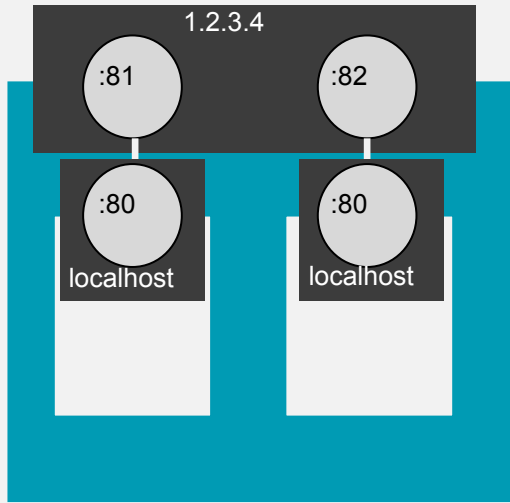

Bridge

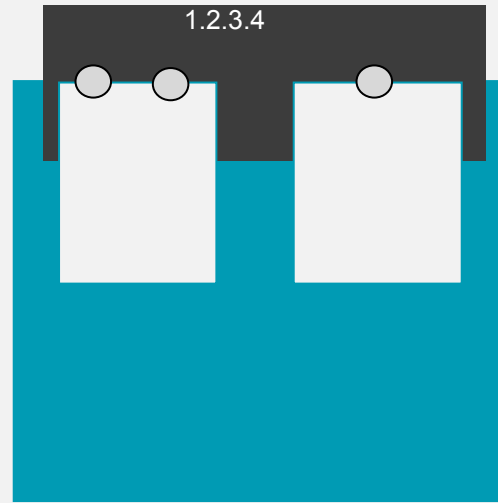

Host

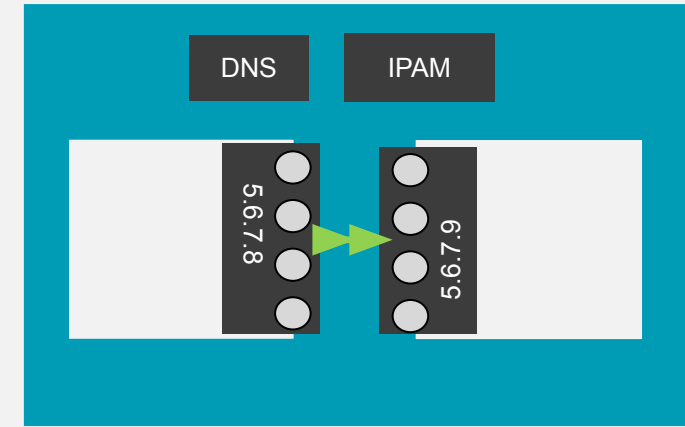

Overlay Network

```
docker network ls
```

```
docker network inspect bridge
```

```
docker network create --driver overlay multi-host-network
```

```
docker network connect multi-host-network container1
```

○ Bound port

■ Network interface

□ Guest

■ Host



QAWARE

# Anhang

# <https://github.com/veggiemonk/awesome-docker>



QA|WARE

This repository

Search

Pull requests

Issues

Gist

veggiemonk

awesome-docker

Watch

406

Star

4,798

Fork

536

Code

Issues

Pull requests

Projects

Wiki

Pulse

Graphs

A curated list of Docker resources and projects  
http://veggiemonk.github.io/awesome-docker/

001 commits

4 branches

1 release

138 contributors

Create new file

Upload files

Find file

Clone or download

Branch: master

New pull request

vegasbrianc committed on GitHub Merge pull request #240 from sixeyed/patch-2

oatianeore oatianeore 10 months ago

oatianeore Update: travis.yml 28 days ago

CONTRIBUTING... fix contribution link 6 months ago

LICENSE.md Create License.md a year ago

README.md Added "Where to start - on Windows" section 3 days ago

README.md

Awesome Docker

A curated list of Docker resources and projects inspired by @indresorhus' awesome and improved by these amazing contributors.

It's now a GitHub project because it's considerably easier for other people to edit, fix and expand on Docker using GitHub. Just click README.md to submit a pull request. If this list is not complete, you can contribute to make it so.

Please, help organize these resources so that they are easy to find and understand for new comers. See how to Contribute for tips!

If you see a link here that is not (any longer) a good fit, you can fix it by submitting a pull request to improve this file. Thank you!

The creators and maintainers of this list do not receive and should not receive any form of payment to accept a change made by any contributor. The goal of this repo is to index articles, learning materials and projects, not to advertise for profit. All pull requests are merged by default and removed if inappropriate or unavailable, or fixed when necessary.

All the links are monitored and tested with awesome\_bot made by @dkhamsing

What is Docker ?

Docker is an open platform for developers and sysadmins to build, ship, and run distributed applications. Consisting of Docker Engine, a portable, lightweight runtime and packaging tool, and Docker Hub, a cloud service for sharing applications and automating workflows, Docker enables apps to be quickly assembled from components and eliminates the friction between development, QA, and production environments. As a result, IT can ship faster and run the same app, unchanged, on laptops, data center VMs, and any cloud.

Source: What is Docker

Where to start ?

10-minute Interactive Tutorial

Docker Training

Read this complete article: Basics – Docker, Containers, Hypervisors, CoreOS

Watch the video: Docker for Developers (54:26) by @jpetazzo

Docker Jumpstart: a quick introduction

Docker Curriculum: A comprehensive tutorial for getting started with Docker. Teaches how to use Docker and deploy dockerized apps on AWS with Elastic Beanstalk and Elastic Container Service.

Install Docker on your machine and play with a few Useful Images

Try Panamax: Docker Management for Humans It will install a CoreOS VM with VirtualBox and has nice front end

Install Docker Toolbox Docker Toolbox is an installer to quickly and easily

- Docker Containers on the desktop by @jfrzelle) The funniest way to learn about docker! (Tips: checkout her dotfiles and her dockerfiles)
- Container Hacks and Fun Images by @jfrzelle @ DockerCon 2015 MUST WATCH Video (38:50)
- Learn Docker Full environment set up, screenshots, step-by-step tutorial and more resources (video, articles, cheat sheets) by @dwy!
- Docker Caveats What You Should Know About Running Docker In Production (written 11 APRIL 2016) MUST SEE
- How to Whale Learn Docker in your web browser, no setup or installation required.
- Docker for all - Developers, Testers, DevOps, Product Owners + Videos Docker Training Videos for all

## Where to start - on Windows ?

- Windows Containers Quick Start Overview of Windows containers, drilling down to Quick Starts for Windows 10 and Windows Server 2016
- Build And Run Your First Docker Windows Server Container Walkthrough Installing Docker on Windows 10, building a Docker image and running a Windows container
- Video: Windows Containers and Docker: The 101 A 20-minute overview, using Docker to run PowerShell, ASP.NET Core and ASP.NET apps
- A Comparative Study of Docker Engine on Windows Server vs Linux Comparing the feature sets and implementations of Docker on Windows and Linux
- Docker with Microsoft SQL 2016 + ASP-NET Demonstration running ASP-NET and SQL Server workloads in Docker
- Running a Legacy ASP-NET App in a Windows Container Steps for Dockerizing a legacy ASP-NET app and running as a Windows container
- Exploring ASP-NET Core with Docker in both Linux and Windows Containers Running ASP-NET Core apps in Linux and Windows containers, using Docker for Windows

## MENU

- What is Docker ?
- Where to start ?
- MENU
- Useful Articles
  - Main Resources
  - General Articles
  - Deep Dive
  - Networking
  - Metal
  - Multi-Server
  - Cloud Infrastructure
  - Good Tips
  - Newsletter
  - Continuous Integration
  - Optimizing Images
  - Service Discovery
  - Security
  - Performances
  - Raspberry Pi & ARM
  - Other
- Books
  - In english
  - Chinese
  - German
  - Portuguese
- Tools
  - Terminal User Interface
  - Dev Tools
  - Continuous Integration / Continuous Delivery
  - Deployment
  - Hosting for repositories (registries)

- Reverse Proxy
- Web Interface
- Local Container Manager
- Volume management and plugins
- Useful Images
- Dockerfile
- Docker Compose file
- Storing Images and Registries
- Monitoring
- Networking
- Logging
- Deployment and Infrastructure
- PaS
- Remote Container Manager / Orchestration
- Security
- Service Discovery
- Metadata
- Slides
- Videos
  - Main Account
  - Useful videos
- Interactive Learning Environments
- Interesting Twitter Accounts
  - People
- Communities and Meetups

## Useful Articles

### Main Resources

- Docker Weekly Huge resource
- Docker Cheat Sheet by @wsargent MUST SEE
- Docker Printable Refcard by @dionomid
- CenturyLink Labs
- Valuable Docker Links Very complete
- Docker Ecosystem (Mind Map) MUST SEE
- Docker Ecosystem (PDF) MUST SEE find it on blog by Bryzgalov Peter.
- Blog of @frazelledazzell
- Blog of @jpetazzo
- Blog of @progrum
- Blog of @jwilder
- Blog of @crosbymichael
- Blog of @gliderlabs
- Blog of @sebgao
- Blog of @codeship
- Digital Ocean Community
- Container42
- Container solutions
- DockerOne Docker Community (in Chinese) by @LiYingJie
- Project Web Dev : (Article series) How to create your own website based on Docker
- Docker vs. VMs? Combining Both for Cloud Portability Nirvana
- Docker Containers on the desktop by @jfrzelle The funniest way to learn about docker! (Tips: checkout her dotfiles and her dockerfiles)
- Awesome Linux Container more general about container than this repo, by @Fritz-zy.

### General Articles

- Getting Started with Docker by @fidelio -- Servers For Hackers is valuable resource. At some point, every programmer finds themselves needing to know their way around a server.
- What is Docker and how do you monitor it?
- How to Use Docker on OS X: The Missing Guide
- Docker for (Java) Developers

- Deploying NGINX with Docker
- Eight Docker Development Patterns
- Rails Development Environment for OS X using Docker
- Logging on Docker: What You Need to Know - see the video (~50min)
- Comparing Five Monitoring Options for Docker
- Minimalistic data-only container for Docker Compose (Written Mar 1, 2015)
- Running Docker Containers with Systemd
- Dockerizing Flask With Compose and Machine - From Localhost to the Cloud -- GitHub Learn how to deploy an application using Docker Compose and Docker Machine (written 17 April 2015)
- Why and How to use Docker for Development (written 28 APR 2015)
- Automating Docker Logging: ElasticSearch, Logstash, Kibana, and Logspout (written 27 APR 2015)
- Docker Host Volume Synchronization (written 1 JUN 2015)
- From Local Development to Remote Deployment with Docker Machine and Compose (written 2 JUL 2015)
- Docker: Build, Ship and Run Any App, Anywhere by Martijn Dwaars, Wiebe van Geest, Rik Nijssen, and Rick Wieman from Delft University of Technology (written 2 JUL 2015)
- Joining the Docker Ship Learn how to contribute to docker (written 9 JUL 2015)
- Continuous Deployment with Gradle and Docker Describes a complete pipeline from source to production deploy (includes a complete Spring Boot example project) by @gesellix
- Containerization and the PaS Cloud -- This article discusses the requirements that arise from having to facilitate applications through distributed multicloud platforms.
- Docker for Development: Common Problems and Solutions by @rdsbhas
- Docker Adoption Data A study by Datadog on the real world Docker usage statics and deployment patterns.
- How to monitor Docker (4-part series)
- Using Ansible with Docker Machine to Bootstrap Host Nodes by @nathanleclaire
- Swarm v. Fleet v. Kubernetes v. Mesos Comparing different orchestration tools. (written OCT 2015)
- The Shortlist of Docker Hosting There are so many specialized and optimized Docker hosting services available, It's high time for a review to see what's on offer (by Chris Ward).

### Portuguese Articles

- Uma rápida introdução ao Docker e instalação no Ubuntu
- O que é uma imagem e o que é um container Docker?
- Criando uma imagem Docker personalizada
- Comandos mais utilizados no Docker

### Deep Dive

- Creating containers - Part 1 This is part one of a series of blog posts detailing how docker creates containers. By @crosbymichael
- Data-only container madness

### Networking

- Using Docker Machine with Weave 0.10 (written 22 APR 2015)
- How to Route Traffic through a Tor Docker container by @jfrzelle (writtent 20 JUN 2015)
- Demystifying Docker overlay networking. By @nigelpoulton

### Metal

- How to use Docker on Full Metal
- CargoOS A bare essential OS for running the Docker Engine on bare metal or Cloud.

### Multi-Server

- A Docker based mini-PaaS by @prologic
- A multi-host scalable web services demo using Docker swarm, Docker compose, NGINX, and Blockbridge

### Cloud Infrastructure

- Cloud Infrastructure Automation for Docker Nodes

### Good Tips

- 24 random docker tips by @csabapalfi
- GUI Apps with Docker by @fgrehm
- Automated Nginx Reverse Proxy for Docker by @jwilder
- Using NSEnter with Boot2Docker
- A Simple Way to Dockerize Applications by @jwilder
- Building good docker images by @bergknoff
- 10 Things Not To Forget Before Deploying Docker In Production
- Docker CIFS – How to Mount CIFS as a Docker Volume
- Nginx Proxy for Docker (written 9 JUL 2015)
- Dealing with linked containers dependency in docker-compose by @rochacbruno
- Docker Tips by @jmervine
- Docker on Windows behind a firewall by @kaltodter
- Pulling Git into a Docker image without leaving SSH keys behind by @khash
- 6 Million Ways To Log In Docker by @raychaser
- Dockerfile Generator (ruby script)
- Running Production Hadoop Clusters in Docker Containers
- 10 practical docker tips (Dec 2015) by @sdirksen
- Kubernetes Cheatsheet - A great resource for managing your Kubernetes installation
- Container Best Practices - Red Hat's Project Atomic created a Container Best Practices guide which applies to everything and is updated regularly.
- Production Meteor and Node Using Docker, Part I by @projectrocket
- Resource Management in Docker by @marekgoldmann

### Newsletter

- Docker Team
- CenturyLink Labs
- Tutum
- Shippable
- WebOps weekly

### Continuous Integration

- Docker and Phoenix: How to Make Your Continuous Integration More Awesome
- Jenkins 2.0 - Screencast Series by Virendra Bhaltholia
- Pushing to ECR Using Jenkins Pipeline Plugin by @mikesir87

### Optimizing Images

- Create the smallest possible Docker container
- Creating a Docker image from your code
- Optimizing Docker Images
- How to Optimize Your Dockerfile by @tutumcloud
- Building Docker Images for Static Go Binaries by @kelseynightower
- Squashing Docker Images by @jwilder
- Dockerfile Golf (or optimizing the Docker build process)
- DockerSlim shrinks fat Docker images creating the smallest possible images.
- Skinny/Whale Skinnywhale helps you make smaller (as in megabytes) Docker containers.
- MicroBadger - Analyze the contents of images and add metadata labels

### Service Discovery

- @progrum Service Discovery articles series:
  - Consul Service Discovery with Docker
  - Understanding Modern Service Discovery with Docker
  - Automatic Docker Service Announcement with Registrator