

AI FAQ Assistant AI - AI-powered FAQ and customer support automation.

Description

The AI FAQ Assistant is a robust, secure, and intelligent REST API platform designed to streamline FAQ creation, user authentication, and AI-powered content management. Built with Node.js and Express.js, the application utilizes MongoDB as its primary data store along with Mongoose ODM for elegant data modeling and schema validation.

Security is central to the architecture, implementing JWT (JSON Web Tokens) for stateless user sessions and route guarding alongside bcrypt for strong password encryption. The backend handles intensive operations like automated FAQ generation, semantic search queries, and dynamic context parsing. It also features robust centralized error handling and response status sanitization to prevent unhandled database leakage and ensure operational durability.

Scenario-Based Case Study

Background

Priya is a customer support operations manager who handles massive backlogs of repetitive user inquiries but struggles to organize entries, classify topics, write precise summaries, and track client question trends efficiently.

Problem

- Difficulty generating and maintaining up-to-date documentation workflows.
- Limited visibility into semantic search match keywords and rapid query resolutions.
- Limited visibility into semantic search match keywords and rapid query resolutions.
- Time-consuming manual processes for drafting complex support answers.
- Lack of unified database permission layers protecting private documentation from public adjustments.

Solution

The AI FAQ Assistant backend delivers a centralized, secure API wrapper that decouples application business logic from frontend delivery systems. It introduces internal verification matrices controlling specialized services for content creation, category keywords, database persistence, and automated text inference modules.

Usage

- Authenticated Creator Usage: Registers profiles, requests instant AI assistance, drafts official FAQ schemas, and updates or removes self-authored records.
- Public/Consumer Usage: Queries general list routes to consume published articles and issues localized semantic queries via parameters.

Outcome

By offloading workflow controls to a robust backend, operational delays are minimized. Data structural integrity is strictly maintained through automated schema validation, security tokens guarantee that only original authors modify documents, and high-performance indexing facilitates real-time data discoverability.


1. Software Requirements

- Operating System: Windows 10/11, macOS, or Linux (supports cross-platform operations).
- Node.js (v18 or above): Runtime ecosystem running server logic and routing infrastructure.
- npm (v9 or above): Node package manager to control operational dependencies.
- Express.js (v4/v5 Ecosystem): Lightweight routing web framework to construct backend RESTful entry points.
- MongoDB / Mongoose ODM: Document NoSQL engine storing application users and curated data entities.
- Postman / ThunderClient: API verification toolkit to assert schema validation responses across administrative route shields.
- Code Editor: Visual Studio Code or similar IDE environment.

2. Hardware Requirements

- Processor: Intel Core i5 (12th Gen) equivalent.
- RAM: 8 GB minimum (16 GB recommended for concurrent instances of MongoDB processing layers).
- Storage: 1 GB of available disk workspace.

Epic-1: Project Architecture

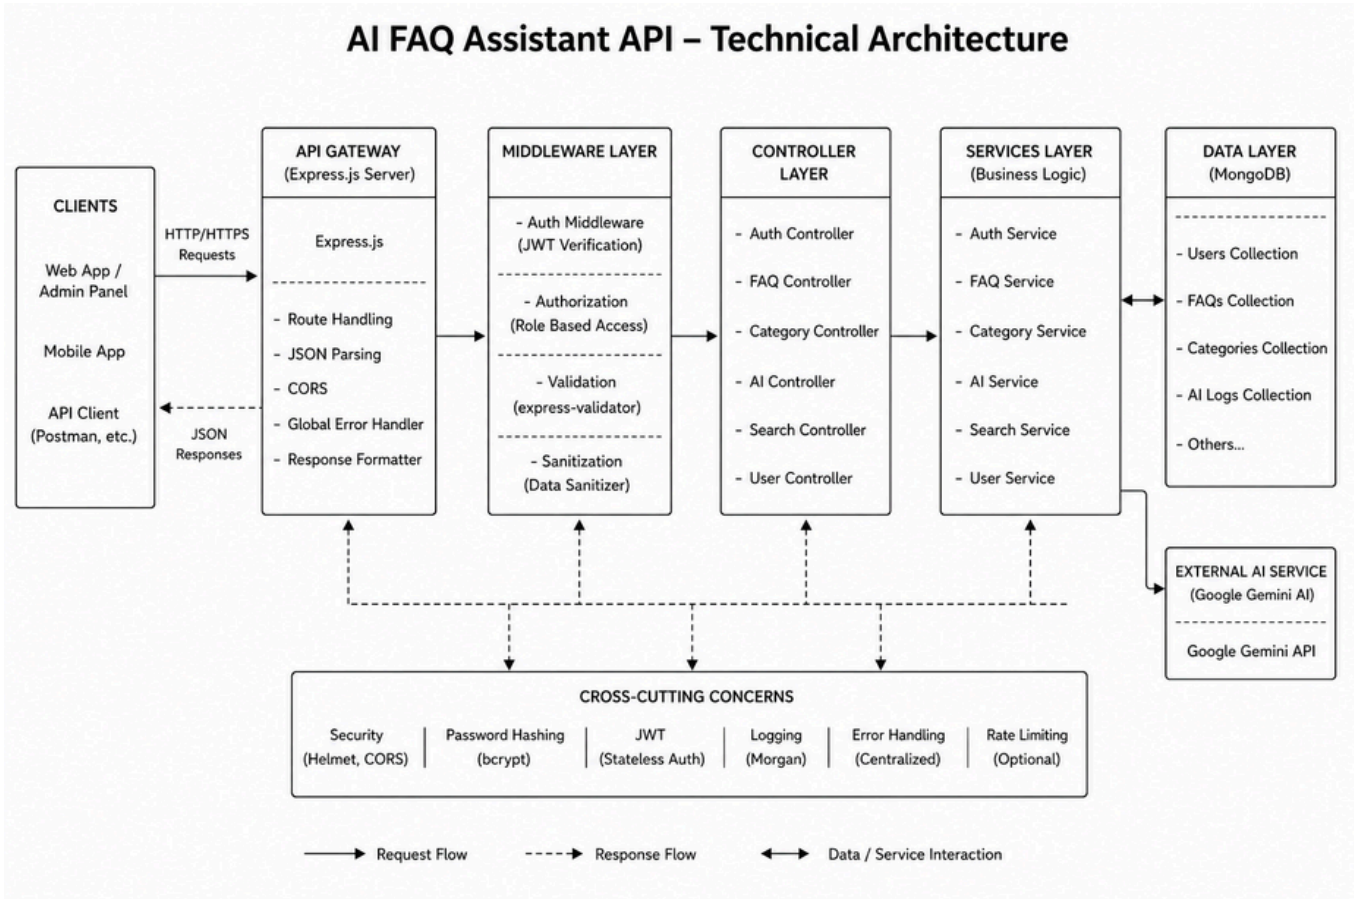


The AI FAQ Assistant application exposes structured endpoints handled by a layered server architecture model. Incoming requests undergo filter processing before interacting with data services.

Components Definition

- Interface: API tools like Postman query distinct route paths to extract JSON entities.
- Express Server Gateway: Monitors network ports, maps explicit HTTP methods (GET, POST, PUT, DELETE), parses incoming JSON payloads, and handles CORS headers.
- Authentication Middleware: Extracts tokens from headers, validates user context signatures, and evaluates authorization thresholds for guarded resource paths.
- Granular Services (Logic Modules): Enforces isolated domain rules for user session life cycles and operational query modifications.
- Database Interface Layer: Mongoose translates operational application logic into performant native MongoDB queries.
- AI Flow (Service Integration): Connected to external AI models via Google Gemini SDK integrations, letting the controller layer offload complex question-answering tasks and automated topic generation workflows.

Entity-Relationship (ER) Diagram Description

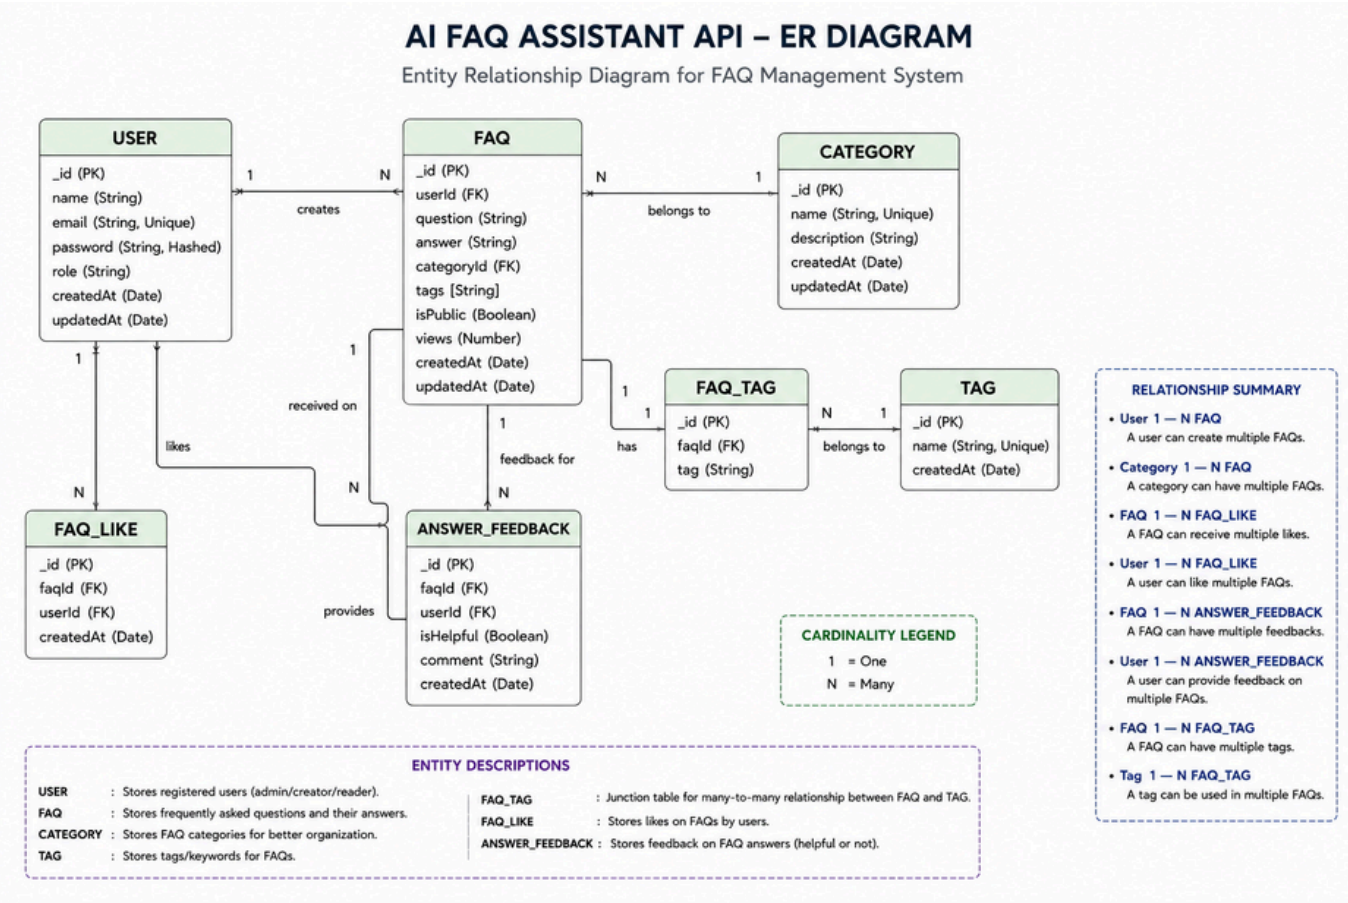

The backend database consists of multiple MongoDB collections connected through logical references to maintain user authentication, FAQ management, AI-generated content, and category organization.

1. User Entity

- `_id` (Primary Key - ObjectId)
- `name` (String, Required)
- `email` (String, Required, Unique)
- `password` (String, Hashed, Required)
- `role` (String, Default: "user")
- `createdAt`
- `updatedAt`

2. FAQ Entity

- `_id` (Primary Key - ObjectId)
- `question` (String, Required)
- `answer` (String, Required)
- `category` (String, Required)
- `createdBy` (Foreign Key referencing User Collection)
- `createdAt`
- `updatedAt`

3. AI Generation Entity (Logical)

(Generated dynamically using Google Gemini AI before persistence.)

- `topic` (String)
- `generatedQuestion` (String)
- `generatedAnswer` (String)
- `generatedCategory` (String)
- `generatedAt`

4. Category Entity (Logical)

- `categoryName` (String)
- `description` (String)
- `totalFAQs` (Number)

User → FAQ (One-to-Many):

User → FAQ (One-to-Many): A registered user can create and manage multiple FAQ records.

Category → FAQ (One-to-Many): Each category can contain multiple FAQ documents.

User → AI Generated FAQ (One-to-Many): A user can generate multiple AI-assisted FAQs, which may later be saved into the FAQ collection.

FAQ → Search Results (Logical Relationship): Search queries retrieve matching FAQ documents using keyword and semantic matching.

Key Features

- **JWT Authentication & Authorization:** Secure token-based authentication protects private API endpoints.
- **AI FAQ Generation:** Google Gemini AI automatically generates questions, answers, and topic suggestions.
- **Semantic FAQ Search:** Intelligent keyword-based search enables faster information retrieval.
- **Complete CRUD Operations:** Create, Read, Update, and Delete FAQ records.
- **Category Management:** Organizes FAQs into structured categories for easier navigation.
- **Password Encryption:** User passwords are securely hashed using bcrypt before storage.
- **Centralized Error Handling:** Standardized API error responses improve reliability and debugging.
- **Schema Validation:** Mongoose validation ensures data integrity before database persistence.
- **RESTful API Architecture:** Modular Express.js routes provide scalable backend services.
- **MongoDB Integration:** Efficient NoSQL document storage using Mongoose ODM.

Roles and Responsibilities

Admin

- Manage all registered users.
- View, update, and delete any FAQ
- Monitor AI-generated content.
- Manage FAQ categories.
- Access complete system functionality.

Content Creator

- Create new FAQs.
- Edit personal FAQ records.
- Delete owned FAQs.
- Generate FAQs using AI.
- Organize FAQs under categories.


Authenticated User

- View public FAQs.
- Search FAQs using keywords.
- Generate AI-assisted answers.
- Access personal profile information.

Public User


- View published FAQs.
- Search FAQs.
- Cannot create, edit, or delete FAQ records.
- No access to protected API endpoints.

User Flow

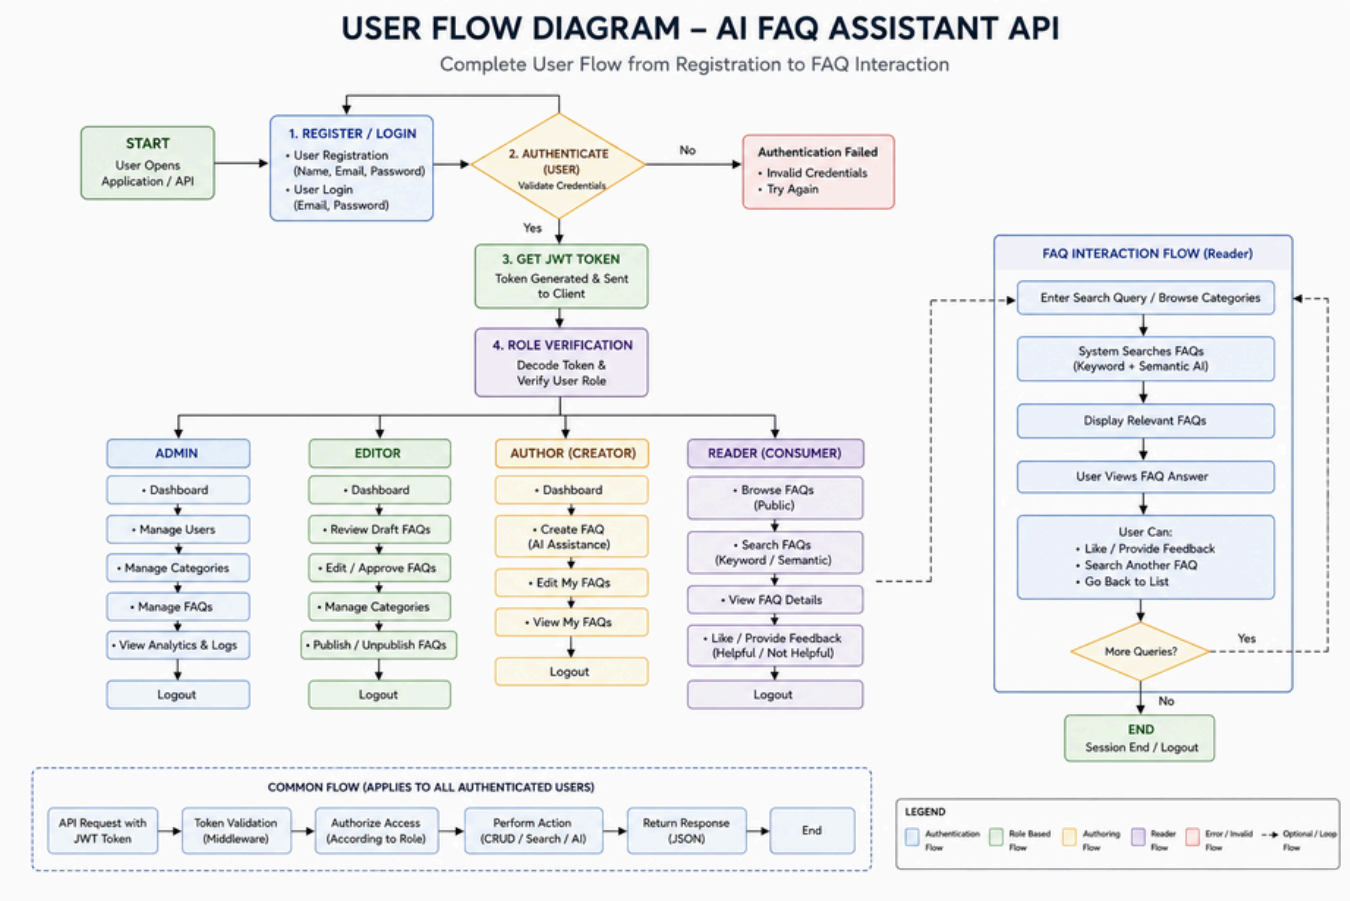

MVC Architecture Pattern

The system architecture structures its source configuration layers around the Model-View-Controller design pattern to completely decouple components:

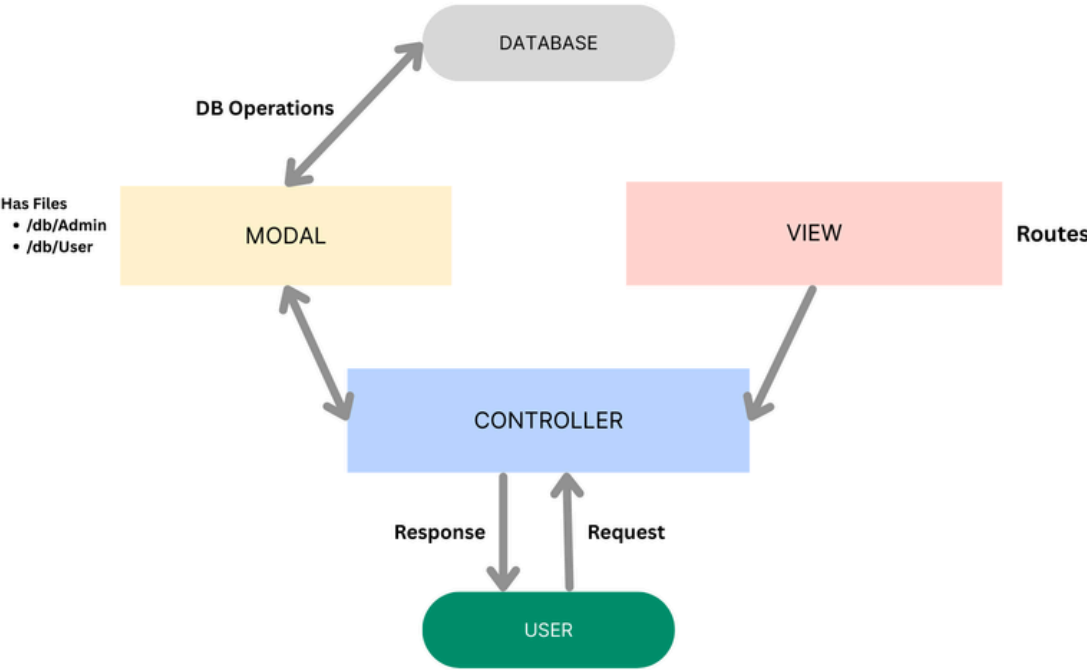

The system architecture structures its source configuration layers around the Model-View-Controller design pattern to completely decouple components:

Model Layer (Data Blueprint)

Defines structural blueprints via strongly enforced Mongoose schemas mapping explicit fields into raw collection items inside MongoDB. It sets field rules and defaults before validation persistence occurs.

Controller Layer (Execution Matrix)

The intermediary brain of the ecosystem. It captures request vectors from execution routes, checks structural request constraints, delegates processing workflows directly to models or services, and packages resultant output into standard JSON return arrays.


View Layer (Routing Network Interface)

In this pure headless backend service context, standard user-interface template views do not exist. Instead, the interface layer lives as an API Routing Layer. It links network requests on specified paths directly to their associated controller handler logic maps.

Epic 2: Project Setup and Configuration

Creating Project Folder

1. Create a new folder with your **AI FAQ Assistant**.
2. Inside that folder, create a new subfolder named **src**.
3. Now open that folder in VS Code.

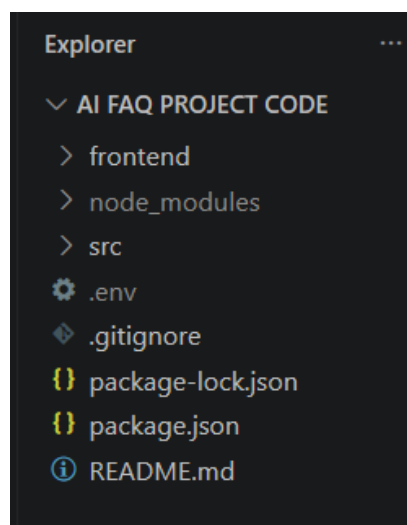


Server Setup (npm init)

Open your root folder terminal in VS Code and run: Bash

```
npm init -y
npm install express mongoose dotenv cors jsonwebtoken bcrypt @google/genai
```

File and Folder Structure Matrix

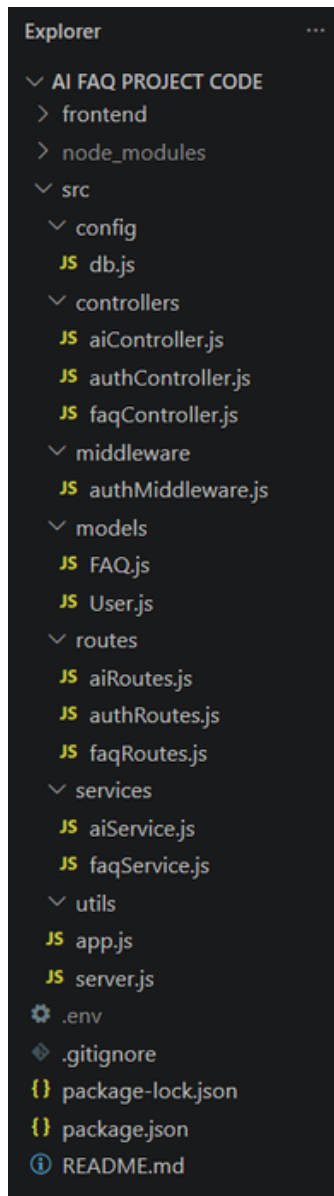

Epic 3: Backend Development

Core System Script Implementations

1. Gateway Server Node (src/server.js)

This main entrance mechanism aggregates environment variables, triggers database listeners, and binds network listeners to active environment ports:

```
JS server.js X
src > JS server.js > ...
1  require("dotenv").config();
2
3  const app = require("../app");
4  const connectDB = require("../config/db");
5
6  const PORT = process.env.PORT || 5000;
7
8  // Connect to MongoDB
9  connectDB();
10
11 // Start server
12 app.listen(PORT, () => {
13   console.log(`AI FAQ Assistant API running on port ${PORT}`);
14 });
```

2. Gateway Express Setup (src/app.js)

```
JS app.js X
src > JS app.js > ...
1  const express = require("express");
2  const cors = require("cors");
3  const dotenv = require("dotenv");
4
5  const authRoutes = require("../routes/authRoutes");
6  const faqRoutes = require("../routes/faqRoutes");
7  const aiRoutes = require("../routes/aiRoutes");
8
9  // Load environment variables
10 dotenv.config();
11
12 const app = express();
13
14 // Enable CORS
15 app.use(cors());
16
17 // Parse JSON request bodies
18 app.use(express.json());
19
20 // Parse URL-encoded request bodies
21 app.use(express.urlencoded({ extended: false }));
22
23 // API Routes
24 app.use("/api/auth", authRoutes);
25 app.use("/api/faqs", faqRoutes);
26 app.use("/api/ai", aiRoutes);
27
28 // Basic status check route
29 app.get("/", (req, res) => {
30   res.json({
31     success: true,
32     message: "AI FAQ Assistant API is running.",
33     version: "1.0.0",
34   });
35 });
36 ...
37 // Handle unknown routes
38 app.use((req, res) => {
39   res.status(404).json({
40     success: false,
41     message: `Route not found: ${req.method} ${req.originalUrl}`,
42   });
43 });
44
45 // Error handler
46 app.use((err, req, res, next) => {
47   console.error("Server Error:", err);
48
49   res.status(500).json({
50     success: false,
51     message: "Internal server error",
52     error: err.message,
53   });
54 });
55
56 module.exports = app;
```

3. Security Access Middleware (src/middleware/authMiddleware.js)

Intercepts incoming target queries, extracts transmission header authorization records, and validates token identity context claims:

```
JS authMiddleware.js X
src > middleware > JS authMiddleware.js > ...
1  const jwt = require("jsonwebtoken");
2
3  const authMiddleware = (req, res, next) => {
4    try {
5      const authHeader = req.headers.authorization;
6
7      if (!authHeader || !authHeader.startsWith("Bearer ")) {
8        return res.status(401).json({
9          success: false,
10         message: "Authentication token is required",
11       });
12     }
13   }
14 }
```

```

13
14     const token = authHeader.split(" ")[1];
15
16     const decoded = jwt.verify(token, process.env.JWT_SECRET);
17
18     req.user = decoded;
19
20     next();
21 } catch (error) {
22     return res.status(401).json({
23         success: false,
24         message: "Invalid or expired token",
25     });
26 }
27 };
28
29 const authorizeRoles = (...allowedRoles) => {
30     return (req, res, next) => {
31         if (!req.user || !allowedRoles.includes(req.user.role)) {
32             return res.status(403).json({
33                 success: false,
34                 message: "Access denied",
35             });
36         }
37
38         next();
39     };
40 };
41
42 module.exports = {
43     authMiddleware,
44     authorizeRoles,
45 };

```

Epic 4: Database Configuration

Mongoose Schema Definitions

1. Identity Resource Document Schema (src/models/User.js)

Enforces profile field criteria validations and hooks password hashing steps prior to user document persistence:

```

JS User.js X
src > models > JS User.js > ...
36 userSchema.pre("save", async function () {
37     if (!this.isModified("password")) {
38         return;
39     }
40
41     const salt = await bcrypt.genSalt(10);
42     this.password = await bcrypt.hash(this.password, salt);
43 });
44
45 userSchema.methods.comparePassword = async function (candidatePassword) {
46     return await bcrypt.compare(candidatePassword, this.password);
47 };
48
49 module.exports = mongoose.model("User", userSchema);

```

2. FAQ Resource Document Schema (src/models/FAQ.js)

Models core properties and maps a distinct relational reference link back to the source creator document:

```

JS FAQ.js X
src > models > JS FAQ.js > ...
1  const mongoose = require("mongoose");
2
3  const faqSchema = new mongoose.Schema(
4      {
5          question: {
6              type: String,
7              required: true,
8              trim: true,
9          },
10

```

```

11     answer: {
12       type: String,
13       required: true,
14       trim: true,
15     },
16
17     category: {
18       type: String,
19       required: true,
20       trim: true,
21     },
22
23     createdBy: {
24       type: mongoose.Schema.Types.ObjectId,
25       ref: "User",
26       required: true,
27     },
28   },
29   {
30     timestamps: true,
31   }
32 );
33
34 module.exports = mongoose.model("FAQ", faqSchema);

```

API Router Interface Endpoints

1. Public Authentication Operations (src/routes/authRoutes.js)

```

15 authRoutes.js X
src > routes > JS authRoutes.js > ...
1  const express = require("express");
2
3  const {
4    register,
5    login,
6  } = require("../controllers/authController");
7
8  const router = express.Router();
9
10 console.log("AUTH ROUTES LOADED");
11
12 // Register
13 router.post("/register", register);
14
15 // Login
16 router.post("/login", login);
17
18 module.exports = router;

```

2. Protected FAQ Operations (src/routes/faqRoutes.js)

```

15 faqRoutes.js X
src > routes > JS faqRoutes.js > ...
1  const express = require("express");
2
3  const router = express.Router();
4
5  const {
6    createFAQ,
7    getAllFAQs,
8    getFAQById,
9    updateFAQ,
10    deleteFAQ,
11    searchFAQ,
12  } = require("../controllers/faqController");
13
14 const {
15   authMiddleware,
16   authorizeRoles,
17 } = require("../middleware/authMiddleware");
18
19 router.get("/", getAllFAQs);
20
21 router.get("/search", searchFAQ);
22
23 router.get("/:id", getFAQById);
24
25 // Create FAQ
26 router.post(
27   "/",
28   authMiddleware,
29   authorizeRoles("admin", "creator"),
30   createFAQ
31 );
32

```

```

33 // Update FAQ
34 router.put(
35   "/:id",
36   authMiddleware,
37   authorizeRoles("admin", "creator"),
38   updateFAQ
39 );
40
41 // Delete FAQ
42 router.delete(
43   "/:id",
44   authMiddleware,
45   authorizeRoles("admin"),
46   deleteFAQ
47 );
48
49 module.exports = router;

```

3. AI Automation Operations (src/routes/aiRoutes.js)

```

1  const express = require("express");
2
3  const {
4    askQuestion,
5    generateFAQQuestion,
6  } = require("../controllers/aiController");
7
8  const {
9    authMiddleware,
10   authorizeRoles,
11 } = require("../middleware/authMiddleware");
12
13 const router = express.Router();
14
15 // Ask AI Question
16 router.post("/ask", askQuestion);
17
18 // Generate FAQ using Gemini AI
19 // Only Admin and Creator can generate FAQs
20 router.post(
21   "/generate-faq",
22   authMiddleware,
23   authorizeRoles("admin", "creator"),
24   generateFAQQuestion
25 );
26
27 module.exports = router;

```

Epic 5: Project Executions

Running the API Application

- Install Postman or ThunderClient (VS Code extension).
- Start the backend development server environment parameters:

Bash

npm run dev

API Testing Specification Demo

To verify operational structural integrity via execution endpoints, map endpoints using the configurations below:

1. Identity Onboarding Path Registration

- **Route:** POST /api/auth/register
- **Access:** Public

- **Route:** POST /api/auth/login
- **Access:** Public

JSON

```
{
  "email": "admin@example.com",
  "password": "Admin@123"
}
```

3. Resource Entity Creation (FAQ)

- **Route:** POST /api/faqs
- **Access:** Private (Bearer <JWT Token>)

JSON

```
{
  "question": "How do I configure custom category tags?",
  "answer": "Navigate to settings panel, append keyword tags arrays, and save schema.",
  "category": "Configuration"
}
```

Add New FAQ

How do I configure custom category tags?

Navigate to settings panel, append keyword tags arrays, and save schema.

Configuration

Add FAQ

4. Keyword Resource Entity Fetching (Search)

localhost:5000/api/auth/r...localhost:5000/api/auth/L...localhost:5000/api/faqs/6..

GET http://localhost:5000/api/faqs/search?keyword=configure

Send

QueryHeadersAuthBodyTestsPre Run

JSONXMLTextFormForm-encodeGraphQLBinary

JSON ContentFormat

1

New Request Xlocalhost:5000/api/faqs

Status: 200 OK Size: 360 Bytes Time: 111 ms

ResponseHeaders7CookiesResultsDocs

</>≡

```
1 {
2   "success": true,
3   "count": 1,
4   "faqs": [
5     {
6       "_id": "6ab8d8e36927d63180400ad5",
7       "question": "How do I configure custom category tags?",
8       "answer": "Navigate to settings panel, append keyword tags arrays,
9         and save schema.",
10      "category": "Configuration",
11      "createdBy": "6ab3d117d1e01dbaffaf1a59",
12      "createdAt": "2026-09-27T08:50:43.137Z",
13      "updatedAt": "2026-09-27T08:50:43.137Z",
14      "_v": 0
15    }
16  ]
17 }
```

- **Route:** GET /api/faqs/search?q=configure
- **Access:** Public

Existing FAQs

How do I configure custom category tags?

All Categories


How do I configure custom category tags?

Navigate to settings panel, append keyword tags arrays, and save schema.

Category: Configuration

EditDelete


5. AI Intelligent Content Automation (Generate FAQ Pair)

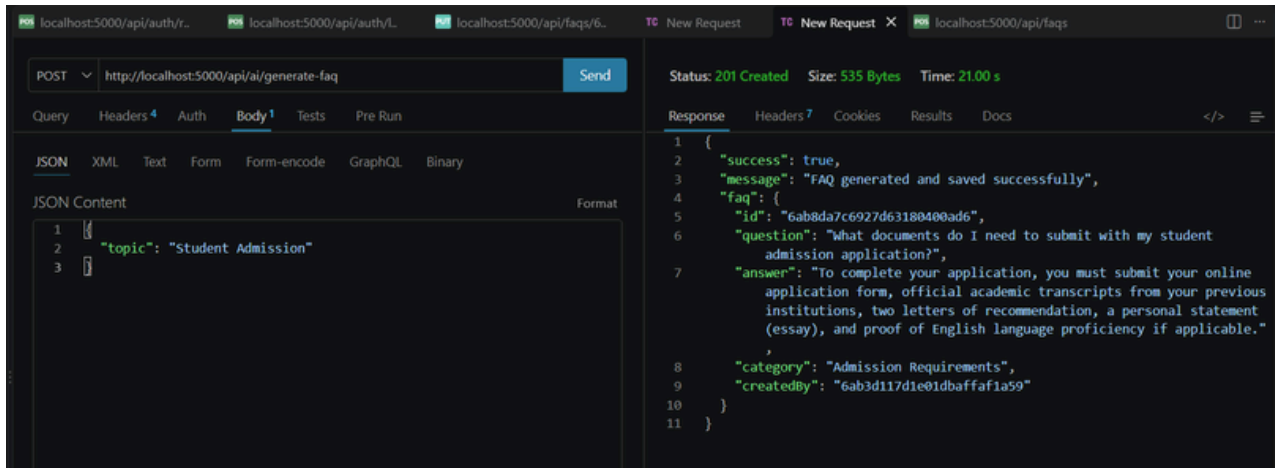

- **Route:** POST /api/ai/generate-faq
- **Access:** Private (Bearer <JWT Token>)

JSON

```
{
  "topic": "Student Admission"
}
```

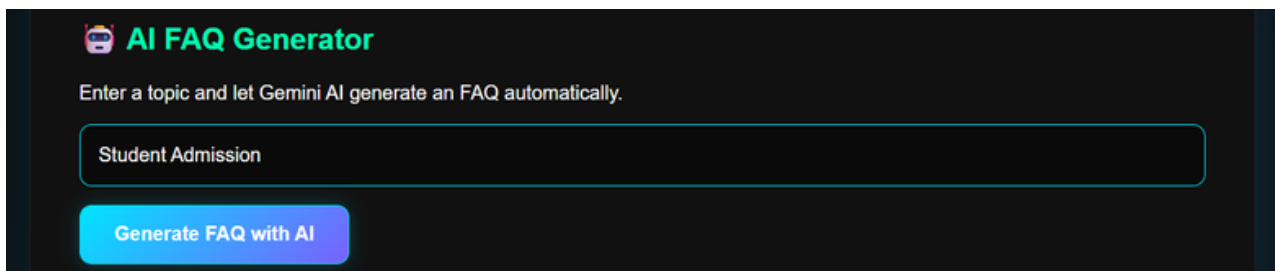

API TESTING VIDEO:

https://drive.google.com/file/d/1D9vGUf97xXdLdR4aTj6bsGEZ7JbJrmF2/view?usp=drive_link

DEMO LINK:

https://drive.google.com/file/d/1CgWslW4MQs_nE930Xq4t0Jy3y2eS5HVv/view?usp=drive_link

Code Drive:

https://drive.google.com/drive/folders/1VrHvUU4HkdJ_kHFoIrJLY0VEI2P0pnKR?usp=sharing