

# **BLACKDUCK** | Hub

# Installing Hub using Docker Compose

Version 4.7.2



This edition of the *Installing Hub using Docker Compose* refers to version 4.7.2 of the Black Duck Hub.

This document created or updated on Friday, July 20, 2018.

#### Please send your comments and suggestions to:

Black Duck Software, Incorporated 800 District Avenue, Suite 201 Burlington, MA 01803-5061 USA

#### Copyright © 2018 by Black Duck Software, Inc.

All rights reserved. All use of this documentation is subject to the license agreement between Black Duck Software, Inc. and the licensee. No part of the contents of this document may be reproduced or transmitted in any form or by any means without the prior written permission of Black Duck Software, Inc.

Black Duck, Know Your Code, and the Black Duck logo are registered trademarks of Black Duck Software, Inc. in the United States and other jurisdictions. Black Duck Code Center, Black Duck Code Sight, Black Duck Hub, Black Duck Protex, and Black Duck Suite are trademarks of Black Duck Software, Inc. All other trademarks or registered trademarks are the sole property of their respective owners.

# Contents

Chapter 1: Overview	
Hub Architecture	1
Components hosted on Black Duck servers	1
Chapter 2: Installation planning	2
Getting started	2
New installations	2
Upgrading from a previous version of the Hub	2
Hardware requirements	2
Docker requirements	3
Operating systems	3
Software requirements	3
Network requirements	4
Database requirements	4
Proxy server requirements	5
Configuring your NGiNX server to work with the Hub	5
Amazon services	6
Additional port information	7
Chapter 3: Installing the Hub	8
Installation files	9
Download from the GitHub page	9
Download using the wget command	9
Distribution	9
Installing the Hub	10
Chapter 4: Administrative tasks	12
Understanding the default sysadmin user	13
Configuring web server settings	13
Configuring the hostname	13
Configuring the host port	13
Disabling IPv6	14
Configuring Proxy settings	14
Proxy password	14
Importing a proxy certificate	15
Configuring an external PostgreSQL instance	15

Managing certificates	16
Using custom certificates	17
Accessing log files	18
Obtaining logs	19
Viewing log files for a container	19
Scaling Job Runner and Scan containers	19
Scaling Job Runner containers	19
Scaling scan containers	20
Changing the default memory limits for the Web App, Job Runner, and Scan containers	20
Changing the default Web App container memory limits	20
Changing the default Job Runner container memory limits	21
Changing the default Scan container memory limits	22
Configuring the report database password	23
Accessing the API documentation through a proxy server	23
Providing access to the REST APIs from a non-Hub server	23
Configuring secure LDAP	24
Obtaining your LDAP information	24
Importing the server certificate	25
LDAP trust store password	27
Configuring SAML for Single Sign-On	28
Providing your Hub system information to Customer Support	30
Customizing user IDs of Hub containers	30
Including ignored components in reports	32
Enabling the hierarchical BOM	32
Starting or stopping the Hub	32
Starting up the Hub	32
Shutting down the Hub	32
Chapter 5: Uninstalling the Hub	33
Chapter 6: Upgrading the Hub	34
Installation files	
Download from the GitHub page	34
Download using the wget command	34
Upgrading from the AppMgr architecture	35
Migrating your PostgreSQL database	35
Upgrading the Hub	
Upgrading from a single-container AppMgr Hub	37
Migrating your PostgreSQL database	37
Upgrading the Hub	38
Upgrading from an existing Docker architecture	38
Migrating your PostgreSQL database	38
Ungrading the Hub	30



Appendix A: Docker containers	41
Web App container	43
Authentication container	44
Scan container	45
Job runner container	46
Solr container	47
Registration container	47
DB container	
Documentation container	49
WebServer container	50
ZooKeeper container	51
LogStash container	52
CA container	52

# The Hub documentation

The documentation for the Hub consists of online help and these documents:

Title	File	Description
Release Notes	release_notes_bd_hub.pdf	Contains information about the new and improved features, resolved issues, and known issues in the current and previous releases.
Installing Hub using Docker Compose	hub_install_compose.pdf	Contains information about installing and upgrading the Hub using Docker Compose.
Installing Hub using Docker Swarm	hub_install_swarm.pdf	Contains information about installing and upgrading the Hub using Docker Swarm.
Installing Hub using Kubernetes	hub_install_kubernetes.pdf	Contains information about installing and upgrading the Hub using Kubernetes.
Installing Hub using OpenShift	hub_install_openshift.pdf	Contains information about installing and upgrading the Hub using OpenShift.
Getting Started	hub_getting_started.pdf	Provides first-time users with information on using the Hub.
Scanning Best Practices	hub_scanning_best_practices.pdf	Provides best practices for scanning.
Getting Started with the Hub SDK	getting_started_hub_sdk.pdf	Contains overview information and a sample use case.
Report Database	report_db_bd_hub.pdf	Contains information on using the report database.

Hub integration documentation can be found on **Confluence**.

# **Training**

Black Duck Academy is a one-stop resource for all your Black Duck education needs. It provides you with 24x7 access to online training courses and how-to videos.

New videos and courses are added monthly.

At Black Duck Academy, you can:

- Learn at your own pace.
- Review courses as often as you wish.
- Take assessments to test your skills.
- Print certificates of completion to showcase your accomplishments.

Learn more at https://www.blackducksoftware.com/services/training

View the full catalog of courses and try some free courses at https://academy.blackducksoftware.com

When you are ready to learn, log in or sign up for an account: https://academy.blackducksoftware.com

# **Customer Success Community**

The Black Duck Customer Success Community is our primary online resource for customer support, solutions, and information. The Customer Success Community allows users to quickly and easily open support cases and monitor progress, learn important product information, search a knowledgebase, and gain insights from other Black Duck customers. The many features included in the Customer Success Community center around the following collaborative actions:

- Connect Open support cases and monitor their progress, as well as, monitor issues that require
   Engineering or Product Management assistance
- Learn Insights and best practices from other Black Duck product users to allow you to learn valuable lessons from a diverse group of industry leading companies. In addition, the Customer Hub puts all the latest product news and updates from Black Duck at your fingertips, helping you to better utilize our products and services to maximize the value of open source within your organization.
- Solve Quickly and easily get the answers you're seeking with the access to rich content and product knowledge from Black Duck experts and our Knowledgebase.
- Share Collaborate and connect with Black Duck staff and other customers to crowdsource solutions and share your thoughts on product direction.

Access the Customer Success Community. If you do not have an account or have trouble accessing the system, please send an email to communityfeedback@blackducksoftware.com or call us at +1 781.891.5100 ext. 5.

To see all the ways you can interact with Black Duck Support, visit: https://www.blackducksoftware.com/support/contact-support.

This document provides instructions for installing Black Duck Hub in a Docker environment.

## **Hub Architecture**

The Black Duck Hub is deployed as a set of Docker containers. "Dockerizing" the Hub so that different components are containerized allows third-party orchestration tools such as Compose or Swarm to manage all individual containers.

The Docker architecture brings these significant improvements to the Hub:

- Improved performance
- Easier installation and updates
- Scalability
- Product component orchestration and stability

See <u>Docker containers</u>, for more information on the Docker containers that comprise the Hub application.

Visit the Docker website: https://www.docker.com/ for more information on Docker.

To obtain Docker installation information, go to https://docs.docker.com/engine/installation/.

# Components hosted on Black Duck servers

The following remote Black Duck services are leveraged by the Black Duck Hub:

- Registration server: Used to validate the Hub license.
- Black Duck KnowledgeBase server: The Black Duck KnowledgeBase (KB) is the industry's most comprehensive database of open source project, license, and security information. Leveraging the Black Duck KB in the cloud ensures that the Hub can display the most up-to-date information about open source software (OSS) without requiring regular updates to your Hub.

# Chapter 2: Installation planning

This chapter describes the pre-installation planning and configuration that must be performed before you can install the Black Duck Hub.

# **Getting started**

The process for installing the Hub depends on whether you are installing the Hub for the first time or upgrading from a previous version of the Hub (either based on the AppMgr architecture or based on the Docker architecture).

#### **New installations**

For new installation of the Hub:

- 1. Read this planning chapter to review all requirements.
- 2. After ensuring that you meet all requirements, go to Chapter 3 for installation instructions.
- 3. Review Chapter 4 for any administrative tasks.

# Upgrading from a previous version of the Hub

- 1. Read this planning chapter to review all requirements,
- 2. After ensuring that you meet all requirements, go to Chapter 6 for upgrade instructions.
- 3. Review Chapter 4 for any administrative tasks.

# Hardware requirements

The following is the minimum hardware that is needed to run a single instance of all containers:

- 4 CPUs
- 16GB RAM
- 250 GB of free disk space for the database and other Hub containers
- Commensurate space for database backups

The <u>descriptions of each container</u> document the individual requirements for each container if it will be running on a different machine or if more than one instance of a container will be running (currently only supported for the Job Runner and Scan containers).

Note: The amount of required disk space is dependent on the number of projects being managed, so individual requirements can vary. Consider that each project requires approximately 200 MB.

Black Duck recommends monitoring disk utilization on the Hub servers to prevent disks from reaching capacity which could cause issues with the Hub.

Note: Installing Hub Alert requires 1 GB of additional memory.

# **Docker requirements**

Docker Compose is a tool for running multi-container Docker applications.

The Hub supports Docker versions 17.06.x, 17.09.x, 17.12.x, and 18.03.x (CE or EE).

The minimum supported version of docker-compose must be able to read Docker Compose 2.1 files.

# **Operating systems**

The preferred operating systems for installing the Hub in a Docker environment are:

- CentOS 7.3
- Red Hat Enterprise Linux server 7.3
- Ubuntu 16.04.x
- SUSE Linux Enterprise server version 12.x (64-bit)
- Oracle Enterprise Linux 7.3

In addition, Black Duck will support other Linux operating systems that support Docker version 17.06.x (CE or EE).

Windows operating system is currently not supported.

# Software requirements

The Hub is a web application that has an HTML interface. You access the application via a web browser. The following web browser versions have been tested with the Hub:

- Chrome 66.0.3359.181 (Official Build) (64-bit)
- Firefox 60.0.1 (64-bit)
- Internet Explorer 11.0.1029.15063.0
- Microsoft Edge 40.15063.674.0
- Microsoft EdgeHTML 15.15063
- Safari 11.1 (13605.1.33.1.4)

Note that the Hub does not support compatibility mode.

**Note:** These browser versions are the currently-released versions on which Black Duck has tested Hub. Newer browser versions may be available after the Hub is released, and may or may not work as expected. Older browser versions may work as expected, but have not been tested and may not be supported.

# **Network requirements**

The Hub requires the following ports to be externally accessible:

- Port 443 Web server HTTPS port for the Hub via NGiNX
- Port 55436 Read-only database port from PostgreSQL for reporting

If your corporate security policy requires registration of specific URLs, connectivity from your Hub installation to Black Duck hosted servers is limited to communications via HTTPS/TCP on port 443 with the following servers:

- updates.suite.blackducksoftware.com (to register your software)
- kb.blackducksoftware.com (access the Black Duck KB data)

**Note:** If you are using a network proxy, these URLs must be configured as destinations in your proxy configuration.

# **Database requirements**

The Hub uses the PostgreSQL object-relational database to store data.

Prior to installing the Hub, determine whether you want to use the database container that is automatically installed or an external (for example, Amazon Relational Database Service (RDS)) PostgreSQL instance.

- To use an external PostgreSQL instance:
  - 1. Set up your external PostgreSQL instance using Amazon RDS.

When creating your RDS instance, set the "Master User" to **blackduck**.

- 2. Configure your database connection settings.
- 3. Install or upgrade the Hub.

Currently, the Hub requires PostgreSQL 9.6.X.

#### PostgreSQL versions

For the Hub version 4.7.2, the currently-supported version of PostgreSQL is 9.6.x, which is the version supplied in the Hub's PostgreSQL container. If you choose to run your own PostgreSQL instance, you must be at PostgreSQL version 9.6.x for compatibility with the Hub version 4.7.2.

Refer to <u>Chapter 6</u>, <u>Upgrading the Hub</u> for database migration instructions if upgrading from a pre-4.2.0 version of the Hub.

# **Proxy server requirements**

The Hub supports:

- No Authentication
- Digest
- Basic
- NTLM

If you are going to make proxy requests to the Hub, work with the proxy server administrator to get the following required information:

- The protocol used by proxy server host (http or https).
- The name of the proxy server host
- The port on which the proxy server host is listening.

# Configuring your NGiNX server to work with the Hub

If you have an NGINX server acting as an HTTPS server/proxy in front of the Hub, you must modify the NGINX configuration file so that the NGINX server passes the correct headers to the Hub. The Hub then generates the URLs that use HTTPS.

**Note:** Only one service on the NGINX server can use https port 443.

To pass the correct headers to the Hub, edit the location block in the nginx.config configuration file to:

```
location / {
   client_max_body_size 1024m;
   proxy_pass http://127.0.0.1:8080;
   proxy_pass_header X-Host;
   proxy_set_header Host $host:$server_port;
   proxy_set_header X-Real-IP $remote_addr;
   proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
   proxy_set_header X-Forwarded-Proto $scheme;
}
```

If the X-Forwarded-Prefix header is being specified in a proxy server/load balancer configuration, edit the location block in the nginx.conf configuration file:

```
location/prefixPath {
   proxy set header X-Forwarded-Prefix "/prefixPath";
```

}

To scan files successfully, you must use the **context** parameter in the Hub Scanner or include it in the **Hub Server URL** field in the Hub Scanner UI.

**Note:** Although these instructions apply to an NGINX server, similar configuration changes would need to be made for any type of proxy server.

If the proxy server will rewrite requests to the Hub, let the proxy server administrator know that the following HTTP headers can be used to preserve the original requesting host details.

HTTP Header	Description	
X-Forwarded-Host	Tracks the list of hosts that were re-written or routed to make the request. The original host is the first host in the comma-separated list.	
	Example:	
	X-Forwarded-Host: "10.20.30.40, my.example, 10.1.20.20"	
X-Forwarded-Port	Contains a single value representing the port used for the original request.	
	Example:	
	X-Forwarded-Port: "9876"	
X-Forwarded-Proto	Contains a single value representing the protocol scheme used for the original request.	
	Example:	
	X-Forwarded-Proto: "https"	
X-Forwarded-Prefix	Contains a prefix path used for the original request.	
	Example:	
	X-Forwarded-Prefix: "prefixPath"	
	To successfully scan files, you must use the <b>context</b> parameter	

# **Amazon services**

#### You can:

- Install the Hub on Amazon Web Services (AWS)
  - Refer to your AWS documentation and your AMI documentation for more information on AWS.
- Use Amazon Relational Database Service (RDS) for the PostgreSQL database that is used by the Hub.

Refer to your Amazon Relational Database Service documentation for more information on

Amazon RDS.

Currently the Hub requires PostgreSQL version 9.6.x.

# Additional port information

The following list of ports cannot be blocked by firewall rules or by your Docker configuration. Examples of how these ports may be blocked include:

- The iptables configuration on the host machine.
- A firewalld configuration on the host machine.
- External firewall configurations on another router/server on the network.
- Special Docker networking rules applied above and beyond what Docker creates by default, and also what Black Duck creates by default.

The complete list of ports that must remain unblocked is:

- **443**
- **8443**
- **8000**
- **8888**
- **8983**
- **16543**
- **17543**
- **16545**
- **16544**
- **55436**

# Chapter 3: Installing the Hub

Prior to installing the Hub, ensure that you meet the following requirements:

Hub Installation Req	uirements		
Hardware requirements			
	You have ensured that your hardware meets the minimum hardware requirements.		
Docker requirement	Docker requirements		
	You have ensured that your system meets the docker requirements.		
Software requirements			
	You have ensured that your system and potential clients meet the <u>software</u> requirements.		
Network requirements			
	You have ensured that your network meets the <a href="network requirements">network requirements</a> .  Specifically:  • Port 443 and port 55436 are externally accessible.  • The server has access to updates.suite.blackducksoftware.com which is used to validate the Hub license.		
Database requirements			
	You have selected your <u>database configuration</u> .  Specifically, you have <u>configured database settings</u> if you are using an external PostgreSQL instance.		
Proxy requirements			
	You have ensured that your network meets the <u>proxy requirements</u> .  Configure <u>proxy settings</u> before or after installing the Hub.		
Web server requirements			
	Configure web server settings before or after installing the Hub.		

# Installation files

The installation files are available on GitHub.

Download the orchestration files. As part of the install/upgrade process, these orchestration files pull down the necessary Docker images.

Note that although the filename of the tar.gz file differs depending on how you access the file, the content is the same.

# Download from the GitHub page

- 1. Select the link to download the .tar.gz file from the GitHub page: https://github.com/blackducksoftware/hub.
- 2. Uncompress the Hub .gz file:

```
gunzip hub-4.7.2.tar.gz
```

3. Unpack the Hub.tar file:

```
tar xvf hub-4.7.2.tar
```

# Download using the wget command

1. Run the following command:

```
wget https://github.com/blackducksoftware/hub/archive/v4.7.2.tar.gz
```

2. Uncompress the Hub .gz file:

```
gunzip v4.7.2.tar.gz
```

3. Unpack the Hub.tar file:

```
tar xvf v4.7.2.tar
```

# **Distribution**

The docker-compose directory has the following files you need to install or upgrade the Hub.

- docker-compose.dbmigrate.yml: Docker Compose file used to migrate the PostgreSQL database when using the database container provided by the Hub.
- docker-compose.externaldb.yml: Docker Compose file used with an external PostgreSQL database.
- docker-compose.yml: Docker Compose file when using the database container provided by the Hub.
- external-postgres-init.pgsql: PostgresSQL.sql file used to configure an external PostgreSQL database.
- hub-postgres.env: Environment file to configure an external PostgreSQL database.
- hub-proxy.env: Environment file to configure proxy settings.
- hub-webserver.env: Environment file to configure web server settings.

In the bin directory:

- hub\_create\_data\_dump.sh: Script used to back up the PostgreSQL database when using the database container provided by the Hub.
- hub\_db\_migrate.sh: Script used to migrate the PostgreSQL database when using the database container provided by the Hub.
- hub\_reportdb\_changepassword.sh: Script used to set and change the report database password.
- system\_check.sh: Script used to gather your Hub system information to send to Customer Support.

# Installing the Hub

This section provides instructions for new installations of the Hub.

Prior to installing the Hub, determine if there are any settings that need to be configured.

To install the Hub, you may need to be a user in the docker group, a root user, or have sudo access.

**Note:** These instructions are for new installations of the Hub. Refer to Chapter 6 for more information about upgrading the Hub.

■ To install the Hub with the PostgreSQL database container:

```
docker-compose -f docker-compose.yml -p hub up -d
```

**Note:** Use the version of the docker-compose.yml file located in the docker-compose directory.

To install the Hub with an external PostgreSQL instance:

```
docker-compose -f docker-compose.externaldb.yml -p hub up -d
```

**Note:** Use the version of the docker-compose.externaldb.yml file located in the docker-compose directory.

The Black Duck Hub is installed.

You can confirm that the installation was successful by running the <code>docker ps</code> command to view the status of each container. A "healthy" status indicates that the installation was successful. Note that the containers may be in a "starting" state for a few minutes post-installation.

Once all the containers for Hub are up, the web application for the Hub will be exposed on port 443 to the docker host. Be sure that you have configured the <a href="hostname">hostname</a> and then you can access the Hub by entering the following:

https://hub.example.com

The first time you access the Hub, the Registration & End User License Agreement appears. You must accept the terms and conditions to use the Hub.

Enter the registration key provided to you to access the Hub.

**Note:** If you need to reregister, you must accept the terms and conditions of the End User License Agreement again.

# **Chapter 4: Administrative tasks**

This chapter describes these administrative tasks:

- Understanding the default sysadmin user.
- Configuring web server settings, such as configuring the hostname, host port, or disabling IPv6.
- Configuring proxy settings.
- Configuring an external PostgreSQL instance.
- Replacing the existing self-signed certificate for the Web Server with a custom certificate.
- Accessing log files.
- Scaling Job Runner and Scan containers.
- Changing the default memory limits for the Web App, Job Runner, and Scan containers.
- Configuring the report database password.
- Providing access to the API documentation through a proxy server.
- Providing access to the REST APIs from a non-Hub server.
- Configuring secure LDAP.
- Configuring Single Sign-On (SSO).
- Providing your Hub system information to Customer Support.
- Customizing user IDs of Hub containers
- Including ignored components in reports
- Enabling the hierarchical BOM
- Starting or stopping the Hub

#### Using environment files

Note that some configurations use environment files; for example, configuring web server, proxy, or external PostgreSQL settings. The environment files (hub-webserver.env, hub-proxy.env, and hub-postgres.env) to configure these settings are located in the docker-compose directory.

To configure settings that use environment files:

- To set configuration settings *before* installing the Hub, edit the file as described below and save your changes.
- To modify existing settings *after* installing the Hub, do the following:
  - 1. Stop the containers:

docker-compose -p hub stop

- 2. Open the file and edit the settings.
- 3. Reconnect the containers:

```
docker-compose -p hub up
```

# Understanding the default sysadmin user

When you install the Black Duck Hub, there is a default system administrator (sysadmin) account already configured. The default sysadmin user has all roles and permissions associated with it.

**Tip:** As a best practice, you should use the default sysadmin account for your initial log in and then immediately change the default password—blackduck—so that the server is secure. To change your password, select **My Profile** from your username/user profile icon in the upper right corner of the Hub UI.

# Configuring web server settings

Edit the hub-webserver.env file to:

- Configure the hostname.
- Configure the host port.
- Disable IPv6.

## Configuring the hostname

Edit the hub-webserver.env file to configure the hostname so the certificate host name matches. The environment variable has the service name as the default value.

When the web server starts up, it generates an HTTPS certificate if certificates are not configured. You must specify a value for the PUBLIC\_HUB\_WEBSERVER\_HOST environment variable to tell the web server the hostname it will listen on so that the hostnames can match. Otherwise, the certificate will only have the service name to use as the hostname. This value should be changed to the publicly-facing hostname that users will enter in their browser to access Hub. For example:

```
PUBLIC HUB WEBSERVER HOST=blackduck-docker01.dc1.lan
```

# Configuring the host port

You can configure a different value for the host port which, by default, is 443.

- To configure the host port
  - 1. Modify the host port value defined in the following files.

```
In the docker-compose.yml or docker-compose.externaldb.yml file, edit the first value shown in ports: ['443:8443'] to the new port value.
```

```
webserver:
  image: blackducksoftware/hub-nginx:4.7.2
```

```
ports: ['443:8443']
```

For example, to change the port to 8443:

```
webserver:
  image: blackducksoftware/hub-nginx:4.7.2
  ports: ['8443:8443']
```

2. Edit the PUBLIC\_HUB\_WEBSERVER\_PORT value in the hub-webserver.env file to the new port value. For example:

```
PUBLIC HUB WEBSERVER PORT=8443
```

#### **Disabling IPv6**

By default, NGiNX listens on IPv4 and IPv6. If IPv6 is disabled on a host machine, change the value of the IPv4 ONLY environment variable to 1.

# **Configuring Proxy settings**

Edit the hub-proxy.env file to configure proxy settings. You will need to configure these settings if a proxy is required for external internet access.

These are the containers that need access to services hosted by Black Duck:

- Authentication
- Registration
- Job Runner
- Web App
- Scan

Proxy environment variables are:

- HUB\_PROXY\_HOST. Name of the proxy server host.
- HUB PROXY PORT. The port on which the proxy server host is listening.
- HUB PROXY SCHEME. Protocol to use to connect to the proxy server.
- HUB\_PROXY\_USER. Username to access the proxy server.

The environment variables for NTLM proxies are:

- HUB\_PROXY\_WORKSTATION. The workstation the authentication request is originating from. Essentially, the computer name for this machine.
- HUB\_PROXY\_DOMAIN. The domain to authenticate within.

#### **Proxy password**

The following services require the proxy password:

- Authentication
- Web App

- Registration
- Job Runner
- Scan

There are two methods for specifying a proxy password:

- Mount a directory that contains a text file called HUB\_PROXY\_PASSWORD\_FILE to /run/secrets. This is the most secure option.
- Specify an environment variable called HUB\_PROXY\_PASSWORD that contains the proxy password.

You can use the hub-proxy.env file to specify an environment variable if it is not specified in a separate mounted file or secret:

- 1. Remove the pound sign (#) located in front of HUB\_PROXY\_PASSWORD so that it is no longer commented out.
- 2. Enter the proxy password.
- 3. Save the file.

## Importing a proxy certificate

You can import a proxy certificate to work with the proxy.

- 1. Mount a directory that contains a text file called 'HUB\_PROXY\_CERT\_FILE' to /run/secrets.
- 2. For the authentication, webapp, registration, jobrunner, and scan services, add the secret by adding in a volume mount string in the docker-compose.yml or docker-compose.externaldb.yml file such that each service's volume section appears as follows:

```
service:
image: blackducksoftware/hub-service:<hub-version>
...
volumes: ['/directory/where/the/cert-folder/is:/run/secrets']
```

# Configuring an external PostgreSQL instance

This section describes how to configure an external PostgreSQL instance.

The Hub supports using an external PostgreSQL instance managed by Amazon Relational Database Service (RDS). Be sure that you have configured the instance as described below prior to installing or upgrading the Hub.

- To configure an external PostgreSQL instance
  - 1. Create a database user named **blackduck** with administrator privileges.

For Amazon RDS, set the "Master User" to **blackduck** when creating the database instance.

No other specific values are required.

2. Run the external-postgres-init.pgsql script, located in the docker-compose directory, to create users, databases, and other necessary items. For example:

```
psql -U blackduck -h <hostname> -p <port> -f external_postgres_init.pgsql
postgres
```

3. Using your preferred PostgreSQL administration tool, configure passwords for the **blackduck**, **blackduck\_user**, and **blackduck\_reporter** database users.

These users were created by the external-postgres-init.pgsql script in the previous step.

4. Edit the hub-postgres.env environment file to specify the database connection parameters:

Parameter	Description
HUB_POSTGRES_ENABLE_SSL	Forces the use of SSL in database connections.
	This must be set to "false".
HUB_POSTGRES_HOST	Hostname of the server with the PostgreSQL instance.
HUB_POSTGRES_PORT	Database port to connect to for the PostgreSQL instance.
HUB_POSTGRES_USER	Database username. By default, this is set to <b>blackduck_user</b> .
HUB_POSTGRES_ADMIN	Database administrator. By default, this is set to <b>blackduck</b> .

- 5. Provide the **blackduck** and **blackduck user** passwords to the Hub:
  - a. Create a file named HUB\_POSTGRES\_USER\_PASSWORD\_FILE with the password for the **blackduck user** user.
  - b. Create a file named HUB\_POSTGRES\_ADMIN\_PASSWORD\_FILE with the password for the **blackduck** user.
  - c. Mount a directory that contains both files to /run/secrets in the Web App, Job runner, and Scan containers by editing the docker-compose.externaldb.yml file.
- 6. Install or upgrade the Hub.

# Managing certificates

By default, the Hub uses an HTTPS connection. The default certificate used to run HTTPS is a self-signed certificate which means that it was created locally and was not signed by a recognized Certificate Authority (CA).

If you use this default certificate, you will need to make a security exception to log in to the Hub UI, as your browser does not recognize the issuer of the certificate, so it is not accepted by default.

You will also receive a message regarding the certificate when connecting to the Hub server when scanning as the Hub Scanner cannot verify the certificate because it is a self-signed and is not issued by a CA. Note that the Hub Scanner 2.0 does provide an option that allows you to connect to the Hub

instance with a self-signed certificate.

You can obtain a signed SSL certificate from a Certificate Authority of your choice. To obtain a signed SSL certificate, create a Certificate Signing Request (CSR), which the CA then uses to create a certificate that will identify the server running your Hub instance as "secure". After you receive your signed SSL certificate from the CA, you can replace the self-signed certificate.

- To create an SSL certificate keystore
  - 1. At the command line, to generate your SSL key and a CSR, type:

```
openssl genrsa -out <keyfile> <keystrength>
openssl req -new -key <keyfile> -out <CSRfile>
```

#### where:

- <keyfile> is <your company's server name>.key
- **<keystrength>** is the size of your site's public encryption key
- **<CSRfile>** is <your company's server name>.csr

**Note:** It is important that the name entered for your company's server be the full hostname that your SSL server will reside on, and that the organization name be identical to what is in the 'whois' record for the domain.

#### For example:

```
openssl genrsa -out server.company.com.key 1024

openssl reg -new -key server.company.com.key -out server.company.com.csr
```

This example creates a CSR for server.company.com to get a certificate from the CA.

- 2. Send the CSR to the CA by their preferred method (usually through a web portal).
- 3. Indicate that you need a certificate for an Apache web server.
- 4. Provide any requested information about your company to the CA. This information must match your domain registry information.
- 5. Once you receive your certificate from the CA, use the instructions in the next section to upload the certificate into the Hub instance.

#### Using custom certificates

The Web Server container has a self-signed certificate obtained from Docker. You may want to replace this certificate with a custom certificate-key pair.

1. Create a file named WEBSERVER\_CUSTOM\_CERT\_FILE with the certificate file.

For example, if the certificate file you received from a Certificate Authority is <code>Hub.crt</code>, rename the file to WEBSERVER CUSTOM CERT FILE.

2. Create a file named WEBSERVER\_CUSTOM\_KEY\_FILE with the key file.

For example, if the key file you received from a Certificate Authority is  $\mathtt{Hub}$ .  $\mathtt{key}$ , rename the file to WEBSERVER CUSTOM KEY FILE.

3. Mount a directory that contains both files to /run/secrets in the Web Server container by editing the volumes section of the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory.

```
webserver
image: blackducksoftware/hub-nginx:4.7.2
ports: ['443:8443']
env_file:hub-webserver.env
links: [webapp, cfssl, documentation]
volumes: ['webserver-
volume:/opt/blackduck/hub/webserver/security',
'/directory/where/the/cert-key-files/are:/run/secrets']
```

4. Optionally, add the URL and path to the certificate in the healthcheck property in the Webserver container by editing the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory.

Verify that the path to the certificate is correct, otherwise the webserver container will appear as unhealthy.

5. Start the Webserver container.

# Accessing log files

You may need to troubleshoot an issue or provide log files to Customer Support.


Users with the System Administrator role can download a zipped file that contains the current log files.

- To download the log files from the Hub UI
  - 1. Log in to the Hub with the System Administrator role.
  - 2. Click the expanding menu icon ( ) and select **Administration**.

The Administration page appears.

3. Select **System Settings**.

The System Settings page appears.

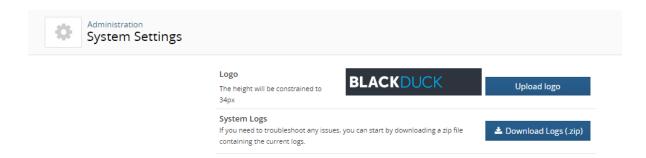

#### 4. Click **Download Logs (.zip)**.

It may take a few minutes to prepare the log files.

Refer to the installation guide for more information on obtaining logs.

## **Obtaining logs**

To obtain logs from the containers:

docker cp <logstash container ID>:/var/lib/logstash/data logs/

where 'logs/' is a local directory where the logs will be copied into.

## Viewing log files for a container

Use the docker-compose logs command to view all logs:

docker-compose logs

# Scaling Job Runner and Scan containers

The Job Runner and Scan containers can be scaled.

You may need to be a user in the docker group, a root user, or have sudo access to run the following command to scale the containers.

## Scaling Job Runner containers

In each example, use the version of the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory.

This example adds a second Job Runner container:

- Using the DB container: docker-compose -f docker-compose.yml -p hub up --scale jobrunner=2 -d
- Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up --scale jobrunner=2 -d

You can remove a Job Runner container by specifying a lower number than the current number of Job

Runner containers. The following example scales back the Job Runner container to a single container:

- Using the DB container: docker-compose -f docker-compose.yml -p hub up --scale jobrunner=1 -d
- Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up --scale jobrunner=1 -d

#### Scaling scan containers

In each example, use the version of the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory.

This example adds a second Scan container:

- Using the DB container: docker-compose -f docker-compose.yml -p hub up --scale scan=2 -d
- Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up --scale scan=2 -d

You can remove a Scan container by specifying a lower number than the current number of Scan containers. The following example scales back the Scan container to a single container:

- Using the DB container: docker-compose -f docker-compose.yml -p hub up --scale scan=1 -d
- Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up --scale scan=1 -d

# Changing the default memory limits for the Web App, Job Runner, and Scan containers

The Web App, Job Runner, and Scan containers may require higher than default memory limits depending on the load place on the Hub.

**Note:** The default memory limits should never be decreased as this will cause the Hub to function incorrectly.

# Changing the default Web App container memory limits

There are two memory settings for the Web App container:

- The HUB\_MAX\_MEMORY environment variable controls the maximum Java heap size.
- The mem limit setting controls the overall memory of the Web App container.

Note that the  $mem_limit$  setting must be higher than the maximum Java heap size. If updating the Java heap size, Black Duck recommends setting the  $mem_limit$  value to at least 1GB higher than the maximum Java heap size.

The following example changes the maximum Java heap size for the Web App container to 8GB and the mem\_limit to 9GB. In the docker-compose directory, use the docker-compose.yml file (if using the DB container), or the docker-compose.externaldb.yml file (if using an external PostgreSQL

instance), and edit these lines under the webapp services description:

#### **Original values:**

```
services:
...
webapp:
...
environment: {HUB_MAX_MEMORY: 4096m}
restart: always
mem_limit: 4608M
...
```

#### **Updated values:**

```
services:
...
webapp:
...
environment: {HUB_MAX_MEMORY: 8192m}
restart: always
mem_limit: 9216M
```

# Changing the default Job Runner container memory limits

There are two memory settings for the Job Runner container:

- The HUB\_MAX\_MEMORY environment variable controls the maximum Java heap size.
- The mem limit setting controls the overall memory of the Job Runner container.

Note that the mem\_limit setting must be higher than the maximum Java heap size. If updating the Java heap size, Black Duck recommends setting the mem\_limit value to at least 1GB higher than the maximum Java heap size.

**Note:** These settings apply to all Job Runner containers, including scaled Job Runner containers.

The following example changes the maximum Java heap size for the Job Runner container to 8GB and mem\_limit to 9GB. In the docker-compose directory, use the docker-compose.yml file (if using the DB container), or the docker-compose.externaldb.yml file (if using an external PostgreSQL instance), and edit these lines under the jobrunner services description:

#### **Original values:**

```
services:
...
jobrunner:
```

```
environment: {HUB_MAX_MEMORY: 4096m}
restart: always
mem_limit: 4608M
```

#### **Updated values:**

```
services:
...
jobrunner:
...
environment: {HUB_MAX_MEMORY: 8192m}
restart: always
mem_limit: 9216M
...
```

## Changing the default Scan container memory limits

There are two memory settings for the Scan container:

- The HUB\_MAX\_MEMORY environment variable controls the maximum Java heap size.
- The mem limit setting controls the overall memory of the container.

Note that the mem\_limit setting must be higher than the maximum Java heap size. If updating the Java heap size, Black Duck recommends setting the mem\_limit value to at least 1GB higher than the maximum Java heap size.

**Note:** These settings apply to all scan containers, including scaled scan containers.

The following example changes the maximum Java heap size for the Scan container from 2GB to 4GB and mem\_limit to 5GB. In the docker-compose directory, use the docker-compose.yml file (if using the DB container), or the docker-compose.externaldb.yml file (if using an external PostgreSQL instance), and edit these lines under the scan services description:

#### **Original values:**

```
services:
...
scan:
...
environment: {HUB_MAX_MEMORY: 2048m}
restart: always
mem_limit: 2560M
...
```

#### **Updated values:**

```
services:
```

```
scan:
...
environment: {HUB_MAX_MEMORY: 4096m}
restart: always
mem_limit: 5120M
```

# Configuring the report database password

This section provides instructions on configuring the report database password.

Use the hub\_reportdb\_changepassword.sh script, located in the docker-compose/bin directory to set or change the report database password.

**Note:** This script sets or changes the report database password when using the database container that is automatically installed by the Hub. If you are using an external PostgreSQL database, use your preferred PostgreSQL administration tool to configure the password.

Note that to run the script to set or change the password:

- You may need to be a user in the docker group, a root user, or have sudo access.
- You must be on the Docker host that is running the PostgreSQL database container.

In the following example, the report database password is set to 'blackduck':

```
./bin/hub reportdb changepassword.sh blackduck
```

# Accessing the API documentation through a proxy server

If you are using a reverse proxy and that reverse proxy has Hub under a subpath, configure the BLACKDUCK\_SWAGGER\_PROXY\_PREFIX property so that you can access the API documentation. The value of BLACKDUCK\_SWAGGER\_PROXY\_PREFIX is the Hub path. For example, if you have Hub being accessed under 'https://customer.companyname.com/hub' then the value of BLACKDUCK\_SWAGGER\_PROXY\_PREFIX would be 'hub'.

To configure this property, edit the hub-proxy, env file located in the docker-compose directory.

# Providing access to the REST APIs from a non-Hub server

You may wish to access the Hub REST APIs from a web page that was served from a non-Hub server.

To enable access to the REST APIs from a non-Hub server, Cross Origin Resource Sharing (CORS) must be enabled.

The properties used to enable and configure CORS for Hub installations are:

Property	Description
BLACKDUCK_HUB_CORS_ENABLED	Required. Defines whether CORS is enabled; "true" indicates CORS is enabled.
BLACKDUCK_CORS_ALLOWED_ORIGINS_PROP_NAME	Required. Allowed origins for CORS.  The browser sends an origin header when it makes a cross-origin request. This is the origin that must be listed in the blackduck.hub.cors.allowedOrigins/BLACKDUCK_CORS_ALLOWED_ORIGINS_PROP_NAME property.  For example, if you are running a server that serves a page from http:///123.34.5.67:8080, then the browser should set this as the origin, and this value should be added to the property.  Note that the protocol, host, and port must match. Use a comma-separated list to specify more than one base origin URL.
BLACKDUCK_CORS_ALLOWED_HEADERS_PROP_NAME	Optional. Headers that can be used to make the requests.
BLACKDUCK_CORS_EXPOSED_HEADERS_PROP_NAME	Optional. Headers that can be accessed by the browser requesting CORS.

To configure these properties, edit the hub-proxy.env file, located in the docker-compose directory.

# Configuring secure LDAP

If you see certificate issues when connecting your secure LDAP server to the Hub, the most likely reason is that the Hub server has not set up a trust connection to the secure LDAP server. This usually occurs if you are using a self-signed certificate.

To set up a trust connection to the secure LDAP server, import the server certificate into the local Hub LDAP truststore by:

- 1. Obtaining your LDAP information.
- 2. Using the Hub UI to import the server certificate.

## **Obtaining your LDAP information**

Contact your LDAP administrator and gather the following information:

#### **LDAP Server Details**

This is the information that the Hub uses to connect to the directory server.

• (required) The host name or IP address of the directory server, including the protocol scheme and port, on which the instance is listening.

**Example:** ldaps://<server name>.<domain name>.com:339

• (optional) If your organization does not use anonymous authentication, and requires credentials for LDAP access, the password and either the LDAP name or the absolute LDAP distinguished name (DN) of a user that has permission to read the directory server.

#### **Example of an absolute LDAP DN:**

uid=ldapmanager, ou=employees, dc=company, dc=com

Example of an LDAP name: jdoe

• (optional) If credentials are required for LDAP access, the authentication type to use: simple or digest-MD5.

#### **LDAP Users Attributes**

This is the information that the Hub uses to locate users in the directory server:

• (required) The absolute base DN under which users can be located.

Example: dc=example, dc=com

• (required) The attribute used to match a specific, unique user. The value of this attribute personalizes the user profile icon with the name of the user.

**Example:** uid={0}

#### **Test Username and Password**


• (required) The user credentials to test the connection to the directory server.

#### Importing the server certificate


- To import the server certificate
  - 1. Log in to the Hub as a system administrator.
  - 2. Click the expanding menu icon ( ) and select **Administration**.

The Administration page appears.

3. Select **LDAP integration** to display the LDAP Integration page.

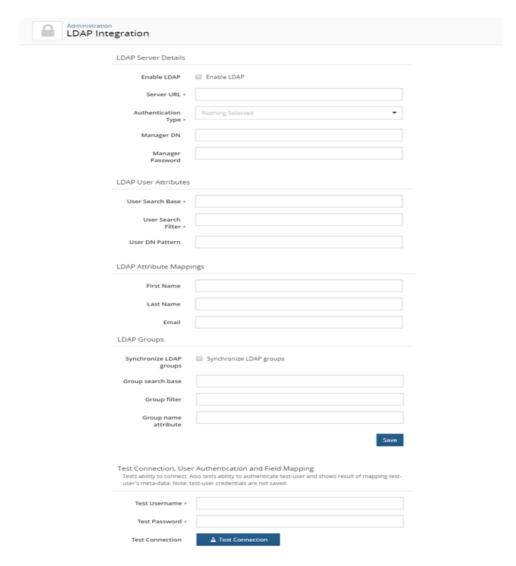

- 4. Select the **Enable LDAP** option and complete the information in the **LDAP Server Details** and **LDAP User Attributes** sections, as described above. In the **Server URL** field, ensure that you have configured the secure LDAP server: the protocol scheme is ldaps://.
- 5. Enter the user credentials in the **Test Connection**, **User Authentication and Field Mapping** section and click **Test Connection**.
- 6. If there are no issues with the certificate, it is automatically imported and the "Connection Test Succeeded" message appears:

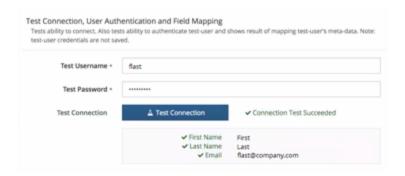

7. If there is an issue with the certificate, a dialog box listing details about the certificate appears:



#### Do one of the following:

• Click **Cancel** to fix the certificate issues.

Once fixed, retest the connection to verify that the certificate issues have been fixed and the certificate has been imported. If successful, the "Connection Test Succeeded" message appears.

• Click **Save** to import this certificate.

Verify that the certificate has been imported by clicking **Test Connection**. If successful, the "Connection Test Succeeded" message appears.

#### LDAP trust store password

If you add a custom Hub web application trust store, use these methods for specifying an LDAP trust store password.

There are two methods for specifying an LDAP trust store password:

■ Mount a directory that contains a text file called LDAP\_TRUST\_STORE\_PASSWORD\_FILE to /run/secrets by editing the volumes section for webapp services in the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory.

```
volumes: ['log-volume:/opt/blackduck/hub/logs', 'webapp-
volume:/opt/blackduck/hub/hub-webapp/security',
'/directory/where/files/are:/run/secrets']
```

 Specify an environment variable called LDAP\_TRUST\_STORE\_PASSWORD that contains the LDAP trust store password.

# Configuring SAML for Single Sign-On

Security Assertion Markup Language (SAML) is an XML-based, open-standard data format for exchanging authentication and authorization data between parties. For example, between an identity provider and a service provider. Black Duck Hub's SAML implementation provides single sign-on (SSO) functionality, enabling Hub users to be automatically signed-in to the Hub when SAML is enabled. Enabling SAML applies to all your Hub users, and cannot be selectively applied to individual users.


To enable or disable SAML functionality, you must be a user with the system administrator role.

#### For additional SAML information:

- Assertion Consumer Service (ACS): https://host/saml/SSO
- Recommended Service Provider Entity ID: https://host where host is your Black Duck server location.

#### Note the following:

- The Hub is able to synchronize and obtain an external user's information (Name, FirstName, LastName and Email) if the information is provided in attribute statements. Note that the first and last name values are case-sensitive.
  - The Hub is also able to synchronize an external user's group information if you enable group synchronization in the Hub.
- When logging in with SAML enabled, you are re-directed to your identity provider's login page, not the Hub's login page.
- When SSO users log out of the Hub, a logout page now appears notifying them that they successfully logged out of the Hub. This logout page includes a link to log back into the Hub; users may not need to provide their credentials to successfully log back in to the Hub.
- If there are issues with the SSO system and you need to disable the SSO configuration, you can enter the following URL: *Hub servername*/sso/login to log in to the Hub.
- To enable single sign-on using SAML
  - 1. Click the expanding menu icon ( ) and select **Administration**. The Administration page appears.
  - 2. Select **SAML Integration** to display the SAML Integration page.

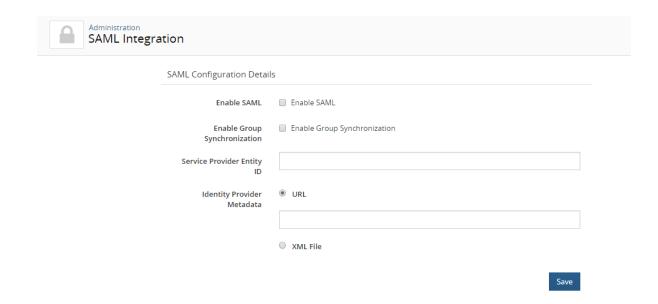

- 3. In the **SAML Configuration Details** settings, complete the following:
  - a. Select the **Enable SAML** check box.
  - b. Optionally, select the **Enable Group Synchronization** check box. If this option is enabled, upon login, groups from IDP are created in the Hub and users will be assigned to those groups. Note that you must configure IDP to send groups in attribute statements with the attribute name of 'Groups'.
  - c. **Service Provider Entity ID** field. Enter the information for the Hub server in your environment in the format **https://host** where *host* is your Hub server.
  - d. **Identity Provider Metadata**. Select one of the following:
    - **URL** and enter the URL for your identity provider.
    - **XML File** and either drop the file or click in the area shown to open a dialog box from which you can select the XML file.
- 4. Click Save.
- 5. Add the HUB\_SAML\_EXTERNAL\_URL to your hub-proxy.env file (for Docker Swarm or Docker Compose) or the 3-hub.yml file (for Kubernetes or OpenShift). The value is the public URL of the Hub server. For example:

HUB SAML EXTERNAL URL=https://blackduck-docker01.dc1.lan

**Note:** You must restart the Hub for your configuration changes to take effect.

- To disable single sign-on using SAML
  - 1. Click the expanding menu icon ( ) and select **Administration**.
  - 2. Select **SAML Integration** to display the SAML Integration page.
  - 3. In the **SAML Configuration Details** settings, clear the **Enable SAML** check box.
  - 4. Click **Save**.

**Note:** You must restart the Hub for your configuration changes to take effect.

# Providing your Hub system information to Customer Support

Customer Support may ask you to provide them with information regarding your Hub installation, such as system statistics and environmental or network information. To make it easier for you to quickly obtain this information, Black Duck provides a script, <code>system\_check.sh</code>, which you can use to collect this information. The script outputs this information to a file, <code>system\_check.txt</code>, located in your working directory, which you can then send to Customer Support.

The system check.sh script is located in the docker-compose/bin directory:

```
./bin/system check.sh
```

Note that to run this script, you may need to be a user in the docker group, a root user, or have sudo access.

## **Customizing user IDs of Hub containers**

You may need to change the user ID (UID) under which a container runs.

The current UID for each container is:

Authentication (hub-authentication): 100

■ CA (hub-cfssl): 100

■ DB (hub-postgres): 70

■ Documentation (hub-documentation): 8080

■ Job Runner (hub-jobrunner): 100

■ Logstash (hub-logstash): 100

Registration (hub-registration): 8080

Scan (hub-scan): 8080Solr (hub-solr): 8983

■ Web App (hub-webapp): 8080

• webserver (hub-nginx): 100

Zookeeper (hub-zookeeper): 1000

Changing the UID consists of editing the existing value for a container that is specified in the .yml file: in the docker-compose directory, use the docker-compose.yml file (if using the DB container), or the docker-compose.externaldb.yml file (if using an external PostgreSQL instance), and edit the user: line in the container's section.

The following example changes the UID for the Web App container from 8080 to 1001:

#### Original value:

```
services:
...
webapp:
...
user: tomcat:root
...
Updated value:
services:
...
webapp:
...
user: 1001:root
```

#### Note the following:

- The UID for the postgres container *cannot* be changed. The UID must equal 70.
- If you change a value, you will need to edit these values again after you upgrade the Hub.
- Although some containers have the same UID value (for example, the Documentation, Registration, Scan and Web App container each has a UID of 8080), changing the UID value of one container does not change the UID value for the containers that have the same UID value. For example, changing the value of the Web App container from 8080 to 1001 does not change the value of the Scan, Documentation, or Registration containers the UID value for these three containers remains 8080.
- The containers expect that whichever user the container runs as, the user must still be specified as being in the root group.

#### To customize the UID

1. Run the following command to bring down the Hub:

```
docker-compose -f docker.compose.yml -p hub down
```

- 2. Edit the value as described above.
- 3. Run the following command to bring up the Hub:

- docker-compose -f docker-compose.yml -p hub up -d
- docker-compose -f docker-compose.externaldb.yml -p hub up -d

## Including ignored components in reports

By default, ignored components and vulnerabilities associated with those ignored components are excluded from the Vulnerability Status report, Vulnerability Update report, Vulnerability Remediation report and the Project Version report. To include ignored components, set the value of the BLACKDUCK\_REPORT\_IGNORED\_COMPONENTS environment variable in the hub-proxy.env file in the docker-compose directory to "true".

Resetting the value of the BLACKDUCK\_REPORT\_IGNORED\_COMPONENTS to "false" excludes ignored components.

## **Enabling the hierarchical BOM**

By default, the hierarchical BOM is disabled. To enable this feature, add the HIERARCHICAL\_VERSION\_BOM environment variable in an .env file or to the webapp service in the docker-compose.yml or docker-compose.externaldb.yml file located in the docker-compose directory. Set the value to "true".

Resetting the value to "false" disables the feature.

## Starting or stopping the Hub

Use these commands to start up or shut down the Hub.

#### Starting up the Hub

Run the following command to start up the Hub with the PostgreSQL database container:

```
docker-compose -f docker-compose.yml -p hub up -d
```

• Run the following command to start up the Hub with an external database:

```
docker-compose -f docker-compose.externaldb.yml -p hub up -d
```

#### Shutting down the Hub

Run the following command to shut down the Hubwith the PostgreSQL database container:

```
docker-compose -f docker-compose.yml -p hub down
```

• Run the following command to shut down the Hub with an external database:

```
docker-compose -f docker-compose.externaldb.yml -p hub down
```

## **Chapter 5: Uninstalling the Hub**

Follow these instructions to uninstall the Hub.

To uninstall the Hub, do one of the following:

• Stop and remove the containers and remove the volumes.

```
docker-compose -p hub down -v
```

• Stop and remove the containers but keep the volumes. For example:

```
docker-compose -p hub down
```

Note that the PostgreSQL database is not backed up. Use these instructions to back up the database.

**BLACKDUCK** Page | 33 Black Duck Hub 4.7.2

## Chapter 6: Upgrading the Hub

The Hub supports upgrading to any available version, giving you the ability to jump multiple versions in a single upgrade.

The upgrade instructions depend on your previous version of the Hub:

- AppMgr architecture
- Single-container AppMgr architecture
- Multi-container Docker

#### Installation files

The installation files are available on GitHub.

Download the orchestration files. As part of the install/upgrade process, these orchestration files pull down the necessary Docker images.

Note that although the filename of the tar.gz file differs depending on how you access the file, the content is the same.

#### Download from the GitHub page

- 1. Select the link to download the .tar.gz file from the GitHub page: https://github.com/blackducksoftware/hub.
- 2. Uncompress the Hub .gz file:

```
gunzip hub-4.7.2.tar.gz
```

3. Unpack the Hub.tar file:

```
tar xvf hub-4.7.2.tar
```

#### Download using the wget command

1. Run the following command:

```
wget https://github.com/blackducksoftware/hub/archive/v4.7.2.tar.gz
```

2. Uncompress the Hub .gz file:

```
gunzip v4.7.2.tar.gz
```

3. Unpack the Hub.tar file:

```
tar xvf v4.7.2.tar
```

## Upgrading from the AppMgr architecture

This section describes how to upgrade from a previous version of the Hub based on the AppMgr architecture to the multi-container Docker architecture.

Note: These instructions also apply when upgrading from an AppMgr Amazon Web Services (AWS)

Upgrading to the multi-container Docker architecture consists of:

1. Migrating your PostgreSQL database.

This is an optional step if you want to retain your existing database data.

2. Upgrading the Hub.

#### Migrating your PostgreSQL database

To use your existing PostgreSQL data, you must migrate the database data which consists of:

- 1. Backing up the original PostgreSQL database.
- 2. Restoring the data.
- To back up the original PostgreSQL database
  - 1. Log in to the Hub server as the **blckdck** user.

**Note:** This is the user that owns the Hub database and installation directory.

2. Run the following commands to dump to a compressed file.

```
export PATH=$PATH:/opt/blackduck/hub/postgresql/bin
export PGPORT=5432
pg_dump -Fc -f /tmp/bds_hub.dump bds_hub
```

**Tip:** Ensure that you dump the database to a location with sufficient free space. This example uses /tmp.

This command puts the information from the  $bds_hub$  database into a file called  $bds_hub$ . dump in the /tmp directory. It ignores several scratch tables that do not need to be backed up.

3. Save the bds hub.dump file on another system or offline.

**Tip:** If you find that dumping the database takes too long, you can greatly increase the speed by dumping it to an uncompressed file. The trade-off is that while the dump is completed up to 3 times faster, the resulting file may be 4 times larger. To experiment with this on your system, add the --compress=0 parameter to your pg dump command.

#### To restore the PostgreSQL data

1. Use the docker-compose.dbmigrate.yml file located in the docker-compose directory. It starts the containers and volumes needed to migrate the database.

```
docker-compose -f docker-compose.dbmigrate.yml -p hub up -d
```

2. After the DB container has started, run the migration script located in the docker-compose directory. This script restores the data from the existing database dump file.

```
./bin/hub db migrate.sh <path to dump file>
```

After stopping the containers, you can upgrade to the multi-image Docker version of the Hub.

#### **Error messages**

When the dump file is restored from the an AppMgr installation of the Hub, you may receive error messages such as:

"ERROR: role "blckdck" does not exist"

along with other error messages. Also, at the end of the migration, you may see the following:

WARNING: errors ignored on restore: 7

These error messages and warnings can be ignored. They will not affect the restoration of the data.

#### **Upgrading the Hub**

1. If you ran the setup-autostart.sh script in your previous AppMgr version of the Hub, you will need to remove the 'iptable' entries that were created by that script. As a root user, cd to the directory where you installed the Hub, for example, /opt/blackduck/hub/appmgr/bin and run the iptables-redirect.sh script with the delete parameter:

```
./iptables-redirect.sh delete
```

Note that you can safely run this script If you are unsure if autostart was configured as this script makes no changes if the previous AppMgr version of the Hub was not configured for autostart.

- 2. If you are installing the Hub on the same server that had the AppMgr version of the Hub installed on it:
  - a. Run the uninstall.sh script to remove old files:

```
/opt/blackduck/hub/appmgr/bin/uninstall.sh
```

b. As a root user or with sudo access, remove the autostart file. The uninstall.sh script states

the location of the file at the end of the script run. For example:

```
rm -rf /etc/init.d/bds-hub-controller
```

- 3. Run one of the following commands, using the files located in the docker-compose directory in the newer version of the Hub. The command depends on whether you are using the DB container or an external PostgreSQL instance:
  - Using the DB container: docker-compose -f docker-compose.yml -p hub up -d
  - Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up -d

## Upgrading from a single-container AppMgr Hub

This section describes how to upgrade from a previous version of the Hub based on the single-container AppMgr architecture to the multi-container Docker architecture.

Upgrading to the multi-container Docker architecture consists of:

1. Migrating your PostgreSQL database.

This is an optional step if you want to retain your existing database data.

2. Upgrading the Hub.

#### Migrating your PostgreSQL database

To use your existing PostgreSQL data, you must migrate the database data which consists of:

- 1. Backing up the original PostgreSQL database.
- 2. Restoring the data.
- To back up the PostgreSQL database
  - 1. Run the following command to create a PostgreSQL dump file:

```
docker exec -it <containerid or name> pg_dump -U blackduck -Fc -f /tmp/bds_hub.dump bds_hub
```

2. Copy the dump file out of the container by running the following command:

```
docker cp <containerid>:<path to dump file in container> .
```

- To restore the PostgreSQL data
  - 1. Use the docker-compose.dbmigrate.yml file located in the docker-compose directory. It starts the containers and volumes needed to migrate the database.

```
docker-compose -f docker-compose.dbmigrate.yml -p hub up -d
```

2. After the DB container has started, run the migration script located in the docker-compose

directory. This script restores the data from the existing database dump file.

```
./bin/hub db migrate.sh <path to dump file>
```

After stopping the containers, you can upgrade to the multi-image Docker version of the Hub.

#### Error messages

When the dump file is restored from the an AppMgr installation of the Hub, you may receive error messages such as:

"FRROR: role "blckdck" does not exist"

along with other error messages. Also, at the end of the migration, you may see the following:

WARNING: errors ignored on restore: 7

These error messages and warnings can be ignored. They will not affect the restoration of the data.

#### **Upgrading the Hub**

- 1. Run one of the following commands using the files, located in the docker-compose directory in the newer version of the Hub. The command depends on whether you are using the DB container or an <a href="external PostgreSQL">external PostgreSQL</a> instance:
  - Using the DB container: docker-compose -f docker-compose.yml -p hub up -d
  - Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up -d

## Upgrading from an existing Docker architecture

Upgrading from a previous version of the Hub consists of:

1. Migrating your PostgreSQL database.

The PostgreSQL database version was upgraded to version 9.6.x in 4.2.0. If you are upgrading from a version prior to 4.2.0, you must migrate your database prior to upgrading the Hub.

The data migration will temporarily require an additional free disk space at approximately 2.5 times your original database volume size to hold the database dump and the new 4.2 database volume. As a rule-of-thumb, if the volume upon which your database resides is at least 60% free, there should be enough disk space.

If you are upgrading from version 4.2.0, then migrating your database is optional.

2. Upgrading the Hub.

**Note:** The method to configure custom SSL certificates for NGiNX changed in 4.1.0. If you are upgrading from version 4.0.0 or 4.0.1 and you had configured custom SSL certificates for NGiNX, you will need to reconfigure them.

#### Migrating your PostgreSQL database

To use your existing PostgreSQL data, you must migrate the database data which consists of:

- 1. Backing up the original PostgreSQL database.
- 2. Bringing down the Hub containers.
- 3. Restoring the data.

**Note:** If your Hub instance was configured to use an external database (like Amazon RDS), the recommended approach is to migrate your data to a 9.6 instance of PostgreSQL and configure your system to point to that instance. If an administrator attempts to perform an upgrade on a system that is connected to a non-9.6 PostgreSQL database, the application will fail to start, however the data remains safe.

To back up the PostgreSQL database that is automatically installed with the Hub

Run the following script which creates a PostgreSQL dump file in the hub-postgres container and then copies the dump file from the container to the local PostgreSQL dump file.

```
./bin/hub create data dump.sh <path to local PostgreSQL dump file>
```

- To bring down the Hub containers
  - 1. Run the following command to bring down the Hub containers that have the previous version of the Hub running:

```
docker-compose -f docker-compose.yml -p hub down
```

- To restore the PostgreSQL data
  - 1. Use the docker-compose.dbmigrate.yml file located in the docker-compose directory. It starts the containers and volumes needed to migrate the database.

```
docker-compose -f docker-compose.dbmigrate.yml -p hub up -d
```

2. After the DB container has started, run the migration script located in the docker-compose directory. This script restores the data from the existing database dump file.

```
./bin/hub_db_migrate.sh <path to local PostgreSQL dump file>
```

You can now upgrade the Hub.

#### **Upgrading the Hub**

- To upgrade the Hub:
  - 1. Stop the existing containers:

```
docker-compose -p hub down
```

2. Run the following command using the files included in the newer version of the Hub located in the

docker-compose directory. The command depends on whether you are using the DB container or an external PostgreSQL instance:

- Using the DB container: docker-compose -f docker-compose.yml -p hub up -d
- Using an external PostgreSQL instance: docker-compose -f docker-compose.externaldb.yml -p hub up -d

## Appendix A: Docker containers


These are the containers within the Docker network that comprise the Hub application:

- 1. Web App
- 2. Authentication
- 3. Scan
- 4. Job Runner
- 5. Solr
- 6. Registration
- 7. DB

**Note:** This container is not included in the Hub application if you use an external Postgres instance.

- 8. Documentation
- 9. WebServer
- 10. Zookeeper
- 11. LogStash
- 12. CA

The following diagram shows the basic relationships among the containers and which ports are exposed outside of the Docker network.

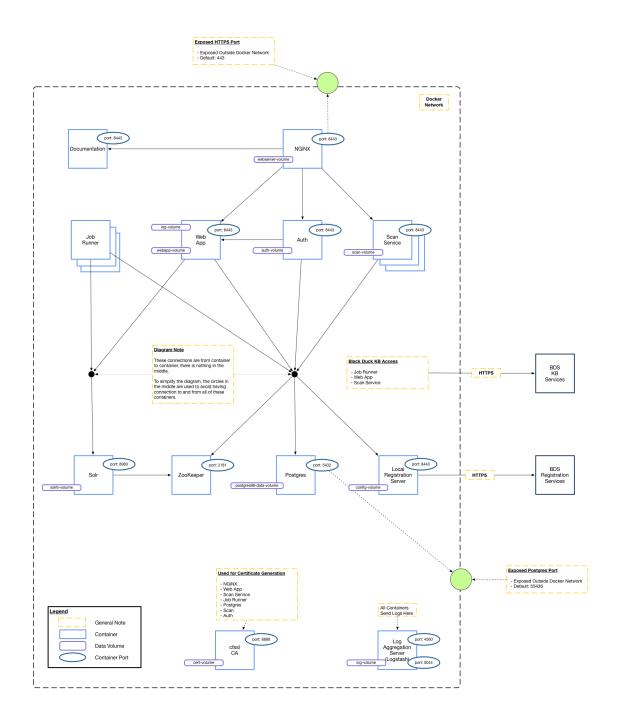

The following tables provide more information on each container.

## Web App container

Container Name: Web App	
Image Name	blackducksoftware/hub-webapp:4.7.2
Description	The Web App container is the container that all Web/UI/API requests are made against. It also processes any UI requests. In the diagram, the ports for the Web App are not exposed outside of the Docker network. There is an NGiNX reverse proxy (as described in the WebServer container) that is exposed outside of the Docker network instead.
Scalability	There should only be a single instance of this container. It should not be scaled.
Links/Ports	The Web App container needs to connect to these containers/services:  • postgres  • solr  • zookeeper  • registration  • logstash  • cfssl  The container needs to expose port 8443 to other containers that will link to it.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • postgres: \$HUB_POSTGRES_HOST  • solr: This should be taken care of by ZooKeeper.  • zookeeper: \$HUB_ZOOKEEPER_HOST  • registration: \$HUB_REGISTRATION_HOST  • logstash: \$HUB_LOGSTASH_HOST  • cfssl: \$HUB_CFSSL_HOST
Constraints	<ul><li>Default max Java heap size: 2GB</li><li>Container memory: 2.5GB</li><li>Container CPU: 1 CPU</li></ul>

Container Name: Web App	
Volumes	log-volume:/opt/blackduck/hub/logs
	webapp-volume:/opt/blackduck/hub/hub-webapp/security
Environment File	hub-proxy.env

#### **Authentication container**

Container Name: hub-authentication	
Image Name	blackducksoftware/hub-authentication:4.7.2
Description	The Hub authentication service is the container that all authentication-related requests are made against.
Scalability	There should only be a single instance of this container. It currently cannot be scaled.
Links/Ports	Nothing external (8443 internally). This container will need to connect to these other containers/services:  • postgres  • cfssl  • logstash  • regtistration  • zookeeper  • webapp  The container needs to expose 8443 to other containers that will link to it.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • postgres - \$HUB_POSTGRES_HOST  • cfssl - \$HUB_CFSSL_HOST  • logstash - \$HUB_LOGSTASH_HOST  • registration - \$HUB_REGISTRATION_HOST  • zookeeper - \$HUB_ZOOKEEPER_HOST  • webapp - \$HUB_WEBAPP_HOST
Constraints	<ul> <li>Default max Java heap size: 512MB</li> <li>Container memory: 1GB</li> <li>Container CPU: 1 CPU</li> </ul>
Volumes	authentication-volume: /opt/blackduck/hub/hub-

Container Name: hub-authentication	
	authentication/security
Environment File	hub-proxy.env

## Scan container

Container Name: Scan	
Image Name	blackducksoftware/hub-scan:4.7.2
Description	The Hub scan service is the container that all scan data requests are made against.
Scalability	This container can be scaled.
Links/Ports	The Scan container needs to connect to these containers/services:  • postgres  • zookeeper  • registration  • logstash  • cfssl  The container needs to expose port 8443 to other containers that will link to it.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • postgres: \$HUB_POSTGRES_HOST  • zookeeper: \$HUB_ZOOKEEPER_HOST  • registration: \$HUB_REGISTRATION_HOST  • logstash: \$HUB_LOGSTASH_HOST  • cfssl: \$HUB_CFSSL_HOST
Constraints	<ul><li>Default max Java heap size: 2GB</li><li>Container memory: 2.5GB</li><li>Container CPU: 1 CPU</li></ul>
Volumes	log-volume:/opt/blackduck/hub/logs scan-volume:/opt/blackduck/hub/hub-scan/security
Environment File	hub-proxy.env

## Job runner container

Container Name: Job Runner	
Image Name	blackducksoftware/hub-jobrunner:4.7.2
Description	The Job Runner container is the container that is responsible for running all Hub jobs. This includes matching, BOM building, reports, data updates, and so on. This container does not have any exposed ports.
Scalability	This container can be scaled.
Links/Ports	The Job Runner container needs to connect to these containers/services:  • postgres  • solr  • zookeeper  • registration  • logstash  • cfssl
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that any individual service name may be different. For example, you may have an external PostgreSQL endpoint which is resolved through a different service name. To support such use cases, these environment variables can be set to override the default host names:  • postgres: \$HUB_POSTGRES_HOST  • solr: This should be taken care of by ZooKeeper.  • zookeeper: \$HUB_ZOOKEEPER_HOST  • registration: \$HUB_REGISTRATION_HOST  • logstash: \$HUB_LOGSTASH_HOST  • cfssl: \$HUB_CFSSL_HOST
Constraints	<ul> <li>Default max Java heap size: 4GB</li> <li>Container memory: 4GB</li> <li>Container CPU: 1 CPU</li> </ul>
Volumes	N/A
Environment File	hub-proxy.env

## Solr container

Container Name: Solr	
Image Name	blackducksoftware/hub-solr:4.7.2
Description	Solr is an open source enterprise search platform. The Hub uses Solr as its search server for project data.
	This container has Apache Solr running within it. There is only a single instance of this container. The Solr container exposes ports internally to the Docker network, but not outside of the Docker network.
Scalability	This container should not be scaled.
Links/Ports	The Solr container needs to connect to these containers/services:
	• zookeeper
	• logstash
	The container needs to expose port 8443 to other containers that will link to it.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:
	<ul><li>zookeeper: \$HUB_ZOOKEEPER_HOST</li><li>logstash: \$HUB_LOGSTASH_HOST</li></ul>
Constraints	Default max Java heap size: 512MB
	Container memory: 512MB
	Container CPU: Unspecified
Volumes	solr6-volume:/opt/blackduck/hub/solr/cores.data
Environment File	N/A

## **Registration container**

Container Name: Registration	
Image Name	blackducksoftware/hub-registration:4.7.2
Description	The container is a small service that handles registration requests from the other containers. At periodic intervals, this container connects to the Black Duck Registration Service and obtains registration updates.
Scalability	The container should not be scaled.

Container Name: Registration	
Links/Ports	The Registration container needs to connect to this containers/services:  • logstash  The container needs to expose port 8443 to other containers that link to it.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • logstash: \$HUB_LOGSTASH_HOST
Constraints	<ul><li>Default max Java heap size: 256MB</li><li>Container memory: 256MB</li><li>Container CPU: Unspecified</li></ul>
Volumes	config-volume:/opt/blackduck/hub/registration/config
Environment File	hub-proxy.env

#### **DB** container

**Note:** This container is not included in the Hub application if you use an external Postgres instance.

Container Name: DB	
Image Name	blackducksoftware/hub-postgres:4.7.2
Description	The DB container holds the PostgreSQL database which is an open source object-relational database system. The Hub uses the PostgreSQL database to store data.
	There is a single instance of this container. This is where all Hub data is stored. There are two sets of ports for Postgres. One port will be exposed to containers within the Docker network. This is the connection that the Hub App, Job Runner, and potentially other containers use. This port is secured via certificate authentication. A second port is exposed outside of the Docker network. This allows a read-only user to connect via a password set using the hub_reportdb_changepassword.sh script. This port and user can be used for reporting and data extraction.  Refer to the Report Database guide for more information on the report database.

Container Name: DB	
Scalability	There should only be a single instance of this container. It should not be scaled.
Links/Ports	The DB container needs to connect to these containers/services:  • logstash  • cfssl  The container needs to expose port 5432 to other containers that will link to it within the Docker network.  This container exposes port 55436 outside of the Docker network for database reporting.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • logstash: \$HUB_LOGSTASH_HOST  • cfssl: \$HUB_CFSSL_HOST
Constraints	<ul> <li>Default max Java heap size: N/A</li> <li>Container memory: 3GB</li> <li>Container CPU: 1 CPU</li> </ul>
Volumes	postgres96-data-volume:/var/lib/postgresql/data
Environment File	N/A

## **Documentation container**

Container Name: Documentation	
Image Name	blackducksoftware/hub-documentation:4.7.2
Description	The Documentation container supplies documentation for the Hub.
Scalability	There is a single instance of this container. It should not be scaled.
Links/Ports	This container must connect to these other containers/services:
	<ul><li>logstash</li></ul>
	The documentation container must expose port 8443 to other containers that link to it.

Black Duck Hub 4.7.2

Container Name: Documentation	
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • logstash: \$HUB_LOGSTASH_HOST
Constraints	<ul> <li>Default Max Java Heap Size: 512MB</li> <li>Container Memory: 512MB</li> <li>Container CPU: unspecified</li> </ul>
Volumes	N/A
Environment File	N/A

## WebServer container

Container Name: WebServer	
Image Name	blackducksoftware/hub-nginx:4.7.2
Description	The WebServer container is a reverse proxy for the Hub Web App. It has a port exposed outside of the Docker network. This is the container configured for HTTPS. There are config volumes here for configuration of HTTPS.
Scalability	The container should not be scaled.
Links/Ports	The Web App container needs to connect to these containers/services:  • webapp  • cfssl  • documentation  • scan  • authentication  This container exposes port 443 outside of the Docker network.
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • webapp: \$HUB_WEBAPP_HOST  • cfssl: \$HUB_CFSSL_HOST  • scan: \$HUB_SCAN_HOST

Container Name: WebServer	
	<ul><li>documentation: \$HUB_DOC_HOST</li><li>authentication: \$HUB_AUTHENTICATION_HOST</li></ul>
Constraints	<ul><li>Default max Java heap size: N/A</li><li>Container memory: 512MB</li><li>Container CPU: Unspecified</li></ul>
Volumes	webserver-volume:/opt/blackduck/hub/webserver/security
Environment File	hub-webserver.env

## ZooKeeper container

Container Name: Zookeeper		
Image Name	blackducksoftware/hub-zookeeper:4.7.2	
Description	This container stores data for the Hub App, Job Runners, Solr, and potentially other containers. It exposes ports within the Docker network, but not outside the Docker network.	
Scalability	This container should not be scaled.	
Links/Ports	The Zookeeper container needs to connect to this container/service:  • logstash	
	The container needs to expose port 2181 within the Docker network to other containers that will link to it.	
Alternate Host Name Environment Variables	There are times when running in other types of orchestrations that it is useful to have host names set for these containers that are not the default that Docker Compose or Docker Swarm use. These environment variables can be set to override the default host names:  • logstash: \$HUB_LOGSTASH_HOST	
Constraints	<ul><li>Default max Java heap size: 256MB</li><li>Container memory: 256MB</li><li>Container CPU: Unspecified</li></ul>	
Volumes	N/A	
Environment File	N/A	

## LogStash container

Container Name: LogStash	
Image Name	blackducksoftware/hub-logstash:4.7.2
Description	The LogStash container collects and store logs for all containers.
Scalability	There should only be a single instance of this container. It should not be scaled.
Links/Ports	The container needs to expose port 5044 within the Docker network to other containers/services that will link to it.
Constraints	<ul><li>Default max Java heap size: 1GB</li><li>Container memory: 1GB</li><li>Container CPU: Unspecified</li></ul>
Volumes	log-volume:/var/lib/logstash/data
Environment File	N/A

## **CA** container

Container Name: CA	
Image Name	blackducksoftware/hub-cfssl:4.7.2
Description	The CA container uses CFSSL which is used for certificate generation for PostgreSQL, NGiNX, and clients that need to authenticate to Postgres.
Scalability	There should only be a single instance of this container. It should not be scaled.
Links/Ports	The container needs to expose port 8888 within the Docker network to other containers/services that link to it.
Constraints	<ul><li>Default max Java heap size: N/A</li><li>Container memory: 512MB</li><li>Container CPU: Unspecified</li></ul>
Volumes	cert-volume:/etc/cfssl
Environment File	N/A