

[◀ Back to Week 4](#)[✕ Lessons](#)[Prev](#)[Next](#)

## Examples and Intuitions II

The  $\Theta^{(1)}$  matrices for AND, NOR, and OR are:

*AND :*

$$\Theta^{(1)} = \begin{bmatrix} -30 & 20 & 20 \end{bmatrix}$$

*NOR :*

$$\Theta^{(1)} = \begin{bmatrix} 10 & -20 & -20 \end{bmatrix}$$

*OR :*

$$\Theta^{(1)} = \begin{bmatrix} -10 & 20 & 20 \end{bmatrix}$$

We can combine these to get the XNOR logical operator (which gives 1 if  $x_1$  and  $x_2$  are both 0 or both 1).

$$\begin{bmatrix} x_0 \\ x_1 \\ x_2 \end{bmatrix} \rightarrow \begin{bmatrix} a_1^{(2)} \\ a_2^{(2)} \end{bmatrix} \rightarrow [a^{(3)}] \rightarrow h_{\Theta}(x)$$

For the transition between the first and second layer, we'll use a  $\Theta^{(1)}$  matrix that combines the values for AND and NOR:

$$\Theta^{(1)} = \begin{bmatrix} -30 & 20 & 20 \\ 10 & -20 & -20 \end{bmatrix}$$

For the transition between the second and third layer, we'll use a  $\Theta^{(2)}$  matrix that uses the value for OR:

$$\Theta^{(2)} = \begin{bmatrix} -10 & 20 & 20 \end{bmatrix}$$


Let's write out the values for all our nodes:

$$a^{(2)} = g(\Theta^{(1)} \cdot x)$$

$$a^{(3)} = g(\Theta^{(2)} \cdot a^{(2)})$$

$$h_{\Theta}(x) = a^{(3)}$$

And there we have the XNOR operator using a hidden layer with two nodes! The following summarizes the above algorithm:

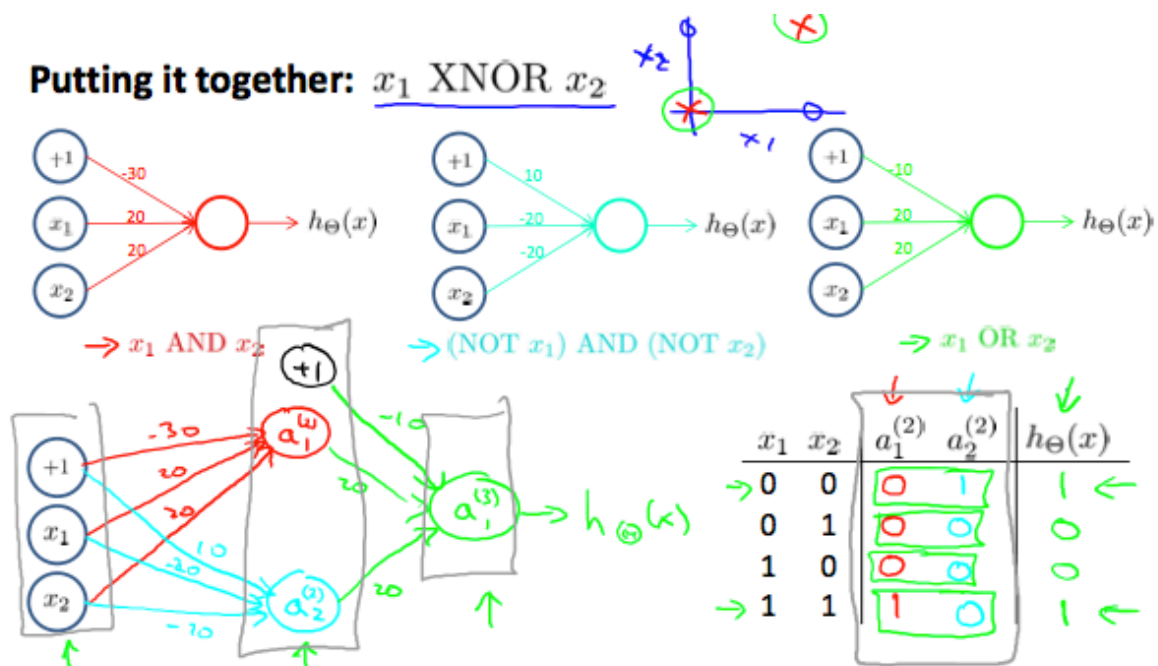

✓ Complete

