

# iRMC Usage Note

4.2026

© Copyright Fsas Technologies Inc. 2026

All rights reserved

Designations used in this document may be trademarks, the use of which by third parties for their own purposes could violate the rights of the trademark owners

---

All rights reserved, including intellectual property rights.  
Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.  
For further information see  
<https://global.fujitsu/en-global/terms>  
© Copyright Fsas Technologies Inc. 2026

# Contents

|                                                        |    |    |
|--------------------------------------------------------|----|----|
| Contents                                               | 2  |    |
| 1 General                                              | 3  |    |
| 1.1 Change History                                     | 3  |    |
| 1.2 Target                                             | 3  |    |
| 2 WebUI Network page                                   | 4  |    |
| 2.1 Status display                                     | 4  |    |
| 3 PCI card status/temperature monitoring               | 5  |    |
| 3.1 PCI card status monitoring                         | 5  |    |
| 3.2 Description                                        | 6  |    |
| 3.3 Status/temperature monitoring correspondence table | 7  |    |
| 4 Fan behavior with PCI Card Installed                 | 14 |    |
| 4.1 Description                                        | 14 |    |
| 4.2 Fan speed mode table                               | 15 |    |
| 5 RAID function                                        | 29 |    |
| 5.1 Support iRMC version                               | 29 |    |
| 5.2 Supported properties                               | 33 |    |
| 5.2.1 Supported properties for Storage controller      |    | 34 |
| 5.2.2 Supported properties for FBU                     |    | 40 |
| 5.2.3 Supported properties for Enclosure               |    | 41 |
| 5.2.4 Supported properties for Physical drive          |    | 42 |
| 5.2.5 Supported properties for Logical drive           |    | 45 |
| 5.3 Supported operations                               | 47 |    |
| 5.3.1 Supported operations for Storage controller      |    | 47 |
| 5.3.2 Supported operations for Physical drive          |    | 48 |
| 5.3.3 Supported operations for Logical drive           |    | 50 |
| 5.4 Restrictions                                       | 52 |    |
| 5.4.1 Backup and Restore RAID Properties Setting       |    | 52 |

# 1 General

This document provides information about iRMC usage.

## 1.1 Change History

| Date       | Version | Changes                                                                                                                                  |
|------------|---------|------------------------------------------------------------------------------------------------------------------------------------------|
| 26.10.2022 | 1.0     | First version                                                                                                                            |
| 5.12.2022  | 1.1     | Correction of some descriptions                                                                                                          |
| 15.5.2023  | 1.2     | Added section 5 "RAID function", Correction of some descriptions                                                                         |
| 27.9.2023  | 1.3     | Updated Status/temperature monitoring correspondence table                                                                               |
| 26.4.2024  | 1.4     | Updated Status/temperature monitoring correspondence table                                                                               |
| 11.10.2024 | 1.5     | Add Card Model (18.11 Correction of typographical errors)                                                                                |
| 28.1.2025  | 1.6     | Addition and modification of the FAN rotation table<br>Chapter 5: Added acquirable status for GPU cards<br>Chapter 5: Added VMD for ESXi |
| 27.10.2025 | 1.7     | Change in copyright notice<br>Modification of description wording<br>Chapter 5: Add new cards. Update the description.                   |
| 27.4.2026  | 1.8     | Add Card Model<br>Updated Status/temperature monitoring correspondence table                                                             |

## 1.2 Target

This document is intended for PRIMERGY servers with iRMC.

## 2 WebUI Network page

### 2.1 Status display

In iRMC WebUI, The Network page of the System menu provides information on the network adapters of the managed server. Certain information like temperature will only be available for MCTP capable controllers when MCTP is enabled.

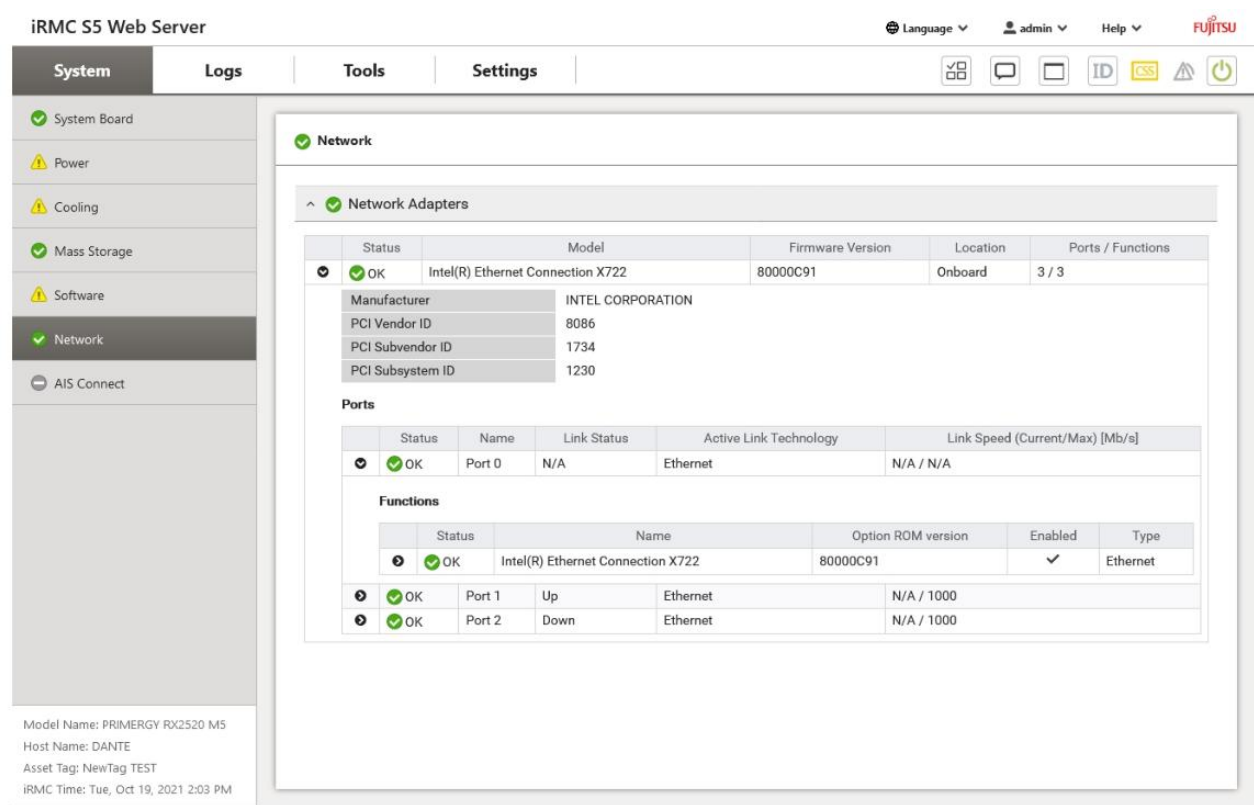


Figure 1: Network page

#### ■About Displaying Status

The status is displayed for each controller and port.

|          |                                      |
|----------|--------------------------------------|
| OK       | The device state is normal.          |
| Warning  | A warning level error has occurred.  |
| Critical | A critical level error has occurred. |

\*If the card does not support status monitoring, OK is displayed.

About Link status is as follows:

|      |                                                |
|------|------------------------------------------------|
| Up   | Port is link-up.                               |
| Down | Port is link-down.                             |
| N/A  | Indicates that link status cannot be obtained. |

\*If the card does not support link status monitoring, N/A is displayed.

### 3 PCI card status/temperature monitoring

#### 3.1 PCI card status monitoring

If the PCI card supports the Management Component Transport Protocol (MCTP), information can be obtained through MCTP. MCTP compatible iRMC firmware are iRMC S5 FW version 2.42P or later, and iRMC S6 FW version 1.09S or later. However, PCI card status monitoring may be limited depending on the iRMC S5 FW version. This is described in the firmware release note for each PRIMERGY server.

The main update is:

- The iRMC S5 FW version 2.60 P to 2.65 P has a malfunction of the MCTP function. iRMC will not be able to monitor hardware in an environment with an MCTP capable PCI card.
  - iRMC S5 FW version 3.05P fixes this issue.
  - iRMC S6 FW includes fixes for this issue from the first release.

On-board LAN is not monitored.

If you use MCTP, you must enable the Enable MCTP option in Settings > System > Management Protocol Options in the iRMC WebUI.

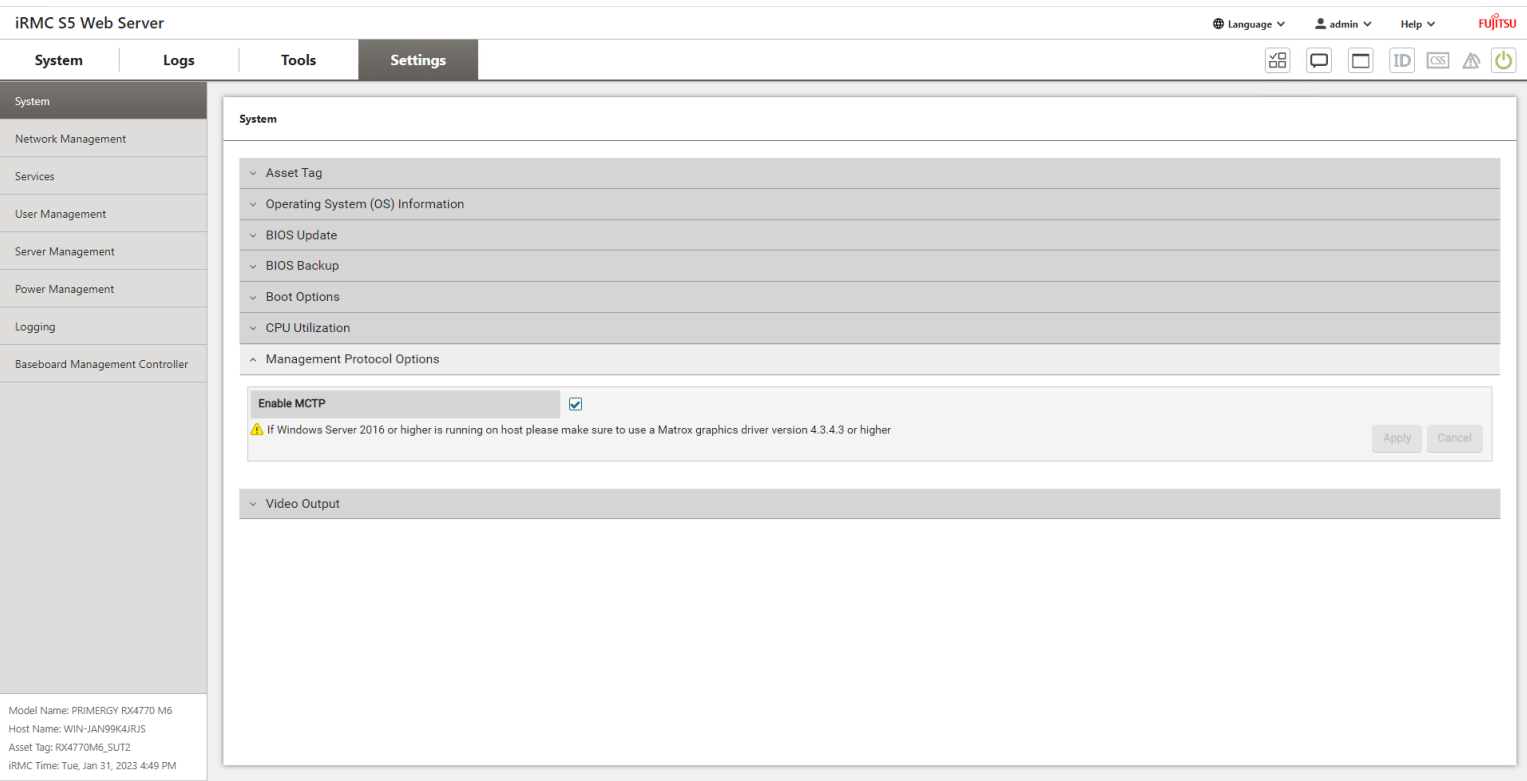


Figure 2: Enable MCTP option

### 3.2 Description

This section explains the notations in “3.3 Status/temperature monitoring correspondence table”.

The "Status Monitoring" section describes the availability of each PCI Card information and the types of status displayed on the WebUI. The types of status displayed and fault determination depend on the card's processing.

Whether the status is failed or not depends on the PCI card process.

Card information can be monitored when the OS is only running (Even if you boot the OS once and shut down).

Notation:

**OK/Warning/Critical:** The PCI card status can be obtained, and OK is displayed when normal, while Warning or Critical is displayed according to the status when an abnormality is detected.

**OK:** For cards that cannot retrieve the PCI card status information, OK is displayed regardless of the PCI card status.

- Status monitoring SW/FW

**iRMC:** iRMC directly accesses the device via MCTP to obtain Status information

**Agent:** The "ServerView Agents" or "ServerView Agentless Service" on the host OS accesses the device to obtain status information and notify iRMC. Therefore, iRMC can display and monitor this information if "ServerView Agents" or "ServerView Agentless Service" is installed on the host OS. For VMware ESXi, iRMC can display and monitor Status information if "ServerView ESXi CIM Provider" is installed.

- Temperature Monitoring

**Controller:** Displays the controller temperature. If controller temperature information cannot be obtained, this item is not displayed in Web UI.

**Port:** Displays the temperature of the port. If the port temperature information cannot be obtained, this item is not displayed.in Web UI

○ : Indicates that temperature monitoring is possible.

- : Indicates that temperature monitoring is disabled.



3.3 Status/temperature monitoring correspondence table

| Product name                    | Vendor Type Name                            |                                                           | Status Monitoring       |                         |                         | Temperature monitoring |        |
|---------------------------------|---------------------------------------------|-----------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                                 |                                             |                                                           | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| LAN Card (1000BASE-T)           | PLAN AP 1x1Gbit Cu Intel I210-T1            | S26361-F3852-L501<br>S26361-F3852-E1                      | OK                      | OK                      | Agent                   | -                      | -      |
| LAN Card (1000BASE-T)           | PLAN AP 1x1Gbit Cu Intel I210-T1 (Retail)   | S26361-F5959-L501<br>S26361-F5959-E1                      | OK                      | OK                      | Agent                   | -                      | -      |
| LAN Card (100GBASE)             | QLogic 45611 100 Gb 1p QSFP 28              | S26361-F4057-L501<br>S26361-F4057-E1<br>S26361-F4057-E201 | OK                      | OK                      | Agent                   | ○                      | -      |
| LAN Card (100GBASE)             | PLAN EP MCX4-EN 100Gb 1p QSFP28             | S26361-F4052-L501<br>S26361-F4052-E1<br>S26361-F4052-E201 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (1000BASE-T) | PLAN CP 2x1Gbit Cu Intel I350-T2 LP         | S26361-F4610-L502<br>S26361-F4610-E2                      | OK                      | OK                      | Agent                   | -                      | -      |
| Dual port LAN Card (100GBASE)   | PLAN EP E810-CQDA2 2X 100G QSFP28 PCIe      | S26361-F5780-L502<br>S26361-F5780-E2<br>S26361-F5780-E202 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (100GBASE)   | PLAN EP MCX6-DX 2X 100G QSFP28              | S26361-F5786-L502<br>S26361-F5786-E2<br>S26361-F5786-E202 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (10GBASE)    | PLAN EP X710-DA2 2x10Gb SFP+                | S26361-F3640-L502<br>S26361-F3640-E2<br>S26361-F3640-E202 | OK                      | OK                      | iRMC                    | -                      | -      |
| Dual port LAN Card (10GBASE)    | PLAN EP QL41132 2X 10G SFP+                 | S26361-F4069-L502<br>S26361-F4069-E2<br>S26361-F4069-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (10GBASE-T)  | PLAN EP X710-T2L 2X 10GBASE-T PCIe          | S26361-F5779-L502<br>S26361-F5779-E2<br>S26361-F5779-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (10GBASE-T)  | PLAN EP X550-T2 2x 10GBASE-T                | S26361-F3948-L502<br>S26361-F3948-E2<br>S26361-F3948-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (10GBASE-T)  | PLAN EP X710-T2L 2X 10GBASE-T PCIe (Retail) | S26361-F5960-L502<br>S26361-F5960-E2<br>S26361-F5960-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (10GBASE-T)  | Cavium FastLinQ QL41112HLRJ                 | S26361-F4068-L502<br>S26361-F4068-E2<br>S26361-F4068-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (25GBASE)    | PLAN EP E810-XXVDA2 2X 25G SFP28 PCIe       | S26361-F5822-L502<br>S26361-F5822-E2<br>S26361-F5822-E202 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (25GBASE)    | PLAN EP MCX4-LX 25Gb 2p SFP28 LP            | S26361-F4054-L502<br>S26361-F4054-E2<br>S26361-F4054-E202 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (25GBASE)    | PLAN EP XXV710-DA2 2x 25/10GbE              | S26361-F4055-L502<br>S26361-F4055-E2<br>S26361-F4055-E202 | OK                      | OK                      | iRMC                    | -                      | -      |
| Dual port LAN Card (25GBASE)    | Cavium QL41212 (2x 25GBASE)                 | S26361-F4056-L502<br>S26361-F4056-E2<br>S26361-F4056-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port LAN Card (40GBASE)    | PLAN EP MCX4-EN 40Gb 2p QSFP LP             | S26361-F4053-L502<br>S26361-F4053-E2<br>S26361-F4053-E202 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Quad port LAN Card (1000BASE-T) | PLAN CP 4x1Gbit Cu Intel I350-T4 LP         | S26361-F4610-L504<br>S26361-F4610-E4<br>S26361-F4610-E204 | OK                      | OK                      | iRMC                    | -                      | -      |

| Product name                          | Vendor Type Name                      |                                                           | Status Monitoring       |                         |                         | Temperature monitoring |        |
|---------------------------------------|---------------------------------------|-----------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                                       |                                       |                                                           | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| Quad port LAN Card (10GBASE)          | PLAN EP X710-DA4 4x10Gb SFP+          | S26361-F3640-L504<br>S26361-F3640-E4<br>S26361-F3640-E204 | OK                      | OK                      | iRMC                    | -                      | -      |
| Quad port LAN Card (10GBASE)          | PLAN EP QL41134 4X 10G SFP+           | S26361-F4069-L504<br>S26361-F4069-E4<br>S26361-F4069-E204 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Quad port LAN Card (10GBASE-T)        | Intel X710-T4 (4x 10GBASE-T)          | S26361-F3948-L504<br>S26361-F3948-E4<br>S26361-F3948-E204 | OK                      | OK                      | iRMC                    | -                      | -      |
| Quad port LAN Card (10GBASE-T)        | PLAN EP X710-T4L 4X 10GBASE-T PCIe    | S26361-F5779-L504<br>S26361-F5779-E4<br>S26361-F5779-E204 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Quad port LAN Card (10GBASE-T)        | PLAN EP QL41134 4X 10GBASE-T          | S26361-F4068-L504<br>S26361-F4068-E4<br>S26361-F4068-E204 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Quad port LAN Card (25GBASE)          | PLAN EP E810-XXVDA4 4X 25G SFP28 PCIe | S26361-F5822-L504<br>S26361-F5822-E4<br>S26361-F5822-E204 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Fibre Channel Card (64Gbps)           | PFC EP LPe36000 1X 64GB PCIe v4       | S26361-F4086-L501<br>S26361-F4086-E1<br>S26361-F4086-E201 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Fibre Channel Card (16Gbps)           | PFC EP LPe31000 1x 16Gb               | S26361-F5596-L501<br>S26361-F5596-E1<br>S26361-F5596-E201 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Fibre Channel Card (16Gbps)           | PFC EP QLE2690 1x 16Gb                | S26361-F5580-L501<br>S26361-F5580-E1<br>S26361-F5580-E201 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Fibre Channel Card (32Gbps)           | PFC EP LPe35000 1X 32GFC PCIe v4      | S26361-F4085-L501<br>S26361-F4085-E1<br>S26361-F4085-E201 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Fibre Channel Card (32Gbps)           | PFC EP QLE2770 1X 32GFC PCIe v4       | S26361-F4087-L501<br>S26361-F4087-E1<br>S26361-F4087-E201 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Fibre Channel Card (32Gbps)           | PFC EP QLE2870 1X 32GFC PCIe v4       | PY-FC431<br>PYBFC431<br>PYBFC431L                         | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (32Gbps) | PFC EP LPe32002 2x 32Gb Broadcom      | S26361-F4044-L502<br>S26361-F4044-E2<br>S26361-F4044-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (32Gbps) | PFC EP QLE2742 2x 32Gb QLogic         | S26361-F4043-L502<br>S26361-F4043-E2<br>S26361-F4043-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (64Gbps) | PFC EP LPe36002 2X 64GB PCIe v4       | S26361-F4086-L502<br>S26361-F4086-E2<br>S26361-F4086-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (16Gbps) | PFC EP LPe31002 2x 16Gb               | S26361-F5596-L502<br>S26361-F5596-E2<br>S26361-F5596-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (16Gbps) | PFC EP QLE2692 2x 16Gb                | S26361-F5580-L502<br>S26361-F5580-E2<br>S26361-F5580-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (32Gbps) | PFC EP LPe35002 2X 32GFC PCIe v4      | S26361-F4085-L502<br>S26361-F4085-E2<br>S26361-F4085-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Dual port Fibre Channel Card (32Gbps) | PFC EP QLE2772 2X 32GFC PCIe v4       | S26361-F4087-L502<br>S26361-F4087-E2<br>S26361-F4087-E202 | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |



| Product name                            | Vendor Type Name                                      |                                                                                                       | Status Monitoring       |                         |                         | Temperature monitoring |        |
|-----------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                                         |                                                       |                                                                                                       | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| Dual port Fibre Channel Card (32Gbps)   | PFC EP QLE2872 2X 32GFC PCIe v4                       | PY-FC432<br>PYBFC432<br>PYBFC432L                                                                     | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| IB HCA Card (100Gbps)                   | PIB EP 100Gb 1port EDR ConnectX-6                     | S26361-F5724-L102<br>S26361-F5724-E102                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| IB HCA Card (100Gbps)                   | PIB EP 100Gb 1port EDR ConnectX-5                     | S26361-F5717-L102<br>S26361-F5717-E102                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| IB HCA Card (200Gbps)                   | PIB EP 200Gb 1 port HDR ConnectX-6                    | S26361-F5756-L102<br>S26361-F5756-E102                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port IB HCA Card (100Gbps)         | PIB EP 100Gb 2port EDR ConnectX-6                     | S26361-F5724-L202<br>S26361-F5724-E202                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port IB HCA Card (100Gbps)         | PIB EP 100Gb 2port EDR ConnectX-5                     | S26361-F5717-L202<br>S26361-F5717-E202                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port IB HCA Card (200Gbps)         | PIB EP 200Gb 2port EDR ConnectX-6                     | S26361-F5756-L202<br>S26361-F5756-E202                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (1000BASE-T × 4) | PLAN CP I350-T4 4X 1000BASE-T OCPv3 IL                | S26361-F4610-L404<br>S26361-F4610-E404                                                                | OK / Warning / Critical | OK                      | iRMC                    | -                      | -      |
| Port expansion options (1000BASE-T × 4) | PLAN EM 4x 1Gb T OCP interface Intel                  | S26361-F3953-L401<br>S26361-F3953-E401                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (1000BASE-T × 4) | PLAN EM 4x 1Gb T OCP interface Intel for CX25x0M4     | S26361-F5651-L530<br>S26361-F5651-E530                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (100GBASE × 2)   | PLAN EP E810-CQDA2 2X 100G QSFP28 OCPV3               | S26361-F5780-L302<br>S26361-F5780-E302<br>S26361-F5921-E302                                           | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (100GBASE × 2)   | PLAN EP E810-CQDA2 2X 100G QSFP28 OCPV3 IL            | S26361-F5780-L402<br>S26361-F5780-E402                                                                | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (100GBASE × 2)   | PLAN EP MCX6-DX 2X 100G QSFP28 OCPv3                  | S26361-F5786-L302<br>S26361-F5786-E302<br>S26361-F5786-L402<br>S26361-F5786-E402<br>S26361-F5923-E302 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (10GBASE × 2)    | PLAN EM 2x 10GB SFP+ OCP interface Intel              | S26361-F3953-L211<br>S26361-F3953-E211                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (10GBASE × 2)    | PLAN EM 2x 10GB SFP+ OCP interface Intel for CX25x0M4 | S26361-F5651-L510<br>S26361-F5651-E510                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (10GBASE × 2)    | PLAN EP X710-DA2 2X 10G SFP+ OCPv3 IL                 | S26361-F3640-L402<br>S26361-F3640-E402                                                                | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE × 4)    | PLAN EM 4x 10GB SFP+ OCP interface Intel              | S26361-F3953-L411<br>S26361-F3953-E411                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (10GBASE × 4)    | PLAN EM 4x 10GB SFP+ OCP interface Intel for CX25x0M4 | S26361-F5651-L550<br>S26361-F5651-E550                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (10GBASE × 4)    | PLAN EP X710-DA4 4X 10G SFP+ OCPv3 IL                 | S26361-F3640-L404<br>S26361-F3640-E404<br>S26361-F5919-E304                                           | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE-T × 2)  | PLAN EM 2x 10Gb T OCP interface Intel for CX25x0M4    | S26361-F5651-L540<br>S26361-F5651-E540                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (10GBASE-T × 2)  | PLAN EP X710-T2L 2X 10GBASE-T OCPv3 IL                | S26361-F5779-L402<br>S26361-F5779-E402                                                                | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE-T × 2)  | PLAN EM 2x 10Gb T OCP interface Intel                 | S26361-F3953-L210<br>S26361-F3953-E210                                                                | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (25GBASE × 2)    | PLAN EP XXV710-DA2 2x25Gb OCP                         | S26361-F4055-L302<br>S26361-F4055-E302                                                                | OK                      | OK                      | iRMC                    | -                      | -      |

| Product name                            | Vendor Type Name                          |                                                                                                | Status Monitoring       |                         |                         | Temperature monitoring |        |
|-----------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                                         |                                           |                                                                                                | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| Port expansion options (25GBASE×2)      | PLAN EP E810-XXVDA2 2X 25G SFP28 OCPV3    | S26361-F5822-L302<br>S26361-F5822-E302<br>S26361-F5920-E302                                    | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (25GBASE×2)      | PLAN EP E810-XXVDA2 2X 25G SFP28 OCPV3 IL | S26361-F5822-L402<br>S26361-F5822-E402                                                         | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (25GBASE×2)      | PLAN EP MCX4-LX 2X 25G SFP28 OCPv3 IL     | S26361-F5785-L402<br>S26361-F5785-E402                                                         | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (25GBASE×2)      | PLAN EP MCX4-LX 25Gb 2p SFP28 OCP         | S26361-F4054-L302<br>S26361-F4054-E302                                                         | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (25GBASE×2)      | PLAN EP MCX4-LX 2X 25G SFP28 OCPv3        | S26361-F5785-L302<br>S26361-F5785-E302<br>S26361-F5922-E302                                    | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options(25GBASE×2)       | PLAN EP N225P 25Gb 2p SFP28 OCPv3         | PY-LA3G2U<br>PYBLA3G2U<br>PY-LA3G2U3<br>PYBLA3G2U3                                             | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options(25GBASE×2)       | PLAN EP N225PI 25Gb 2p SFP28 OCPv3        | PY-LA3G2U2<br>PYBLA3G2U2<br>PY-LA3G2U4<br>PYBLA3G2U4                                           | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options(25GBASE×4)       | PLAN EP E810-XXVDA4 4X 25G SFP28 OCPV3    | S26361-F5822-L304<br>S26361-F5822-E304<br>S26361-F5822-L404<br>S26361-F5822-E404<br>PYBLA404U3 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options (1000BASE-T×4)   | PLAN CP I350-T4 4X 1000BASE-T OCPv3       | S26361-F4610-L304<br>S26361-F4610-E304                                                         | OK / Warning / Critical | OK                      | iRMC                    | -                      | -      |
| Port expansion options (10GBASE×2)      | PLAN EP X710-DA2 2X 10G SFP+ OCPv3        | S26361-F3640-L302<br>S26361-F3640-E302<br>S26361-F5919-E302                                    | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE×4)      | PLAN EP X710-DA4 4X 10G SFP+ OCPv3        | S26361-F3640-L304<br>S26361-F3640-E304                                                         | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE-T×2)    | PLAN EP X710-T2L 2X 10GBASE-T OCPv3       | S26361-F5779-L302<br>S26361-F5779-E302<br>S26361-F5918-E302                                    | OK / Warning / Critical | OK                      | iRMC                    | ○                      | -      |
| Port expansion options (100GBASE×2)     | PLAN EP N2100G 100Gb 2p QSFP56 OCPv3      | PY-LA452U<br>PYBLA452U<br>PY-LA452U2<br>PYBLA452U2                                             | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Converged network adapters (25GBASE)    | PCNA EP QL41262 2X 25G SFP28              | S26361-F4070-L502<br>S26361-F4070-E2<br>S26361-F4070-E202                                      | OK                      | OK                      | Agent                   | ○                      | -      |
| Quad port LAN Card(1000BASE-T)          | PLAN CP BCM5719-4P 4X 1000BASE-T PCIe     | PY-LA284<br>PYBLA284<br>PYBLA284L                                                              | OK                      | OK                      | Agent                   | -                      | -      |
| Dual port LAN Card(10GBASE)             | PLAN EP P210P 2x10Gb SFP PCIe             | PY-LA3J2<br>PYBLA3J2<br>PYBLA3J2L                                                              | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Dual port LAN Card(10GBASE-T)           | PLAN EP P210TP 2X 10GBASE-T PCIe          | PY-LA3K2<br>PYBLA3K2<br>PYBLA3K2L                                                              | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options (4 x 1000BASE-T) | PLAN CP N41T 4X 1000BASE-T OCPv3          | PY-LA284U<br>PYBLA284U<br>PY-LA284U2<br>PYBLA284U2                                             | OK                      | OK                      | Agent                   | -                      | -      |
| Port expansion options (2 x 10 GBASE)   | PLAN EP N210P 2X 10G SFP OCPv3            | PY-LA3J2U<br>PYBLA3J2U<br>PY-LA3J2U2<br>PYBLA3J2U2                                             | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |

| Product name                            | Vendor Type Name                         |                                                                                                                                            | Status Monitoring       |                         |                         | Temperature monitoring |        |
|-----------------------------------------|------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                                         |                                          |                                                                                                                                            | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| Port expansion options (2 x 10 GBASE)   | PLAN EP N210P 2X 10G SFP OCPv3           | PY-LA3J2U3<br>PYBLA3J2U3<br>PY-LA3J2U4<br>PYBLA3J2U4                                                                                       | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options (2 x 10 GBASE-T) | PLAN EP N210TP 2X 10GBASE-T OCPv3        | PY-LA3K2U<br>PYBLA3K2U<br>PY-LA3K2U2<br>PYBLA3K2U2<br>PY-LA3K2U3<br>PYBLA3K2U3<br>PY-LA3K2U4<br>PYBLA3K2U4                                 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options (10GBASE-T×4)    | Intel X710-T4L OCPv3                     | S26361-F5779-L304<br>S26361-F5779-E304<br>S26361-F5779-L404<br>S26361-F5779-E404<br>PYBLA344U3                                             | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Port expansion options (25GBASE×2)      | NVIDIA (Mellanox) MCX631432AN-ADAB OCPv3 | PY-LA402U4<br>PYBLA402U4                                                                                                                   | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Port expansion options (25GBASE×2)      | NVIDIA (Mellanox) MCX631432AN-ADAB OCPv3 | PY-LA402U5<br>PYBLA402U5                                                                                                                   | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (25GBASE)            | Broadcom P225P                           | PY-LA3H2<br>PYBLA3H2<br>PYBLA3H2L                                                                                                          | OK                      | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Dual port LAN Card (25GBASE×2)          | NVIDIA (Mellanox) MCX631102AN-ADAT       | PY-LA4024<br>PYBLA4024<br>PYBLA402L4                                                                                                       | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | ○      |
| Dual port LAN Card (100GBASE)           | Broadcom P2100G                          | PY-LA442<br>PYBLA442<br>PYBLA442L                                                                                                          | OK                      | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card                     | PSAS CP600e                              | PY-SC4FAE<br>PYBSC4FAE<br>PYBSC4FAEL                                                                                                       | OK                      | OK                      | Agent                   | -                      | -      |
| SAS Controller Card                     | PSAS CP600i                              | PY-SC4FA<br>PYBSC4FA<br>PYBSC4FA2<br>PYBSC4FAL<br>PYBSC4FA2L<br>PY-SR4FA<br>PYBSR4FA<br>PYBSR4FAL                                          | OK                      | OK                      | Agent                   | -                      | -      |
| SAS Controller Card                     | PSAS CP 2100-8i                          | PY-SC3MA2<br>PYBSC3MA2<br>PYBSC3MA2L<br>S26361-F5888-L502<br>S26361-F5888-E2<br>S26361-F5888-E202<br>PYBSC3MAVL<br>PYBSC3MA4<br>PYBSC3MA4L | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card                     | PSAS CP 2200-16i                         | PY-SC4MA1<br>PYBSC4MA1<br>PYBSC4MA1L<br>PYBSC4MA3<br>PYBSC4MA3L<br>PYBSC4MA2<br>PYBSC4MA2L                                                 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |

| Product name        | Vendor Type Name  |                                                                                                                                                                                                                                                                                               | Status Monitoring       |                         |                         | Temperature monitoring |        |
|---------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                     |                   |                                                                                                                                                                                                                                                                                               | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| SAS Controller Card | PRAID CP500i      | S26361-F5791-L501<br>S26361-F5791-E1<br>S26361-F5791-E201<br>S26361-F5791-L551<br>S26361-F5791-E51<br>S26361-F5791-E251                                                                                                                                                                       | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID CM500i      | S26361-F5839-L290<br>S26361-F5839-E290                                                                                                                                                                                                                                                        | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP520i      | S26361-F4042-L502<br>S26361-F4042-E2<br>S26361-F4042-E202                                                                                                                                                                                                                                     | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP540i      | S26361-F4042-L514<br>S26361-F4042-E214                                                                                                                                                                                                                                                        | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP580i      | S26361-F4042-L508<br>S26361-F4042-E208<br>S26361-F4042-E228                                                                                                                                                                                                                                   | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP640i      | PY-SR4C63<br>PYBSR4C63<br>PYBSR4C63L                                                                                                                                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP680i      | S26361-F5790-L508<br>S26361-F5790-E8<br>S26361-F5790-E208<br>PYBSR4C62<br>S26361-F5790-L518<br>S26361-F5790-E218<br>S26361-F5790-E228<br>S26361-F5790-E238                                                                                                                                    | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP 3252-8i  | PY-SR4MA1<br>PYBSR4MA1<br>PYBSR4MA1L                                                                                                                                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP 3254-8i  | PY-SR4MA2<br>PYBSR4MA2L                                                                                                                                                                                                                                                                       | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP 3258-16i | PY-SR4MA3<br>PYBSR4MA3L<br>PYBSR4MA4<br>PYBSR4MA4L                                                                                                                                                                                                                                            | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID EP680e      | S26361-F5794-L501<br>S26361-F5794-E1<br>S26361-F5794-E201                                                                                                                                                                                                                                     | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PRAID CP400i      | S26361-F3842-L501<br>S26361-F3842-E1                                                                                                                                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PSAS CP403i       | S26361-F3842-E3<br>S26361-F3842-L503                                                                                                                                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card | PSAS CP503i       | S26361-F5792-L503<br>S26361-F5792-L553<br>S26361-F5792-L554<br>S26361-F5792-L504<br>S26361-F5792-E3<br>S26361-F5792-E11<br>S26361-F5792-E111<br>S26361-F5792-E53<br>S26361-F5792-E253<br>S26361-F5792-E254<br>S26361-F5792-E51<br>S26361-F5792-E151<br>S26361-F5792-E203<br>S26361-F5792-E204 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |

| Product name              | Vendor Type Name |                                                                                                                                                                                                    | Status Monitoring       |                         |                         | Temperature monitoring |        |
|---------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|-------------------------|------------------------|--------|
|                           |                  |                                                                                                                                                                                                    | Health                  | Port                    | Status monitoring SW/FW | Controller             | Health |
| SAS Controller Card       | PSAS CP400e      | S26361-F3845-L501<br>S26361-F3845-E1<br>S26361-F3845-E201                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card       | PSAS CP500e      | S26361-F3845-L501<br>S26361-F3845-E1<br>S26361-F3845-E201<br>S26361-F5793-L551<br>S26361-F5793-E51<br>S26361-F5793-E251<br>S26361-F5793-L501<br>S26361-F5793-E1<br>S26361-F5793-E201               | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card       | PRAID CP700i     | PY-SC4FB<br>PYBSC4FBL                                                                                                                                                                              | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Controller Card       | PRAID EP740i     | PY-SR4C71<br>PYBSR4C71L<br>PYBSR4C72<br>PYBSR4C72L                                                                                                                                                 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Array Controller Card | PRAID EP400i     | S26361-F5243-L1<br>S26361-F5243-L11<br>S26361-F5243-E1<br>S26361-F5243-E11                                                                                                                         | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Array Controller Card | PRAID EP420i     | S26361-F5243-L2<br>S26361-F5243-E2<br>S26361-F5243-L12<br>S26361-F5243-E12<br>S26361-F5800-L420<br>S26361-F5800-E420<br>S26361-F5243-L4<br>S26361-F5243-E4<br>S26361-F5243-L14<br>S26361-F5243-E14 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Array Controller Card | PRAID EP540i     | S26361-F4042-L504<br>S26361-F4042-E4<br>S26361-F4042-E204<br>S26361-F4042-L514<br>S26361-F4042-E214<br>S26361-F4042-E24<br>S26361-F4042-E224                                                       | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Array Controller Card | PRAID EP540e     | S26361-F4063-L504<br>S26361-F4063-E4<br>S26361-F4063-E204                                                                                                                                          | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| SAS Array Controller Card | PRAID EP781i     | PY-SR4C73<br>PYBSR4C73                                                                                                                                                                             | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Dual M.2 Controller Card  | PDUAL CP100      | PY-DMCP24<br>PYBDMCP24<br>PYBDMCP24L<br>PYBDMCP33<br>PYBDMCP33L<br>S26361-F5966-E201<br>S26361-F5966-L501<br>PY-DMCP32<br>PYBDMCP32L                                                               | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |
| Dual M.2 Controller Card  | PDUAL CP300      | PY-DMCP35<br>PYBDMCP35<br>PYBDMCP35L<br>PYBDMCP37L                                                                                                                                                 | OK / Warning / Critical | OK / Warning / Critical | iRMC                    | ○                      | -      |

## 4 Fan behavior with PCI Card Installed

### 4.1 Description

This section describes the fan behavior when each PCI card is installed in the server.

The fan speed may change depending on the PCI card installed. The difference in fan speed is classified according to the "Fan speed mode".

**Note: If a card or GPU not listed here is installed, the fan speed mode will be set to "High".**

- The PRIMERGY RX1440 M2 (4th Gen AMD EPYC)/PRIMERGY RX1440 M2 (5th Gen AMD EPYC) have the same specifications for FAN operation.
- The PRIMERGY RX2540 M7 (4th Gen Intel Xeon-SP)/PRIMERGY RX2540 M7 (5th Gen Intel Xeon-SP) have the same specifications for FAN operation.

About Fan speed mode:

- “Standard” mode (Std): It takes the temperature information from the card and controls the fan speed according to the temperature value.
- “High speed” mode (High): While the host power is turned on, the fan rotates at high speed. That makes the fan more noisy than normal.
- “Low speed” mode (Low): While the host power is turned on, the fan rotates at low speed. That makes the fan less noisy than normal.
- “-”: The PCI card is not available on the server. This card does not support installation in the server.
  - When cards with different modes are installed, the higher fan speed mode takes precedence.



4.2 Fan speed mode table

| Product name                         | Vendor Type Name                 |                                                           | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |     |
|--------------------------------------|----------------------------------|-----------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----|
| Fibre Channel Card(16Gbps)           | PFC EP LPe31000 1x 16Gb          | S26361-F5596-L501<br>S26361-F5596-E1<br>S26361-F5596-E201 | Std        | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | Std        | Std        | Std        | Std        | High       | Std        | Std        | Std        | -          | -          | -          | High       | Std        | High       | Std        | Std        | -          | -          | -          | Std        | -          | Std |
| Fibre Channel Card(16Gbps)           | PFC EP QLE2690 1x 16Gb           | S26361-F5580-L501<br>S26361-F5580-E1<br>S26361-F5580-E201 | Std        | Std        | Std        | Std        | -          | -          | -          | Std        | -          | Std        | Std        | Std        | Std        | High       | Std        | Std        | Std        | -          | -          | -          | High       | Std        | High       | Std        | Std        | -          | -          | -          | -          | -          | -   |
| Dual port Fibre Channel Card(16Gbps) | PFC EP LPe31002 2x 16Gb          | S26361-F5596-L502<br>S26361-F5596-E2<br>S26361-F5596-E202 | Std        | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | Std        | Std        | Std        | Std        | High       | Std        | Std        | Std        | -          | -          | -          | High       | Std        | High       | Std        | Std        | -          | -          | -          | -          | -          | -   |
| Dual port Fibre Channel Card(16Gbps) | PFC EP QLE2692 2x 16Gb           | S26361-F5580-L502<br>S26361-F5580-E2<br>S26361-F5580-E202 | Std        | Std        | Std        | Std        | -          | -          | -          | Std        | -          | Std        | Std        | Std        | Std        | High       | Std        | Std        | Std        | -          | -          | -          | High       | Std        | High       | Std        | Std        | -          | -          | -          | -          | -          | -   |
| Fibre Channel Card(32Gbps)           | PFC EP LPe32000 1x 32Gb Broadcom | S26361-F4044-L501<br>S26361-F4044-E1<br>S26361-F4044-E201 | -          | -          | -          | -          | -          | *1         | -          | -          | -          | *1         | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -   |
| Fibre Channel Card(32Gbps)           | PFC EP LPe35000 1X 32GFC PCIe v4 | S26361-F4085-L501<br>S26361-F4085-E1<br>S26361-F4085-E201 | Std        | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | *1         | Std        | Std        | Std        | -          | Std        | Std        | Std        | -          | -          | -          | High       | Std        | -          | Std        | Std        | -          | -          | -          | -          | -          | Std |
| Fibre Channel Card(32Gbps)           | PFC EP QLE2740 1x 32Gb QLogic    | S26361-F4043-L501<br>S26361-F4043-E1<br>S26361-F4043-E201 | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -   |
| Fibre Channel Card(32Gbps)           | PFC EP QLE2770 1X 32GFC PCIe v4  | S26361-F4087-L501<br>S26361-F4087-E1<br>S26361-F4087-E201 | Std        | Std        | Std        | Std        | -          | -          | High       | Std        | -          | -          | High       | -          | Std        | -          | Std        | Std        | -          | -          | -          | -          | High       | Std        | -          | Std        | Std        | -          | -          | -          | -          | -          | -   |
| Fibre Channel Card(32Gbps)           | PFC EP QLE2870 1X 32GFC PCIe v4  | PY-FC431<br>PYBFC431<br>PYBFC431L                         | Std        | Std        | Std        | Std        | -          | -          | High       | Std        | -          | -          | High       | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | High       | Std        | -          | Std        | Std        | -          | -          | -          | -          | -          | -   |
| Dual port Fibre Channel Card(32Gbps) | PFC EP LPe32002 2x 32Gb Broadcom | S26361-F4044-L502<br>S26361-F4044-E2<br>S26361-F4044-E202 | -          | -          | -          | -          | -          | *1         | -          | -          | -          | *1         | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -   |
| Dual port Fibre Channel Card(32Gbps) | PFC EP QLE2742 2x 32Gb QLogic    | S26361-F4043-L502<br>S26361-F4043-E2<br>S26361-F4043-E202 | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -   |



| Product name                          | Vendor Type Name                                  |                                                             | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |     |      |
|---------------------------------------|---------------------------------------------------|-------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----|------|
| Dual port Fibre Channel Card (32Gbps) | PFC EP LPe35002 2X 32GFC PCIe v4                  | S26361-F4085-L502<br>S26361-F4085-E2<br>S26361-F4085-E202   | Std        | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | *1         | Std        | Std        | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | High       | Std        | -          | Std        | -          | -          | -          | -          | -          | Std |      |
| Dual port Fibre Channel Card(32Gbps)  | PFC EP QLE2772 2X 32GFC PCIe v4                   | S26361-F4087-L502<br>S26361-F4087-E2<br>S26361-F4087-E202   | Std        | Std        | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | -          | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | High       | Std        | -          | Std        | -          | -          | -          | -          | -          | -   |      |
| Dual port Fibre Channel Card (32Gbps) | PFC EP QLE2872 2X 32GFC PCIe v4                   | PY-FC432<br>PYBFC432<br>PYBFC432L                           | Std        | Std        | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | -          | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | High       | Std        | -          | Std        | -          | -          | -          | -          | -          | -   |      |
| Fibre Channel Card(64Gbps)            | PFC EP LPe36000 1X 64GB PCIE v4                   | S26361-F4086-L501<br>S26361-F4086-E1<br>S26361-F4086-E201   | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | Std |      |
| Dual port Fibre Channel Card(64Gbps)  | PFC EP LPe36002 2X 64GB PCIE v4                   | S26361-F4086-L502<br>S26361-F4086-E2<br>S26361-F4086-E202   | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | Std |      |
| Port expansion options(1000BASE-T×4)  | PLAN CP I350-T4 4X 1000BASE-T OCPv3               | S26361-F4610-L304<br>S26361-F4610-E304<br>S26361-F5917-E304 | -          | -          | -          | Std        | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | Low        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |     |      |
| Port expansion options(1000BASE-T×4)  | PLAN CP I350-T4 4X 1000BASE-T OCPv3 IL            | S26361-F4610-L404<br>S26361-F4610-E404                      | -          | -          | Std        | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -   |      |
| Port expansion options(1000BASE-T×4)  | PLAN EM 4x 1Gb T OCP interface Intel              | S26361-F3953-L401<br>S26361-F3953-E401                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | *1         | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -   |      |
| Port expansion options(1000BASE-T×4)  | PLAN EM 4x 1Gb T OCP interface Intel for CX25x0M4 | S26361-F5651-L530<br>S26361-F5651-E530                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -   |      |
| Port expansion options(10GBASE-T×2)   | PLAN EP X710-T2L 2X 10GBASE-T OCPv3               | S26361-F5779-L302<br>S26361-F5779-E302<br>S26361-F5918-E302 | -          | -          | -          | Low        | -          | -          | Std        | -          | -          | -          | High       | Std        | Low        | -          | Std        | Low        | Low        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -   | High |
| Port expansion options(10GBASE-T×2)   | PLAN EP X710-T2L 2X 10GBASE-T OCPv3 IL            | S26361-F5779-L402<br>S26361-F5779-E402                      | -          | -          | Low        | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -   |      |
| Port expansion options(10GBASE-T×2)   | PLAN EM 2x 10Gb T OCP interface Intel             | S26361-F3953-L210<br>S26361-F3953-E210                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | *1         | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -   |      |



| Product name                        | Vendor Type Name                                      |                                                             | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |      |
|-------------------------------------|-------------------------------------------------------|-------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------|
| Port expansion options(10GBASE-T×2) | PLAN EM 2x 10Gb T OCP interface Intel for CX25x0M4    | S26361-F5651-L540<br>S26361-F5651-E540                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -    |
| Port expansion options(10GBASE×2)   | PLAN EP X710-DA2 2X 10G SFP+ OCPv3                    | S26361-F3640-L302<br>S26361-F3640-E302                      | -          | -          | -          | Low        | -          | -          | Std        | -          | -          | -          | High       | Std        | Std        | -          | Std        | Low        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |      |
| Port expansion options(10GBASE×2)   | PLAN EP X710-DA2 2X 10G SFP+ OCPv3 IL                 | S26361-F3640-L402<br>S26361-F3640-E402                      | -          | -          | Low        | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          |      |
| Port expansion options(10GBASE×2)   | PLAN EM 2x 10GB SFP+ OCP interface Intel              | S26361-F3953-L211<br>S26361-F3953-E211                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | *1         | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          |      |
| Port expansion options(10GBASE×2)   | PLAN EM 2x 10GB SFP+ OCP interface Intel for CX25x0M4 | S26361-F5651-L510<br>S26361-F5651-E510                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          |      |
| Port expansion options(10GBASE×4)   | PLAN EP X710-DA4 4X 10G SFP+ OCPv3 IL                 | S26361-F3640-L404<br>S26361-F3640-E404<br>S26361-F5919-E304 | -          | -          | Low        | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -    |
| Port expansion options(10GBASE×4)   | PLAN EM 4x 10GB SFP+ OCP interface Intel              | S26361-F3953-L411<br>S26361-F3953-E411                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | *1         | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |      |
| Port expansion options(10GBASE×4)   | PLAN EM 4x 10GB SFP+ OCP interface Intel for CX25x0M4 | S26361-F5651-L550<br>S26361-F5651-E550                      | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          |      |
| Port expansion options(10GBASE×4)   | PLAN EP X710-DA4 4X 10G SFP+ OCPv3                    | S26361-F3640-L304<br>S26361-F3640-E304                      | -          | -          | -          | Low        | -          | -          | Std        | -          | -          | -          | High       | Std        | Std        | -          | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High |
| Port expansion options (25GBASE×2)  | PLAN EP E810-XXVDA2 2X 25G SFP28 OCPV3                | S26361-F5822-L302<br>S26361-F5822-E302<br>S26361-F5920-E302 | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | High       | High       | Std        | -          | High       | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High |
| Port expansion options(25GBASE×2)   | PLAN EP E810-XXVDA2 2X 25G SFP28 OCPV3 IL             | S26361-F5822-L402<br>S26361-F5822-E402                      | -          | -          | -          | -          | -          | -          | Std        | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -    |
| Port expansion options(25GBASE×2)   | PLAN EP XXV710-DA2 2x25Gb OCP                         | S26361-F4055-L302<br>S26361-F4055-E302                      | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | -    |

| Product name                       | Vendor Type Name                                                             |                                                                                                       | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Port expansion options(25GBASE×2)  | PLAN EP MCX4-LX 2X 25G SFP28 OCPv3                                           | S26361-F5785-L302<br>S26361-F5785-E302<br>S26361-F5922-E302                                           | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | High       | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Port expansion options(25GBASE×2)  | PLAN EP MCX4-LX 2X 25G SFP28 OCPv3 IL                                        | S26361-F5785-L402<br>S26361-F5785-E402                                                                | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          |
| Port expansion options(25GBASE×2)  | PLAN EP MCX4-LX 25Gb 2p SFP28 OCP                                            | S26361-F4054-L302<br>S26361-F4054-E302                                                                | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | -          |
| Port expansion options(25GBASE×4)  | PLAN EP E810-XXVDA4 4X 25G SFP28 OCPV3                                       | S26361-F5822-L304<br>S26361-F5822-E304<br>S26361-F5822-L404<br>S26361-F5822-E404<br>PYBLA404U3        | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       |
| Port expansion options(100GBASE×2) | PLAN EP E810-CQDA2 2X 100G QSFP28 OCPV3                                      | S26361-F5780-L302<br>S26361-F5780-E302<br>S26361-F5921-E302                                           | -          | -          | -          | High       | -          | -          | High       | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Port expansion options(100GBASE×2) | PLAN EP E810-CQDA2 2X 100G QSFP28 OCPV3 IL                                   | S26361-F5780-L402<br>S26361-F5780-E402                                                                | -          | -          | High       | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          |
| Port expansion options(100GBASE×2) | PLAN EP MCX6-DX 2X 100G QSFP28 OCPv3NVIDIA(Mellano x) MCX623436AN-CDAB OCPv3 | S26361-F5786-L302<br>S26361-F5786-E302<br>S26361-F5786-L402<br>S26361-F5786-E402<br>S26361-F5923-E302 | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | Std        | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| LAN Card(1000BASE-T)               | PLAN AP 1x1Gbit Cu Intel I210-T1                                             | S26361-F3852-L501<br>S26361-F3852-E1                                                                  | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| LAN Card(1000BASE-T)               | PLAN AP 1x1Gbit Cu Intel I210-T1 (Retail)                                    | S26361-F5959-L501<br>S26361-F5959-E1<br>S26361-F5959-E201                                             | -          | -          | -          | -          | -          | *1         | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | High       | High       | -          | -          | -          | -          |
| LAN Card(100GBASE)                 | PLAN EP MCX4-EN 100Gb 1p QSFP28 LP                                           | S26361-F4052-L501<br>S26361-F4052-E1<br>S26361-F4052-E201                                             | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| LAN Card(100GBASE)                 | Cavium QL45611 (1x 100GBASE)                                                 | S26361-F4057-L501<br>S26361-F4057-E1<br>S26361-F4057-E201                                             | -          | -          | -          | -          | Std        | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |

| Product name                   | Vendor Type Name                                  |                                                           | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|--------------------------------|---------------------------------------------------|-----------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Dual port LAN Card(1000BASE-T) | PLAN CP 2x1Gbit Cu<br>Intel I350-T2 LP            | S26361-F4610-L502<br>S26361-F4610-E2<br>S26361-F4610-E202 | Low        | Low        | -          | -          | -          | *1         | -          | -          | -          | Std        | -          | -          | Low        | -          | Std        | -          | Low        | Std        | Std        | Low        | High       | Low        | High       | -          | High       | High       | -          | -          | -          | -          |
| Dual port LAN Card(100GBASE)   | PLAN EP E810-CQDA2<br>2X 100G QSFP28 PCIe         | S26361-F5780-L502<br>S26361-F5780-E2<br>S26361-F5780-E202 | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | High       | High       | High       | -          | High       | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       |
| Dual port LAN Card(100GBASE)   | PLAN EP MCX6-DX 2X<br>100G QSFP28                 | S26361-F5786-L502<br>S26361-F5786-E2<br>S26361-F5786-E202 | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | High       | High       | Low        | -          | Std        | High       | Low        | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       |
| Dual port LAN Card(10GBASE)    | PLAN EP X710-DA2<br>2x10Gb SFP+                   | S26361-F3640-L502<br>S26361-F3640-E2<br>S26361-F3640-E202 | Std        | Std        | -          | -          | -          | -          | Std        | Std        | -          | Std        | Std        | Std        | -          | High       | Std        | Std        | -          | -          | Std        | Low        | High       | Low        | High       | Std        | High       | High       | High       | High       | High       | High       |
| Dual port LAN Card(10GBASE)    | Fujitsu PLAN EP<br>QL41132 2X 10G SFP+            | S26361-F4069-L502<br>S26361-F4069-E2<br>S26361-F4069-E202 | -          | -          | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Dual port LAN Card(10GBASE-T)  | PLAN EP X550-T2 2x<br>10GBASE-T                   | S26361-F3948-L502<br>S26361-F3948-E2<br>S26361-F3948-E202 | -          | -          | -          | -          | -          | *1         | -          | -          | -          | Std        | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | High       | High       | -          | -          | -          | -          |
| Dual port LAN Card(10GBASE-T)  | PLAN EP X710-T2L 2X<br>10GBASE-T PCIe             | S26361-F5779-L502<br>S26361-F5779-E2<br>S26361-F5779-E202 | Std        | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | -          | High       | -          | Std        | -          | High       | High       | High       | -          | -          | -          |
| Dual port LAN Card(10GBASE-T)  | PLAN EP X710-T2L 2X<br>10GBASE-T PCIe<br>(Retail) | S26361-F5960-L502<br>S26361-F5960-E2<br>S26361-F5960-E202 | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | High       | High       | High       | High       | -          | -          | -          | -          |
| Dual port LAN Card(10GBASE-T)  | Cavium FastLinQ<br>QL41112HLRJ                    | S26361-F4068-L502<br>S26361-F4068-E2<br>S26361-F4068-E202 | -          | -          | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Dual port LAN Card(25GBASE)    | PLAN EP E810-XXVDA2<br>2X 25G SFP28 PCIe          | S26361-F5822-L502<br>S26361-F5822-E2<br>S26361-F5822-E202 | Std        | High       | Std        | Std        | -          | -          | Std        | High       | -          | -          | Std        | High       | Std        | -          | High       | High       | Std        | -          | Std        | High       | High       | High       | -          | High       | -          | -          | High       | High       | High       | High       |
| Dual port LAN Card(25GBASE)    | PLAN EP XXV710-DA2<br>2x 25/10GbE                 | S26361-F4055-L502<br>S26361-F4055-E2<br>S26361-F4055-E202 | -          | -          | -          | -          | -          | Std        | -          | -          | -          | *1         | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | High       | High       | -          | -          | -          | -          |
| Dual port LAN Card(25GBASE)    | PLAN EP MCX4-LX<br>25Gb 2p SFP28 LP               | S26361-F4054-L502<br>S26361-F4054-E2<br>S26361-F4054-E202 | Std        | -          | -          | -          | Std        | Std        | High       | -          | -          | *1         | Std        | -          | High       | High       | Std        | -          | -          | -          | Std        | -          | High       | -          | High       | -          | -          | Std        | Std        | Std        | Std        | -          |

| Product name                   | Vendor Type Name                      |                                                           | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|--------------------------------|---------------------------------------|-----------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Dual port LAN Card(25GBASE)    | Cavium QL41212 (2x 25GBASE)           | S26361-F4056-L502<br>S26361-F4056-E2<br>S26361-F4056-E202 | -          | -          | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Dual port LAN Card(40GBASE)    | PLAN EP MCX4-EN 40Gb 2p QSFP LP       | S26361-F4053-L502<br>S26361-F4053-E2<br>S26361-F4053-E202 | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Quad port LAN Card(1000BASE-T) | PLAN CP 4x1Gbit Cu Intel I350-T4 LP   | S26361-F4610-L504<br>S26361-F4610-E4<br>S26361-F4610-E204 | Low        | Low        | Low        | Low        | -          | *1         | Std        | Std        | -          | Std        | Std        | Std        | Low        | Std        | Std        | Low        | Low        | -          | Std        | Low        | High       | Low        | High       | Std        | High       | High       | High       | High       | Std        | Std        |
| Quad port LAN Card(10GBASE)    | PLAN EP X710-DA4 4x10Gb SFP+          | S26361-F3640-L504<br>S26361-F3640-E4<br>S26361-F3640-E204 | Std        | -          | Std        | Std        | -          | -          | Std        | Std        | -          | *1         | Std        | Std        | Std        | High       | Std        | Std        | Std        | -          | Std        | Std        | High       | Std        | High       | Std        | High       | High       | High       | High       | High       | High       |
| Quad port LAN Card(10GBASE)    | PLAN EP QL41134 4X 10G SFP+           | S26361-F4069-L504<br>S26361-F4069-E4<br>S26361-F4069-E204 | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Quad port LAN Card(10GBASE-T)  | Intel X710-T4 (4x 10GBASE-T)          | S26361-F3948-L504<br>S26361-F3948-E4<br>S26361-F3948-E204 | -          | -          | -          | -          | Std        | High       | -          | -          | -          | Std        | Std        | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | High       | High       | -          | -          | -          | -          |
| Quad port LAN Card(10GBASE-T)  | PLAN EP X710-T4L 4X 10GBASE-T PCIe    | S26361-F5779-L504<br>S26361-F5779-E4<br>S26361-F5779-E204 | Std        | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | Std        | Std        | High       | Std        | -          | Std        | -          | -          | High       | High       | High       | High       |
| Quad port LAN Card(10GBASE-T)  | PLAN EP QL41134 4X 10GBASE-T          | S26361-F4068-L504<br>S26361-F4068-E4<br>S26361-F4068-E204 | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Quad port LAN Card (25GBASE)   | PLAN EP E810-XXVDA4 4X 25G SFP28 PCIe | S26361-F5822-L504<br>S26361-F5822-E4<br>S26361-F5822-E204 | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| IB HCA Card(100Gbps)           | PIB EP 100Gb 1port EDR ConnectX-5     | S26361-F5717-L102<br>S26361-F5717-E102                    | -          | -          | -          | -          | Std        | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | -          |
| IB HCA Card(100Gbps)           | PIB EP 100Gb 1port EDR ConnectX-6     | S26361-F5724-L102<br>S26361-F5724-E102                    | -          | -          | -          | -          | Std        | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | -          |
| IB HCA Card(200Gbps)           | PIB EP 200Gb 1 port HDR ConnectX-6    | S26361-F5756-L102<br>S26361-F5756-E102                    | -          | -          | -          | -          | -          | High       | -          | -          | -          | High       | High       | -          | -          | High       | Std        | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | -          | High       | High       |

| Product name                           | Vendor Type Name                          |                                                           | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|----------------------------------------|-------------------------------------------|-----------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| IB HCA Card(200Gbps)                   | 1 port 200Gb infiniband NDR200 ConnectX-7 | PY-HC521<br>PYBHC521                                      | -          | -          | Std        | Std        | -          | -          | -          | High       | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Dual port IB HCA Card(100Gbps)         | PIB EP 100Gb 2port EDR ConnectX-5         | S26361-F5717-L202<br>S26361-F5717-E202                    | -          | -          | High       | High       | -          | High       | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          |
| Dual port IB HCA Card(100Gbps)         | PIB EP 100Gb 2port EDR ConnectX-6         | S26361-F5724-L202<br>S26361-F5724-E202                    | -          | -          | -          | -          | -          | High       | Std        | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | -          |
| Dual port IB Card(200Gbps)             | PIB EP 200Gb 2port EDR ConnectX-6         | S26361-F5756-L202<br>S26361-F5756-E202                    | -          | -          | High       | -          | -          | High       | High       | -          | -          | High       | High       | -          | High       | High       | Std        | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          |
| IB HCA Card(400Gbps)                   | 1 port 400Gb infiniband NDR ConnectX-7    | PY-HC541<br>PYBHC541                                      | -          | -          | Std        | Std        | -          | -          | -          | High       | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Converged Network Adapters (25GBASE)   | PCNA EP QL41262 2X 25G SFP28, LP,FH       | S26361-F4070-L502<br>S26361-F4070-E2<br>S26361-F4070-E202 | -          | -          | -          | -          | -          | High       | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Fibre Channel Card(16Gbps)             | PFC EP LPe31000 1x 16Gb                   | S26361-F5596-L501<br>S26361-F5596-E1<br>S26361-F5596-E201 | Std        | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        |
| Quad port LAN Card(1000BASE-T)         | PLAN CP BCM5719-4P 4X 1000BASE-T PCIe     | PY-LA284<br>PYBLA284<br>PYBLA284L                         | High       | Low        | Low        | Low        | -          | -          | High       | High       | -          | -          | High       | High       | Low        | High       | Low        | Low        | Low        | High       | High       | Low        | High       | Low        | -          | High       | High       | High       | High       | High       | High       |
| Dual port LAN Card(10GBASE)            | PLAN EP P210P 2x10Gb SFP PCIe             | PY-LA3J2<br>PYBLA3J2<br>PYBLA3J2L                         | High       | Std        | Std        | Std        | -          | -          | High       | High       | -          | -          | High       | High       | Std        | Std        | Std        | Std        | Std        | -          | High       | Std        | High       | Std        | Std        | High       | High       | -          | High       | High       | High       |
| Dual port LAN Card(10GBASE-T)          | PLAN EP P210TP 2X 10GBASE-T PCIe          | PY-LA3K2<br>PYBLA3K2<br>PYBLA3K2L                         | High       | High       | Std        | Std        | -          | -          | High       | High       | -          | -          | High       | High       | Std        | Std        | Std        | High       | Std        | -          | High       | Std        | High       | High       | High       | High       | High       | -          | High       | High       | Std        |
| Port expansion options(4 x 1000BASE-T) | PLAN CP N41T 4X 1000BASE-T OCPv3          | PY-LA284U<br>PYBLA284U<br>PY-LA284U2<br>PYBLA284U2        | -          | -          | Low        | Low        | -          | -          | Std        | -          | -          | -          | High       | High       | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |

| Product name                           | Vendor Type Name                         |                                                                                                            | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|----------------------------------------|------------------------------------------|------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Port expansion options(2 x 10 GBASE)   | PLAN EP N210P 2X 10G SFP OCPv3           | PY-LA3J2U<br>PYBLA3J2U<br>PY-LA3J2U2<br>PYBLA3J2U2<br>PY-LA3J2U3<br>PYBLA3J2U3<br>PY-LA3J2U4<br>PYBLA3J2U4 | -          | -          | -          | Low        | -          | -          | Std        | Std        | -          | -          | High       | Low        | -          | -          | High       | Low        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Port expansion options(2 x 10 GBASE-T) | PLAN EP N210TP 2X 10GBASE-T OCPv3        | PY-LA3K2U<br>PYBLA3K2U<br>PY-LA3K2U2<br>PYBLA3K2U2<br>PY-LA3K2U3<br>PYBLA3K2U3<br>PY-LA3K2U4<br>PYBLA3K2U4 | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | High       | -          | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Port expansion options (10GBASE-T×4)   | Intel X710-T4L OCPv3                     | S26361-F5779-L304<br>S26361-F5779-E304<br>S26361-F5779-L404<br>S26361-F5779-E404                           | -          | -          | Low        | Low        | -          | -          | Std        | High       | -          | -          | High       | High       | Std        | -          | Std        | High       | Std        | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       | High       |
| Port expansion options(25GBASE×2)      | NVIDIA (Mellanox) MCX631432AN-ADAB OCPv3 | PY-LA402U4<br>PYBLA402U4                                                                                   | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |
| Port expansion options(25GBASE×2)      | NVIDIA (Mellanox) MCX631432AN-ADAB OCPv3 | PY-LA402U5<br>PYBLA402U5                                                                                   | -          | -          | Std        | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Port expansion options(25GBASE×2)      | PLAN EP N225P 25Gb 2p SFP28 OCPv3        | PY-LA3G2U<br>PYBLA3G2U                                                                                     | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Port expansion options(25GBASE×2)      | PLAN EP N225PI 25Gb 2p SFP28 OCPv3       | PY-LA3G2U2<br>PYBLA3G2U2<br>PY-LA3G2U4<br>PYBLA3G2U4                                                       | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Port expansion options (100GBASE×2)    | PLAN EP N2100G 100Gb 2p QSFP56 OCPv3     | PY-LA452U<br>PYBLA452U<br>PY-LA452U2<br>PYBLA452U2                                                         | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Dual port LAN Card(25GBASE)            | Broadcom P225P 25GB 2P SFP28 PCIE        | PY-LA3H2<br>PYBLA3H2<br>PYBLA3H2L                                                                          | -          | Std        | -          | -          | -          | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | -          | Std        | -          | High       | -          | -          | -          | -          | -          | -          |
| Dual port LAN Card(25GBASE×2)          | NVIDIA (Mellanox) MCX631102AN-ADAT       | PY-LA4024<br>PYBLA4024<br>PYBLA402L4                                                                       | -          | High       | High       | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | High       | -          | High       | -          | -          | High       | -          | -          | High       | High       | High       | High       |
| Dual port LAN Card(100GBASE)           | Broadcom P2100G 100GB 2P QSFP56 PCIE     | PY-LA442<br>PYBLA442<br>PYBLA442L                                                                          | -          | -          | High       | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          |



| Product name        | Vendor Type Name |                                                                                                                                            | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|---------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| SAS Controller Card | PSAS CP600e      | PY-SC4FAE<br>PYBSC4FAE<br>PYBSC4FAEL                                                                                                       | Std        | Std        | Std        | Std        | -          | -          | Low        | Std        | -          | -          | Low        | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          |
| SAS Controller Card | PSAS CP600i      | PY-SC4FA<br>PYBSC4FA<br>PYBSC4FA2<br>PYBSC4FAL<br>PYBSC4FA2L<br>PY-SR4FA<br>PYBSR4FA<br>PYBSR4FAL                                          | -          | Std        | Std        | Std        | -          | -          | Low        | Std        | -          | -          | Low        | Std        | -          | -          | -          | Std        | -          | Std        | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | Std        | Std        |
| SAS Controller Card | PSAS CP 2100-8i  | PY-SC3MA2<br>PYBSC3MA2<br>PYBSC3MA2L<br>S26361-F5888-L502<br>S26361-F5888-E2<br>S26361-F5888-E202<br>PYBSC3MAVL<br>PYBSC3MA4<br>PYBSC3MA4L | Std        | Std        | Std        | Std        | -          | -          | Low        | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | Std        | Std        | Std        | Std        | -          | -          | -          | -          | Std        | Std        |
| SAS Controller Card | PSAS CP 2200-16i | PY-SC4MA1<br>PYBSC4MA1<br>PYBSC4MA1L<br>PYBSC4MA3<br>PYBSC4MA3L<br>PYBSC4MA2<br>PYBSC4MA2L                                                 | -          | Std        | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | Std        | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          |
| SAS Controller Card | PRAID CP500i     | S26361-F5791-L501<br>S26361-F5791-E1<br>S26361-F5791-E201<br>S26361-F5791-L551<br>S26361-F5791-E51<br>S26361-F5791-E251                    | -          | -          | -          | -          | -          | -          | Low        | Std        | -          | -          | Low        | -          | -          | -          | -          | -          | -          | Std        | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          |
| SAS Controller Card | PRAID CM500i     | S26361-F5839-L290<br>S26361-F5839-E290                                                                                                     | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | -          | -          |
| SAS Controller Card | PRAID EP520i     | S26361-F4042-L502<br>S26361-F4042-E2<br>S26361-F4042-E202                                                                                  | Std        | -          | -          | -          | Std        | -          | Low        | Std        | -          | Low        | Low        | Std        | -          | -          | -          | -          | -          | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          |
| SAS Controller Card | PRAID EP540i     | S26361-F4042-L514<br>S26361-F4042-E214                                                                                                     | Std        | -          | -          | -          | Std        | -          | Low        | Std        | -          | Low        | Low        | Std        | -          | Std        | -          | -          | -          | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          |
| SAS Controller Card | PRAID EP580i     | S26361-F4042-L508<br>S26361-F4042-E208<br>S26361-F4042-E228                                                                                | Std        | -          | -          | -          | -          | -          | Low        | Std        | -          | -          | Low        | Std        | -          | Std        | -          | -          | -          | -          | Std        | Std        | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          |
| SAS Controller Card | PRAID EP640i     | PY-SR4C63<br>PYBSR4C63<br>PYBSR4C63L                                                                                                       | Std        | Std        | Std        | Std        | -          | -          | Low        | Std        | -          | -          | Low        | -          | Std        | -          | -          | Std        | -          | -          | Std        | Std        | Std        | Std        | -          | Std        | -          | -          | -          | -          | High       | High       |

| Product name        | Vendor Type Name  |                                                                                                                                                                                                                                                                                               | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |   |
|---------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---|
| SAS Controller Card | PRAID EP680i      | S26361-F5790-L508<br>S26361-F5790-E8<br>S26361-F5790-E208<br>PYBSR4C62                                                                                                                                                                                                                        | Std        | Std        | Std        | Std        | -          | -          | Low        | Std        | -          | -          | Low        | Std        | Std        | -          | -          | Std        | -          | -          | Std        | Std        | Std        | Std        | -          | Std        | -          | -          | -          | High       | High       |            |   |
| SAS Controller Card | PRAID EP 3252-8i  | PY-SR4MA1<br>PYBSR4MA1<br>PYBSR4MA1L                                                                                                                                                                                                                                                          | -          | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | Std        | -          | -          | Std        | -          | -          | High       | Std        | Std        | Std        | -          | Std        | -          | -          | -          | -          | -          |            |   |
| SAS Controller Card | PRAID EP 3254-8i  | PY-SR4MA2<br>PYBSR4MA2L                                                                                                                                                                                                                                                                       | -          | Std        | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | High       | Std        | Std        | Std        | -          | Std        | -          | -          | -          | -          | -          |            |   |
| SAS Controller Card | PRAID EP 3258-16i | PY-SR4MA3<br>PYBSR4MA3L<br>PYBSR4MA4<br>PYBSR4MA4L                                                                                                                                                                                                                                            | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | High       | Std        | Std        | Std        | -          | Std        | -          | -          | -          | -          | -          |            |   |
| SAS Controller Card | PRAID EP680e      | S26361-F5794-L501<br>S26361-F5794-E1<br>S26361-F5794-E201                                                                                                                                                                                                                                     | -          | -          | Std        | Std        | -          | -          | Low        | Std        | -          | -          | Low        | Std        | Std        | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       |            |   |
| SAS Controller Card | PRAID CP400i      | S26361-F3842-L501<br>S26361-F3842-E1                                                                                                                                                                                                                                                          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | Std        | Std        | -          | -          | -          | -          |   |
| SAS Controller Card | PSAS CP403i       | S26361-F3842-E3<br>S26361-F3842-L503                                                                                                                                                                                                                                                          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | Std        | Std        | -          | -          | -          | -          |   |
| SAS Controller Card | PSAS CP503i       | S26361-F5792-L503<br>S26361-F5792-L553<br>S26361-F5792-L554<br>S26361-F5792-L504<br>S26361-F5792-E3<br>S26361-F5792-E11<br>S26361-F5792-E111<br>S26361-F5792-E53<br>S26361-F5792-E253<br>S26361-F5792-E254<br>S26361-F5792-E51<br>S26361-F5792-E151<br>S26361-F5792-E203<br>S26361-F5792-E204 | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | Std        | -          | Std        | -          | -          | Std        | Std        | -          | -          | -          | - |
| SAS Controller Card | PRAID CP700i      | PY-SC4FB                                                                                                                                                                                                                                                                                      | -          | Std        | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | Std        | -          | Std        | -          | -          | -          | -          | -          |   |
| SAS Controller Card | PRAID EP740i      | PY-SR4C71<br>PYBSR4C71L<br>PYBSR4C72<br>PYBSR4C72L                                                                                                                                                                                                                                            | -          | Std        | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | -          | Std        | -          | -          | -          | Std        | Std        | -          | Std        | -          | Std        | -          | -          | -          | -          | -          |   |



| Product name              | Vendor Type Name |                                                                                                                                                                                                    | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |   |
|---------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---|
| SAS Controller Card       | PSAS CP400e      | S26361-F3845-L501<br>S26361-F3845-E1<br>S26361-F3845-E201                                                                                                                                          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | Std        | Std        | Std        | -          | -          | -          | -          |   |
| SAS Controller Card       | PSAS CP500e      | S26361-F3845-L501<br>S26361-F3845-E1<br>S26361-F3845-E201<br>S26361-F5793-L551<br>S26361-F5793-E51<br>S26361-F5793-E251<br>S26361-F5793-L501<br>S26361-F5793-E1<br>S26361-F5793-E201               | -          | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | Std        | -          | Std        | -          | Std        | Std        | -          | -          | -          | -          |   |
| SAS Array Controller Card | PRAID EP400i     | S26361-F5243-L1<br>S26361-F5243-L11<br>S26361-F5243-E1<br>S26361-F5243-E11                                                                                                                         | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | Std        | Std        | Std        | -          | -          | -          | -          |   |
| SAS Array Controller Card | PRAID EP420i     | S26361-F5243-L2<br>S26361-F5243-E2<br>S26361-F5243-L12<br>S26361-F5243-E12<br>S26361-F5800-L420<br>S26361-F5800-E420<br>S26361-F5243-L4<br>S26361-F5243-E4<br>S26361-F5243-L14<br>S26361-F5243-E14 | -          | -          | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | Std        | -          | Std        | Std        | Std        | -          | -          | -          | -          |   |
| SAS Array Controller Card | PRAID EP540i     | S26361-F4042-L504<br>S26361-F4042-E4<br>S26361-F4042-E204<br>S26361-F4042-L514<br>S26361-F4042-E214<br>S26361-F4042-E24<br>S26361-F4042-E224                                                       | Std        | -          | -          | -          | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | -          | Std        | -          | Std        | Std        | Std        | -          | -          | -          | Std        | Std        | Std        | Std        | - |
| SAS Array Controller Card | PRAID EP540e     | S26361-F4063-L504<br>S26361-F4063-E4<br>S26361-F4063-E204                                                                                                                                          | Std        | -          | -          | -          | Std        | Std        | Std        | -          | -          | Std        | Std        | -          | -          | Std        | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | Std        | Std        | Std        | Std        | -          | - |
| SAS Array Controller Card | PRAID EP781i     | PY-SR4C73<br>PYBSR4C73                                                                                                                                                                             | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | Std        | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |   |
| Dual M.2 Controller Card  | PDUAL CP100      | PY-DMCP24<br>PYBDMCP24<br>PYBDMCP24L<br>PYBDMCP33<br>PYBDMCP33L<br>S26361-F5966-E201<br>S26361-F5966-L501<br>PY-DMCP32<br>PYBDMCP32L                                                               | Std        | High       | Std        | High       | -          | -          | Std        | Std        | -          | -          | Std        | High       | -          | -          | -          | High       | -          | -          | -          | High       | Std        | -          | Std        | -          | -          | -          | -          | -          | High       | High       |   |

| Product name             | Vendor Type Name |                                                    | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|--------------------------|------------------|----------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Dual M.2 Controller Card | PDUAL CP300      | PY-DMCP35<br>PYBDMCP35<br>PYBDMCP35L<br>PYBDMCP37L | Std        | High       | Std        | High       | -          | -          | Std        | Std        | -          | -          | Std        | High       | -          | -          | -          | High       | -          | -          | -          | High       | Std        | -          | -          | Std        | Std        | -          | -          | -          | High       | High       |
| Graphics Card            | NVIDIA A100X     | PYBCA4A2<br>PY-CA4A2                               | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | High       | -          | -          | -          | -          | Std        | -          | -          | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA A16       | S26361-F4025-E170<br>S26361-F4025-L170             | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA A30       | S26361-F4025-E150<br>S26361-F4025-L150             | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA A30X      | PYBCA4A1<br>PY-CA4A1                               | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA A40       | S26361-F4025-E530<br>S26361-F4025-L530             | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA H100      | PYBGP4H11<br>PY-GP4H11                             | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA H100 NVL  | PYBGP5H1<br>PY-GP5H1                               | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA L40       | PY-VG4L2<br>PYBVG4L2                               | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA L40S      | PYBGP4L1<br>PY-GP4L1                               | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA RTX A400  | PYBVG4AEL<br>PY-VG4AEL<br>PYBVG4AE<br>PY-VG4AE     | -          | Std        | Low        | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | -          | -          | Std        | -          | High       | -          | Std        | Std        | Std        | -          | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card            | NVIDIA T400      | PY-VG4T2<br>PYBVG4T2<br>PY-VG4T2L<br>PYBVG4T2L     | Std        | Std        | Low        | Std        | -          | -          | Std        | Std        | -          | -          | High       | Std        | -          | -          | High       | Std        | -          | -          | High       | Std        | Std        | Std        | High       | -          | -          | -          | -          | -          | -          | -          |

| Product name  | Vendor Type Name                |                                                                                  | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|---------------|---------------------------------|----------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Graphics Card | PGRA CP NVIDIA Quadro RTX A4500 | PYBVG4A7<br>PY-VG4A7                                                             | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA RTX 4000                 | PY-VG4L4<br>PYBVG4L4                                                             | -          | -          | -          | Std        | -          | -          | -          | -          | -          | High       | High       | Std        | High       | -          | High       | Std        | -          | -          | -          | High       | High       | -          | High       | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA RTX 6000                 | PY-VG4L3<br>PYBVG4L3                                                             | -          | -          | -          | Std        | -          | -          | -          | -          | -          | High       | -          | Std        | High       | -          | High       | Std        | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card | PGRA CP NVIDIA RTX A6000        | PY-VG4L3<br>PYBVG4L3                                                             | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | Std        | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card | PY NVIDIA A100 80GB for PCIe    | S26361-F4025-E190<br>S26361-F4025-L190                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro P400              | S26361-F4066-L400<br>S26361-F4066-L401<br>S26361-F4066-E400<br>S26361-F4066-E401 | -          | -          | -          | -          | -          | High       | High       | -          | -          | High       | High       | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro P4000             | S26361-F4025-L340<br>S26361-F4025-E340                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro P5000             | S26361-F4025-L350<br>S26361-F4025-E350                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro RTX 4000          | S26361-F4025-L540<br>S26361-F4025-E540                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro RTX 6000          | S26361-F4025-L560<br>S26361-F4025-E560                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA Quadro RTX 8000          | S26361-F4025-L580<br>S26361-F4025-E580                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| Graphics Card | NVIDIA RTX A4000                | S26361-F4025-L130<br>S26361-F4025-E130                                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       | High       | High       | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |

| Product name       | Vendor Type Name                                   |                                                | RX 1330 M5 | RX 1330 M6 | RX 1440 M2 | RX 2450 M2 | RX 2520 M5 | RX 2530 M5 | RX 2530 M6 | RX 2530 M7 | RX 2530 M8 | RX 2540 M5 | RX 2540 M6 | RX 2540 M7 | RX 2540 M8 | RX 4770 M5 | RX 4770 M6 | RX 4770 M7 | RX 4770 M8 | TX 1310 M5 | TX 1320 M5 | TX 1320 M6 | TX 1330 M5 | TX 1330 M6 | TX 2550 M5 | TX 2550 M7 | CX 2550 M5 | CX 2560 M5 | CX 2550 M6 | CX 2560 M6 | CX 2550 M7 | CX 2560 M7 |
|--------------------|----------------------------------------------------|------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Graphics Card      | NVIDIA RTX A6000                                   | S26361-F4025-L830                              | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | High       | High       | High       | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| VDI/GPGPU Card     | NVIDIA A10                                         | S26361-F4025-L730<br>S26361-F4025-E730         | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| VDI/GPGPU Card     | NVIDIA A2                                          | PY-VG4A8<br>PYBVG4A8<br>PY-VG4A8L<br>PYBVG4A8L | -          | High       | High       | High       | -          | High       | Std        | Std        | -          | High       | High       | High       | -          | -          | High       | High       | -          | -          | Std        | High       | High       | High       | -          | High       | -          | -          | -          | -          | -          | -          |
| VDI/GPGPU Card     | NVIDIA L4                                          | PY-VG4L1<br>PYBVG4L1<br>PY-VG4L1L<br>PYBVG4L1L | -          | High       | High       | High       | -          | -          | Std        | Std        | -          | -          | High       | High       | High       | -          | -          | High       | -          | -          | Std        | High       | High       | High       | -          | High       | -          | -          | -          | -          | -          | -          |
| GPU Computing Card | NVIDIA L40S                                        | PY-GP4L1<br>PYBGP4L1                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          |
| GPU Computing Card | NVIDIA RTX PRO 4000<br>Blackwel                    | PY-VG5A1<br>PYBVG5A1                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| GPU Computing Card | NVIDIA RTX PRO 6000<br>Blackwell Server<br>Edition | PY-GP5L1<br>PYBGP5L1                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| GPU Computing Card | NVIDIA H200 NVL                                    | PY-GP5H2<br>PYBGP5H2                           | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |
| VDI Graphics Card  | NVIDIA A16                                         | S26361-F4025-L170<br>S26361-F4025-E170         | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | High       | High       | High       | -          | High       | High       | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          | -          |

\*1) This card does not support FAN speed control. It does not affect FAN operation.

## 5 RAID function

In iRMC WebUI, The MassStorage page of the System menu provides information on the storage controller of the managed server. Properties and operations availability depends on the controller product. This chapter contains following things.

- Support irmc version
- Supported properties
- Supported operations

### 5.1 Support iRMC version

Some storage controllers need to install ServerView Software(SVS) on the host in order to use iRMC functionalities.

Following table contains storage controllers that SVS needs to be installed on the host.

Category information is used to see tables from 5.2.

Refer to “SVS products supported version for storage monitoring and management functions” in <https://support.ts.fujitsu.com/> for SVS configuration detail.

| Product name        | Type Name         |                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Category                | iRMC S5 version | iRMC S6 version | Out-Of-Band interface support status |
|---------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------|-----------------|--------------------------------------|
| SAS Controller card | PSAS PSAS CP400i  | PY-SC3FA, PYBSC3FA, PYBSC3FAB<br>S26361-F3842-L502, S26361-F3842-E2, S26361-F3842-E20                                                                                                                                                                                                                                                                                                                                                                | Broadcom Lynx4 SAS RAID | 3.20P(*1)       | -               | N/A                                  |
| SAS Controller card | PSAS PSAS CP400e  | PY-SC3FE, PYBSC3FE, PYBSC3FEL<br>S26361-F3845-L501, S26361-F3845-E1, S26361-F3845-E201                                                                                                                                                                                                                                                                                                                                                               | Broadcom Lynx4 SAS      | 3.20P(*1)       | -               | N/A                                  |
| SAS Controller card | PSAS PSAS CP403i  | PYBSC3FA3V, PY-SC3FA3V, APYSPR071E<br>S26361-F3842-E3, S26361-F3842-L503, CA08026-H266                                                                                                                                                                                                                                                                                                                                                               |                         | 3.20P(*1)       | -               | N/A                                  |
| SAS Controller card | PSAS PSAS CP500e  | PY-SC3FE, PYBSC3FE, PYBSC3FEL<br>PY-SC3FBF, PYBSC3FBF, PYBSC3FBFL<br>PY-SC3FBE, PYBSC3FBE, PYBSC3FBEL<br>S26361-F3845-L501, S26361-F3845-E1, S26361-F3845-E201<br>S26361-F5793-L551, S26361-F5793-E51, S26361-F5793-E251<br>S26361-F5793-L501, S26361-F5793-E1, S26361-F5793-E201                                                                                                                                                                    | Broadcom Lynx5 SAS      | 3.20P(*1)       | -               | N/A                                  |
| SAS Controller card | PSAS CP503i       | PY-SC3FB2, PYBSC3FB2, PYBSC3FB2L<br>PYBSC3FB4, PYBSC3FB4L<br>PY-SC3FB, PYBSC3FB, PYBSC3FBL<br>PYBSC3FB1, PYBSC3FB1L<br>PY-SC3FB3, PYBSC3FB3L<br>PY-SC3FBV, PYBSC3FBVL<br>S26361-F5792-L553, S26361-F5792-E53, S26361-F5792-E253<br>S26361-F5792-E51, S26361-F5792-E151, S26361-F5792-L503<br>S26361-F5792-E3, S26361-F5792-E203, S26361-F5792-E11<br>S26361-F5792-E111, S26361-F5792-L554, S26361-F5792-E254<br>S26361-F5792-L504, S26361-F5792-E204 |                         | 3.20P(*1)       | 1.09S           | N/A                                  |
| SAS Controller card | PSAS CP600i       | PY-SC4FA, PYBSC4FA, PYBSC4FAL<br>PYBSC4FA2, PYBSC4FA2L, PY-SC4FAV, PYBSC4FAVL                                                                                                                                                                                                                                                                                                                                                                        | Broadcom Lynx6 SAS      | 3.20P(*1)       | 1.09S, 2.00S    | N/A                                  |
| SAS Controller card | PSAS CP600e       | PY-SC4FAE, PYBSC4FAE, PYBSC4FAEL                                                                                                                                                                                                                                                                                                                                                                                                                     |                         | 3.20P(*1)       | 1.09S, 2.00S    | N/A                                  |
| -                   | AHCI              | -                                                                                                                                                                                                                                                                                                                                                                                                                                                    | AHCI                    | 3.20P(*1)       | 1.09S, 2.00S    | N/A                                  |
| -                   | Embedded MegaRAID | -                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Broadcom Onboard        | 3.20P(*1)       | -               | N/A                                  |
| -                   | VROC(SATA)        | -                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Intel Onboard SATA      | 3.20P(*2)       | 1.09S, 2.00S    | N/A                                  |
| -                   | VROC(NVMe)        | -                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Intel Onboard NVMe      | 3.20P(*2)       | 1.09S, 2.00S    | N/A                                  |
| -                   | VMD for ESXi      | -                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Intel Onboard           | 3.20P           | 1.09S, 2.36S    | N/A                                  |

(\*1) Property support 1.60P or later, Operation support 3.03P or later.

(\*2) Property support and Operation support 3.03P or later

It is recommended to use versions listed in the table or later, as they include bug fixes.



Following table contains storage controllers which can be monitored without SVS.

| Product name              | Vendor<br>Type Name |                                                                                                                                                                                                                            | Category                   | iRMC S5 version | iRMC S6 version | Out-Of-Band interface support status |
|---------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------|-----------------|--------------------------------------|
| SAS Array Controller card | PRAID CP400i        | PY-SR3FA, PYBSR3FA<br>S26361-F3842-L501, S26361-F3842-E1                                                                                                                                                                   | Broadcom Lynx4 SAS Array   | 3.20P(*1)       | -               | I2C proprietary                      |
| SAS Array Controller card | PRAID EP400i        | PY-SR3C41H, PYBSR3C41H<br>S26361-F5243-L11, S26361-F5243-E11                                                                                                                                                               | Broadcom Cougar4 SAS Array | 3.20P(*1)       | -               | I2C proprietary                      |
| SAS Array Controller card | PRAID EP420i        | PY-SR3C42H, PYBSR3C42H<br>PY-SR3C43H, PYBSR3C43H<br>S26361-F5243-L12, S26361-F5243-E12<br>S26361-F5243-L14, S26361-F5243-E14                                                                                               |                            | 3.20P(*1)       | -               | I2C proprietary                      |
| SAS Array Controller card | PRAID CP500i        | PY-SR3FB2, PYBSR3FB2, PYBSR3FB2L<br>PY-SR3FB, PYBSR3FB, PYBSR3FBL<br>S26361-F5791-L551, S26361-F5791-E51, S26361-F5791-E251<br>S26361-F5791-L501, S26361-F5791-E1, S26361-F5791-E201                                       | Broadcom Lynx5 SAS Array   | 3.20P(*2)       | 1.09S           | I2C proprietary                      |
| SAS Array Controller card | PRAID CM500i        | PY-SR3G1, PYBSR3G1<br>S26361-F5839-L290, S26361-F5839-E290                                                                                                                                                                 |                            | 3.20P           | -               | I2C proprietary                      |
| SAS Array Controller card | PRAID EP520i        | PY-SR3C52, PYBSR3C52, PYBSR3C52L<br>S26361-F4042-L502, S26361-F4042-E2, S26361-F4042-E202                                                                                                                                  | Broadcom Cougar5 SAS Array | 3.20P(*3)       | 1.09S           | I2C proprietary                      |
| SAS Array Controller card | PRAID EP540i        | PY-SR3C54, PYBSR3C54, PYBSR3C54L<br>PY-SR3C55, PYBSR3C55L<br>PYBSR3C56, PYBSR3C56L<br>S26361-F4042-L504, S26361-F4042-E4, S26361-F4042-E204<br>S26361-F4042-L514, S26361-F4042-E214<br>S26361-F4042-E24, S26361-F4042-E224 |                            | 3.20P(*3)       | 1.09S           | I2C proprietary                      |
| SAS Array Controller card | PRAID EP540e        | PY-SR3C5E, PYBSR3C5E, PYBSR3C5EL<br>S26361-F4063-L504, S26361-F4063-E4, S26361-F4063-E204                                                                                                                                  |                            | 3.20P(*4)       | -               | I2C proprietary                      |
| SAS Array Controller card | PRAID EP580i        | PY-SR3C58, PYBSR3C58, PYBSR3C58L<br>PYBSR3C59, PYBSR3C59L<br>S26361-F4042-L508, S26361-F4042-E8, S26361-F4042-E208<br>S26361-F4042-E28, S26361-F4042-E228                                                                  |                            | 3.20P(*5)       | 1.09S           | I2C proprietary                      |
| SAS Array Controller card | PRAID EP640i        | PY-SR4C63, PYBSR4C63, PYBSR4C63L                                                                                                                                                                                           | Broadcom Cougar6 SAS Array | 3.20P(*2)       | 1.09S<br>2.00S  | I2C proprietary                      |
| SAS Array Controller card | PRAID EP680i        | PY-SR4C6, PYBSR4C6, PYBSR4C6L<br>PY-SR4C65, PYBSR4C65L<br>PYBSR4C62L, PYBSR4C66L<br>S26361-F5795-L504, S26361-F5795-E204<br>S26361-F5790-L518, S26361-F5790-E218<br>S26361-F5790-E228, S26361-F5790-E238                   |                            | 3.20P(*2)       | 1.09S<br>2.00S  | I2C proprietary                      |
| SAS Array Controller card | PRAID EP680e        | PY-SR4C6F, PYBSR4C6F, PYBSR4C6FL<br>PY-SR4C6E, PYBSR4C6E, PYBSR4C6EL<br>S26361-F5794-L508, S26361-F5794-E8, S26361-F5794-E201                                                                                              |                            | 3.20P(*2)       | 1.09S<br>2.00S  | I2C proprietary                      |

| Product name                         | Vendor<br>Type Name |                                                                                                                                                                                  | Category                   | iRMC S5 version | iRMC S6 version                  | Out-Of-Band interface support status |
|--------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------|----------------------------------|--------------------------------------|
| SAS Array Controller card            | PRAID CP600i        | PY-SR4FA,PYBSR4FA,PYBSR4FAL                                                                                                                                                      | Broadcom Lynx6 SAS Array   | 3.39P           | 1.10S<br>2.00S                   | I2C proprietary                      |
| SAS Controller card                  | PSAS CP700i         | PY-SC4FB, PYBSC4FBL                                                                                                                                                              | Broadcom Lynx7 SAS         | -               | 2.58S                            | MCTP supported                       |
| SAS Array Controller card            | PRAID CP700i        | PY-SR4FB, PYBSR4FBL                                                                                                                                                              | Broadcom Lynx7 SAS Array   | -               | 2.58S                            | MCTP supported                       |
| SAS Array Controller card            | PRAID EP740i        | PY-SR4C71, PYBSR4C71L<br>PYBSR4C72, PYBSR4C72L                                                                                                                                   | Broadcom Cougar7 SAS Array | -               | 2.58S                            | MCTP supported                       |
| SAS Array Controller card            | PRAID EP781i        | PY-SR4C73, PYBSR4C73                                                                                                                                                             | Broadcom Cougar7 SAS Array | -               | 2.58S                            | MCTP supported                       |
| SAS Controller card<br>(*)from 3.46P | PSAS CP2100-8i      | PY-SC3MA2, PYBSC3MA2, PYBSC3MA2L<br>PY-SC3MA3, PYBSC3MA3, PYBSC3MA3L<br>PYBSC3MAVL, PYBSC3MANL<br>PYBSC3MA4, PYBSC3MA4L<br>S26361-F5888-L502, S26361-F5888-E2, S26361-F5888-E202 | Microchip SmarHBA          | 3.46P           | 1.20S<br>2.00S                   | MCTP supported                       |
| SAS Controller card                  | PSAS CP2200-16i     | PYBSC4MA1, PYBSC4MA1L<br>PYBSC4MA2, PYBSC4MA2L<br>PYBSC4MA3, PYBSC4MA3L<br>PY-SC4MA1                                                                                             |                            | 3.49P           | 1.20S<br>2.00S                   | MCTP supported                       |
| SAS Array Controller card            | PRAID EP 3252-8i    | PYBSR4MA1, PYBSR4MA1L, PY-SR4MA1                                                                                                                                                 | Microchip SmartRAID        | 3.49P           | 1.20S<br>2.00S                   | MCTP supported                       |
| SAS Array Controller card            | PRAID EP 3254-8i    | PYBSR4MA2, PYBSR4MA2L, PY-SR4MA2                                                                                                                                                 |                            | 3.49P           | 1.20S<br>2.00S                   | MCTP supported                       |
| SAS Array Controller card            | PRAID EP 3258-16i   | PYBSR4MA3, PYBSR4MA3L<br>PYBSR4MA4, PYBSR4MA4L<br>PY-SR4MA3                                                                                                                      |                            | 3.49P           | 1.20S<br>2.00S                   | MCTP supported                       |
| SAS Array Controller card            | PDUAL CP100         | PY-DMCP24, PYBDMCP24, PYBDMCP24L<br>PY-DMCP32, PYBDMCP32L<br>PYBDMCP33, PYBDMCP33L<br>YR5966L501, YR5966E201<br>S26361-F5966-L501, S26361-F5966-E201                             | Marvel SAS Array           | 3.39P           | 1.10S<br>2.00S                   | I2C proprietary                      |
| GPGPU card                           | NVIDIA A100X        | PY-CA4A2,PYBCA4A2                                                                                                                                                                | GPGPU card                 | 3.37P           | 1.10S<br>2.02S<br>2.42S          | MCTP supported                       |
|                                      | NVIDIA A16          | PY-VG4A4,PYBVG4A4                                                                                                                                                                |                            | 3.37P           | 1.14S<br>2.02S<br>2.42S          | MCTP supported                       |
|                                      | NVIDIA A30          | PY-VG4A5,PYBVG4A5                                                                                                                                                                |                            | 3.37P           | 1.14S<br>2.02S<br>2.26S<br>2.42S | MCTP supported                       |
|                                      | NVIDIA A30X         | PY-CA4A1,PYBCA4A1                                                                                                                                                                |                            | -               | 2.02S<br>2.26S                   | MCTP supported                       |
|                                      | NVIDIA A40          | PY-VG4A1,PYBVG4A1                                                                                                                                                                |                            | 3.37P           | 2.02S<br>2.26S                   | MCTP supported                       |



| Product name | Vendor<br>Type Name       |                                          | Category | iRMC S5 version | iRMC S6 version                  | Out-Of-Band interface support status |
|--------------|---------------------------|------------------------------------------|----------|-----------------|----------------------------------|--------------------------------------|
|              | NVIDIA H100               | PY-GP4H11,PYBGP4H11                      |          | -               | 2.02S<br>2.26S<br>2.42S          |                                      |
|              | NVIDIA H100 NVL           | PY-GP5H1,PYBGP5H1                        |          | -               | 2.57S<br>2.45S                   |                                      |
|              | NVIDIA L40                | PY-VG4L2,PYBVG4L2                        |          | -               | 2.02S<br>2.42S                   |                                      |
|              | NVIDIA L40S               | PY-GP4L1,PYBGP4L1                        |          | -               | 2.02S<br>2.42S                   |                                      |
|              | NVIDIA RTX A400           | PY-VG4AEL,PYBVG4AEL<br>PY-VG4AE,PYBVG4AE |          | -               | 1.33S<br>2.45S<br>2.57S          |                                      |
|              | NVIDIA T400               | PY-VG4T2,PYBVG4T2<br>PY-VG4T2L,PYBVG4T2L |          | 3.37P           | 1.10S<br>2.02S<br>2.42S<br>2.50S |                                      |
|              | NVIDIA A2                 | PY-VG4A8,PYBVG4A8,PY-VG4A8L,PYBVG4A8L    |          | 3.37P           | 1.10S<br>2.02S<br>2.42S<br>2.50S |                                      |
|              | NVIDIA L4                 | PY-VG4L1,PYBVG4L1,PY-VG4L1L,PYBVG4L1L    |          | -               | 1.20S<br>2.02S<br>2.42S<br>2.50S |                                      |
|              | NVIDIA Tesla A100<br>80GB | PY-GP4A10,PYBGP4A10                      |          | 3.37P           | 2.02S<br>2.42S                   |                                      |

(\*1) Property support 1.01P or later, Operation support 3.03P or later, PD location support 1.04P

(\*2) Property support and PD location support 2.63P or later, Operation support 3.03P or later

(\*3) Property support 1.02P or later, Operation support 3.03P or later, PD location support 1.04P

(\*4) Property support and PD location support 1.60P or later, Operation support 3.03P or later

(\*5) Property support and PD location support 1.15P or later, Operation support 3.03P or later

## 5.2 Supported properties

This section describes about supported properties for each storage controller category.

“R” means display only.

“RW” means modifiable properties.

“-” means not supported.

Please see a table in 5.1 for Category information.

Note:The following properties are not supported on PRIMERGY M8 models.

Storage Property

- CoercionMode
- MDCAbortOnError
- PatrolReadMaxDrives
- PatrolReadRecoverySupport
- BIOSContinueOnError

Volume Property

- EmulationType

5.2.1 Supported properties for Storage controller

Here are remarks of a table below.

(\*1) Available only SVS is installed

(\*2) Suported only when "Patrol Read" setting is not DISABLED

(\*3) Suported only when "Patrol Read" setting is AUTO

(\*4) Supported from 3.46P

| Category                    | Status | Product | Firmware Version | Package Version | Ports | Protocol | Driver Name | PCI Location | Device Protocols | Vendor | Serial Number | PCI Vendor and Device ID | Sub Vendor and Device ID |
|-----------------------------|--------|---------|------------------|-----------------|-------|----------|-------------|--------------|------------------|--------|---------------|--------------------------|--------------------------|
| Broadcom Lynx4 SAS RAID(*1) | R      | R       | R                | -               | R     | R        | -           | R            | R                | R      | -             | R                        | R                        |
| Broadcom Lynx4 SAS(*1)      | R      | R       | R                | -               | R     | R        | -           | R            | R                | R      | -             | R                        | R                        |
| Broadcom Lynx4 SAS Array    | R      | R       | R                | R               | R     | R        | -           | R(*1)        | -                | R      | R             | R                        | R                        |
| Broadcom Cougar4 SAS Array  | R      | R       | R                | R               | R     | R        | R(*1)       | R(*1)        | R                | R      | R             | R                        | R                        |
| Broadcom Lynx5 SAS(*1)      | R      | R       | R                | -               | R     | R        | -           | R            | R                | R      | -             | R                        | R                        |
| Broadcom Lynx5 SAS Array    | R      | R       | R                | R               | R     | R        | -           | R(*1)        | -                | R      | R             | R                        | R                        |
| Broadcom Cougar5 SAS Array  | R      | R       | R                | R               | R     | R        | R(*1)       | R(*1)        | R                | R      | R             | R                        | R                        |
| Broadcom Lynx6 SAS(*1)      | R      | R       | R                | -               | R     | R        | -           | R            | R                | R      | -             | R                        | R                        |
| Broadcom Lynx6 SAS Array    | R      | R       | R                | R               | R     | R        | -           | R(*1)        | -                | R      | R             | R                        | R                        |
| Broadcom Cougar6 SAS Array  | R      | R       | R                | R               | R     | R        | R(*1)       | R(*1)        | R                | R      | R             | R                        | R                        |
| Broadcom Lynx7 SAS          | R      | R       | R                | R               | R     | R        | R           | R            | R                | R      | R             | R                        | R                        |
| Broadcom Lynx7 SAS Array    | R      | R       | R                | R               | R     | R        | R           | R            | R                | R      | R             | R                        | R                        |
| Broadcom Cougar7 SAS Array  | R      | R       | R                | R               | R     | R        | R           | R            | R                | R      | R             | R                        | R                        |
| Marvel SAS Array            | R      | R       | R                | R               | R     | R        | -           | R(*1)(*4)    | -                | R      | R             | R                        | R                        |
| Microchip SmartHBA          | R      | R       | R                | -               | R     | R        | -           | -            | -                | R      | R             | R                        | R                        |
| Microchip SmartRAID         | R      | R       | R                | -               | R     | R        | -           | -            | -                | R      | R             | R                        | R                        |
| Broadcom Onboard(*1)        | R      | R       | -                | -               | R     | R        | -           | R            | R                | R      | -             | R                        | R                        |
| AHCI(*1)                    | R      | R       | -                | -               | -     | R        | -           | -            | -                | -      | -             | -                        | -                        |
| Intel Onboard(*1)           | R      | R       | -                | -               | -     | R        | -           | R            | R                | R      | -             | -                        | -                        |
| VMD for ESXi(*1)            | R      | R       | -                | -               | -     | R        | -           | -            | R                | R      | R             | -                        | -                        |
| NVMe                        | R      | R       | -                | -               | -     | R        | -           | R(*1)        | R                | R      | R             | -                        | -                        |
| GPGPU card                  | R      | R       | -                | -               | -     | -        | -           | R            | -                | R      | -             | R                        | R                        |

| Category                    | Driver Version | UEFI Driver Version | Controller firmware version | BIOS Version | BIOS Continue On Error | BIOS Status | Boot Volume Number | Temperature | Family | Foreign Configuration | Preserved Cache | Upgrade Key Version | Patrol Read |
|-----------------------------|----------------|---------------------|-----------------------------|--------------|------------------------|-------------|--------------------|-------------|--------|-----------------------|-----------------|---------------------|-------------|
| Broadcom Lynx4 SAS RAID(*1) | R              | R                   | R                           | R            | -                      | -           | -                  | -           | -      | R                     | -               | -                   | -           |
| Broadcom Lynx4 SAS(*1)      | R              | R                   | R                           | R            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | -           |
| Broadcom Lynx4 SAS Array    | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Cougar4 SAS Array  | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Lynx5 SAS(*1)      | R              | R                   | R                           | R            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | -           |
| Broadcom Lynx5 SAS Array    | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Cougar5 SAS Array  | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Lynx6 SAS(*1)      | R              | R                   | R                           | R            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | -           |
| Broadcom Lynx6 SAS Array    | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Cougar6 SAS Array  | R(*1)          | R                   | R                           | R            | RW                     | RW          | RW                 | R           | -      | R                     | R               | -                   | RW          |
| Broadcom Lynx7 SAS          | R(*1)          | R                   | R                           | R            | RW                     | -           | -                  | R           | -      | -                     | -               | -                   | -           |
| Broadcom Lynx7 SAS Array    | R(*1)          | R                   | R                           | R            | RW                     | -           | -                  | R           | -      | R                     | -               | -                   | RW          |
| Broadcom Cougar7 SAS Array  | R(*1)          | R                   | R                           | R            | RW                     | -           | -                  | R           | -      | R                     | R               | -                   | RW          |
| Marvel SAS Array            | -              | R                   | R                           | R            | -                      | -           | -                  | R           | R      | -                     | -               | -                   | -           |
| Microchip SmartHBA          | R(*1)          | -                   | R                           | -            | -                      | -           | -                  | R           | R      | -                     | -               | -                   | -           |
| Microchip SmartRAID         | R(*1)          | -                   | R                           | -            | -                      | -           | -                  | R           | R      | -                     | -               | -                   | -           |
| Broadcom Onboard(*1)        | R              | -                   | -                           | R            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | RW          |
| AHCI(*1)                    | R              | -                   | -                           | -            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | -           |
| Intel Onboard(*1)           | -              | -                   | -                           | -            | -                      | -           | -                  | -           | -      | -                     | -               | -                   | -           |
| VMD for ESXi(*1)            | -              | -                   | -                           | -            | -                      | -           | -                  | -           | -      | -                     | -               | R                   | -           |
| NVMe                        | -              | -                   | -                           | -            | -                      | -           | -                  | R           | -      | -                     | -               | -                   | -           |

\*The Driver version field may include the Driver Name.

| Category                    | Completed Patrol Read Iterations | Next Patrol Read | Patrol Read Rate | Continuous Patrolling | Patrol Read Delay | Patrol Read Max Drives | Patrol Read Recovery Support | Patrol Read for SSD | Spindown Unconfigured Drive | Spindown Hot Spare | Spindown Delay | Devices Per Spins | Spinup Delay |
|-----------------------------|----------------------------------|------------------|------------------|-----------------------|-------------------|------------------------|------------------------------|---------------------|-----------------------------|--------------------|----------------|-------------------|--------------|
| Broadcom Lynx4 SAS RAID(*1) | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Broadcom Lynx4 SAS(*1)      | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Broadcom Lynx4 SAS Array    | R (*2)                           | R (*3)           | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Cougar4 SAS Array  | R (*2)                           | R(*3)            | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Lynx5 SAS(*1)      | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Broadcom Lynx5 SAS Array    | R (*2)                           | R (*3)           | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Cougar5 SAS Array  | R (*2)                           | R (*3)           | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Lynx6 SAS(*1)      | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Broadcom Lynx6 SAS Array    | R (*2)                           | R (*3)           | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Cougar6 SAS Array  | R (*2)                           | R (*3)           | RW               | RW (*3)               | RW (*3)           | RW (*3)                | RW                           | R                   | RW                          | RW                 | RW             | RW                | RW           |
| Broadcom Lynx7 SAS          | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | R                 | R            |
| Broadcom Lynx7 SAS Array    | R                                | R                | RW               | -                     | RW                | RW                     | RW                           | R                   | RW                          | RW                 | RW             | R                 | R            |
| Broadcom Cougar7 SAS Array  | R                                | R                | RW               | -                     | RW                | RW                     | RW                           | R                   | RW                          | RW                 | RW             | R                 | R            |
| Marvel SAS Array            | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Microchip SmartHBA          | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Microchip SmartRAID         | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Broadcom Onboard(*1)        | R (*2)                           | R (*3)           | RW               | -                     | RW (*3)           | RW (*3)                | -                            | -                   | -                           | -                  | -              | -                 | -            |
| AHCI(*1)                    | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| Intel Onboard(*1)           | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| VMD for ESXi(*1)            | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |
| NVMe                        | -                                | -                | -                | -                     | -                 | -                      | -                            | -                   | -                           | -                  | -              | -                 | -            |

| Category                    | Auto Flush Interval | Alarm present | SMART Support | SMART Polling Interval | Copyback | Copyback On SMART Error Support | Copyback On SSD SMART Error Support | Auto Rebuild | BGI Rate | MDC Rate | MDC Schedule Mode | MDC Abort On Error | Rebuild Rate |
|-----------------------------|---------------------|---------------|---------------|------------------------|----------|---------------------------------|-------------------------------------|--------------|----------|----------|-------------------|--------------------|--------------|
| Broadcom Lynx4 SAS RAID(*1) | -                   | R             | R             | -                      | -        | -                               | -                                   | RW           | -        | -        | -                 | -                  | -            |
| Broadcom Lynx4 SAS(*1)      | -                   | R             | R             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Broadcom Lynx4 SAS Array    | -                   | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Cougar4 SAS Array  | RW                  | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Lynx5 SAS(*1)      | -                   | R             | R             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Broadcom Lynx5 SAS Array    | -                   | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Cougar5 SAS Array  | RW                  | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Lynx6 SAS(*1)      | -                   | R             | R             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Broadcom Lynx6 SAS Array    | -                   | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Cougar6 SAS Array  | RW                  | R             | R             | RW                     | RW       | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | RW           |
| Broadcom Lynx7 SAS          | -                   | -             | -             | R                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Broadcom Lynx7 SAS Array    | -                   | -             | -             | R                      | -        | -                               | -                                   | RW           | RW       | RW       | RW                | RW                 | -            |
| Broadcom Cougar7 SAS Array  | -                   | -             | -             | R                      | R        | RW                              | RW                                  | RW           | RW       | RW       | RW                | RW                 | -            |
| Marvel SAS Array            | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Microchip SmarHBA           | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Microchip SmartRAID         | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Broadcom Onboard(*1)        | -                   | -             | -             | -                      | -        | -                               | -                                   | RW           | RW       | -        | -                 | -                  | RW           |
| AHCI(*1)                    | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| Intel Onboard(*1)           | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| VMD for ESXi(*1)            | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |
| NVMe                        | -                   | -             | -             | -                      | -        | -                               | -                                   | -            | -        | -        | -                 | -                  | -            |

| Category                    | Migration Rate | Coercion mode | NCQ Support | NVRAM Size | Memory Size | FlashROM Size | Correctable Errors | Uncorrectable Errors | Rebuild Priority | Surface Analysis Priority | Expand Priority | Parallel Surface Scan Current Count | Internal Connector Count |
|-----------------------------|----------------|---------------|-------------|------------|-------------|---------------|--------------------|----------------------|------------------|---------------------------|-----------------|-------------------------------------|--------------------------|
| Broadcom Lynx4 SAS RAID(*1) | -              | RW            | -           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx4 SAS(*1)      | -              | -             | -           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx4 SAS Array    | RW             | RW            | R           | R          | -           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Cougar4 SAS Array  | RW             | RW            | R           | R          | R           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx5 SAS(*1)      | -              | -             | -           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx5 SAS Array    | RW             | RW            | R           | R          | -           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Cougar5 SAS Array  | RW             | RW            | R           | R          | R           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx6 SAS(*1)      | -              | -             | -           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx6 SAS Array    | RW             | RW            | R           | R          | -           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Cougar6 SAS Array  | RW             | RW            | R           | R          | R           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx7 SAS          | -              | -             | -           | R          | -           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Lynx7 SAS Array    | -              | RW            | R           | R          | -           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Broadcom Cougar7 SAS Array  | -              | RW            | R           | R          | R           | R             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Marvel SAS Array            | -              | -             | -           | -          | -           | -             | -                  | -                    | -                | -                         | -               | -                                   | -                        |
| Microchip SmartHBA          | -              | -             | -           | -          | R           | -             | -                  | -                    | RW               | RW                        | RW              | RW                                  | R                        |
| Microchip SmartRAID         | -              | -             | -           | -          | R           | -             | -                  | -                    | RW               | RW                        | RW              | RW                                  | R                        |
| Broadcom Onboard(*1)        | -              | RW            | R           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| AHCI(*1)                    | -              | -             | -           | -          | -           | -             | R                  | R                    | -                | -                         | -               | -                                   | -                        |
| Intel Onboard(*1)           | -              | -             | -           | -          | -           | -             | -                  | -                    | -                | -                         | -               | -                                   | -                        |
| VMD for ESXi(*1)            | -              | -             | -           | -          | -           | -             | -                  | -                    | -                | -                         | -               | -                                   | -                        |
| NVMe                        | -              | -             | -           | -          | -           | -             | -                  | -                    | -                | -                         | -               | -                                   | -                        |



| Category                       | External<br>Connector<br>Count | Drive Write<br>Cache -<br>Configured | Drive Write<br>Cache -<br>Unconfigured | Drive Write<br>Cache - HBA | Connector<br>Type | SAS Address | Connector<br>Number | Entity<br>Instance |
|--------------------------------|--------------------------------|--------------------------------------|----------------------------------------|----------------------------|-------------------|-------------|---------------------|--------------------|
| Broadcom Lynx4 SAS<br>RAID(*1) | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx4 SAS(*1)         | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx4 SAS Array       | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Cougar4 SAS<br>Array  | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx5 SAS(*1)         | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx5 SAS Array       | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Cougar5 SAS<br>Array  | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx6 SAS(*1)         | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx6 SAS Array       | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Cougar6 SAS<br>Array  | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx7 SAS             | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Lynx7 SAS Array       | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Broadcom Cougar7 SAS<br>Array  | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Marvel SAS Array               | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Microchip SmartHBA             | R                              | RW                                   | RW                                     | RW                         | R                 | R           | R                   | -                  |
| Microchip SmartRAID            | R                              | RW                                   | RW                                     | RW                         | R                 | R           | R                   | -                  |
| Broadcom Onboard(*1)           | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| AHCI(*1)                       | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| Intel Onboard(*1)              | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| VMD for ESXi(*1)               | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | -                  |
| NVMe                           | -                              | -                                    | -                                      | -                          | -                 | -           | -                   | R                  |

5.2.2 Supported properties for FBU

Here are remarks of a table below.  
(\*1)Available only SVS is installed

| Category                    | Status | Device Name | Vendor | Model | Manufacturing Date | Serial Number | Auto Learn Mode | Next Learn Time | Auto Learn Period | Temperature | Design Capacity | Remaining Capacity | Capacitance Percent |
|-----------------------------|--------|-------------|--------|-------|--------------------|---------------|-----------------|-----------------|-------------------|-------------|-----------------|--------------------|---------------------|
| Broadcom Lynx4 SAS RAID(*1) | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Lynx4 SAS(*1)      | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Lynx4 SAS Array    | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Cougar4 SAS Array  | R      | R           | R      | R     | R                  | R             | R               | R               | R                 | R           | R               | R                  | R                   |
| Broadcom Lynx5 SAS(*1)      | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Lynx5 SAS Array    | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Cougar5 SAS Array  | R      | R           | R      | R     | R                  | R             | R               | R               | R                 | R           | R               | R                  | R                   |
| Broadcom Lynx6 SAS(*1)      | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Lynx6 SAS Array    | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Cougar6 SAS Array  | R      | R           | R      | R     | R                  | R             | R               | R               | R                 | R           | R               | R                  | R                   |
| Broadcom Lynx7 SAS          | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Lynx7 SAS Array    | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Broadcom Cougar7 SAS Array  | R      | R           | R      | R     | R                  | R             | R               | R               | R                 | R           | R               | R                  | R                   |
| Marvel SAS Array            | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Microchip SmartHBA          | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Microchip SmartRAID         | R      | R           | -      | -     | -                  | -             | -               | -               | -                 | R           | -               | -                  | -                   |
| Broadcom Onboard(*1)        | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| AHCI(*1)                    | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| Intel Onboard(*1)           | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| VMD for ESXi(*1)            | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |
| NVMe                        | -      | -           | -      | -     | -                  | -             | -               | -               | -                 | -           | -               | -                  | -                   |



5.2.3 Supported properties for Enclosure

Here are remarks of a table below.  
(\*1) Available only SVS is installed

| Category                    | Status | Enclosure Number | Chain | Vendor | Product | Hardware Version | Logical ID | Temperature |
|-----------------------------|--------|------------------|-------|--------|---------|------------------|------------|-------------|
| Broadcom Lynx4 SAS RAID(*1) | -      | -                | -     | -      | -       | -                | -          | -           |
| Broadcom Lynx4 SAS(*1)      | R      | R                | -     | R      | R       | R                | R          | R           |
| Broadcom Lynx4 SAS Array    | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Cougar4 SAS Array  | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Lynx5 SAS(*1)      | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Lynx5 SAS Array    | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Cougar5 SAS Array  | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Lynx6 SAS(*1)      | R      | R                | -     | R      | R       | -                | -          | -           |
| Broadcom Lynx6 SAS Array    | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Cougar6 SAS Array  | R      | R                | R     | R      | R       | R                | R          | R           |
| Broadcom Lynx7 SAS          | R      | R                | R     | R      | R       | -                | R          | R           |
| Broadcom Lynx7 SAS Array    | R      | R                | R     | R      | R       | -                | R          | R           |
| Broadcom Cougar7 SAS Array  | R      | R                | R     | R      | R       | -                | R          | R           |
| Marvel SAS Array            | -      | -                | -     | -      | -       | -                | -          | -           |
| Microchip SmartHBA          | R      | R                | -     | -      | R       | R                | -          | R           |
| Microchip SmartRAID         | R      | R                | -     | -      | R       | R                | -          | R           |
| Broadcom Onboard(*1)        | -      | -                | -     | -      | -       | -                | -          | -           |
| AHCI(*1)                    | -      | -                | -     | -      | -       | -                | -          | -           |
| Intel Onboard(*1)           | -      | -                | -     | -      | -       | -                | -          | -           |
| VMD for ESXi(*1)            | -      | -                | -     | -      | -       | -                | -          | -           |
| NVMe                        | -      | -                | -     | -      | -       | -                | -          | -           |

5.2.4 Supported properties for Physical drive

Here are remarks of a table below.

(\*1) Available only SVS is installed

(\*2) For HDD only

(\*3) For SSD only

(\*4) For LTO tape only

(\*5) supoprted only for expander configuration

(\*6) Only if Foreign configuration is "No"

| Category                    | Status | Enclosure | Port | Slot | Device<br>Number | Interface<br>Type | Type | Product | Physical Size | Foreign<br>Configuration | Max Device<br>Speed | Serial<br>Number | Firmware<br>Version |
|-----------------------------|--------|-----------|------|------|------------------|-------------------|------|---------|---------------|--------------------------|---------------------|------------------|---------------------|
| Broadcom Lynx4 SAS RAID(*1) | R      | -         | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx4 SAS(*1)      | R      | R         | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx4 SAS Array    | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Cougar4 SAS Array  | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx5 SAS(*1)      | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx5 SAS Array    | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Cougar5 SAS Array  | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx6 SAS(*1)      | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx6 SAS Array    | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Cougar6 SAS Array  | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Lynx7 SAS          | R      | R(*5)     | R    | R    | R                | R                 | R    | R (*1)  | R (*1)        | R                        | R                   | R                | R                   |
| Broadcom Lynx7 SAS Array    | R      | R(*5)     | R    | R    | R                | R                 | R    | R (*1)  | R (*1)        | R                        | R                   | R                | R                   |
| Broadcom Cougar7 SAS Array  | R      | R(*5)     | R    | R    | R                | R                 | R    | R (*1)  | R (*1)        | R                        | R                   | R                | R                   |
| Marvel SAS Array            | R      | -         | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Microchip SmartHBA          | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Microchip SmartRAID         | R      | R(*5)     | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| Broadcom Onboard(*1)        | R      | -         | R    | R    | R                | R                 | R    | R       | R             | R                        | R                   | R                | R                   |
| AHCI(*1)                    | R      | -         | -    | -    | R                | R                 | R    | R       | R             | R                        | -                   | R                | R                   |
| Intel Onboard(*1)           | R      | -         | R    | R    | R                | R                 | R    | R       | R             | R                        | -                   | R                | R                   |
| VMD for ESXi(*1)            | R      | -         | -    | R    | R                | R                 | R    | R       | R             | R                        | -                   | R                | R                   |
| NVMe                        | R      | -         | -    | R    | R                | R                 | R    | R (*1)  | R (*1)        | R                        | -                   | R                | -                   |

| Category                    | Rotational Speed(*2) | Temperature [°C] | Miscellaneous errors | S.M.A.R.T. Errors | Media Errors | Predicted Life Left(*3) | Estimated Life Time(*3) | SAS Address | Power Status | Transfer Width | Configurable Size | Name | Activity |
|-----------------------------|----------------------|------------------|----------------------|-------------------|--------------|-------------------------|-------------------------|-------------|--------------|----------------|-------------------|------|----------|
| Broadcom Lynx4 SAS RAID(*1) | R                    | R                | -                    | R                 | -            | R                       | R                       | R           | -            | R              | R                 | R    | R        |
| Broadcom Lynx4 SAS(*1)      | R                    | R                | -                    | R                 | -            | R                       | R                       | R           | -            | R              | R                 | R    | -        |
| Broadcom Lynx4 SAS Array    | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Cougar4 SAS Array  | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Lynx5 SAS(*1)      | R                    | R                | -                    | R                 | -            | R                       | R                       | R           | -            | R              | R                 | R    | -        |
| Broadcom Lynx5 SAS Array    | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Cougar5 SAS Array  | R                    | R(*6)            | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Lynx6 SAS(*1)      | R                    | R                | -                    | R                 | -            | R                       | R                       | R           | -            | R              | R                 | R    | -        |
| Broadcom Lynx6 SAS Array    | R                    | R                | R                    | R                 | R            | -                       | -                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Cougar6 SAS Array  | R                    | R(*6)            | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Lynx7 SAS          | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Lynx7 SAS Array    | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Broadcom Cougar7 SAS Array  | R                    | R                | R                    | R                 | R            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| Marvel SAS Array            | -                    | R                | -                    | -                 | -            | R                       | R                       | -           | -            | -              | -                 | R    | R        |
| Microchip SmartHBA          | R                    | R                | -                    | -                 | -            | R                       | R                       | R           | -            | -              | R                 | R    | R        |
| Microchip SmartRAID         | R                    | R                | -                    | -                 | -            | R                       | R                       | R           | -            | -              | R                 | R    | R        |
| Broadcom Onboard(*1)        | -                    | R                | R                    | R                 | R            | R                       | R                       | -           | -            | R              | R                 | R    | R        |
| AHCI(*1)                    | -                    | R                | -                    | -                 | -            | -                       | -                       | -           | -            | -              | R                 | R    | -        |
| Intel Onboard(*1)           | -                    | -                | -                    | -                 | -            | R                       | R                       | R           | R            | R              | R                 | R    | R        |
| VMD for ESXi(*1)            | -                    | R                | -                    | -                 | -            | R                       | -                       | -           | -            | -              | R                 | R    | R        |
| NVMe                        | -                    | R                | -                    | -                 | -            | R                       | -                       | -           | -            | -              | -                 | -    | -        |

| Category                    | VROC Usage | Socket Number | VMD Number | DeviceType | Location | ID |
|-----------------------------|------------|---------------|------------|------------|----------|----|
| Broadcom Lynx4 SAS RAID(*1) | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx4 SAS(*1)      | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx4 SAS Array    | R          | -             | -          | -          | -        | RW |
| Broadcom Cougar4 SAS Array  | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx5 SAS(*1)      | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx5 SAS Array    | R          | -             | -          | -          | -        | RW |
| Broadcom Cougar5 SAS Array  | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx6 SAS(*1)      | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx6 SAS Array    | R          | -             | -          | -          | -        | RW |
| Broadcom Cougar6 SAS Array  | R          | -             | -          | -          | -        | RW |
| Broadcom Lynx7 SAS          | -          | -             | -          | -          | -        | RW |
| Broadcom Lynx7 SAS Array    | -          | -             | -          | -          | -        | RW |
| Broadcom Cougar7 SAS Array  | -          | -             | -          | -          | -        | RW |
| Marvel SAS Array            | R          | -             | -          | -          | -        | -  |
| Microchip SmartHBA          | R          | -             | -          | R(*4)      | -        | RW |
| Microchip SmartRAID         | R          | -             | -          | R(*4)      | -        | RW |
| Broadcom Onboard(*1)        | R          | -             | -          | -          | -        | RW |
| AHCI(*1)                    | R          | -             | -          | -          | -        | -  |
| Intel Onboard(*1)           | R          | -             | -          | R          | -        | RW |
| VMD for ESXi(*1)            | R          | R             | R          | R          | R        | RW |
| NVMe                        | R          | -             | -          | -          | R        | RW |

5.2.5 Supported properties for Logical drive

Here are remarks of a table below.  
(\*1) Available only SVS is installed  
(\*2) Supported from 3.46P

| Category                    | Status | Drive | Name       | Logical Size | RAID Type | Device Name | Stripe Size | Access Mode | Emulation Type | Default Read Mode | Read Mode | Default Write Mode | Write Mode |
|-----------------------------|--------|-------|------------|--------------|-----------|-------------|-------------|-------------|----------------|-------------------|-----------|--------------------|------------|
| Broadcom Lynx4 SAS RAID(*1) | R      | R     | RW         | R            | R         | R           | R           | -           | -              | -                 | R         | -                  | R          |
| Broadcom Lynx4 SAS(*1)      | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |
| Broadcom Lynx4 SAS Array    | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | -                 | R         | -                  | R          |
| Broadcom Cougar4 SAS Array  | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | RW                | R         | RW                 | R          |
| Broadcom Lynx5 SAS(*1)      | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |
| Broadcom Lynx5 SAS Array    | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | -                 | R         | -                  | R          |
| Broadcom Cougar5 SAS Array  | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | RW                | R         | RW                 | R          |
| Broadcom Lynx6 SAS(*1)      | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |
| Broadcom Lynx6 SAS Array    | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | -                 | R         | -                  | R          |
| Broadcom Cougar6 SAS Array  | R      | R     | RW         | R            | R         | -           | R           | RW          | RW             | RW                | R         | RW                 | R          |
| Broadcom Lynx7 SAS          | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |
| Broadcom Lynx7 SAS Array    | R      | R     | R          | R            | R         | -           | R           | R           | -              | -                 | R         | -                  | R          |
| Broadcom Cougar7 SAS Array  | R      | R     | R          | R            | R         | -           | R           | R           | -              | RW                | R         | RW                 | R          |
| Marvel SAS Array            | R      | R     | RW(*1)(*2) | R            | R         | -           | R           | -           | -              | -                 | -         | -                  | -          |
| Microchip SmartHBA          | R      | R     | RW         | R            | R         | -           | R           | -           | -              | -                 | -         | -                  | -          |
| Microchip SmartRAID         | R      | R     | RW         | R            | R         | -           | R           | -           | -              | -                 | -         | -                  | -          |
| Broadcom Onboard(*1)        | R      | R     | RW         | R            | R         | R           | R           | RW          | -              | -                 | R         | -                  | -          |
| AHCI(*1)                    | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |
| Intel Onboard(*1)           | R      | R     | R          | R            | R         | R           | R           | -           | -              | -                 | -         | -                  | -          |
| VMD for ESXi(*1)            | R      | R     | RW         | R            | R         | R           | R           | -           | -              | -                 | -         | -                  | -          |
| NVMe                        | -      | -     | -          | -            | -         | -           | -           | -           | -              | -                 | -         | -                  | -          |

| Category                       | Default<br>Cache Mode | Cache Mode | Disk Cache<br>Mode | Back Ground<br>TaskSpeed | Preserved<br>Cache | Initialized | Activity | VROC Array<br>Name | Array Toral<br>Size | Array Free<br>Size | Verification<br>Errors | Media Errors<br>Blocks | ID |
|--------------------------------|-----------------------|------------|--------------------|--------------------------|--------------------|-------------|----------|--------------------|---------------------|--------------------|------------------------|------------------------|----|
| Broadcom Lynx4 SAS<br>RAID(*1) | R                     | R          | RW                 | -                        | -                  | -           | R        | -                  | -                   | -                  | -                      | -                      | -  |
| Broadcom Lynx4 SAS(*1)         | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |
| Broadcom Lynx4 SAS Array       | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Cougar4 SAS<br>Array  | RW                    | R          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Lynx5 SAS(*1)         | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |
| Broadcom Lynx5 SAS Array       | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Cougar5 SAS<br>Array  | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Lynx6 SAS(*1)         | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |
| Broadcom Lynx6 SAS Array       | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Cougar6 SAS<br>Array  | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Lynx7 SAS             | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |
| Broadcom Lynx7 SAS Array       | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Broadcom Cougar7 SAS<br>Array  | -                     | -          | RW                 | -                        | R                  | R           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| Marvel SAS Array               | -                     | -          | -                  | -                        | -                  | -           | R        | -                  | -                   | -                  | -                      | -                      | -  |
| Microchip SmarHBA              | -                     | -          | -                  | -                        | -                  | -           | R        | -                  | R                   | R                  | -                      | -                      | -  |
| Microchip SmartRAID            | -                     | -          | -                  | -                        | -                  | -           | R        | -                  | R                   | R                  | -                      | -                      | -  |
| Broadcom Onboard(*1)           | -                     | -          | RW                 | -                        | -                  | -           | R        | -                  | -                   | -                  | -                      | -                      | RW |
| AHCI(*1)                       | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |
| Intel Onboard(*1)              | -                     | -          | RW                 | RW                       | -                  | R           | R        | R                  | R                   | R                  | R                      | R                      | -  |
| VMD for ESXi(*1)               | -                     | -          | -                  | -                        | -                  | R           | R        | R                  | -                   | -                  | -                      | -                      | -  |
| NVMe                           | -                     | -          | -                  | -                        | -                  | -           | -        | -                  | -                   | -                  | -                      | -                      | -  |



### 5.3 Supported operations

This section describes about supported operations for each storage controller category.  
“X” means supported.  
“-” means not supported.

#### 5.3.1 Supported operations for Storage controller

Here are remarks of a table below.  
(\*1) Available only SVS is installed  
(\*2) Need Host OS. ( This card use Host OS memory)  
(\*3) Supported from 3.46P

| Category                    | Create Volume | Delete Volume | Start Patrol Read | Cancel Patrol Read | Import Foreign Config | Clear Foreign Config | Clear Config | Manage Schedule (StartMDC) | Manage Schedule (Start Patrol Read) | Reload |
|-----------------------------|---------------|---------------|-------------------|--------------------|-----------------------|----------------------|--------------|----------------------------|-------------------------------------|--------|
| Broadcom Lynx4 SAS RAID(*1) | X             | X             | -                 | -                  | -                     | X                    | X            | X                          | -                                   | X      |
| Broadcom Lynx4 SAS(*1)      | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Broadcom Lynx4 SAS Array    | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Cougar4 SAS Array  | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Lynx5 SAS(*1)      | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Broadcom Lynx5 SAS Array    | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Cougar5 SAS Array  | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Lynx6 SAS(*1)      | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Broadcom Lynx6 SAS Array    | X             | X             | X                 | X                  | X                     | X                    | X            | X(*2)                      | X                                   | X      |
| Broadcom Cougar6 SAS Array  | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Lynx7 SAS          | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Broadcom Lynx7 SAS Array    | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Broadcom Cougar7 SAS Array  | X             | X             | X                 | X                  | X                     | X                    | X            | X                          | X                                   | X      |
| Marvel SAS Array            | X             | X             | -                 | -                  | -                     | -                    | -            | X(*1)(*3)                  | -                                   | X      |
| Microchip SmartHBA          | X             | X             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Microchip SmartRAID         | X             | X             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Broadcom Onboard(*1)        | X             | X             | -                 | -                  | -                     | X                    | X            | X                          | -                                   | X      |
| AHCI(*1)                    | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |
| Intel Onboard(*1)           | X             | X             | -                 | -                  | -                     | -                    | -            | X                          | -                                   | X      |
| VMD for ESXi(*1)            | X             | X             | -                 | -                  | -                     | -                    | -            | X                          | -                                   | X      |
| NVMe                        | -             | -             | -                 | -                  | -                     | -                    | -            | -                          | -                                   | X      |

5.3.2 Supported operations for Physical drive

Here are remarks of a table below.  
(\*1) Available only SVS is installed  
(\*2) For windows only  
(\*3) For Linux only  
(\*4) Need Host OS. (This card use Host OS memory)

| Category                    | Start Rebuild | Cancel Rebuild | Suspend Rebuild | Resume Rebuild | Start Copyback | Cancel Copyback | Suspend Copyback | Resume Copyback | Create global hotspare | Create dedicated hotspare | Create auto replace hotspare | Delete Hotspare | Set status - online |
|-----------------------------|---------------|----------------|-----------------|----------------|----------------|-----------------|------------------|-----------------|------------------------|---------------------------|------------------------------|-----------------|---------------------|
| Broadcom Lynx4 SAS RAID(*1) | X             | -              | -               | -              | -              | -               | -                | -               | X                      | -                         | -                            | X               | -                   |
| Broadcom Lynx4 SAS(*1)      | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Broadcom Lynx4 SAS Array    | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Broadcom Cougar4 SAS Array  | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Broadcom Lynx5 SAS(*1)      | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Broadcom Lynx5 SAS Array    | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Broadcom Cougar5 SAS Array  | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Broadcom Lynx6 SAS(*1)      | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Broadcom Lynx6 SAS Array    | X(*4)         | X(*4)          | X(*4)           | X(*4)          | X(*4)          | X(*4)           | X(*4)            | X(*4)           | X                      | X                         | -                            | X               | X                   |
| Broadcom Cougar6 SAS Array  | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Broadcom Lynx7 SAS          | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Broadcom Lynx7 SAS Array    | X             | X              | X               | X              | -              | -               | -                | -               | X                      | -                         | -                            | X               | X                   |
| Broadcom Cougar7 SAS Array  | X             | X              | X               | X              | X              | X               | X                | X               | X                      | X                         | -                            | X               | X                   |
| Marvel SAS Array            | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Microchip SmartHBA          | -             | -              | -               | -              | -              | -               | -                | -               | -                      | X                         | X                            | X               | -                   |
| Microchip SmartRAID         | -             | -              | -               | -              | -              | -               | -                | -               | -                      | X                         | X                            | X               | -                   |
| Broadcom Onboard(*1)        | X             | -              | -               | -              | -              | -               | -                | -               | X                      | -                         | -                            | X               | -                   |
| AHCI(*1)                    | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |
| Intel Onboard(*1)           | -             | -              | -               | -              | -              | -               | -                | -               | X(*2)                  | X(*3)                     | -                            | X               | -                   |
| VMD for ESXi(*1)            | -             | -              | -               | -              | -              | -               | -                | -               | X                      | X                         | -                            | X               | -                   |
| NVMe                        | -             | -              | -               | -              | -              | -               | -                | -               | -                      | -                         | -                            | -               | -                   |



| Category                    | Set status - offline | Set status - ready | Set status - missing | Make Force offline | Replace missing drive | Clear CCM |
|-----------------------------|----------------------|--------------------|----------------------|--------------------|-----------------------|-----------|
| Broadcom Lynx4 SAS RAID(*1) | X                    | -                  | -                    | -                  | -                     | -         |
| Broadcom Lynx4 SAS(*1)      | -                    | -                  | -                    | -                  | -                     | -         |
| Broadcom Lynx4 SAS Array    | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Cougar4 SAS Array  | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Lynx5 SAS(*1)      | -                    | -                  | -                    | -                  | -                     | -         |
| Broadcom Lynx5 SAS Array    | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Cougar5 SAS Array  | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Lynx6 SAS(*1)      | -                    | -                  | -                    | -                  | -                     | -         |
| Broadcom Lynx6 SAS Array    | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Cougar6 SAS Array  | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Lynx7 SAS          | -                    | -                  | -                    | -                  | -                     | -         |
| Broadcom Lynx7 SAS Array    | X                    | X                  | X                    | -                  | X                     | -         |
| Broadcom Cougar7 SAS Array  | X                    | X                  | X                    | -                  | X                     | -         |
| Marvel SAS Array            | -                    | -                  | -                    | -                  | -                     | -         |
| Microchip SmartHBA          | -                    | -                  | -                    | X                  | -                     | X         |
| Microchip SmartRAID         | -                    | -                  | -                    | X                  | -                     | X         |
| Broadcom Onboard(*1)        | X                    | -                  | -                    | -                  | -                     | -         |
| AHCI(*1)                    | -                    | -                  | -                    | -                  | -                     | -         |
| Intel Onboard(*1)           | -                    | -                  | -                    | -                  | -                     | X         |
| VMD for ESXi(*1)            | -                    | -                  | -                    | -                  | -                     | -         |
| NVMe                        | -                    | -                  | -                    | -                  | -                     | -         |

5.3.3 Supported operations for Logical drive

Here are remarks of a table below.

- (\*1) Available only SVS is installed
- (\*2) For windows only
- (\*3) Supported from 3.49P
- (\*4) Need Host OS.(This card use Host OS memory)
- (\*5) Supported from 3.46P

| Category                    | Start Rebuild | Cancel Rebuild | Suspend Rebuild | Resume Rebuild | Start MDC | Cancel MDC | Suspend MDC | Resume MDC | Migrate | OCE   | Start Initialize | Cancel Initialize | Start BGI |
|-----------------------------|---------------|----------------|-----------------|----------------|-----------|------------|-------------|------------|---------|-------|------------------|-------------------|-----------|
| Broadcom Lynx4 SAS RAID(*1) | X             | -              | -               | -              | X         | X          | -           | -          | -       | -     | -                | -                 | -         |
| Broadcom Lynx4 SAS(*1)      | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |
| Broadcom Lynx4 SAS Array    | X             | X              | -               | -              | X         | X          | X           | X          | X       | X     | X                | X                 | -         |
| Broadcom Cougar4 SAS Array  | X             | X              | -               | -              | X         | X          | X           | X          | X       | X     | X                | X                 | -         |
| Broadcom Lynx5 SAS(*1)      | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |
| Broadcom Lynx5 SAS Array    | X             | X              | -               | -              | X         | X          | X           | X          | X       | X     | X                | X                 | -         |
| Broadcom Cougar5 SAS Array  | X             | X              | -               | -              | X         | X          | X           | X          | X       | X     | X                | X                 | -         |
| Broadcom Lynx6 SAS(*1)      | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |
| Broadcom Lynx6 SAS Array    | X(*4)         | X(*4)          | -               | -              | X(*4)     | X(*4)      | X(*4)       | X(*4)      | X       | X(*4) | X                | X                 | -         |
| Broadcom Cougar6 SAS Array  | X             | X              | -               | -              | X         | X          | X           | X          | X       | X     | X                | X                 | -         |
| Broadcom Lynx7 SAS          | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |
| Broadcom Lynx7 SAS Array    | X             | X              | -               | -              | X         | X          | X           | X          | -       | -     | X                | X                 | -         |
| Broadcom Cougar7 SAS Array  | X             | X              | -               | -              | X         | X          | X           | X          | -       | X     | X                | X                 | -         |
| Marvel SAS Array            | X(*1)(*5)     | X(*1)(*5)      | X(*1)(*5)       | X(*1)(*5)      | X(*1)     | X(*1)      | X(*1)       | X(*1)      | -       | -     | -                | -                 | -         |
| Microchip SmartHBA          | -             | -              | -               | -              | -         | -          | -           | -          | X(*3)   | X(*3) | -                | -                 | -         |
| Microchip SmartRAID         | -             | -              | -               | -              | -         | -          | -           | -          | X(*3)   | X(*3) | -                | -                 | -         |
| Broadcom Onboard(*1)        | X             | -              | -               | -              | X         | X          | -           | -          | -       | -     | -                | -                 | -         |
| AHCI(*1)                    | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |
| Intel Onboard(*1)           | X(*2)         | -              | -               | -              | X         | X          | -           | -          | -       | X     | -                | -                 | X(*2)     |
| VMD for ESXi(*1)            | X             | -              | -               | -              | X         | X          | -           | -          | -       | X     | -                | -                 | X         |
| NVMe                        | -             | -              | -               | -              | -         | -          | -           | -          | -       | -     | -                | -                 | -         |

| Category                    | Cancel BGI | Suspend BGI | Resume BGI | Heal Array | Manage Schedule(Start MDC) |
|-----------------------------|------------|-------------|------------|------------|----------------------------|
| Broadcom Lynx4 SAS RAID(*1) | -          | -           | -          | -          | X                          |
| Broadcom Lynx4 SAS(*1)      | -          | -           | -          | -          | -                          |
| Broadcom Lynx4 SAS Array    | X          | X           | X          | -          | X                          |
| Broadcom Cougar4 SAS Array  | X          | X           | X          | -          | X                          |
| Broadcom Lynx5 SAS(*1)      | -          | -           | -          | -          | -                          |
| Broadcom Lynx5 SAS Array    | X          | X           | X          | -          | X                          |
| Broadcom Cougar5 SAS Array  | X          | X           | X          | -          | X                          |
| Broadcom Lynx6 SAS(*1)      | -          | -           | -          | -          | -                          |
| Broadcom Lynx6 SAS Array    | X(*4)      | X(*4)       | X(*4)      | -          | X                          |
| Broadcom Cougar6 SAS Array  | X          | X           | X          | -          | X                          |
| Broadcom Lynx7 SAS          | -          | -           | -          | -          | -                          |
| Broadcom Lynx7 SAS Array    | X          | X           | X          | -          | X                          |
| Broadcom Cougar7 SAS Array  | X          | X           | X          | -          | X                          |
| Marvel SAS Array            | -          | -           | -          | -          | X(*1)                      |
| Microchip SmarHBA           | -          | -           | -          | X          | -                          |
| Microchip SmartRAID         | -          | -           | -          | X          | -                          |
| Broadcom Onboard(*1)        | -          | -           | -          | -          | X                          |
| AHCI(*1)                    | -          | -           | -          | -          | -                          |
| Intel Onboard(*1)           | -          | -           | -          | -          | X                          |
| VMD for ESXi(*1)            | -          | -           | -          | -          | X                          |
| NVMe                        | -          | -           | -          | -          | -                          |

5.4 Restrictions

5.4.1 Backup and Restore RAID Properties Setting

This functionality is currently supported only for following storage controllers

| Product name              | Vendor<br>Type Name |                                                                                                                                                                                                                            |
|---------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SAS Array Controller card | PRAID CP400i        | PY-SR3FA, PYBSR3FA<br>S26361-F3842-L501, S26361-F3842-E1                                                                                                                                                                   |
| SAS Array Controller card | PRAID EP400i        | PY-SR3C41H, PYBSR3C41H<br>S26361-F5243-L11, S26361-F5243-E11                                                                                                                                                               |
| SAS Array Controller card | PRAID EP420i        | PY-SR3C42H, PYBSR3C42H<br>PY-SR3C43H, PYBSR3C43H<br>S26361-F5243-L12, S26361-F5243-E12<br>S26361-F5243-L14, S26361-F5243-E14                                                                                               |
| SAS Array Controller card | PRAID CP500i        | PY-SR3FB2, PYBSR3FB2, PYBSR3FB2L<br>PY-SR3FB, PYBSR3FB, PYBSR3FBL<br>S26361-F5791-L551, S26361-F5791-E51, S26361-F5791-E251<br>S26361-F5791-L501, S26361-F5791-E1, S26361-F5791-E201                                       |
| SAS Array Controller card | PRAID CM500i        | PY-SR3G1, PYBSR3G1<br>S26361-F5839-L290, S26361-F5839-E290                                                                                                                                                                 |
| SAS Array Controller card | PRAID EP520i        | PY-SR3C52, PYBSR3C52, PYBSR3C52L<br>S26361-F4042-L502, S26361-F4042-E2, S26361-F4042-E202                                                                                                                                  |
| SAS Array Controller card | PRAID EP540i        | PY-SR3C54, PYBSR3C54, PYBSR3C54L<br>PY-SR3C55, PYBSR3C55L<br>PYBSR3C56, PYBSR3C56L<br>S26361-F4042-L504, S26361-F4042-E4, S26361-F4042-E204<br>S26361-F4042-L514, S26361-F4042-E214<br>S26361-F4042-E24, S26361-F4042-E224 |
| SAS Array Controller card | PRAID EP540e        | PY-SR3C5E, PYBSR3C5E, PYBSR3C5EL<br>S26361-F4063-L504, S26361-F4063-E4, S26361-F4063-E204                                                                                                                                  |
| SAS Array Controller card | PRAID EP580i        | PY-SR3C58, PYBSR3C58, PYBSR3C58L<br>PYBSR3C59, PYBSR3C59L<br>S26361-F4042-L508, S26361-F4042-E8, S26361-F4042-E208<br>S26361-F4042-E28, S26361-F4042-E228                                                                  |
| SAS Array Controller card | PRAID EP640i        | PY-SR4C63, PYBSR4C63, PYBSR4C63L                                                                                                                                                                                           |
| SAS Array Controller card | PRAID EP680i        | PY-SR4C6, PYBSR4C6, PYBSR4C6L<br>PY-SR4C65, PYBSR4C65L<br>PYBSR4C62L, PYBSR4C66L<br>S26361-F5795-L504, S26361-F5795-E204<br>S26361-F5790-L518, S26361-F5790-E218<br>S26361-F5790-E228, S26361-F5790-E238                   |
| SAS Array Controller card | PRAID EP680e        | PY-SR4C6F, PYBSR4C6F, PYBSR4C6FL<br>PY-SR4C6E, PYBSR4C6E, PYBSR4C6EL                                                                                                                                                       |

| Product name              | Vendor       |                                                       |
|---------------------------|--------------|-------------------------------------------------------|
|                           | Type Name    |                                                       |
|                           |              | S26361-F5794-L508, S26361-F5794-E8, S26361-F5794-E201 |
| SAS Array Controller card | PRAID CP600i | PY-SR4FA,PYBSR4FA,PYBSR4FAL                           |