
NUDTEE

UML SEQUENCE DIAGRAMS

FR-1 — Create a Session


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

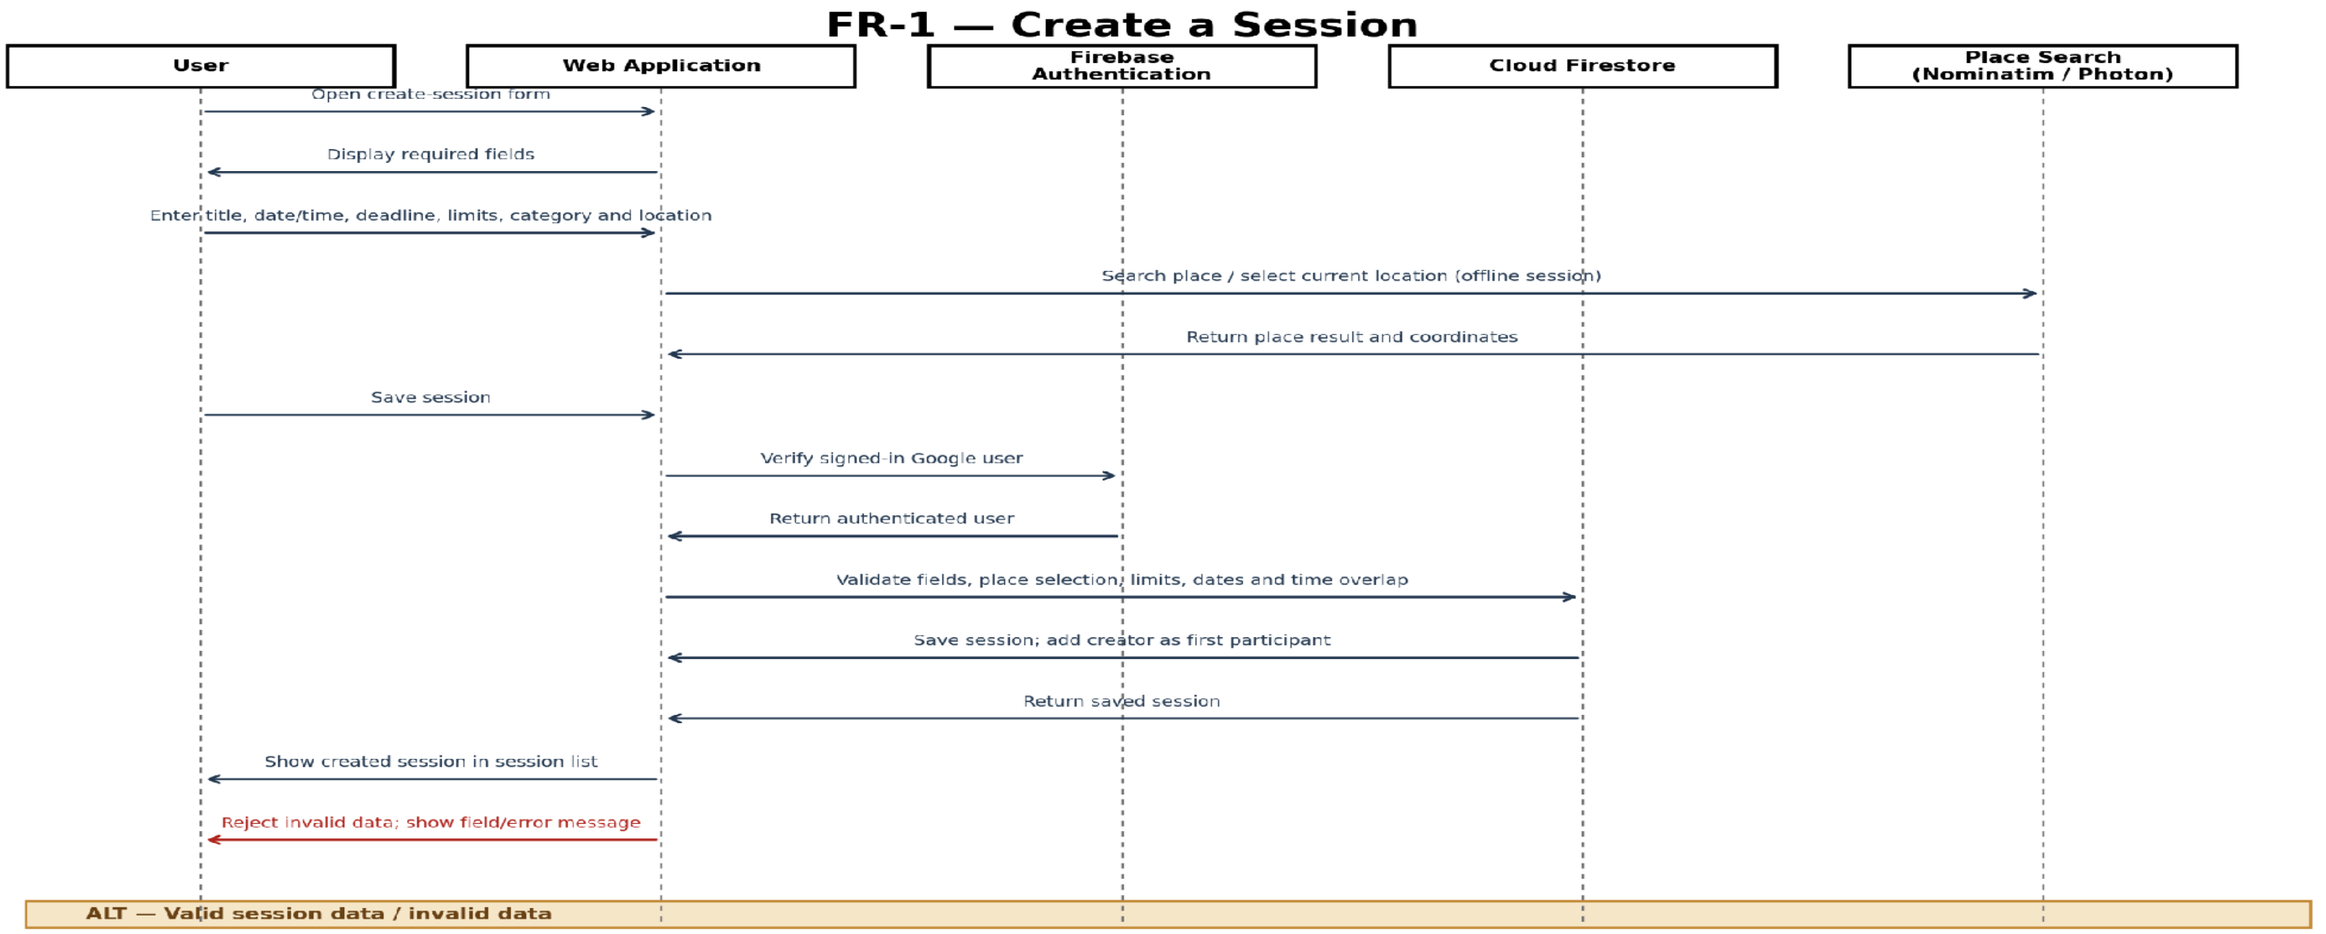

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.

FR-2 — Join / Leave a Session


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

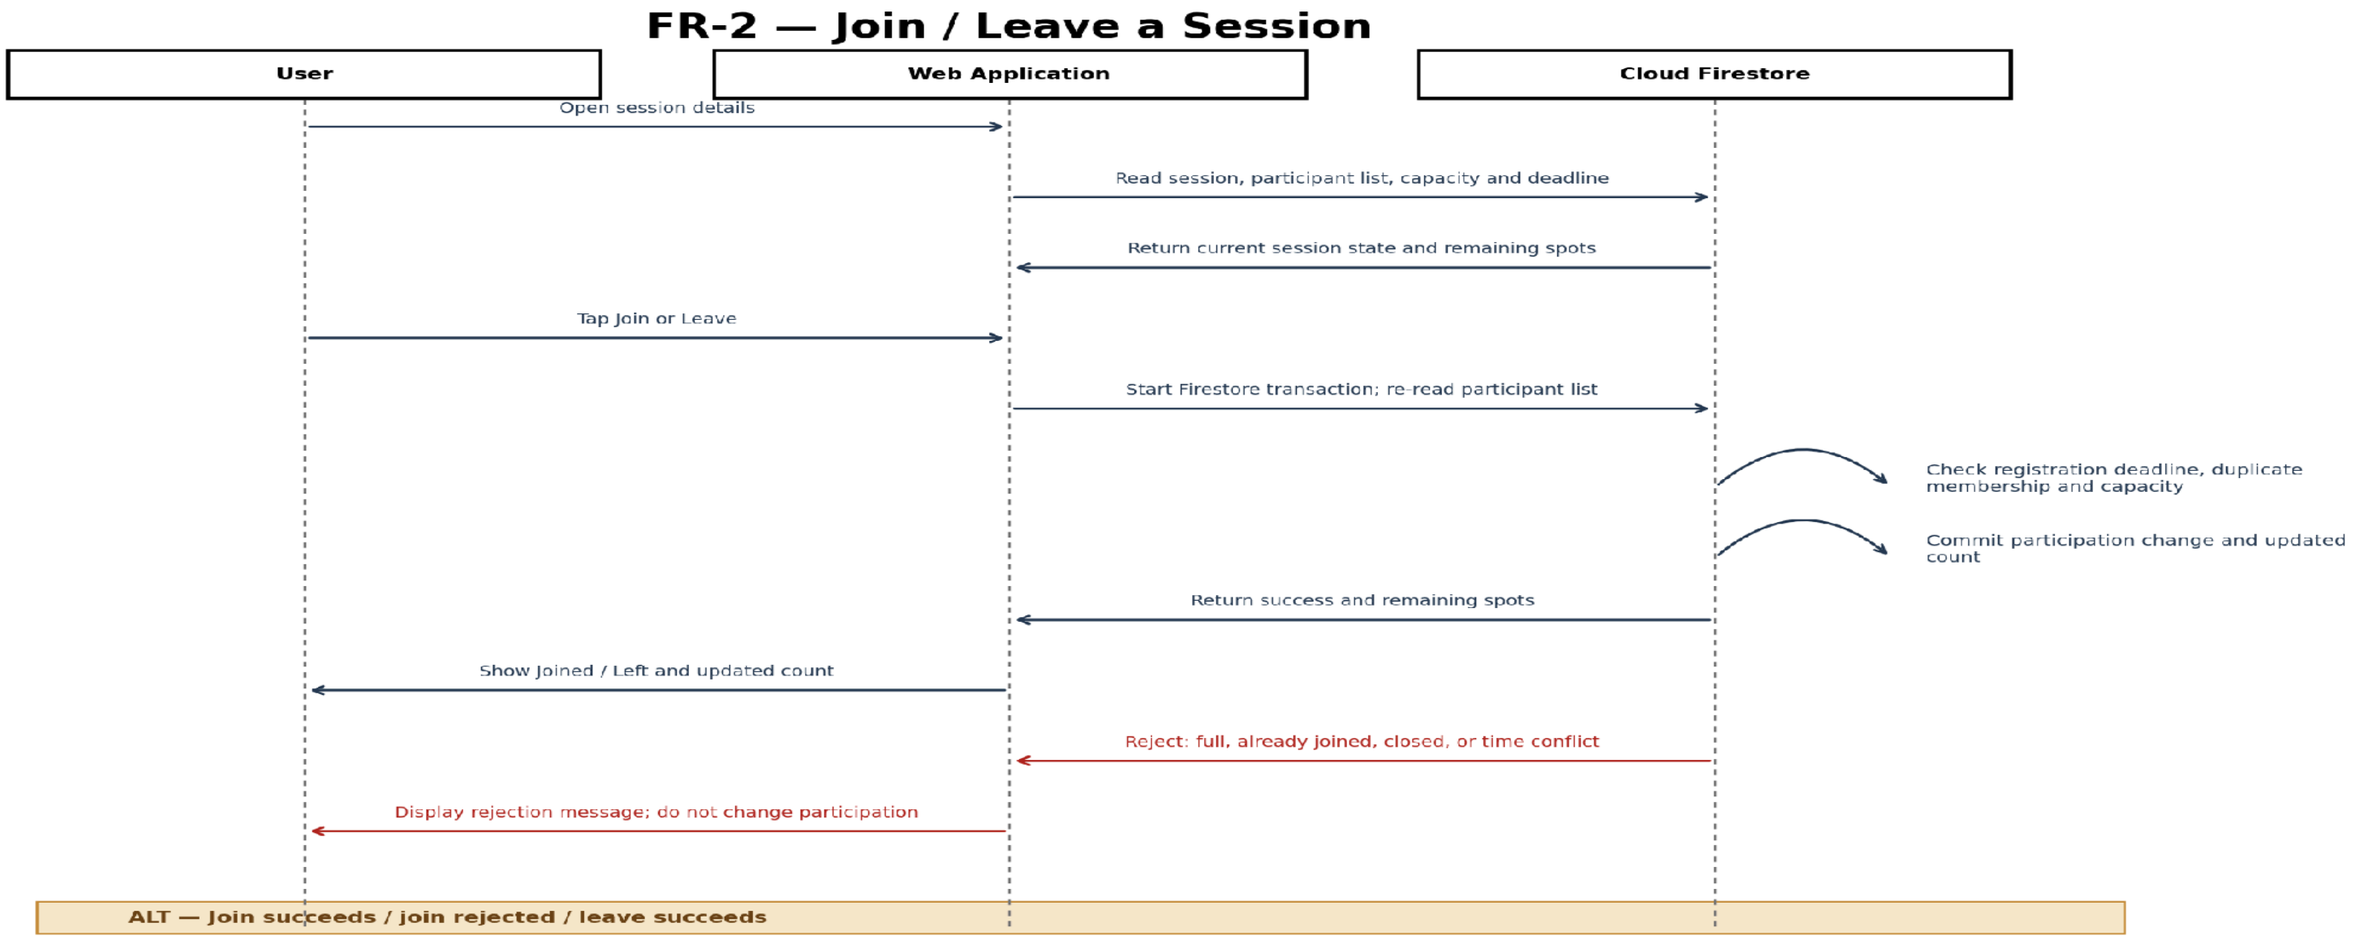

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.

FR-3 — Real-time Session Status


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

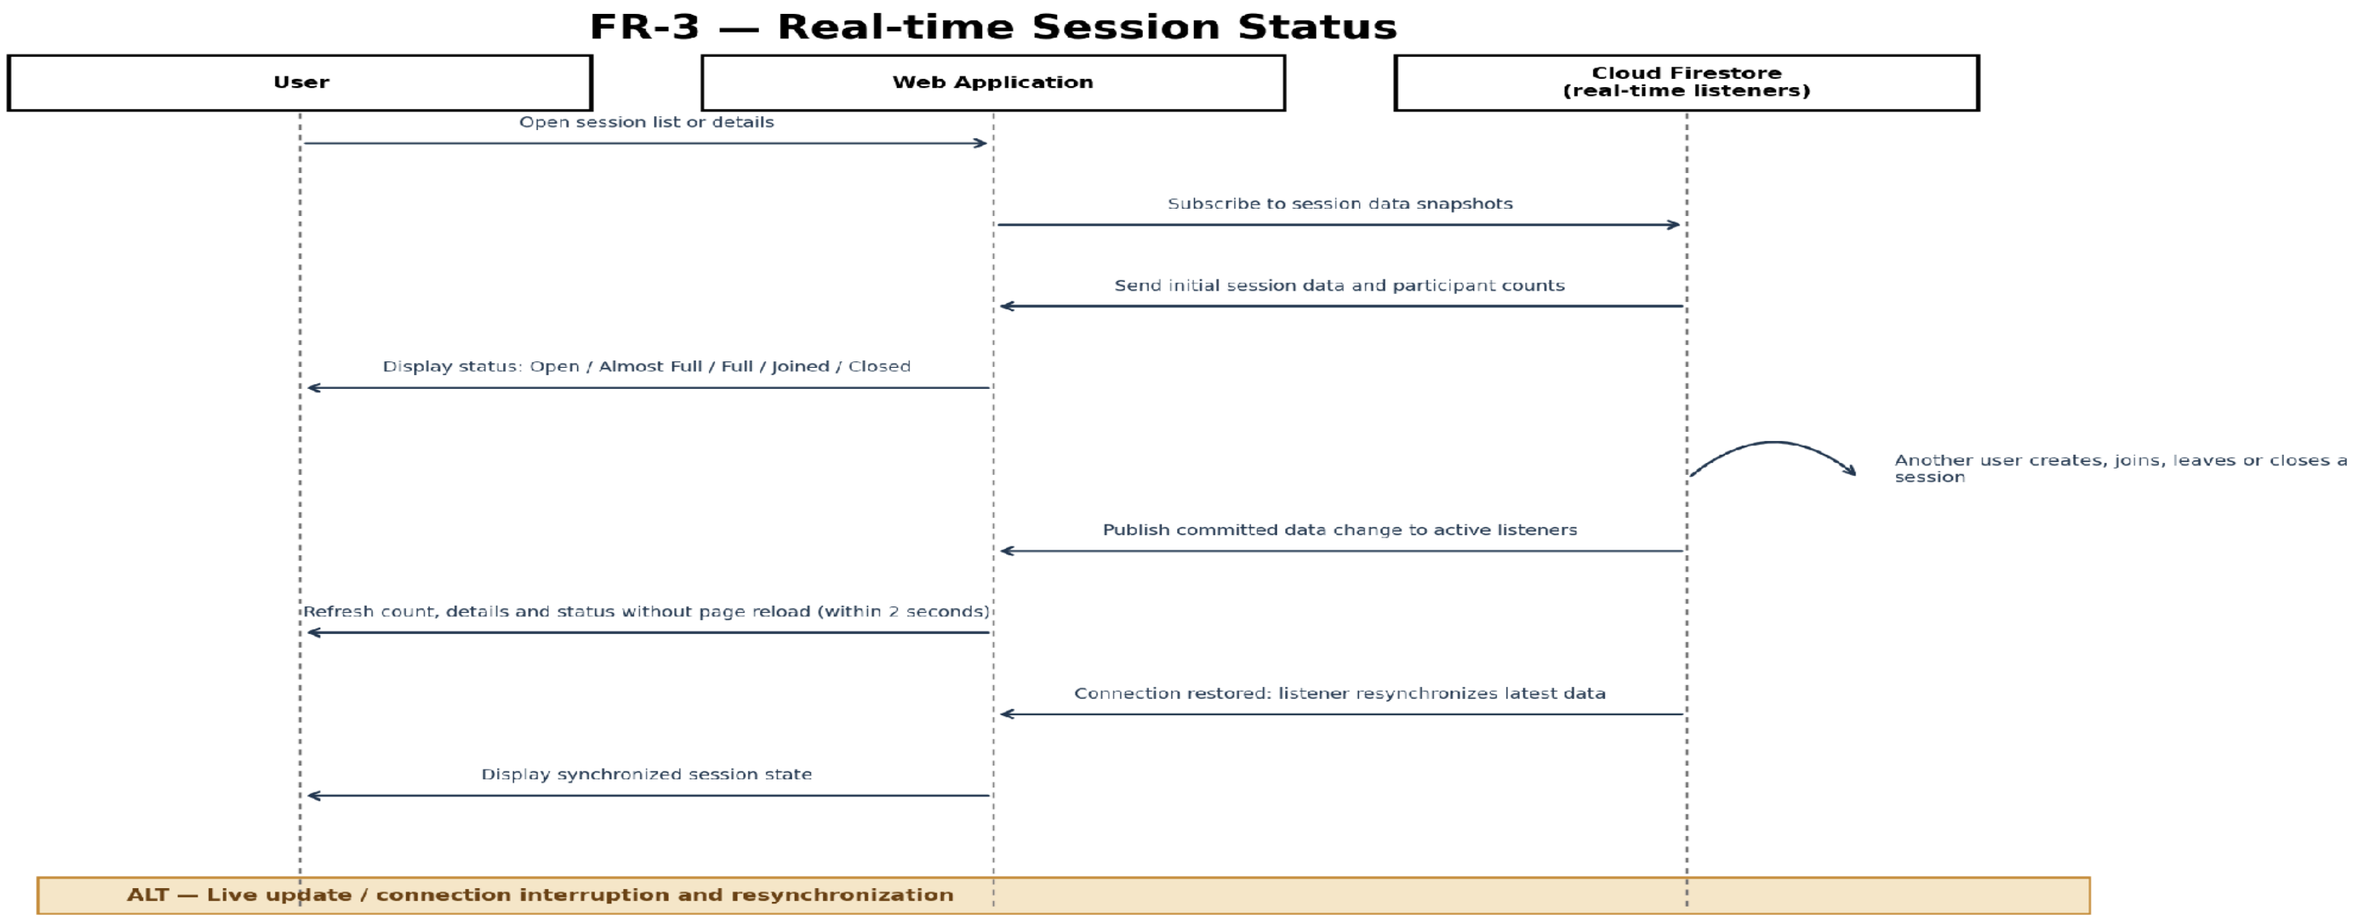

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.

FR-4 — Display Location on Map


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

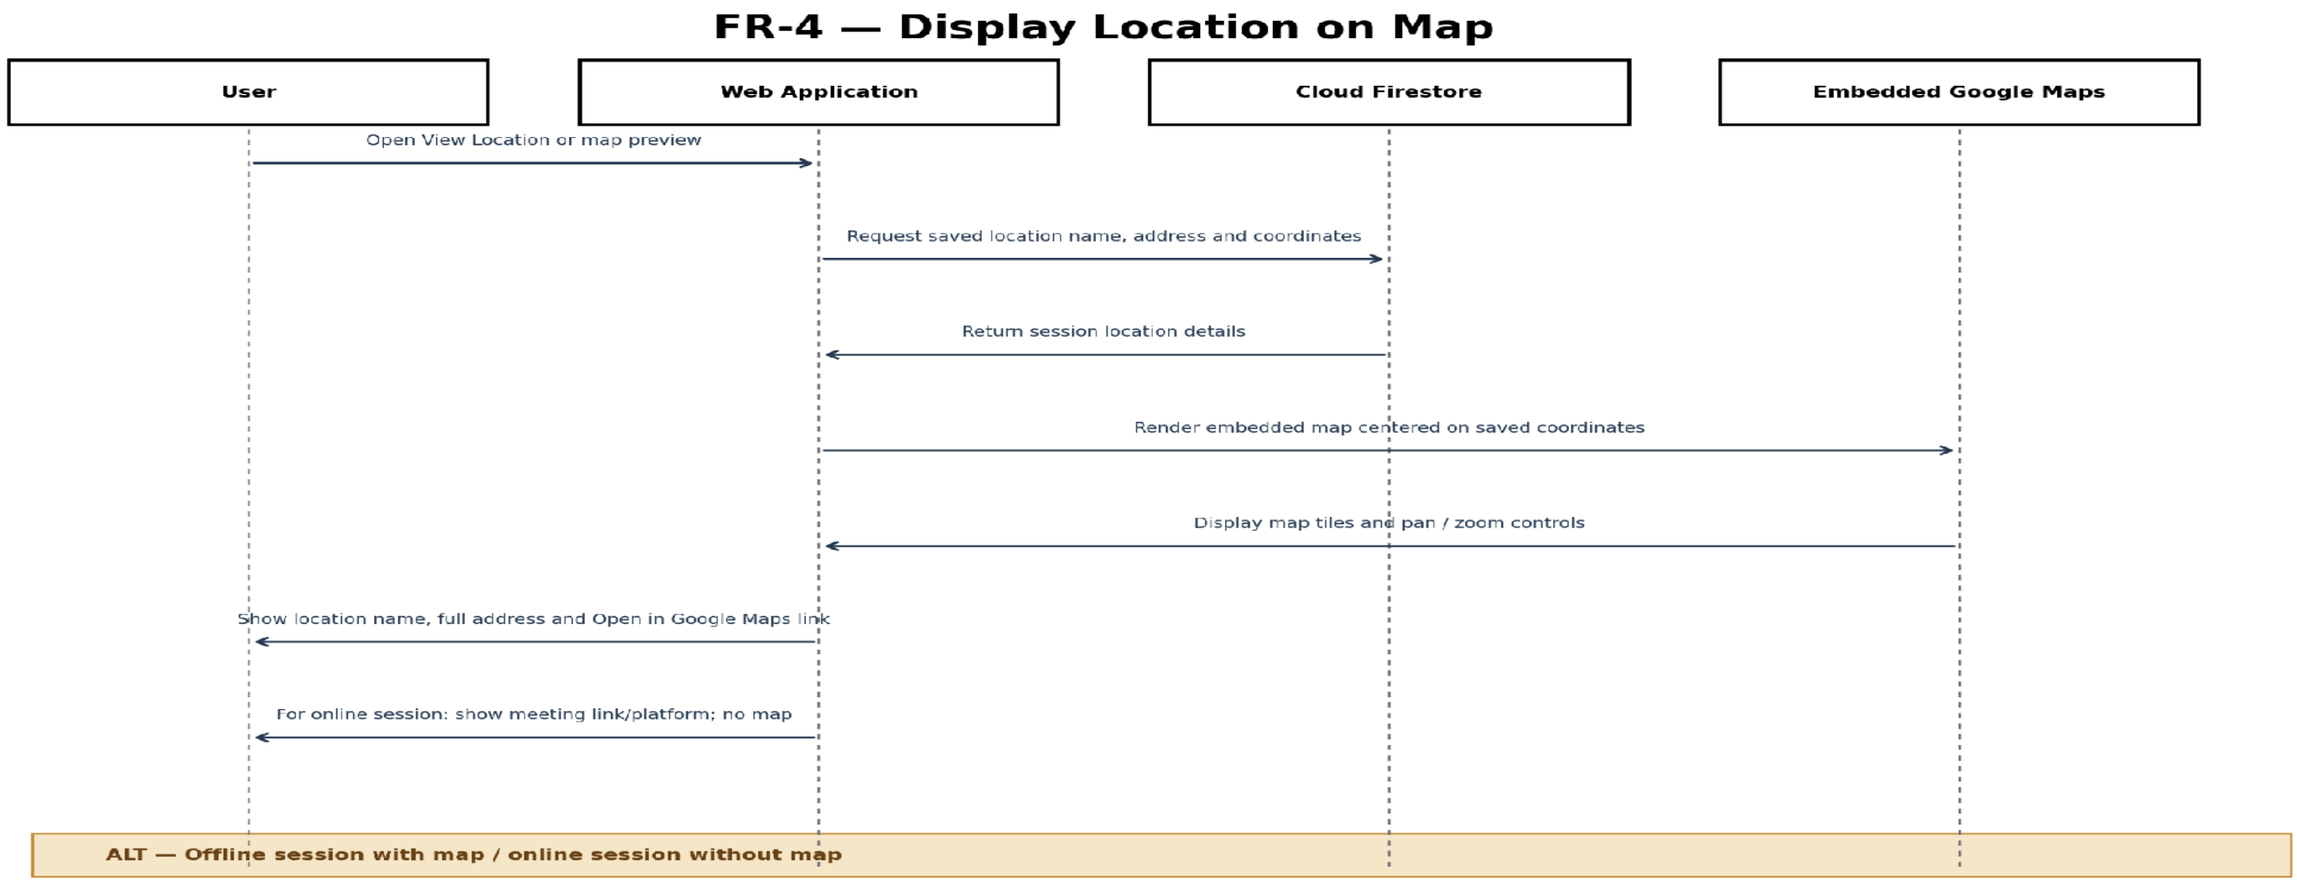

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.

FR-5 — In-room Chat


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

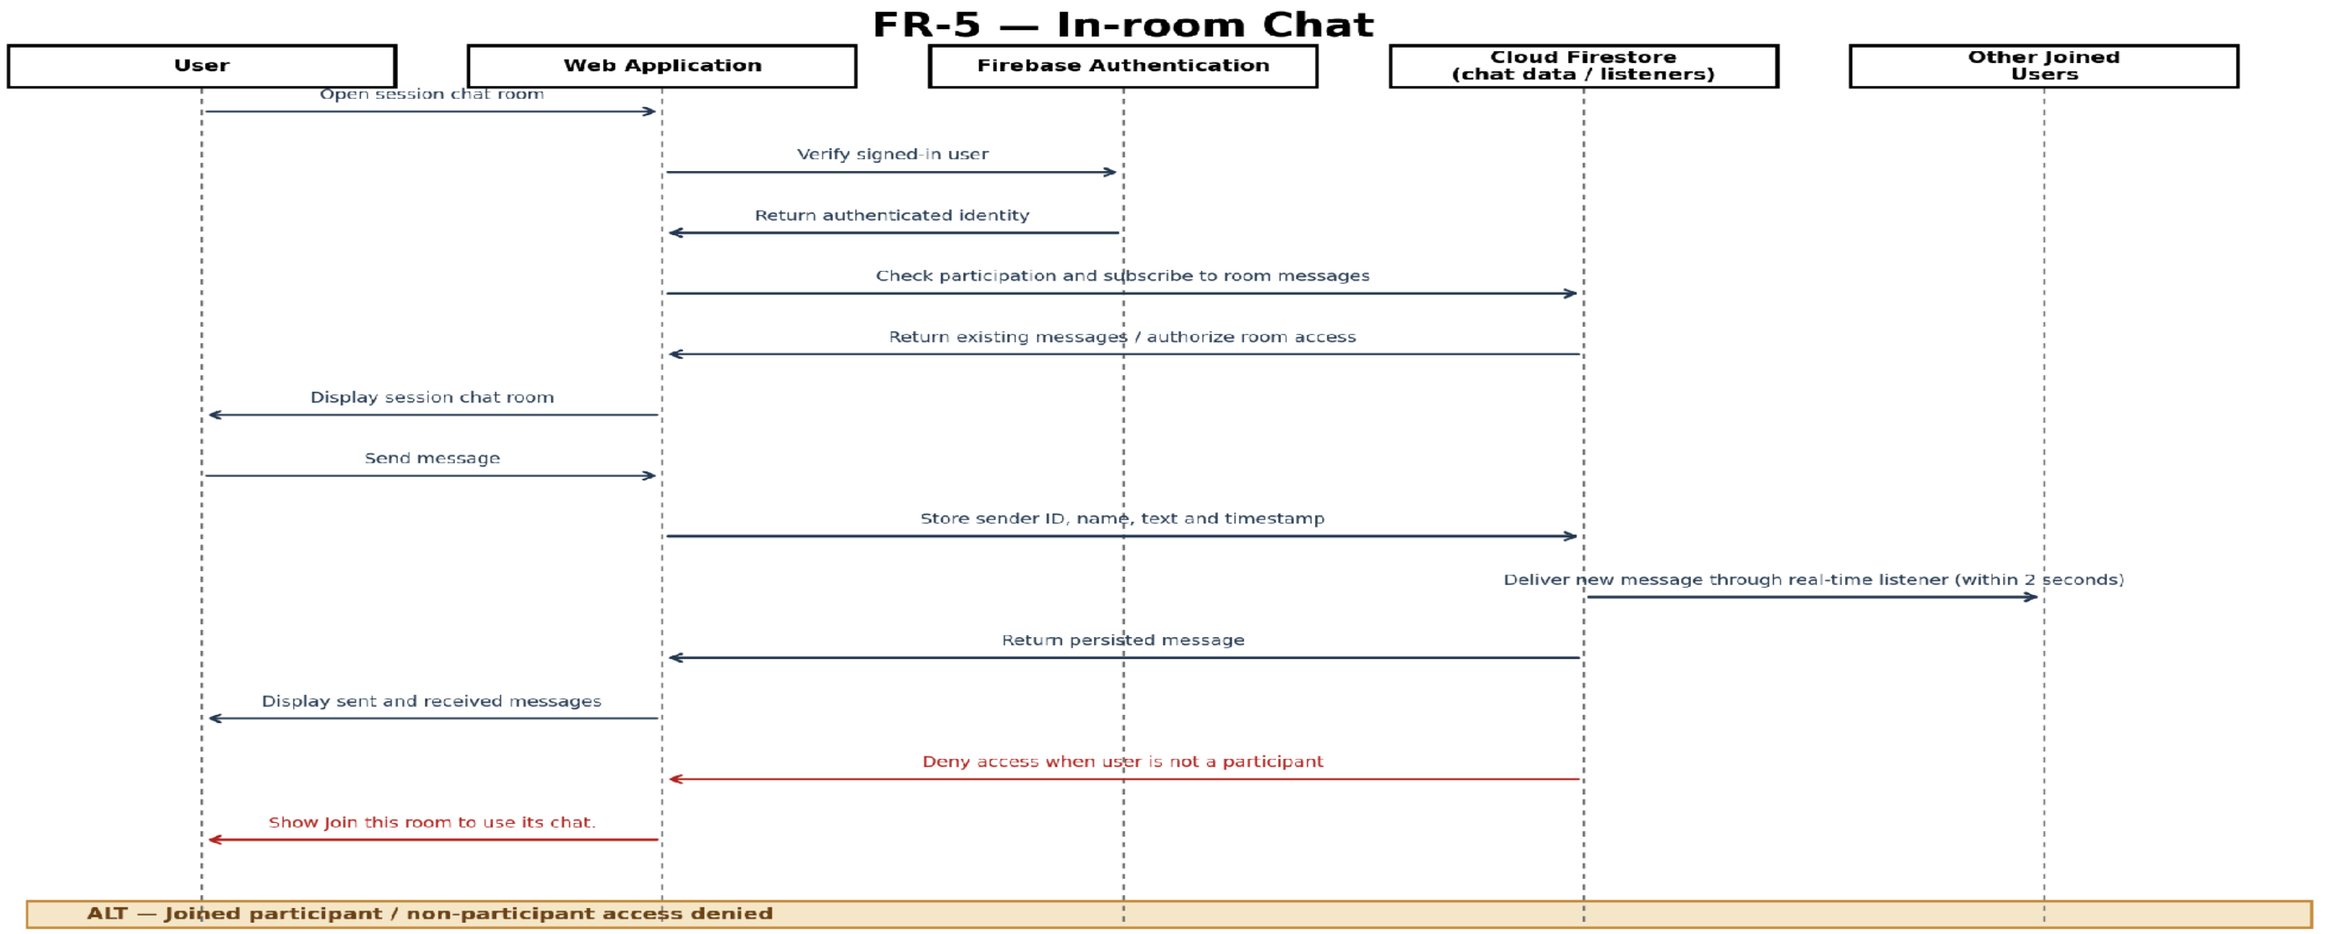

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.

FR-6 — Auto-close Session


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

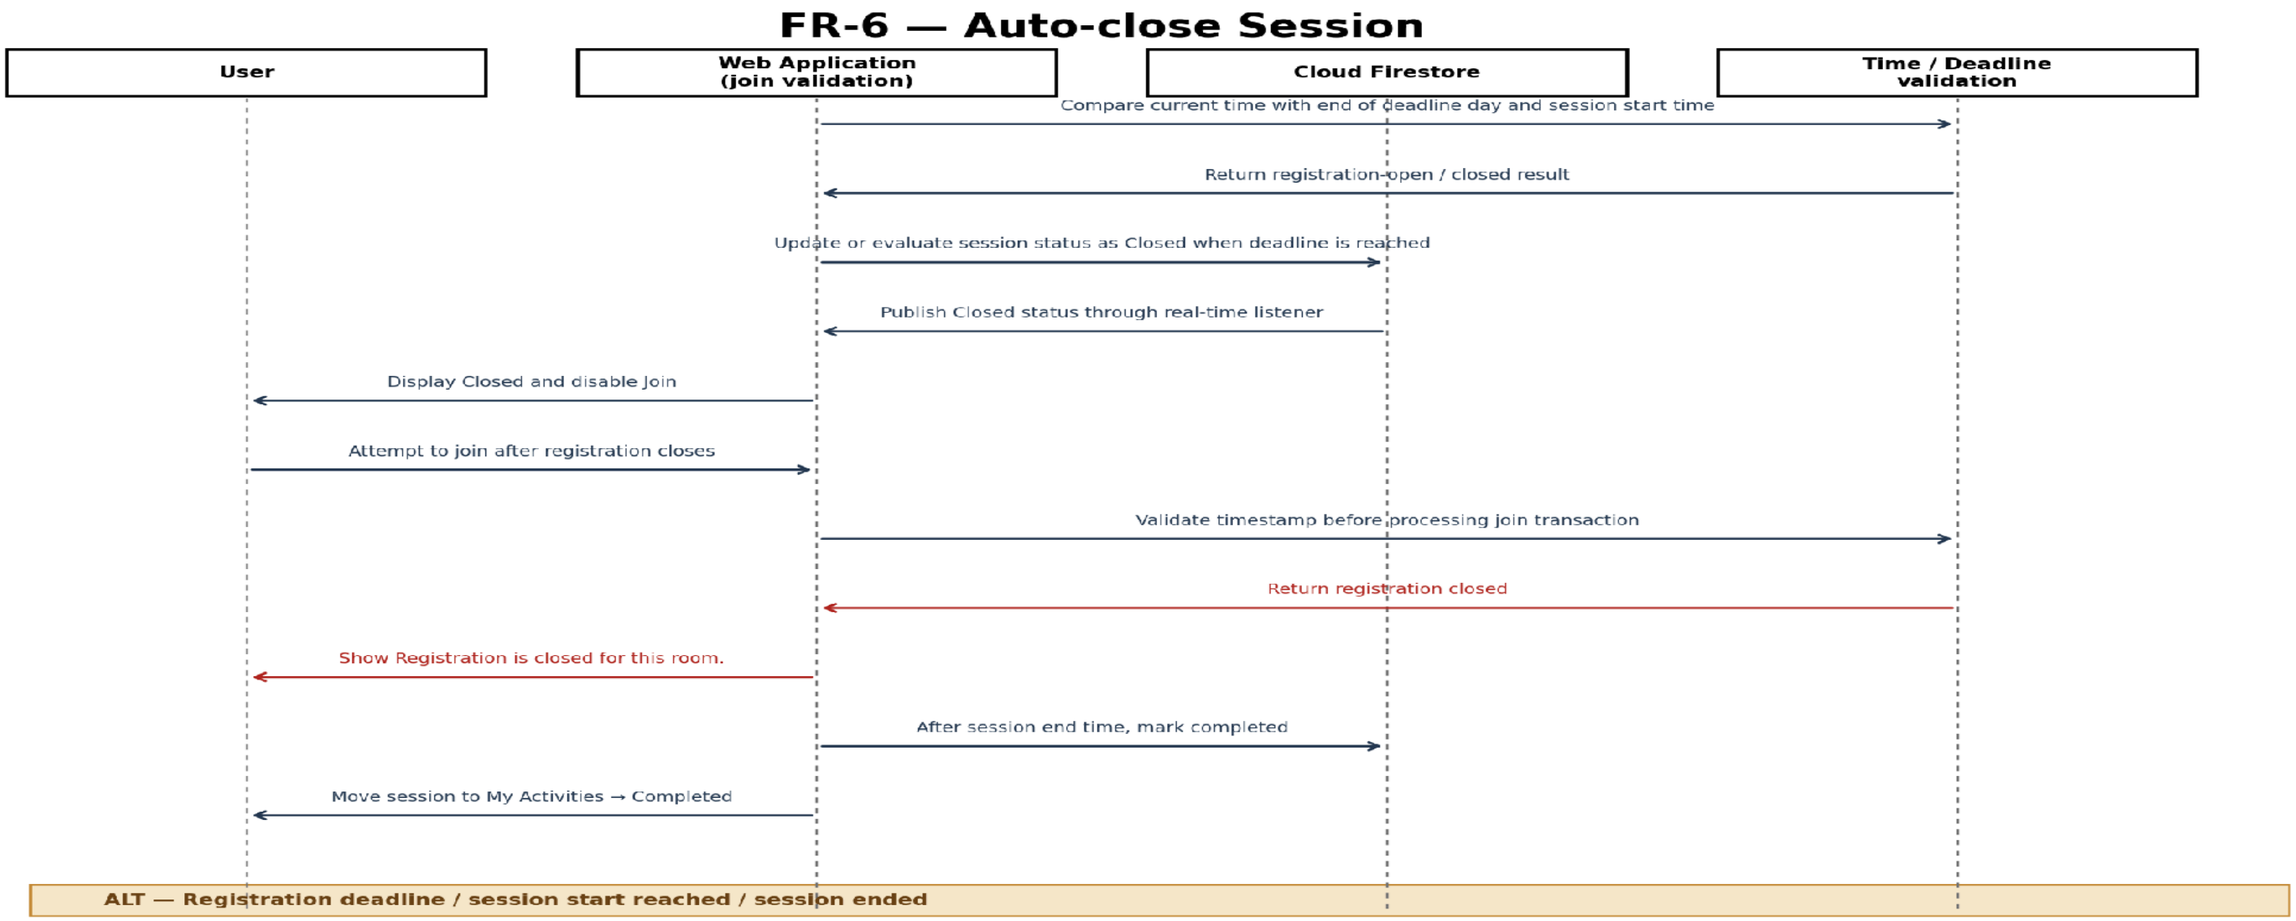

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed. Registration closes at the end of the deadline day or at session start, whichever comes first; completed sessions move to My Activities → Completed.

FR-7 — Add to Google Calendar


Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

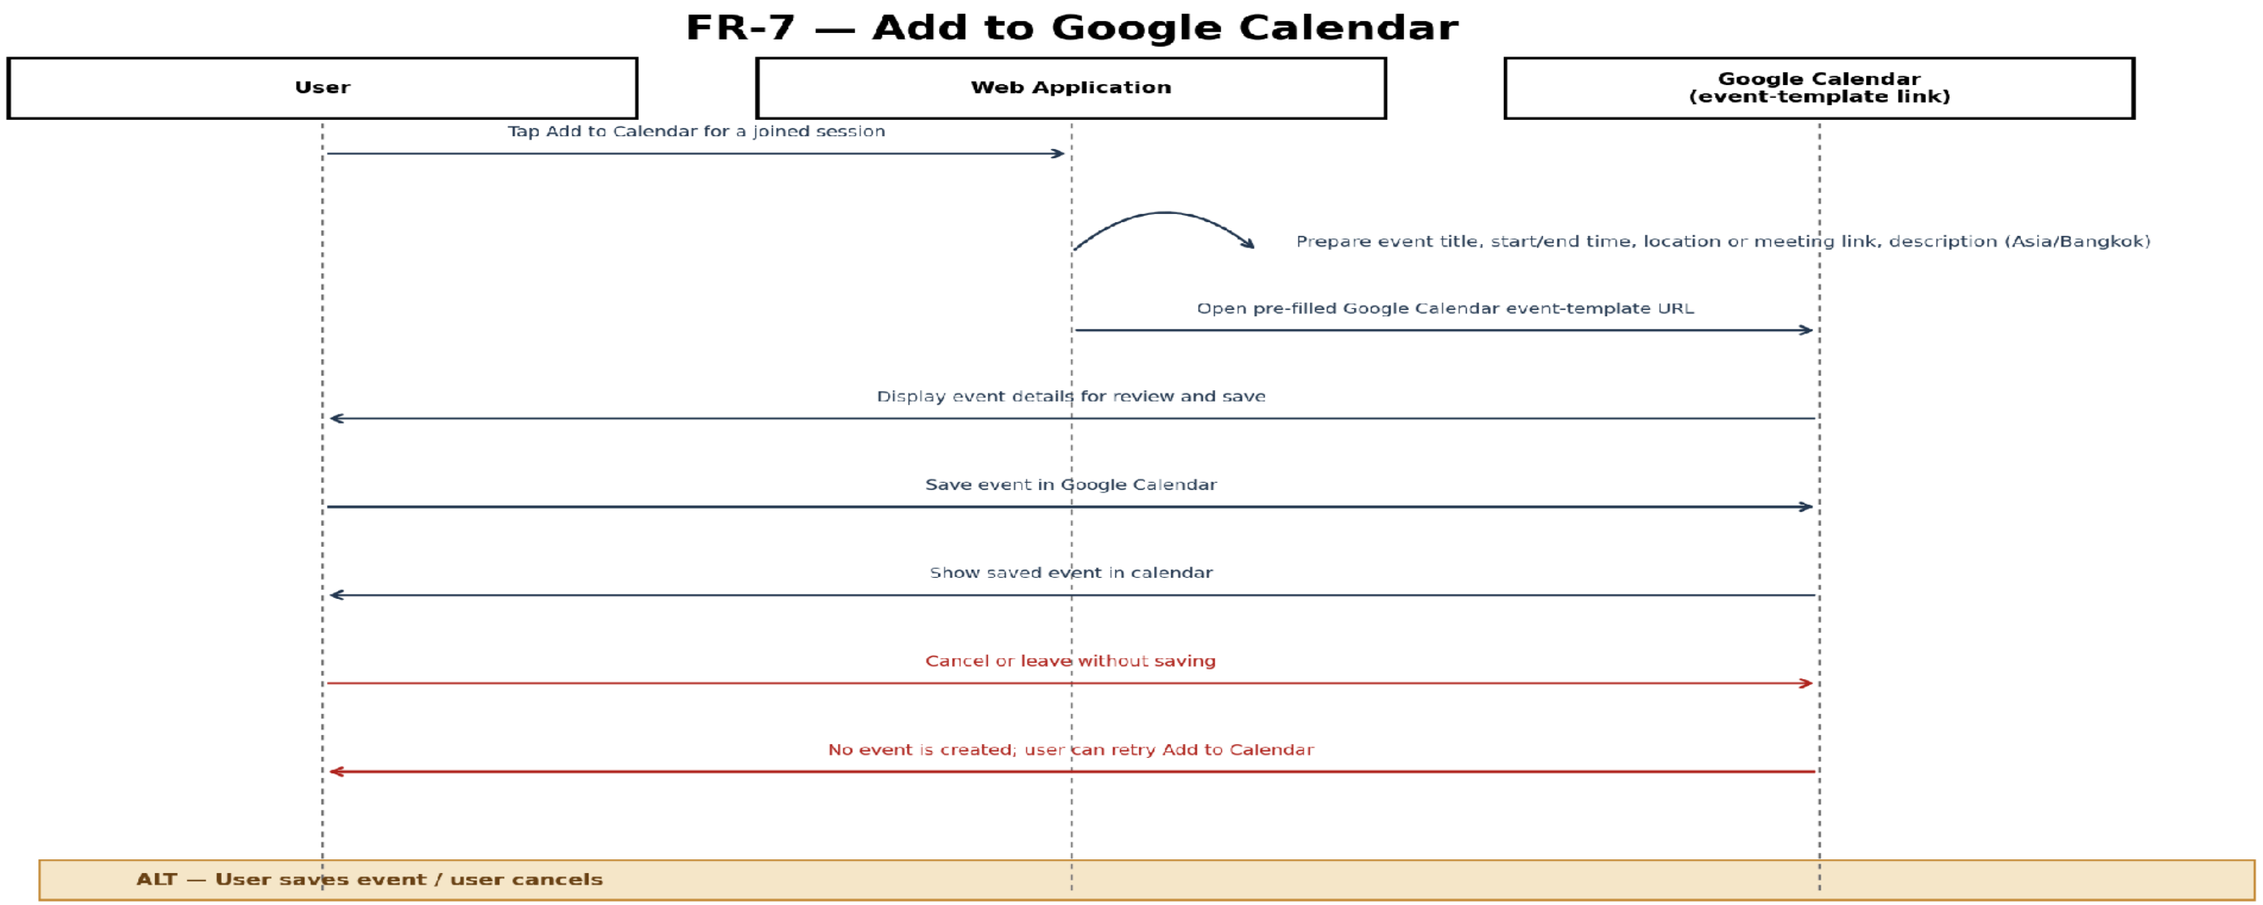

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed. Calendar export uses a pre-filled Google Calendar event-template link; NUDTEE does not handle OAuth access tokens or Calendar API calls.

Overall — NUDTEE System Overview

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate rejection or error paths; the orange band identifies the main alternative flow.

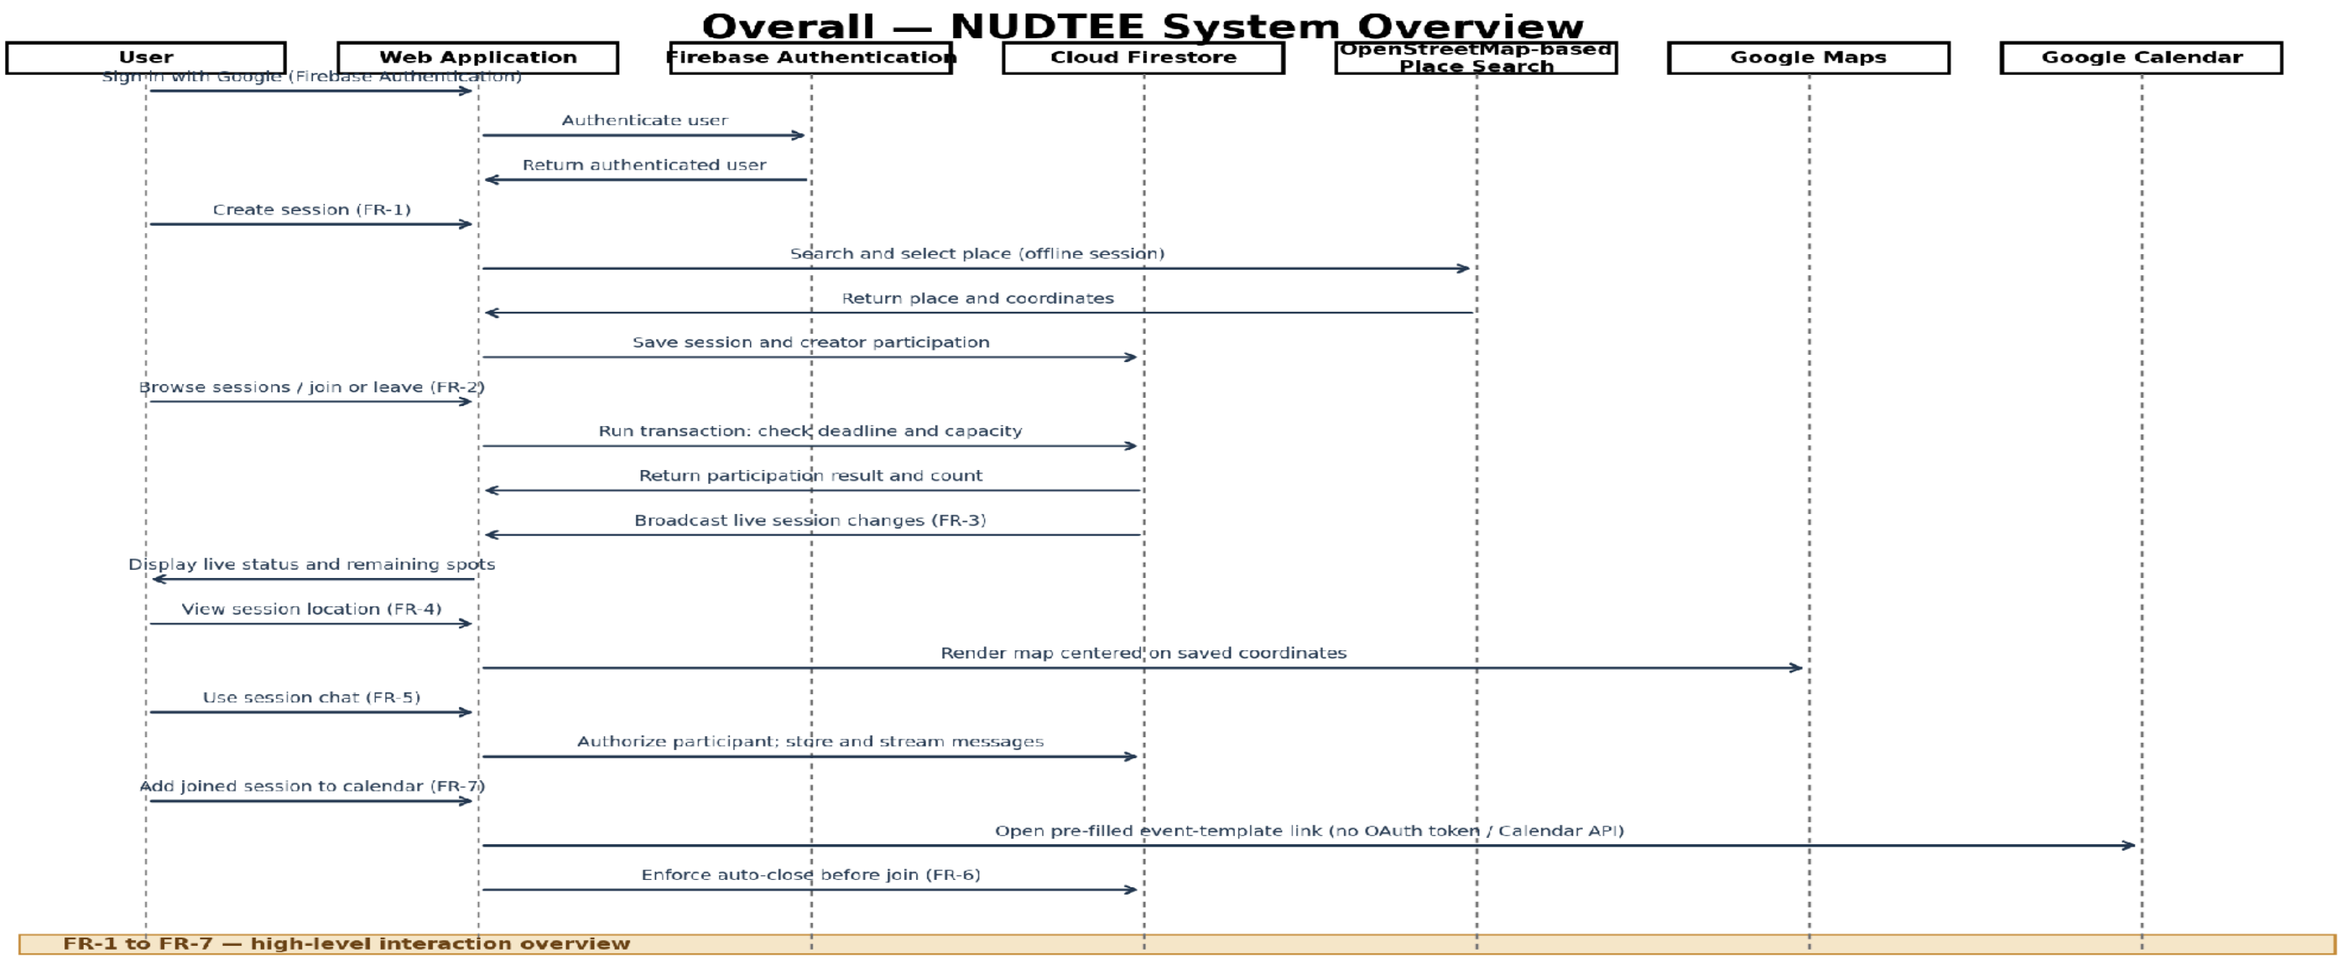

Note: The diagram shows logical interactions. Unspecified internal mechanisms are not assumed.