NUDTEE

UML Sequence Diagrams

7 Functional Requirements + 1 System Overview

Prepared in English. Individual diagrams include success and error flows where specified in the SRS. The overall diagram summarizes the main system interactions.

Source: NEW SRS.pdf and NEW Team Charter.pdf supplied in this conversation. Personal contact details from the Team Charter are intentionally excluded.

FR-1 — Create / Edit a Session

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

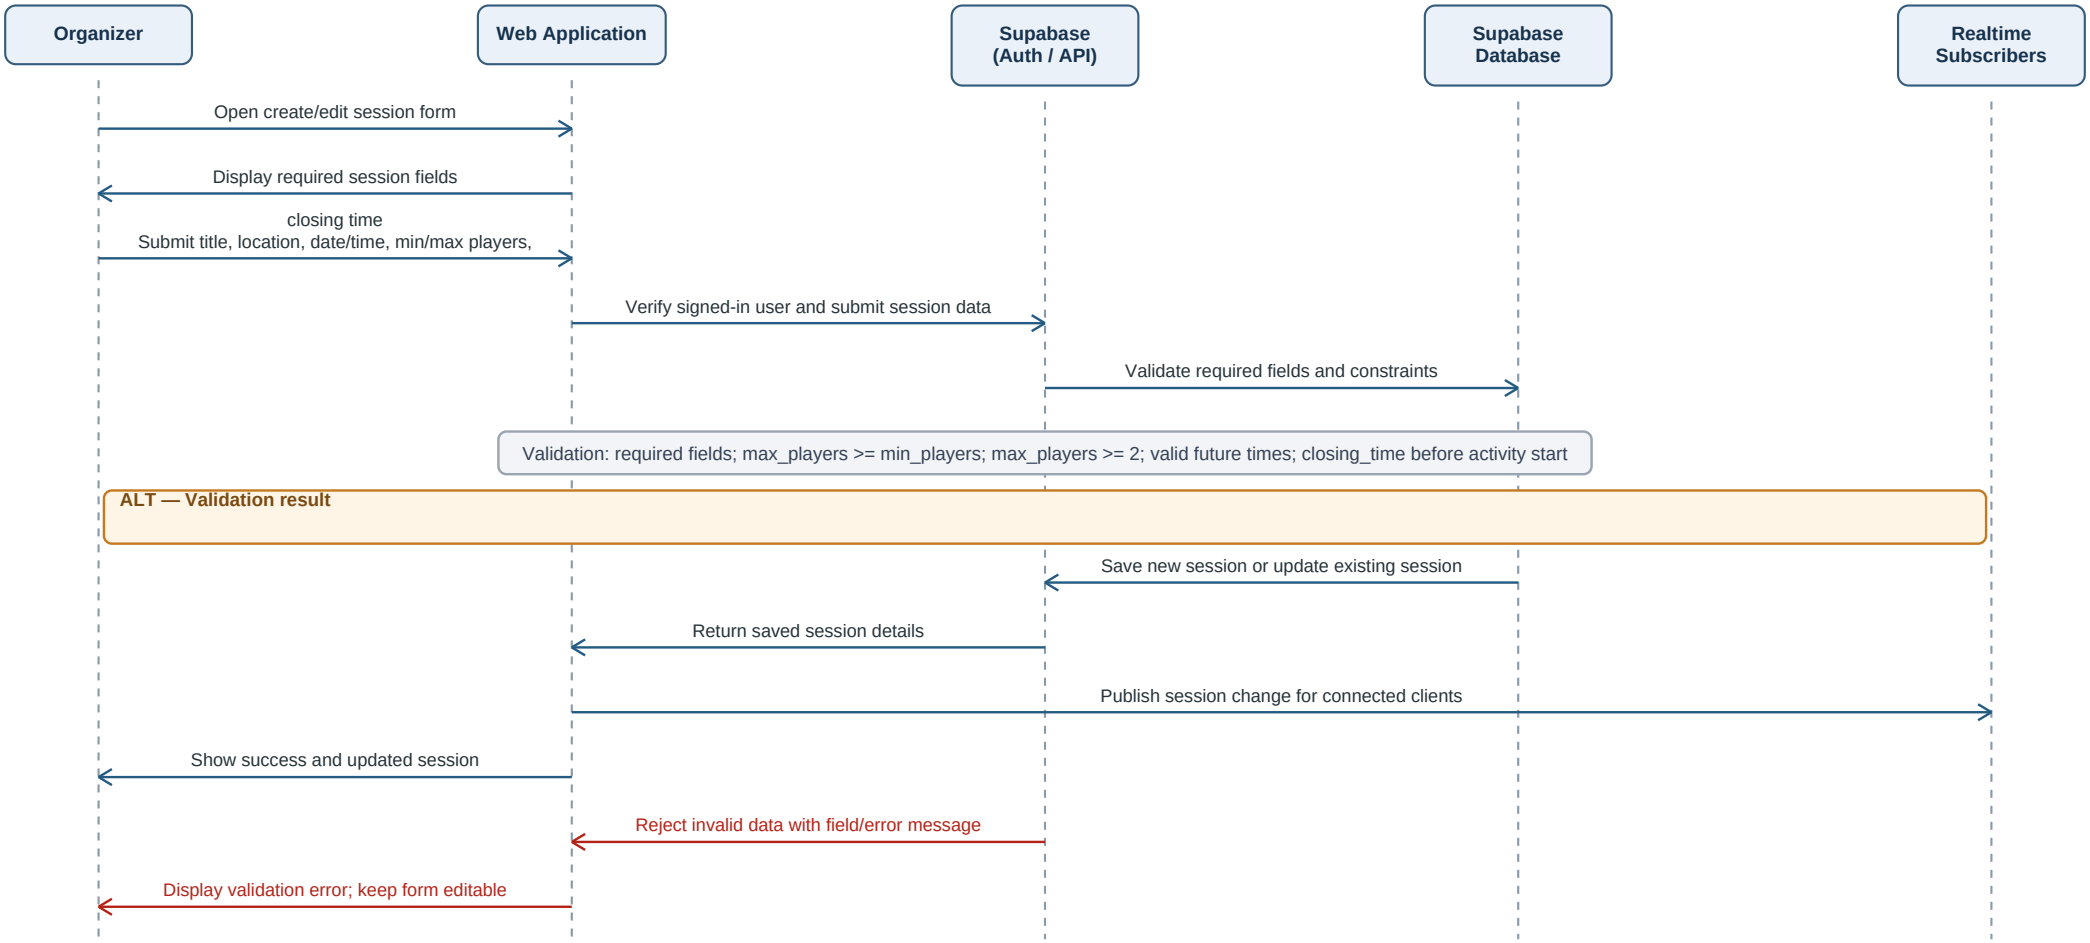

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-2 — Join / Leave a Session

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

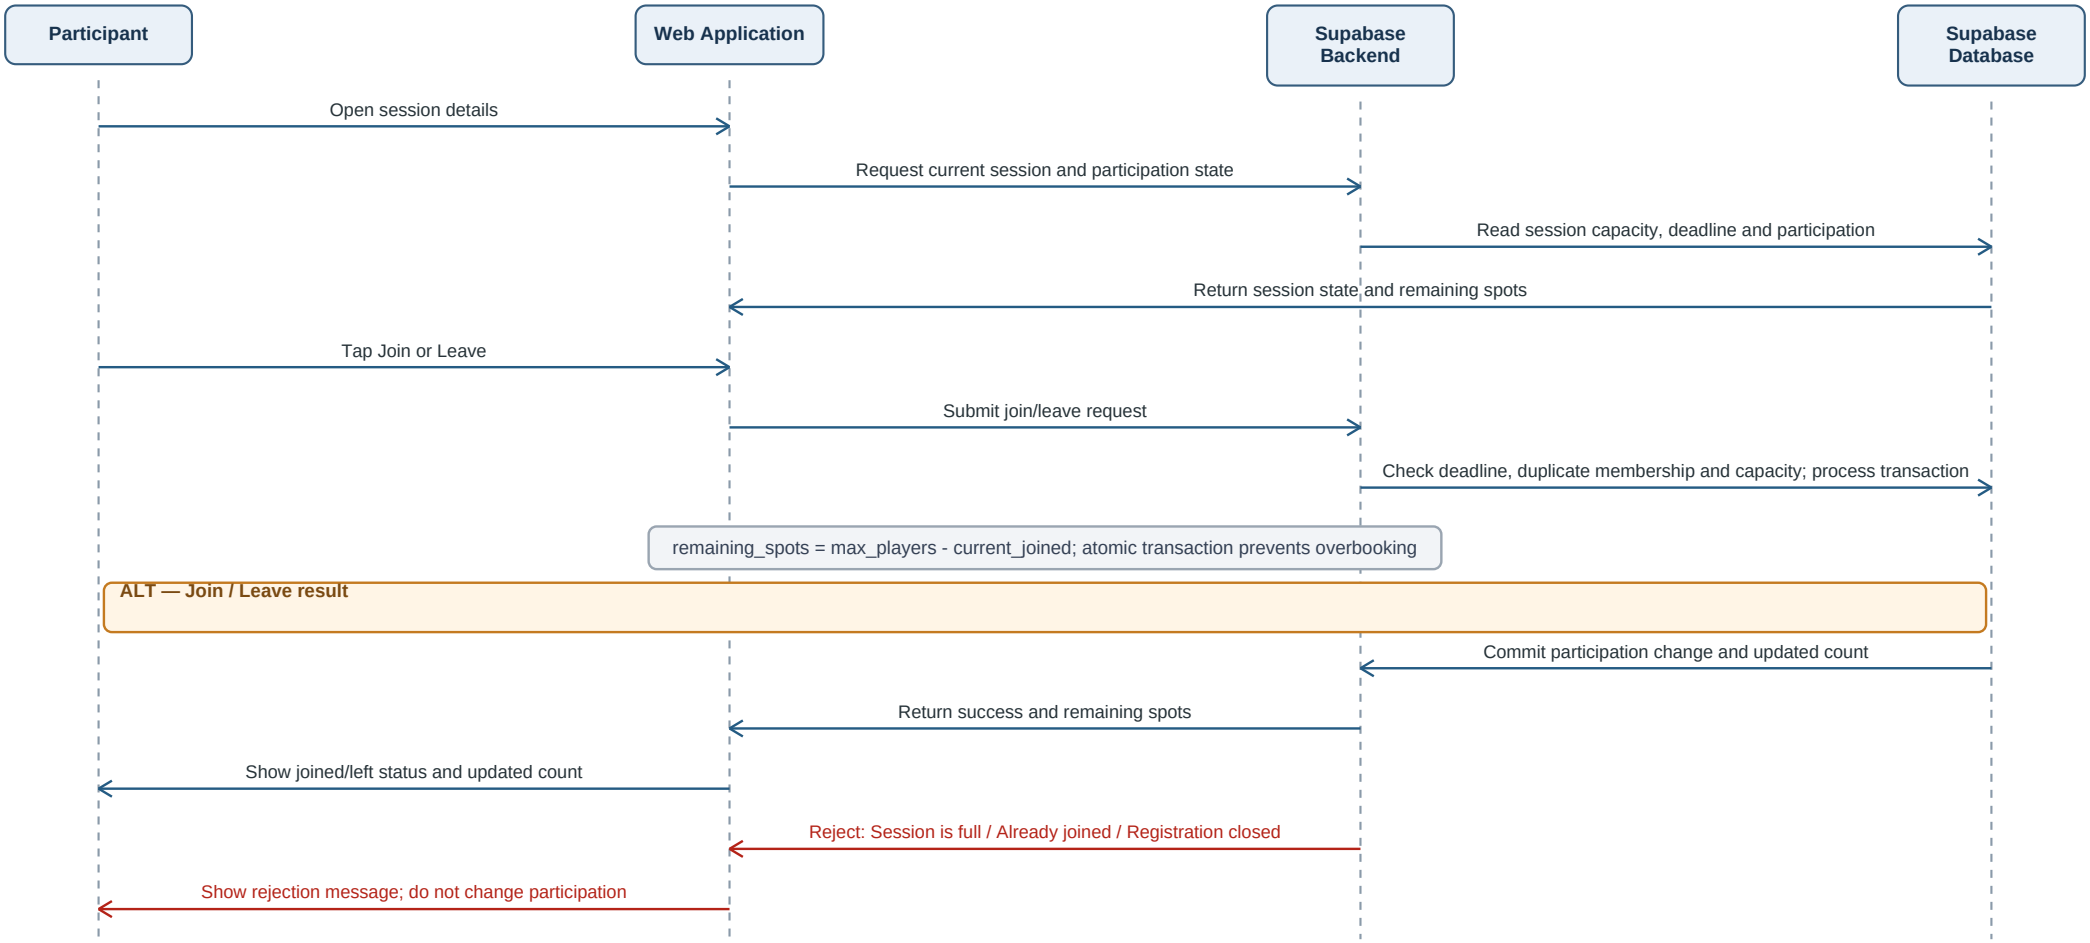

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-3 — Real-time Session Status

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

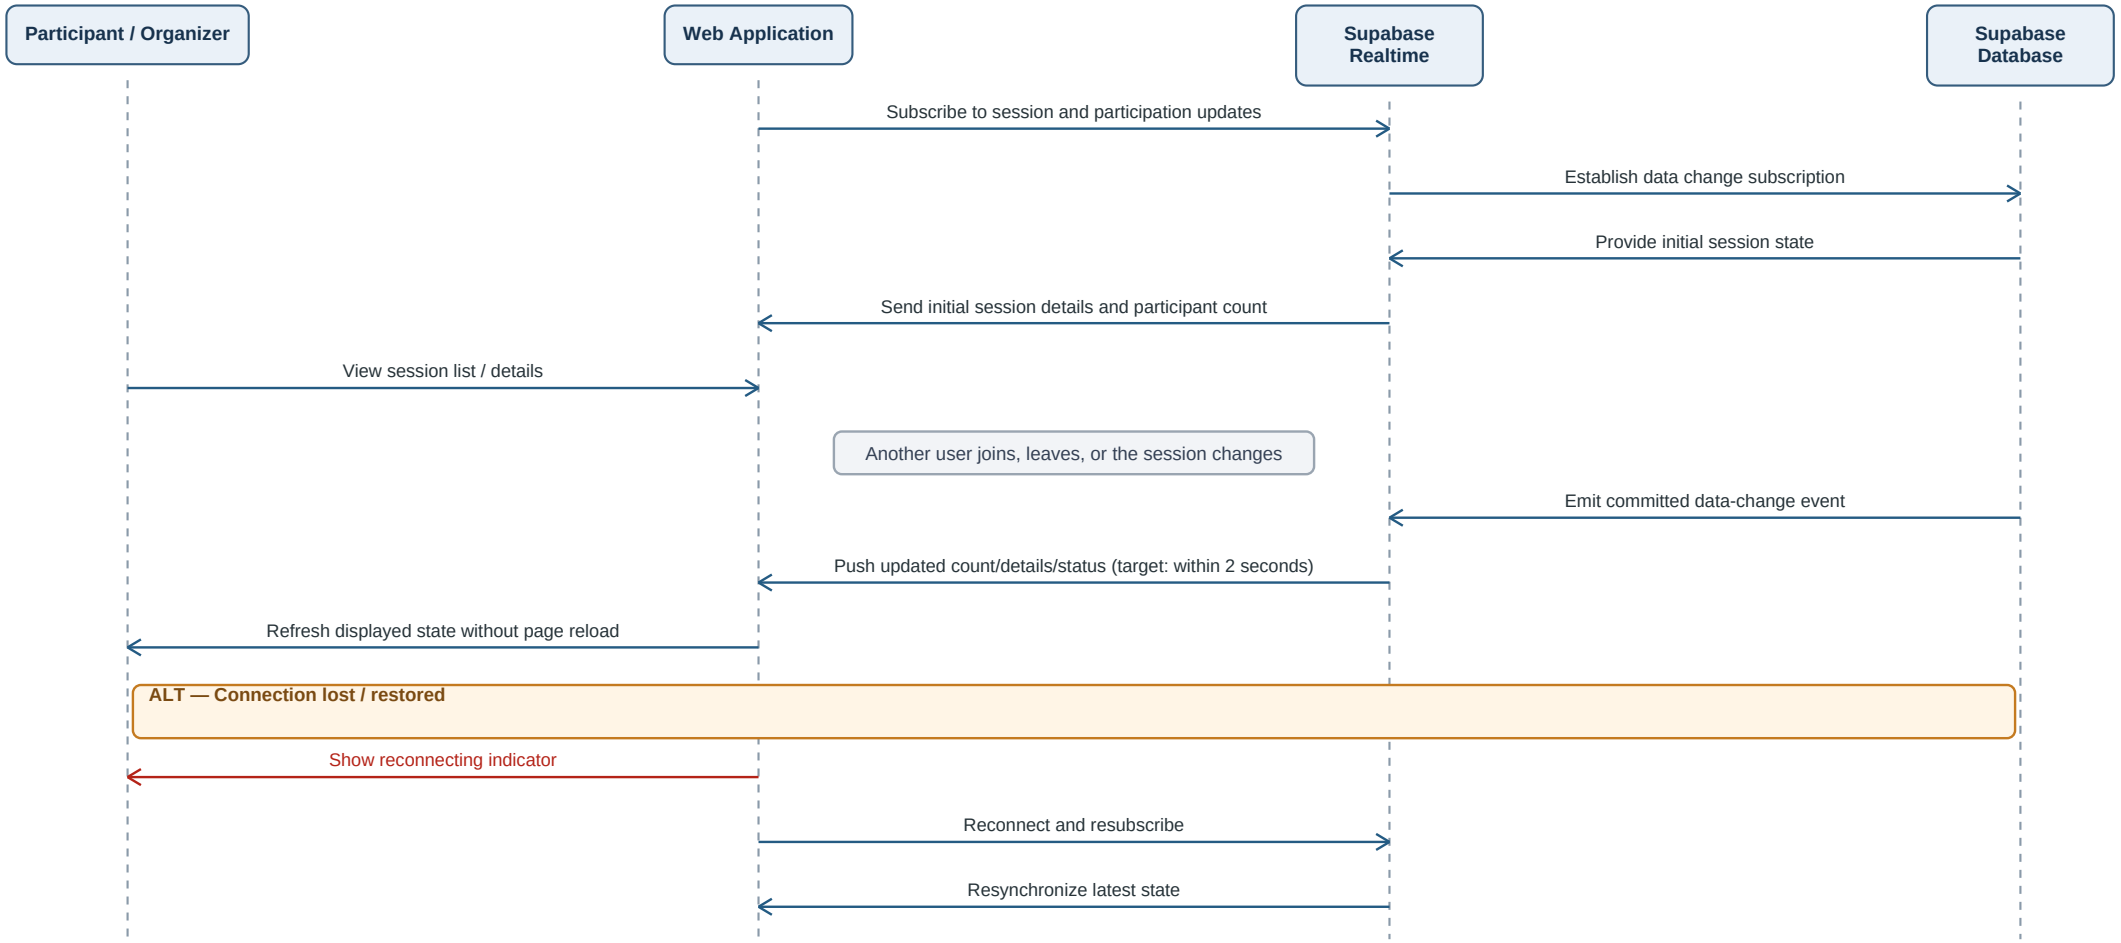

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-4 — Display Location on Map

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

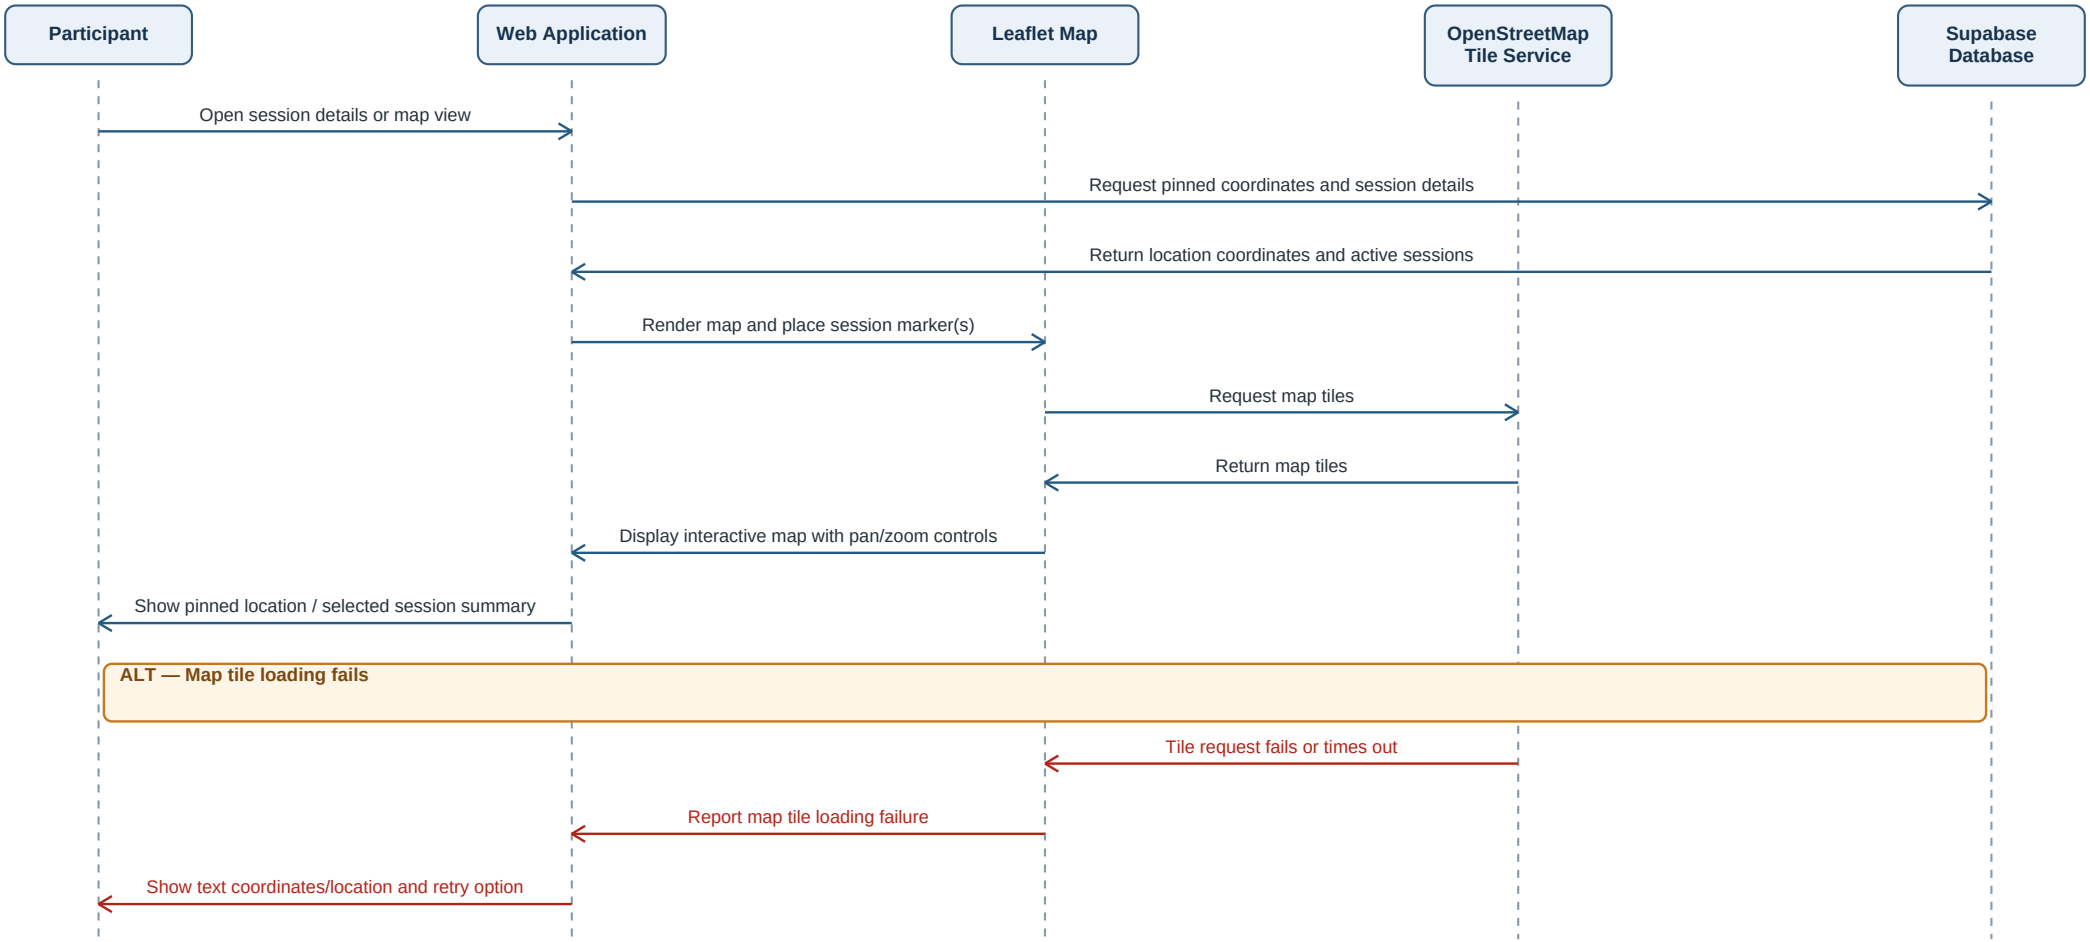

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-5 — In-room Chat

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

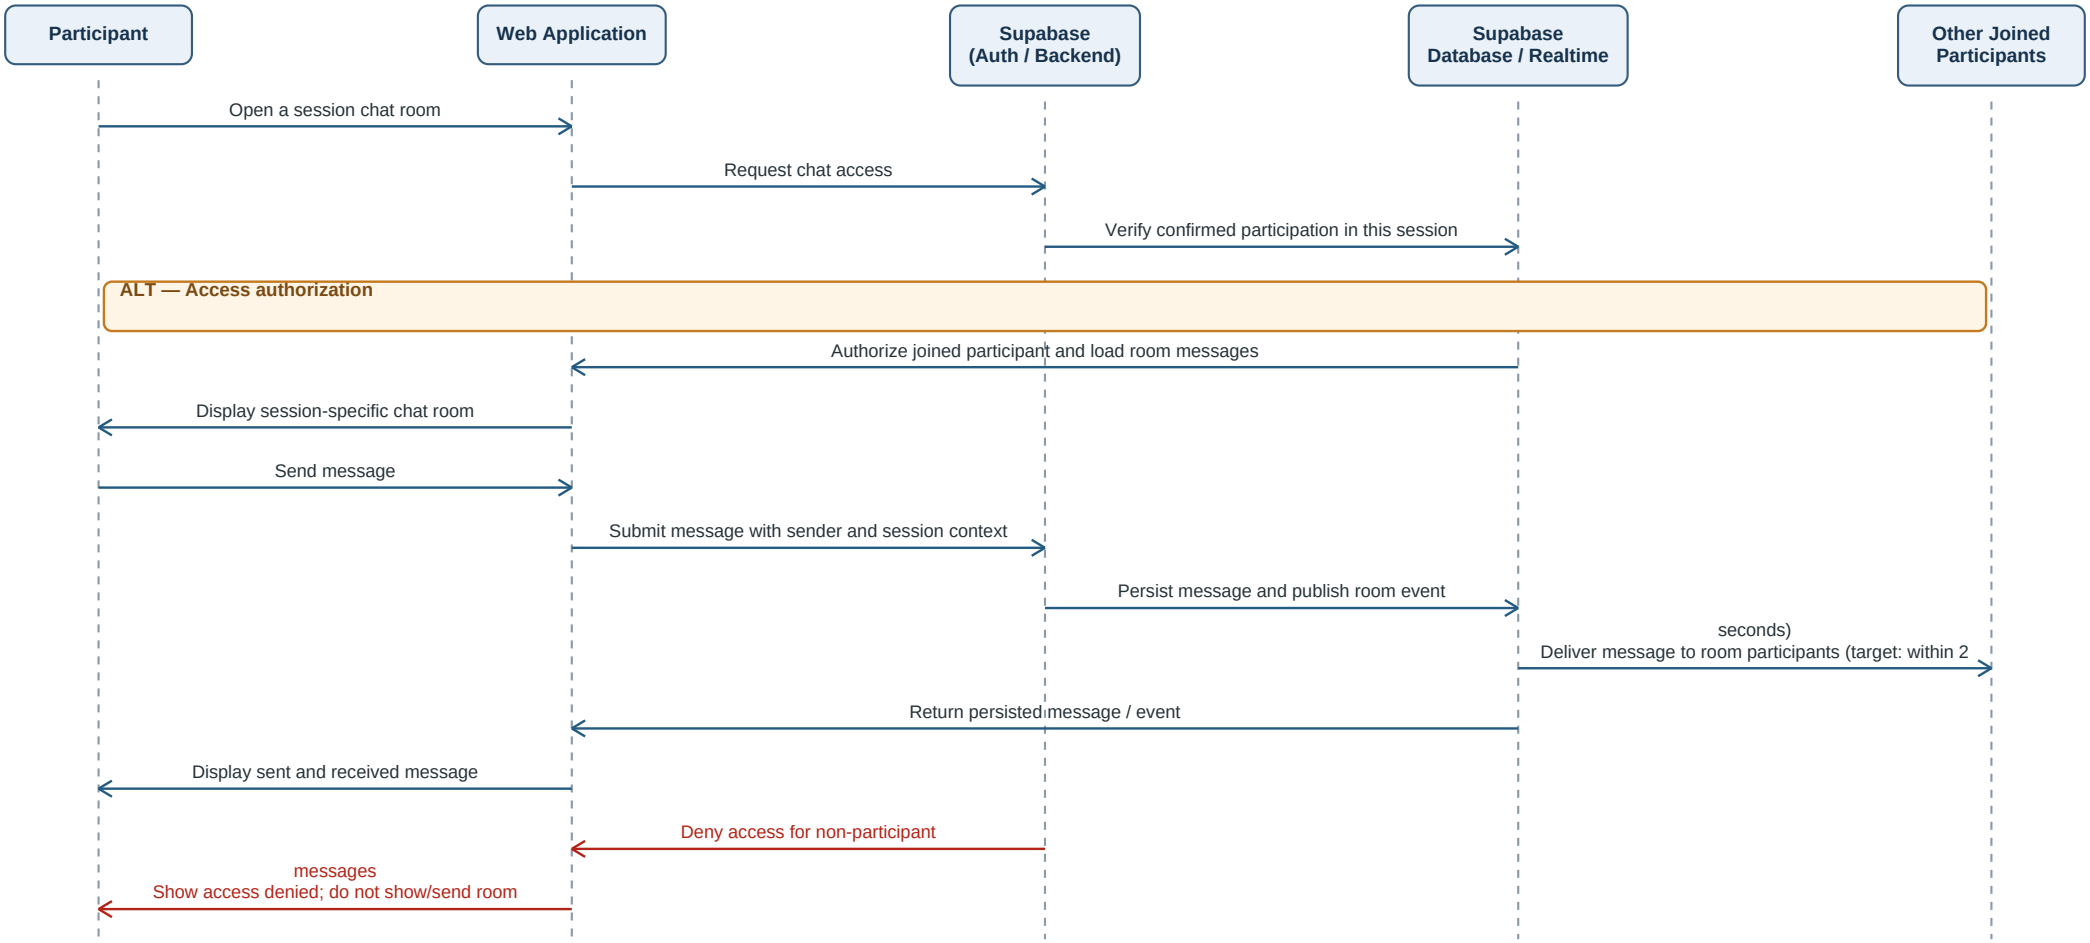

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-6 — Auto-close Session

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

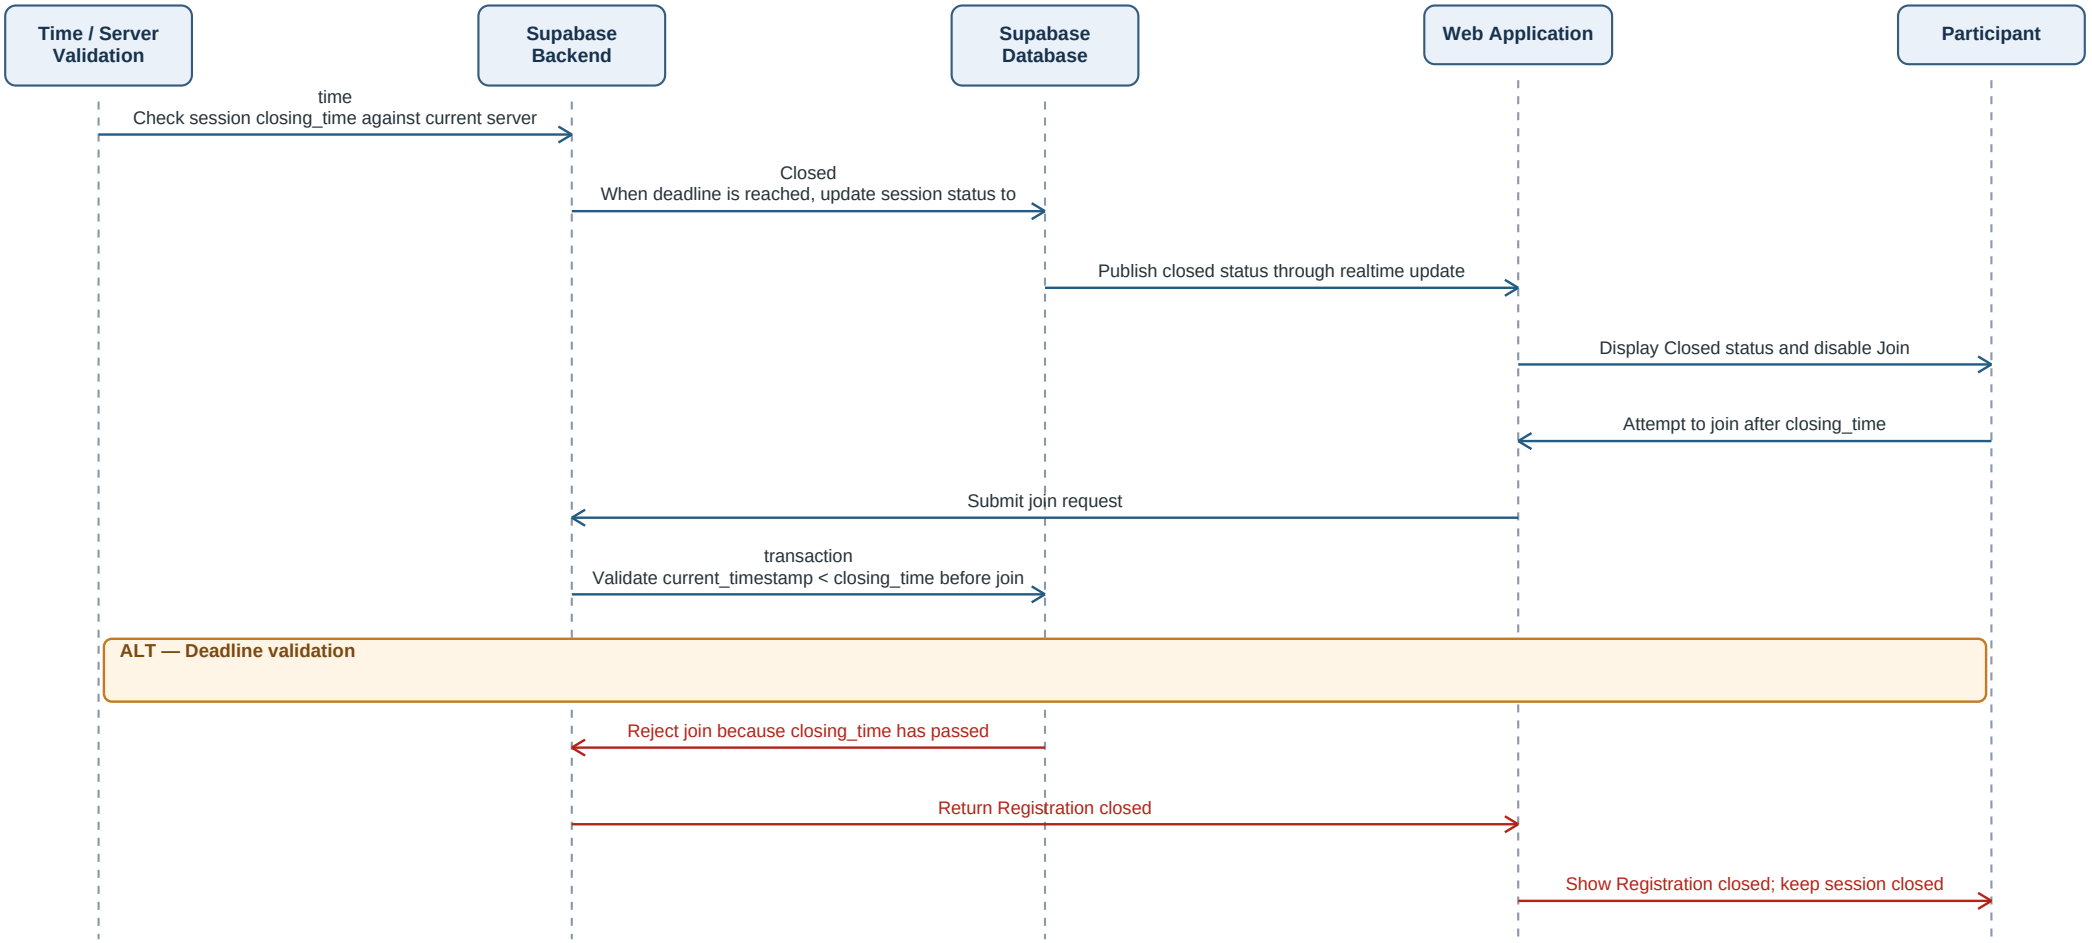

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

FR-7 — Add to Google Calendar

Participants and message order are modeled from the corresponding SRS functional requirement. Red arrows indicate an error/rejection path; the orange band marks an alternative branch.

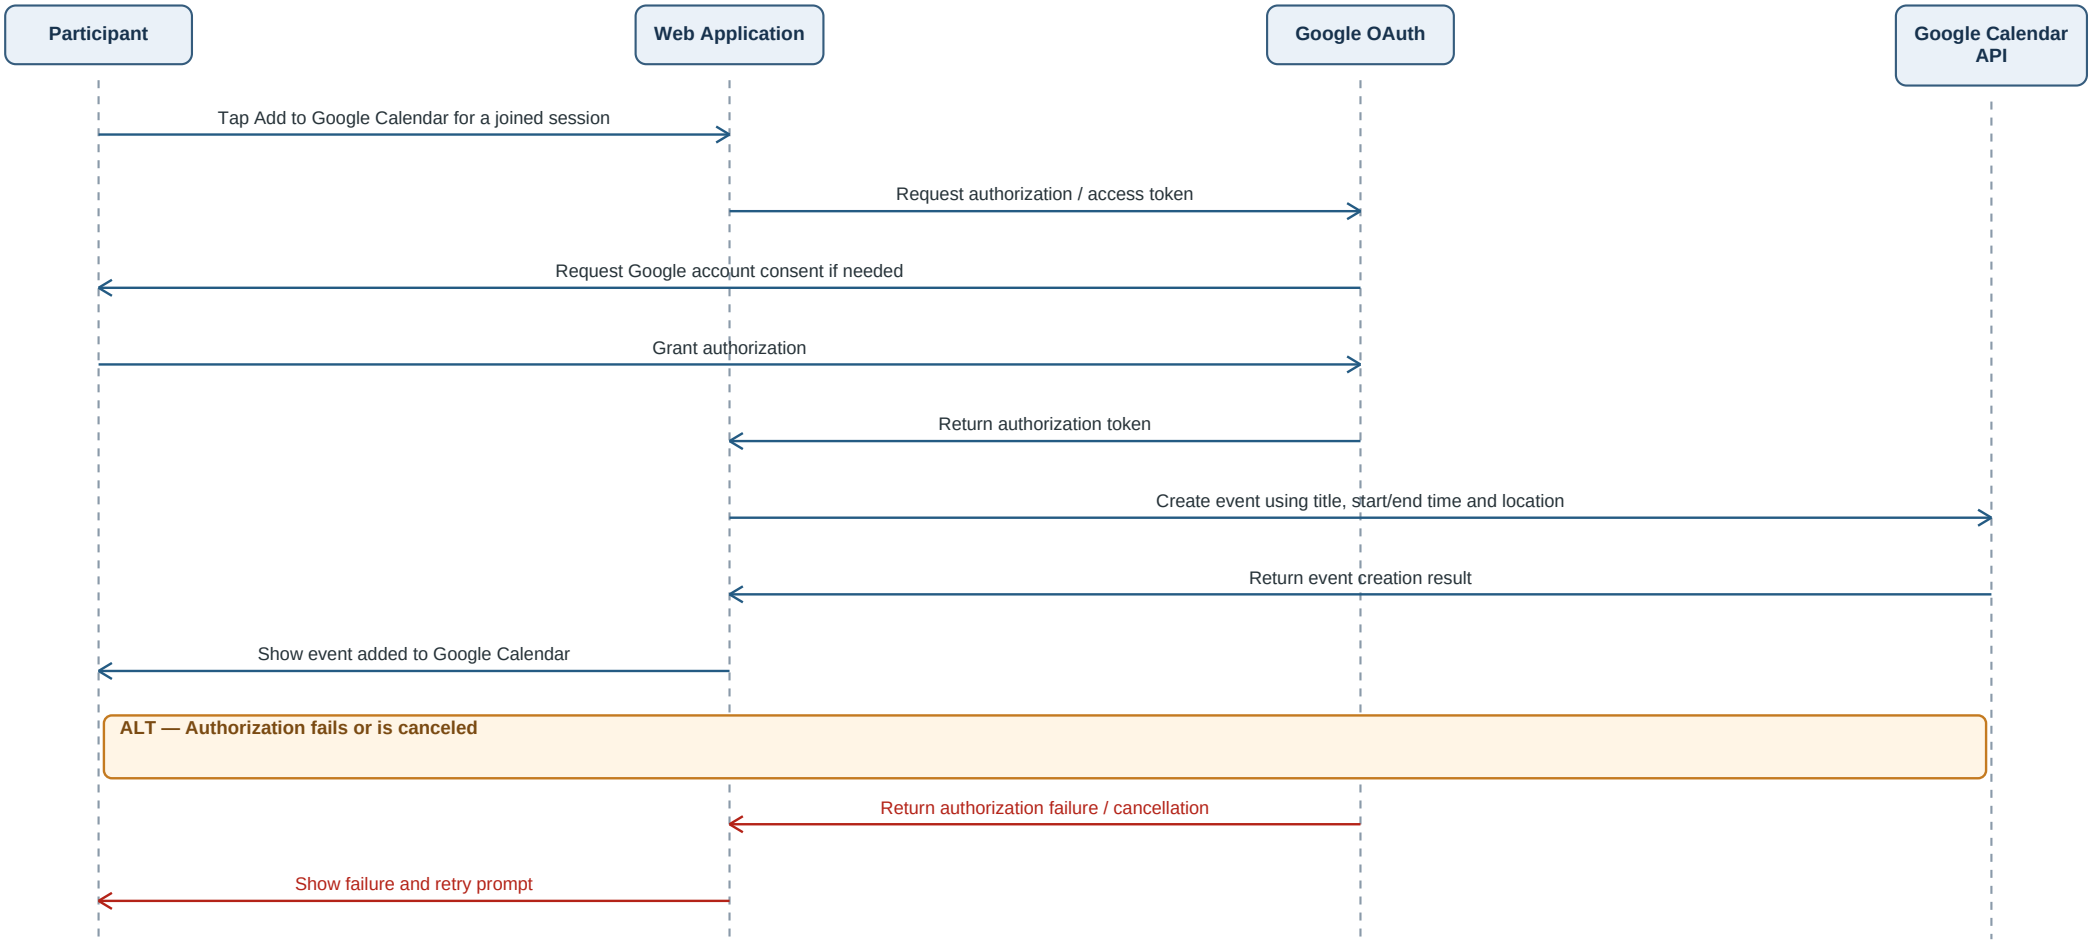

Note: The diagram shows logical interactions. The SRS does not specify every internal implementation detail; unspecified mechanisms are not assumed.

Overall — NUDTEE System Overview

High-level interaction across all seven functional requirements. Detailed success and error branches are shown on the individual FR pages.

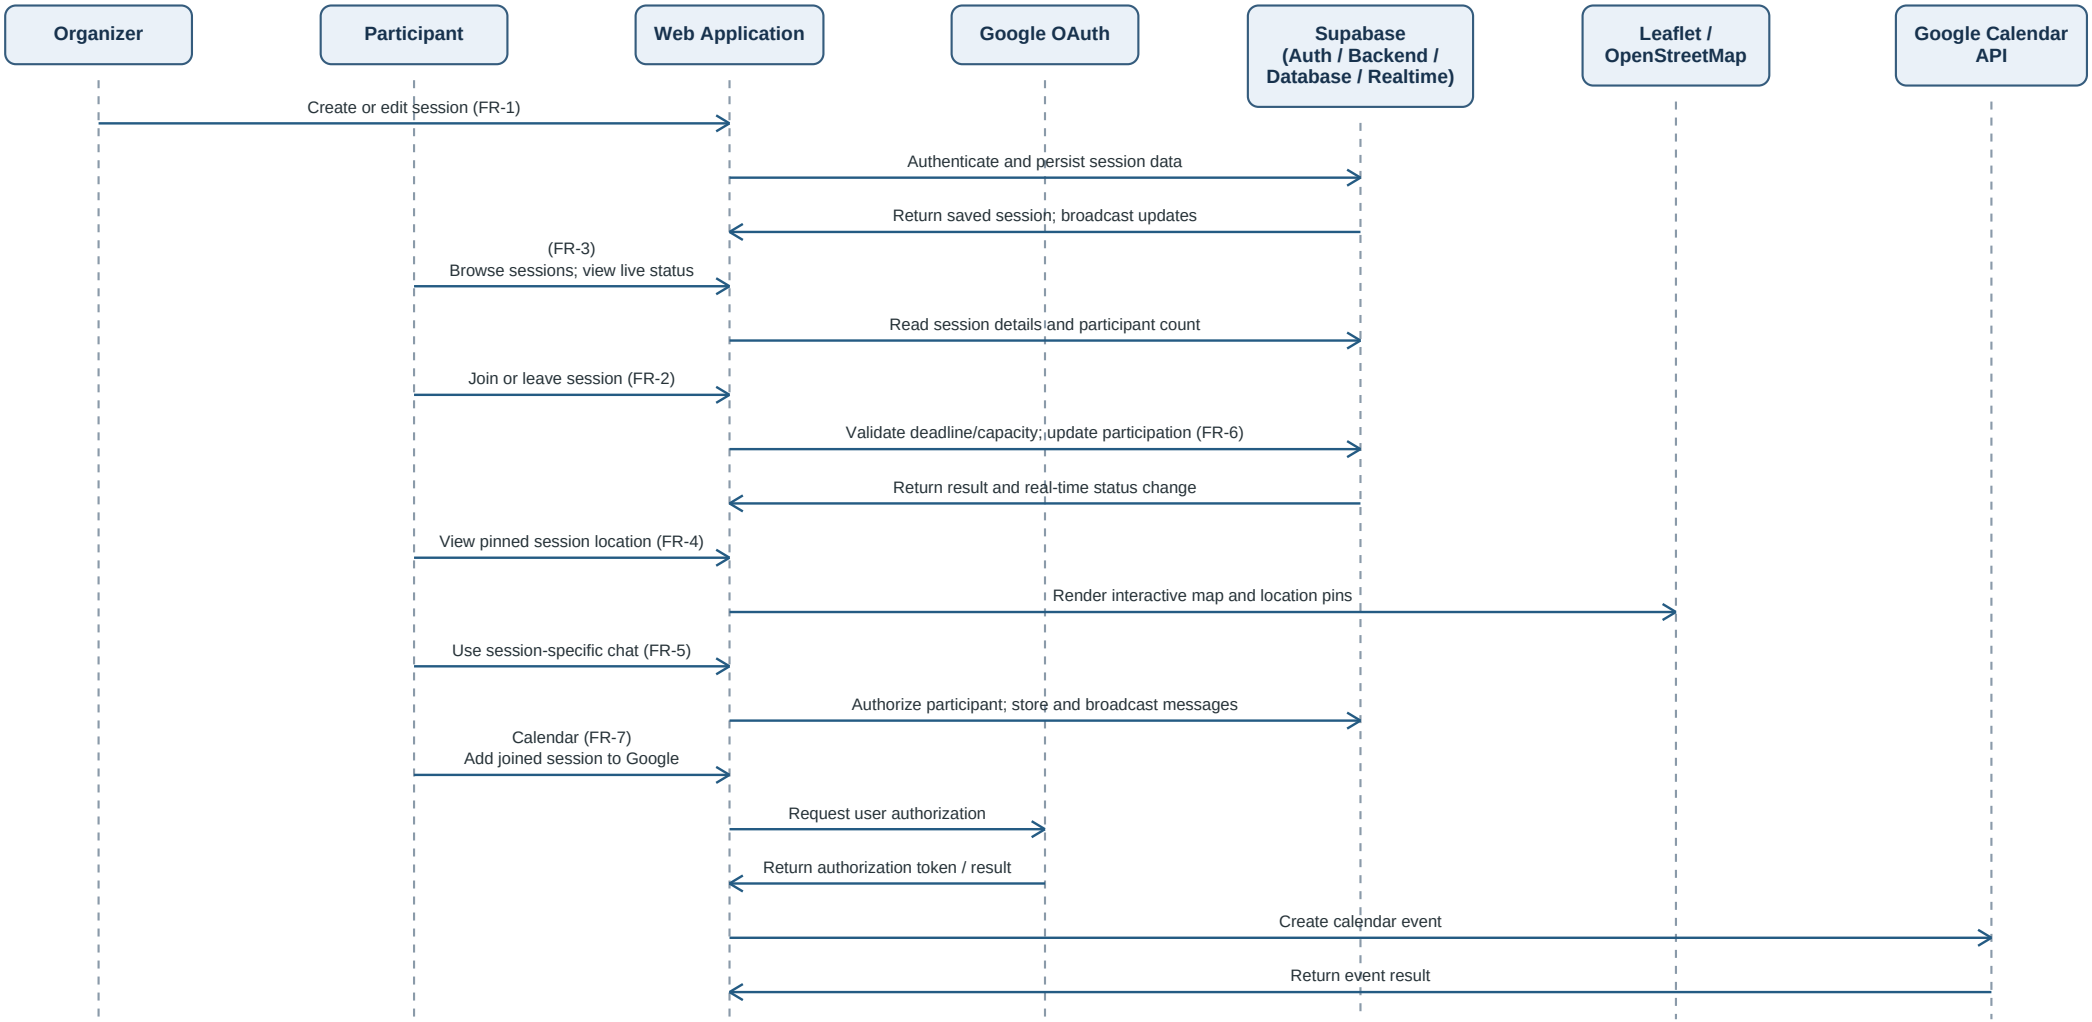

FR coverage: FR-1 Create/Edit • FR-2 Join/Leave • FR-3 Real-time Status • FR-4 Map • FR-5 In-room Chat • FR-6 Auto-close • FR-7 Google Calendar.

Modeling note: *FR-6 is shown as a deadline validation dependency for join requests and a Closed-status update at the deadline. The SRS specifies the behavior but does not name a scheduler implementation. Google OAuth is shown where authentication/authorization is required; the diagram does not assume additional identity-provider details.*