

# **RHCSA / RHCE Preparation**

A Creative  
Commons  
Courseware

# OpenRHC



# OpenRICE

# Course Outline

## Contents

Course Outline	4
Session One: Introductions	24
Introductions: Your Instructor	25
Introductions: Your Instructor	26
Qualifications:	27
Personal:	28
Introductions: Fellow Students	29
Please Introduce Yourself	30
Introductions: The Course	31
Course Goals	32
Introductions: Reasonable Expectations	33
Introductions: Preparation Recommendations	34
Introductions: Preparation Recommendations	35
Introductions: An OS for Practice and Study	36

Introductions: Online Information	37
Introductions: Classroom Infrastructure	38
Red Hat Enterprise Linux	39
The Red Hat Certification Landscape	40
Exercise 1-1: Install RHEL6 on a Virtual Machine	42
RHCSA Objectives	43
RHCSA Objectives: Understand & Use Essential Tools	44
RHCSA: Operate Running Systems	45
RHCSA: Configure Local Storage	46
RHCSA: Create and Configure File Systems	47
RHCSA: Deploy, Configure & Maintain	48
RHCSA: Manage Users and Groups	49
RHCSA: Manage Security	50
RHCE Objectives	51
RHCE: System Configuration and Management	52
RHCE: Network Services	53
RHCE: HTTP/HTTPS	54

RHCE: DNS	55
RHCE: FTP	56
RHCE: NFS	57
RHCE: SMB	58
RHCE: SMTP	59
RHCE: SSH	60
RHCE: NTP	61
<b>Operating a System</b>	<b>62</b>
Boot, Reboot, Shutdown	63
Runlevels	64
Single User Mode	65
Exercise 1-2: Use Single-user mode to recover a root password	66
Exercise 1-3: Boot into runlevel 3	67
Log Files	68
Exercise 1-4: View Logs from an x-term and a virtual terminal	69
Start/Stop Virtual Machines	70

Virtual Machine Consoles	71
Virtual Machine Text Console	72
Virtual Machine Text Console Caveat	73
Start, stop, and check the status of network services	74
Exercise 1-5: Manipulate the cups service	75
Modify the system bootloader	76
<b>Supplemental Reading</b>	<b>77</b>
<b>Supplemental Exercises</b>	<b>78</b>
Reading	79
<b>Session 2 User Mgmt, Storage, and filesystems</b>	<b>80</b>
User Administration with Config Files	81
Structure of /etc/passwd	82
Structure of /etc/shadow	83
Structure of /etc/group	84
Structure of /etc/gshadow	85
User Admin with CLI tools	86
User Admin with GUI tools	87

User environment	88
Common Contents:	89
System-wide Shell Config Files	90
User-configurable Environment Files	91
Exercise 2-1: Configure Users and Groups	92
"Filesystem" - Disambiguation	93
Linux Filesystem Hierarchy	94
Disk and Filesystem tools	95
Working with Partitions	96
Exercise 2-2: Work with Basic Partitions	97
Working with Logical Volume Management	98
Removing Logical Volume structures	99
Exercise 2-3: Work with Logical Volume Management	100
Commands to Know	101
Working with LUKS encrypted storage	102
Persistent mounting of LUKS devices	103
Working with SWAP	104



Using a file for SWAP	105
Mounting Using UUIDs and Filesystem Labels	106
Local Storage: Adding New Storage	107
File systems: Working with Common Linux Filesystems	108
Filesystem Permissions: Basic Permissions	109
Three Sets of Permissions:	110
Three Types of Permissions:	111
Three Extended Attributes:	112
Viewing Permissions	113
Setting Permissions	114
Setting Permissions with Numeric Options	115
Setting Extended Attributes with Numeric Options	116
Setting Extended Attributes with Symbolic Values:	117
Extended Attributes in Directory Listings	118
Umask	119
Umask Examples	120
SGID and Stickybit Use Case -- Collaborative Directories	121

File Access Control Lists	122
getfacl	123
Working with CIFS network file systems	124
Working with NFS file systems	125
iSCSI Devices	126
Accessing iSCSI Devices	127
Disconnecting from iSCSI Devices	128
Additional References	129
Reading	130
Labs	131
<b>Session 3 Managing software, processes, kernel attributes, and users and groups</b>	<b>132</b>
The Red Hat Network (RHN)	133
RHN Subscription Activation	134
3rd Party Yum Repositories	135
Yum Repository Mandatory Configuration Items	136
Yum Repository Common Optional Configuration Items	137
Managing Software: Using yum	138

Yum-related man pages	140
RPM Architecture	141
RPM Package Naming	142
Package Naming Example	143
Installing and Upgrading Packages	144
Upgrading a Kernel	145
RPM and Modified Config Files	146
Uninstalling	147
RPM over a Network	148
Common RPM Queries	149
RPM Verification	150
Validate Package Signatures	151
RPM Checksig Sample Output	152
Verify Installed Files	153
Change Codes from rpm --verify	154
RPM Verify Sample Output	155
Identifying Installed Packages	156

Managing Software: Building RPMs	157
Inside an RPM package	158
Main contents of a .spec file	159
Preamble directives	160
Required Spec file sections	162
Package Building Tools	163
Setting up a Build Environment	164
Viewing the Build Environment	165
Building the RPM	166
RPM Building Exercise	167
Signing Your RPMs	171
Create a Repo with your files	175
RPM Packaging, Other Documentation:	176
Manage Processes and Services	177
Persistent Configuration of Services	178
Manage Processes and Services: Configure systems to boot into a specific runlevel automatically	179
Monitoring Processes	180

Killing Processes	181
Prioritizing Processes	182
nice and renice commands	183
Manage system performance	184
<b>Session 4 Networking and Routing</b>	<b>185</b>
Network Configuration and Troubleshooting	186
IP Address and Subnet Mask	187
Routing and Default Gateway	188
Hostname	189
Name Resolution	190
Two Controlling Services	191
Switching between Controlling Services	192
Network Configuration Files	193
Reference	194
Future (Near!) Network Device Naming Scheme	195
<b>Session 5 Firewalls and SELinux</b>	<b>196</b>
Firewalling in RHEL6	197

iptables Built-in Chains	198
iptables Targets	199
Connection Tracking States	200
Iptables Command Options	201
Matching packets	202
Iptables Tips	204
SELinux	205
SELinux in Action	206
SELinux Enforcement Modes	207
Important SELinux Filesystem locations	208
Related Packages	209
Useful Commands	210
Additional Documentation	211
Setting the SELinux Enforcement Mode	212
SELinux Policy Types	213
SELinux Contexts	214
Setting SELinux file contexts	215

SELinux Booleans	216
Modifying SELinux Booleans	217
Help for SELinux with regard to specific services	218
Monitor SELinux Violations	219
<b>Session 6 Virtualization</b>	<b>220</b>
Virtualization Terms	221
RHEL6 KVM requirements	222
KVM Virtualization Components	223
Installing Virtualization Capabilities	224
Virsh Commands	225
Creating Virtual Machines with Virt-Manager	227
Creating Virtual Machines with virt-install	228
SELinux considerations	229
<b>Session 7 Logging and remote access</b>	<b>230</b>
RHEL 6 Logging with Rsyslog	231
Accepting Remote Logs	232
Rsyslog Configuration: Message Selection	233

Rsyslog Configuration: Actions	234
Practice	235
Remote Access via SSH	236
Investigate SELinux implications for SSH	237
SSH key-based authentication	238
SSH Security Considerations	239
Remote Access via VNC	240
Configuring a VNC remote display	241
Investigate SELinux implications for VNC	242
<b>Session 8 Network Time Protocol and System Performance Reports</b>	<b>243</b>
NTP Overview	244
NTP Packages	245
NTP Documentation	246
Installing, Starting, and Configuring Persistence	247
Defining NTP Terms	248
Configuration of NTP	249
NTP "restrict" options	250



Configure as a Client	251
Configure as a Server	252
Configure as a Peer	253
Investigate SELinux implications for NTP	254
Investigate Firewall Implications for NTP	255
Reporting on System Performance	256
Tools for System Utilization Reporting	257
<b>Session 9 HTTP and FTP</b>	<b>258</b>
Apache Web Server	259
Installation and Basic Configuration	260
Installing a Signed SSL Certificate	261
Virtual Host Configuration	262
Name Virtual Host Configuration	263
Example Virtual Host Configuration	264
Configuring for CGI-BIN scripts	265
Apache Access Control	266
Host Based Security directive formats	267

Access Control with .htaccess files	268
User Based Security with htpasswd flat file	269
Configuring Passwords	270
User Based Security with LDAP authentication	271
SELinux Implications for HTTP	272
Important SELinux Contexts	273
Firewall and SELinux for httpd	274
Very Secure File Transfer Protocol Daemon	275
Installation and Basic Configuration	276
FTP Documentation	277
Investigate SELinux implications for FTP	278
Investigate Firewall Implications for FTP	279
Configuring a Secure "Drop-box" for Anon Upload	280
<b>Session 10 NFS and Samba</b>	<b>282</b>
Network File System (NFS)	283
Packages	284
Configuration	285

Configuring an NFS server (Network File System)	286
/etc/exports	287
Commands	288
SELinux	289
Mounting	290
Automounter	291
Auto.master	292
Auto.*	293
Understanding Automount	294
Samba	295
Accessing SMB/CIFS Shares	296
Samba Packages:	298
SELinux	299
Services	300
/etc/samba/smb.conf (Global)	301
/etc/samba/smb.conf Security Types	302
Samba Users and Passwords	303

/etc/samba/smb.conf (Shares)	304
Testing Configuration	305
Samba Firewalling Considerations	306
HowTo: Enable Home Directory sharing via Samba	307
HowTo: Configure a Group Share	308
<b>Session 11 DNS and SMTP</b>	<b>309</b>
Types of DNS servers	310
Installing and enabling Bind	311
Useful Commands	312
Email TLAs: MTA, MUA, MDA	313
Red Hat's New Default MTA: Postfix	314
Postfix configuration tool	315
Reading Mail	316
<b>Session 12 Finish uncompleted topics, Review, or Practice Exam</b>	<b>317</b>
<b>Supplemental Topics</b>	<b>318</b>
Manage Processes and Services: Schedule tasks using cron	319

Cron	320
Format of a crontab file	321
Controlling Cron	322
at Jobs	323
Securing cron and at	324
User Admin with Config Files	325
Structure of /etc/passwd	326
Structure of /etc/shadow	327
Sample Contents	328
Structure of /etc/group	329
Sample Contents	330
Structure of /etc/gshadow	331
Sample Contents	332
User Admin with CLI tools	333
User Admin with GUI tools	334
User environment	335
Common Contents:	336

System-wide Shell Config Files	337
User-configurable Environment Files	338
CUPS Printing System	339
Controlling Jobs from the Command Line	340
CUPS Web-Based Interface	341
<b>Troubleshooting</b>	<b>342</b>
Booting	343
Booting - (MBR)	344
Booting - GRUB Stage 1.5 (Driver to read filesystem)	345
Booting - GRUB Stage 2 (Menu)	346
Booting - Kernel	347
Booting - initrd (initial ramdisk)	348
Booting - init process	349
Booting - inittab	350
Booting - rc.sysinit	351
Booting - services	352
Networking	353

X	354
TCP_Wrappers	355
Which Services are Protected?	356
Identifying Protected Services	357
Hosts Access Files Syntax	358
<b>Source Repository</b>	<b>359</b>

# Session One: Introductions

**OpenHCE**



# Introductions: Your Instructor

Scott Purcell

[scott@texastwister.info](mailto:scott@texastwister.info)

<http://www.linkedin.com/in/scottpurcell>

<http://twitter.com/texastwister>

<http://www.facebook.com/Scott.L.Purcell>

**OpenRICE**

# Introductions: Your Instructor

**OpenStax**

## *Qualifications:*

- RHCSA, RHCE #110-008-877 (RHEL6)
- Also: CTT+, CLA, CLP, CNI, LPIC1, Linux+
- Curriculum Developer and Trainer for a major computer manufacturer for going on 11 years
- Linux Enthusiast since 2000

## ***Personal:***

- Husband, father, disciple and
- Fun: Part-time Balloon Entertainer

## Introductions: Fellow Students

## *Please Introduce Yourself*

- Name
- Where you work or what you do.
- What Linux experience do you already have?
- What goals do you have for this class?
- Something fun about yourself.

# Introductions: The Course

## Our Textbook:

RHCSA/RHCE Red Hat Linux Certification Study Guide (Exams EX200 & EX300), 6th Edition (Certification Press) Michael Jang ISBN-10: 0071765654 | ISBN-13: 978-0071765657 Publication Date: June 17, 2011 | Edition: 6

Our classroom time will not follow it closely, but it is invaluable for your background reading, later reference, and out-of-class practice and study.

OpenRHCE

## ***Course Goals***

### **Primary Goal:**

Preparation to Pass the RHCE Exam (assumes passage of the RHCSA Exam)

### **Secondary Goal:**

Preparation to Pass the RHCSA Exam

### **Tertiary Goal:**

Acquiring high-level Enterprise-oriented Linux skills

### **NOT a Goal of this course:**

Acquiring basic or user-oriented Linux skills. These are assumed as prerequisite for this course.



## Introductions: Reasonable Expectations

- Should I be able to pass the RHCE on this class alone?

A stunning number (estimated at 50% or more) of seasoned professionals taking Red Hat's own prep courses fail to pass on first attempt.

- Planning for more than one attempt is prudent.

Pass rates go up substantially on 2nd attempts.

- Maximizing your out-of-class preparation time is prudent.

# Introductions: Preparation Recommendations

## 1. Build a Practice/Study Environment

- Scenario 1 -- A single virtualization-capable system with multiple vm "guests".
  - Host must have a 64 bit CPU with HW virtualization extensions
  - 4 GB or more of RAM recommended as a minimum -- 2GB is likely an absolute minimum
  - 60 GB of HDD space recommended as a minimum -- enough for the host OS and several VMs.
- Scenario 2 -- Several physical systems, networked together.
  - These can be 32-bit (i386 / i686) or 64-bit (x86\_64) systems
  - Each should have 768 MB of RAM as a minimum.
  - Each should have 12-20 GB of HDD space as a minimum.

### ***Caution***

You may be unable to practice a few of the objectives (those related to virtualization) in this scenario.

## Introductions: Preparation Recommendations

### 2. Take initiative -- form a study group.

Find Participants:

- In class
- At work
- Linked-In groups
- Local LUGs
- MeetUps

### 3. Practice, practice, practice!

# Introductions: An OS for Practice and Study

## RHEL 6

[http://www.redhat.com/wapps/eval/index.html?evaluation\\_id=1008](http://www.redhat.com/wapps/eval/index.html?evaluation_id=1008)

## CENTOS 6

<https://www.centos.org/>

## ClearOS Core (Not Enterprise)

<http://www.clearfoundation.com/Software/downloads> (64-bit only)

## Scientific Linux

<http://www.scientificlinux.org/>

## Fedora 13

[http://mirrors.fedoraproject.org/publiclist/Fedora/13/x86\\_64/](http://mirrors.fedoraproject.org/publiclist/Fedora/13/x86_64/)

# Introductions: Online Information

Red Hat docs:

[http://docs.redhat.com/docs/en-US/Red\\_Hat\\_Enterprise\\_Linux/index.html](http://docs.redhat.com/docs/en-US/Red_Hat_Enterprise_Linux/index.html)

RHCSA/RHCE Objectives and other information at:

<http://www.redhat.com/certification/>

OpenRHCE

# Introductions: Classroom Infrastructure

RHEL6

OpenRHC

# Red Hat Enterprise Linux

- Overview
- Server and Desktop variants
- Add-on Functionality
- LifeCycle

OpenRHC

# The Red Hat Certification Landscape

- RHCSA

RHCSA is new, replacing the RHCT. It is the "core" sysadmin certification from Red Hat. To earn RHCE and other system administration certs will require first earning the RHCSA.

- [RHCSA Details](#)
- [RHCSA Objectives](#)

- RHCE

RHCE is a senior system administration certification. It is an eligibility requirement for taking any COE exams and is thus a requirement for the upper-level credentials as well.

- [RHCE Details](#)
- [RHCE Objectives](#)



- Certificates of Expertise

COEs are incremental credentials demonstrating skills and knowledge in specialized areas. They are worthy credentials in their own right, but also the building blocks of the upper level credentials.

- Overview of COEs

- RHCSS, RHCDS, RHCA

These upper level credentials recognize those who have achieved expertise in several related specialized areas. Each one requires multiple COEs.

## Exercise 1-1: Install RHEL6 on a Virtual Machine

Following the instructor, install your first virtual machine.

## RHCSA Objectives

**OpenRHCE**

## ***RHCSA Objectives: Understand & Use Essential Tools***

- Access a shell prompt and issue commands with correct syntax
- Use input-output redirection (>, >>, |, 2>, etc.)
- Use grep and regular expressions to analyze text
- Access remote systems using ssh and VNC
- Log in and switch users in multi-user runlevels
- Archive, compress, unpack and uncompress files using tar, star, gzip, and bzip2
- Create and edit text files
- Create, delete, copy and move files and directories
- Create hard and soft links
- List, set and change standard ugo/rwx permissions
- Locate, read and use system documentation including man, info, and files in /usr/share/doc .

[Note: Red Hat may use applications during the exam that are not included in Red Hat Enterprise Linux for the purpose of evaluating candidate's abilities to meet this objective.]

## ***RHCSA: Operate Running Systems***

- Boot, reboot, and shut down a system normally
- Boot systems into different runlevels manually
- Use single-user mode to gain access to a system
- Identify CPU/memory intensive processes, adjust process priority with renice, and kill processes
- Locate and interpret system log files
- Access a virtual machine's console
- Start and stop virtual machines
- Start, stop and check the status of network services

## ***RHCSA: Configure Local Storage***

- List, create, delete and set partition type for primary, extended, and logical partitions
- Create and remove physical volumes, assign physical volumes to volume groups, create and delete logical volumes
- Create and configure LUKS-encrypted partitions and logical volumes to prompt for password and mount a decrypted file system at boot
- Configure systems to mount file systems at boot by Universally Unique ID (UUID) or label
- Add new partitions, logical volumes and swap to a system non-destructively

## ***RHCSA: Create and Configure File Systems***

- Create, mount, unmount and use ext2, ext3 and ext4 file systems
- Mount, unmount and use LUKS-encrypted file systems
- Mount and unmount CIFS and NFS network file systems
- Configure systems to mount ext4, LUKS-encrypted and network file systems automatically
- Extend existing unencrypted ext4-formatted logical volumes
- Create and configure set-GID directories for collaboration
- Create and manage Access Control Lists (ACLs)
- Diagnose and correct file permission problems

## ***RHCSA: Deploy, Configure & Maintain***

- Configure networking and hostname resolution statically or dynamically
- Schedule tasks using cron
- Configure systems to boot into a specific runlevel automatically
- Install Red Hat Enterprise Linux automatically using Kickstart
- Configure a physical machine to host virtual guests
- Install Red Hat Enterprise Linux systems as virtual guests
- Configure systems to launch virtual machines at boot
- Configure network services to start automatically at boot
- Configure a system to run a default configuration HTTP server
- Configure a system to run a default configuration FTP server
- Install and update software packages from Red Hat Network, a remote repository, or from the local filesystem
- Update the kernel package appropriately to ensure a bootable system
- Modify the system bootloader



## ***RHCSA: Manage Users and Groups***

- Create, delete, and modify local user accounts
- Change passwords and adjust password aging for local user accounts
- Create, delete and modify local groups and group memberships
- Configure a system to use an existing LDAP directory service for user and group information

## ***RHCSA: Manage Security***

- Configure firewall settings using system-config-firewall or iptables
- Set enforcing and permissive modes for SELinux
- List and identify SELinux file and process context
- Restore default file contexts
- Use boolean settings to modify system SELinux settings
- Diagnose and address routine SELinux policy violations

## RHCE Objectives

**OpenRHCE**

## ***RHCE: System Configuration and Management***

- Route IP traffic and create static routes
- Use iptables to implement packet filtering and configure network address translation (NAT)
- Use /proc/sys and sysctl to modify and set kernel run-time parameters
- Configure system to authenticate using Kerberos
- Build a simple RPM that packages a single file
- Configure a system as an iSCSI initiator that persistently mounts an iSCSI target
- Produce and deliver reports on system utilization (processor, memory, disk, and network)
- Use shell scripting to automate system maintenance tasks
- Configure a system to log to a remote system
- Configure a system to accept logging from a remote system

## ***RHCE: Network Services***

Network services are an important subset of the exam objectives. RHCE candidates should be capable of meeting the following objectives for each of the network services listed below:

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service

RHCE candidates should also be capable of meeting the following objectives associated with specific services:

## ***RHCE: HTTP/HTTPS***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Configure a virtual host
- Configure private directories
- Deploy a basic CGI application
- Configure group-managed content

## ***RHCE: DNS***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Configure a caching-only name server
- Configure a caching-only name server to forward DNS queries
- Note: Candidates are not expected to configure master or slave name servers

## ***RHCE: FTP***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Configure anonymous-only download



## ***RHCE: NFS***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Provide network shares to specific clients
- Provide network shares suitable for group collaboration

## ***RHCE: SMB***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Provide network shares to specific clients
- Provide network shares suitable for group collaboration

## ***RHCE: SMTP***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Configure a mail transfer agent (MTA) to accept inbound email from other systems
- Configure an MTA to forward (relay) email through a smart host

## ***RHCE: SSH***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Configure key-based authentication
- Configure additional options described in documentation

## ***RHCE: NTP***

- Install the packages needed to provide the service
- Configure SELinux to support the service
- Configure the service to start when the system is booted
- Configure the service for basic operation
- Configure host-based and user-based security for the service
- Synchronize time using other NTP peers

# Operating a System

**OpenRHC**

## Boot, Reboot, Shutdown

- Power On
- GRUB Menu
- Display Manager Screen
- Gnome or KDE
- Terminal commands: shutdown, halt, poweroff, reboot, init

## Runlevels

- Default
- From GRUB Menu



## Single User Mode

- Password Recovery

Note: SELinux bug prevents password changes while set to "Enforcing".

## Exercise 1-2: Use Single-user mode to recover a root password

- Reboot your virtual machine
- Activate the GRUB Menu
- Boot the system in Single User Mode
- Set SELinux to Permissive Mode
- Change the root password
- Set SELinux back to Enforcing Mode
- Activate runlevel 5
- Login as root with the new password

## Exercise 1-3: Boot into runlevel 3

- Reboot your virtual machines
- Activate the GRUB Menu
- Boot the system into runlevel 3
- Login as root
- Transition the system back to runlevel 5

## Log Files

`/var/log/*`

`/root/install.log`

`/root/anaconda-ks.cfg`

View with `cat`, `less` or other tools

Search with `grep`

## Exercise 1-4: View Logs from an x-term and a virtual terminal

- Launch a `gnome-terminal` session and browse the `/var/log/messages` file.
- Invoke a virtual terminal, login as root, and view `/var/log/secure`

## Start/Stop Virtual Machines

- Using virt-manager
- Using virsh commands

## Virtual Machine Consoles

- virt-manager
- virt-viewer

## Virtual Machine Text Console

With libguestfs-tools installed and the VM in question shut-down, from the host:

```
# virt-edit {VMname} /boot/grub/menu.lst
```

There, append to the kernel line:

```
console=tty0 console=ttyS0.
```

After saving, the following commands should allow a console based view of the boot process and a console login:

```
# virsh start {VMname} ; virsh console {VMname}
```



## Virtual Machine Text Console Caveat

After this change, some messages that appear only on the default console will be visible only here. For example, the passphrase prompt to decrypt LUKS-encrypted partitions mounted in `/etc/fstab` will not be visible when using `virt-viewer` and the vm will appear to be hung. Only by using `virsh console` can the passphrase be entered to allow the boot process to continue.

Start, stop, and check the status of network services

**OpenRHC**

## Exercise 1-5: Manipulate the cups service

- Check the status of the cups service
- Stop the cups service.
- Start the cups service.
- Configure cups to start only on runlevels 3 and 5

Modify the system bootloader

OpenRHC

# Supplemental Reading

Jang, Chapters 1-3

**OpenStax**

# Supplemental Exercises

- Setup a practice environment following instructions in Jang, Ch 1.

## Reading

Topics from this class:

Jang, Chapters 1-3

Topics for next class:

Jang 4,6,8

# Session 2 User Mgmt, Storage, and filesystems

**OpenRHC**



# User Administration with Config Files

## **/etc/passwd**

World-readable file of user information

## **/etc/shadow**

Restricted-access file with password and expiry info.

## **/etc/group**

World-readable file of group information

## **/etc/gshadow**

Restricted-access group password, admin, membership info

If editing directly, `vipw` and `vigr` should be used.

# Structure of /etc/passwd

Name:Password:UID:GID:Comments:Homedir:Shell

## Sample Contents

```
$ cat /etc/passwd
root:x:0:0:root:/root:/bin/bash
sshd:x:74:74:Privilege-separated SSH:/var/empty/sshd:/sbin/nologin
ntp:x:38:38::/etc/ntp:/sbin/nologin
gdm:x:42:42::/var/gdm:/sbin/nologin
scott:x:500:500:Scott Purcell:/home/scott:/bin/bash
```

# Structure of /etc/shadow

Name:Password:Lstchg:May:Must:Warn:Disable:Expire

## Sample Contents

```
# cat /etc/shadow
root:$1$IyApEyOS$dZ5SMuC7Yw9/PDMYWi1H11:14373:0:99999:7:::
sshd:!!:14373:0:99999:7:::
ntp:!!:14373:0:99999:7:::
gdm:!!:14373:0:99999:7:::
scott:$1${...}:14374:0:99999:7:::
bob:$1${...}:14398:7:30:7:7:14457:
```

# Structure of /etc/group

Name:Password:GID:Users

## Sample Contents

```
# cat /etc/group
root:x:0:root
scott:x:500:
bob:x:501:
mary:x:502:
sales:x:503:bob,mary
training:x:504:scott
```

# Structure of /etc/gshadow

Name:Password:Admins:Members

## Sample Contents \*\*

```
# cat /etc/gshadow
root:::root
scott:!!::
bob:!:~
mary:!:~
sales:!:~bob,mary
training:!:~scott
```

## User Admin with CLI tools

**useradd, usermod, userdel**

Create, delete, and modify user accounts

**groupadd, groupmod, groupdel**


Create, delete, and modify group accounts

**chage**

Modify password aging and expiration

# User Admin with GUI tools

The GUI tool for managing users and groups is the Red Hat User Manager. It can be launched from the menu at **System | Administration | Users and Groups** or from the CLI as `system-config-users`.

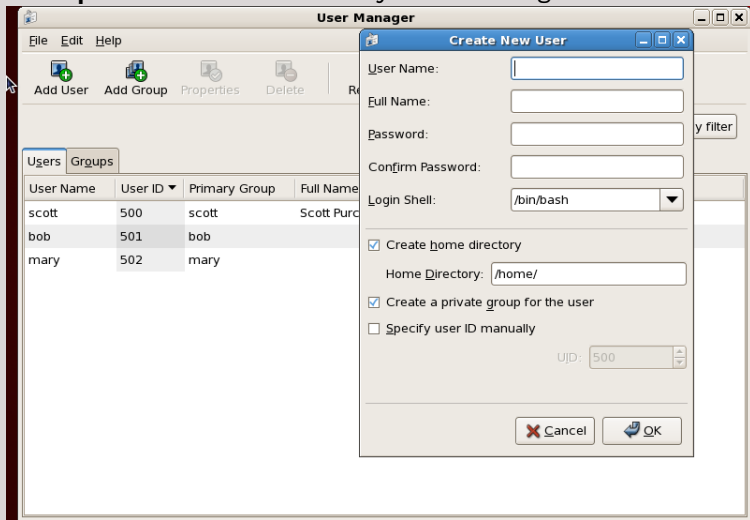

# User environment

## Home directories

/home/{user}/ or /root/

## /etc/skel

Contents copied to home directory of each new user.



## *Common Contents:*

- .bashrc
- .bash\_logout
- .bash\_profile

# System-wide Shell Config Files

## **/etc/profile**

Executed with each user login. Sets paths, variables, etc. Runs scripts in /etc/profile.d.

## **/etc/profile.d**

Scripts that extend /etc/profile, usually added by applications.

## **/etc/bashrc**

System-wide functions and aliases

## User-configurable Environment Files

`~/.bashrc`

User aliases and functions

`~/.bash_profile`

User paths, variables, and environment settings

## Exercise 2-1: Configure Users and Groups

On your client virtual machines, perform these tasks:

1. Create Groups "goodguys" and "villains"
  - Use custom GIDs so that the automatically created GIDs for the UPG scheme remain in sync with the usernames.
2. Create Users "bugs", "tweety" and "roadrunner" and make them members of "goodguys"
3. Create Users "taz", "sam", and "wiley" and make them members of "villains"
4. Set sam's account to expire in 30 days ("wabbit season" ends!)

# "Filesystem" - Disambiguation

Several meanings for the term:

- The way files are physically written to storage devices, as in the ext3, Fat-32, NTFS filesystems, or etc.
- The unified directory structure which logically organizes files
- The standard which defines how directories should be structured and utilized in Linux

# Linux Filesystem Hierarchy

The directory structure of a Linux system is standardized through the Filesystem Hierarchy Standard (explained at <http://www.pathname.com/fhs>)

The Linux Manual system has an abbreviated reference:

```
$ man 7 hier
```

Red Hat has a more complete description, along with RedHat-specific implementation decisions in their **Deployment Guide** at [http://www.redhat.com/docs/en-US/Red\\_Hat\\_Enterprise\\_Linux/5/html/Deployment](http://www.redhat.com/docs/en-US/Red_Hat_Enterprise_Linux/5/html/Deployment)

## Disk and Filesystem tools

- `fdisk` or `parted` -- Used to partition hard disks or other block devices
- `mkfs` and variants -- Used to create filesystems on block devices (actually a front-end for a variety of FS-specific tools)
- `fsck` and variants -- Used to run filesystem checks (a front-end to FS specific tools)
- `mount` -- Used to mount a filesystem to a specific location in the directory structure
- `/etc/fstab` -- Configuration file used to describe the filesystems that should be persistently mounted
- `blkid` -- used to identify filesystems or other in-use devices by UUID or filesystem labels.
- `df` -- used to display the capacity and utilization % of mounted filesystems.
- `partx` -- used to force implementation of a new partition table on an in-use device w/o the need to reboot.

## Working with Partitions

Overview of process for using Basic Storage Devices:

- Install the device or otherwise make it available to the system.
- Partition it with `fdisk` or `parted`.
- Create a filesystem on the partition with `mkfs` or other tools.
- Choose or create a directory to serve as a mount point.
- Mount the partition.
- Add an entry to `/etc/fstab` to make it persistent.



## Exercise 2-2: Work with Basic Partitions

On your Host machine:

- Use `virt-manager` to create a 20 GB virtual disk for your Client VM.

On your Client virtual machine:

1. Use `fdisk -luc` to verify that it is seen after a reboot of the VM.
2. Use `fdisk` to create a 5 GB partition (leaving the remainder unused).
3. Create an `ext4` filesystem on the new partition.
4. Create a new directory at `/shared/villains` and mount the new filesystem there.
5. Verify with `df -h` that the new space is seen.
6. Create an entry in `/etc/fstab` to make it persistent.

Optional Steps:

- Save a test file to `/shared/villains/`.
- Use `ls` to verify that it was saved as intended.
- Use `umount` to unmount the new partition.
- Use `ls` to verify that the file is no longer seen.
- Remount the partition.

## Working with Logical Volume Management

Overview of process for using Logical Volume Management:

- Install the device or otherwise make it available to the system.
- Create a type 8e partition with `fdisk` or `parted`.
- Initialize the partition as a physical volume with `pvcreate`.
- Add the storage of the PV to a volume group with `vgcreate`.
- Allocate storage from the volume group to a logical volume with `lvcreate`.
- Create a filesystem on the logical volume with `mkfs` or other tools.
- Choose or create a directory to serve as a mount point.
- Mount the partition.
- Add an entry to `/etc/fstab` to make it persistent.

## Removing Logical Volume structures

- Unmount the lv you want to remove
- Edit /etc/fstab to remove its entry
- Remove the logical volume: `lvremove /dev/<vg>/<lv>`
- Before removing a VG, ensure there are no more LVs within it.
- Remove the volume group: `vgremove /dev/<vg>`
- Remove the LVM signature from the partitions: `pvremove /dev/<part>`

## Exercise 2-3: Work with Logical Volume Management

On your Client virtual machine:

1. From the unallocated space on the disk you added in the previous exercise, create a 5 GB partition (type 8e) for LVM
2. Initialize it with pvcreate
3. Use vgcreate to create a volume group named "shared" from the physical volume.
4. Use lvcreate to create a 2.5 GB logical volume called "goodguys" from the "shared" volume group.
5. Create an ext3 filesystem on /dev/shared/goodguys.
6. Create a directory /shared/goodguys and mount the LV there.
7. Create an entry in /etc/fstab for persistence.
8. Use df -h to verify the available space.
9. Use lvextend to add another 1 GB to /dev/shared/goodguys.
10. Use resize2fs to grow the filesystem on /dev/shared/goodguys to use the new space.
11. use df -h to verify the available space.

## Commands to Know

### fdisk

- Always use -u and -c for best compatibility with newer storage devices
- Can't create partitions  $\geq$  2TB, use parted with GPT instead

### mkfs

- Used to create filesystems on devices
- Front-end for other filesystem-specific tools (usually named mkfs.<fstype>)

### blkid

- Shows device name, Filesystem Labels, and UUID of detected block devices.
- May not show block devices until a filesystem is created on them.
- May not show block devices used in non-standard ways (for example, a filesystem on a whole disk instead of on a partition)

### mount

- used to make a new filesystem available

## Working with LUKS encrypted storage

cryptsetup-luks-1.1.2-2.el6.x86\_64

Overview of process for using LUKS encryption:

- Create a new partition
- Encrypt it with `cryptsetup luksFormat /dev/<partition>`
- Open the encrypted device and assign it a name with `cryptsetup luksOpen /dev/<partition> <name>`
- Create a filesystem on the named device (`/dev/mapper/<name>`)
- Create a mountpoint for the device
- Mount the device

To lock the volume:

- unmount it
- Use `cryptsetup luksClose <name>` to remove the decryption mapping

# Persistent mounting of LUKS devices

To persistently mount it

- Create an entry in /etc/crypttab:

```
<name> /dev/<partition> <password (none|<blank>|<path/to/file/with/password>)>
```

- If the password field is "none" or left blank, the system will prompt for a password.
- Create an entry in /etc/fstab

## **Note**

At reboot, the password prompt goes only to the default console. If console redirection is enabled, as it might be in the case of enabling a virtual machine to accessible through virsh console <name>, then the only place where the prompt is seen and the passphrase can be entered is at that redirected console.

## Working with SWAP

Overview of process for adding SWAP space using a partition:

- Create a type 82 partition
- Initialize as swap with `mkswap /dev/<partition>`
- Identify the UUID with `blkid`
- Add an `/etc/fstab` line:

```
UUID=<UUID> swap swap defaults 0 0
```

- Activate the new swap space with: `swapon -a`



## Using a file for SWAP

Overview of process for adding SWAP space using a file:

- create a pre-allocated file of the desired size:

```
dd if=/dev/zero of=/path/to/<swapfile> bs=1M count=<size in MB>
```

- Initialize as swap with `mkswap /path/to/<swapfile>`
- Add an `/etc/fstab` line:

```
/path/to/<swapfile> swap swap defaults 0 0
```

- Activate the new swap space with: `swapon -a`

# Mounting Using UUIDs and Filesystem Labels

Configure systems to mount file systems at boot by Universally Unique ID (UUID) or label

## Local Storage: Adding New Storage

Add new partitions, logical volumes, and swap to a system non-destructively

# File systems: Working with Common Linux Filesystems

Create, mount, unmount and use ext2, ext3 and ext4 file systems

Extend existing unencrypted ext4-formatted logical volumes

# Filesystem Permissions: Basic Permissions

Linux permissions are organized around:

- Three sets of permissions -- User, Group, and Other
- Three types of permissions -- Read, Write, and Execute
- Three extended attributes -- SUID, SGID, and Stickybit

## Three Sets of Permissions:

Any given file or directory can be owned by one (and only one) user and one (and only one) group. Three different sets of permissions can be assigned.

- User -- User permissions apply to the individual user who owns the file or directory.
- Group -- Group permissions apply to any user who is a member of the group that owns the file or directory.
- Other -- Other permissions apply to any user account with access to the system that does not fall into the previous categories.

## Three Types of Permissions:

- Read ("r")
  - On a file, allows reading
  - On a directory, allows listing
- Write ("w")
  - On a file, allows editing
  - On a directory, allows creation and deletion of files
- Execute ("x")
  - On a file, allows execution if the file is otherwise executable (script or binary)
  - On a directory, allows entry or traversal (`# cd {dirname}`)

## Three Extended Attributes:

- **SUID (Set User ID)**

On an executable, runs a process under the UID of the file owner rather than that of the user executing it.

- **SGID (Set Group ID)**

On a directory, causes any files created in the directory to belong to the group owning the directory.

- **"Stickybit"**

On a directory, ensures that only the owner of a file or the owner of the directory can delete it, even if all users or other members of a group have write access to the directory.



## Viewing Permissions

Permissions are displayed with positions 2-10 of a "long" filelisting:

```
drwxr-xr-x  
-rw-r--r--  
drwxr-xr-x
```

<u>drwxr</u>	<u>-xr-x</u>	
user	group	other

## Setting Permissions

The `chmod` command is used to set permissions on both files and directories. It has two modes -- one using symbolic options and one using octal numbers.

```
chmod [option] [ugoa...][+--=][rwxst] filename
```

where ugo are user, group, other, or all and rwxst are read, write, execute, s{u/g}id, stickybit.

```
chmod [option] XXXX filename
```

where XXXX is a number representing the complete permissions on the file.

# Setting Permissions with Numeric Options

	User			Group, Other					
Permissions	r	w	x	r	w	x	r	w	x
Numeric Value	4	2	1	4	2	1	4	2	1
Sum	0-7			0-7	0-7				
example.txt	User			Group, Other					
Permissions	r	w	x	r	-	x	-	-	x
Numeric Value	4	2	1	4	0	1	0	0	1
Sum	7			5	1				

```
# chmod 751 myfile.txt
```

## Setting Extended Attributes with Numeric Options

chmod numeric options are actually 4 digits (not three). Missing digits are assumed to be leading zeroes.

The leftmost place is for extended attributes:

Attribute	SUID	SGID	Stickybit
Value	4	2	1

**Example:** `$ chmod 3775 MySharedDir`

## Setting Extended Attributes with Symbolic Values:

```
chmod +t {filename}
```

Sets the sticky bit

```
chmod u+s {filename}
```

Sets suid

```
chmod g+s {filename}
```

Sets sgid

## Extended Attributes in Directory Listings

-rwxrwxrwx	Normal Permissions, All permissions granted
-rwSrwxrwx	Indicates SUID set
-rwsrwxrwx	Indicates SUID and execute permission set
-rwxrwSrwx	Indicates SGID set
-rwxrwsrwx	Indicates SGID and execute permission set
-rwxrwxrwT	Indicates Stickybit set
-rwxrwxrwt	Indicates Stickybit and execute permission set

# Umask

- The umask value determines the permissions that will be applied to newly created files and directories.
- As a "mask" it is subtractive -- representing the value of the permissions you DO NOT want to grant.
- Execute rights are automatically withheld (w/o regard for the umask) for *files* but not for *directories*.
- Extended attributes are not addressed -- even though a umask is four characters.
- The default umask value is set in /etc/bashrc and can be modified (non-persistently!) with the bash built-in command `umask`.

## Umask Examples

- Umask of 0002 yields permissions of 0775 on new directories and 0664 on new files
- Umask of 0022 yields permissions of 0755 on new directories and 0644 on new files



## SGID and Stickybit Use Case -- Collaborative Directories

- Create a Group for Collaboration
- Add users to the group
- Create a directory for collaboration
- Set its group ownership to the intended group
- Set its group permissions appropriately
- Recursively set the SGID and sticky bits on the directory

This ensures that:

1. All files created in this directory will be owned by the intended group (SGID effect)
2. All files created in this directory can only be deleted by the user who owns the file or the user who owns the directory (stickybit effect)

## File Access Control Lists

- Provide more granular control of permissions.
- Filesystem must be mounted with the 'acl' option or be compiled with that option by default

getfacl

setfacl

## getfacl

Example of "getfacl aclidir"

```
# file: aclidir
# owner: frank
# group: frank
user::rwx
user:bob:-wx
user:mary:rw-
group::rwx
mask::rwx
other::r-x
```

Example of `ls -l aclidir`:

```
drwxrwxr-x+ 2 frank frank 4096 2009-05-27 14:15 aclidir
```

# Working with CIFS network file systems

Will be covered in more detail later.

Mount and unmount CIFS network file systems

# Working with NFS file systems

Mount and unmount NFS file systems

OpenRHC

# iSCSI Devices

Package: iscsi-initiator-utils

Allows a system to access remote storage devices with SCSI commands as though it were a local hard disk.

Terms:

- iSCSI initiator: A client requesting access to storage
- iSCSI target: Remote storage device presented from an iSCSI server or "target portal"
- iSCSI target portal: A server providing targets to the initiator
- IQN: "iSCSI Qualified Name" -- a unique name. Both the initiator and target need such a name to be assigned

## Accessing iSCSI Devices

- Install the `iscsi-initiator-utils` package
- Start the `iscsi` and `iscsid` services (and configure them persistently on)
- Set the initiator IQN in `/etc/iscsi/initiatorname.iscsi`
- Discover targets with:

```
iscsiadm -m discovery -t st -p <portal IP address>
```

- Log in to the target using the name displayed in discovery:

```
iscsiadm -m node -T <IQN> -p <portal IP address> -l
```

- Identify the SCSI device name with `dmesg`, `tail /var/log/messages` or `ls -l /dev/disk/by-path/*iscsi*`
- Use the disk as though it were a local hard disk

### *Important*

Be certain to use UUIDs or labels for persistent mounts in `/etc/fstab`. Also, provide `_netdev` as a mount option so that this device will not be mounted until the network is already up.

## Disconnecting from iSCSI Devices

- Ensure the device is not in use
- Unmount the device
- Remove its `/etc/fstab` entry
- Logout from the target:

```
iscsiadm -m node -T <IQN> -p <portal IP> -u
```

- Delete the local record:

```
iscsiadm -m node -T <IQN> -p <portal IP> -o delete
```



## Additional References

4 of the Storage Administration Guide for  
[http://www.redhat.com/docs/en-US/Red\\_Hat\\_Enterprise\\_Linux/6/html/Storage\\_Administration\\_Guide/index.html](http://www.redhat.com/docs/en-US/Red_Hat_Enterprise_Linux/6/html/Storage_Administration_Guide/index.html)  
e of parted.

- Man pages for fdisk(8), fstab(5), mkfs(8), blkid(8), partprobe(8), mount(8), parted(8), cryptsetup(8), and crypttab(5)

## Reading

Topics from this class:

Jang, Chapters 4,6,8

Topics for next class:

Jang Ch 7,9,12,17

## Labs

### Add Storage

- Add a disk to the virtual machine

  - Add Swap

  - Add a partition

  - Add space to a VG

  - Add a LUKS-encrypted filesystem

  - Enlarge an LV

- Add an iSCSI device

### Create a partition for collaboration

- Create File ACLs

# Session 3 Managing software, processes, kernel attributes, and users and groups

**OpenRHC**

# The Red Hat Network (RHN)

The primary delivery mechanism for installable software, updates, errata and bug fixes and systems management functions for an installation of RHEL 6 is the Red Hat Network or RHN.

The "cost" of RHEL 6 is really a subscription to this support network.

These commands are using in managing an RHN subscription:

```
# man -k rhn
rhn-profile-sync      (8) - Update system information on Red Hat Network
rhn_check             (8) - Check for and execute queued actions on RHN
rhn_register         (8) - Connect to Red Hat Network
rhnplugin            (8) - Red Hat Network support for yum(8)
rhnplugin.conf [rhnplugin] (5) - Configuration file for the rhnplugin(8) yum(8) plugin
rhnreg_ks            (8) - A program for non interactively registering systems to Red Hat Network
rhnsd                (8) - A program for querying the Red Hat Network for updates and information
```

# RHN Subscription Activation

A new user of RHEL6 should receive information similar to this:

```
Red Hat subscription login:
Account Number      : *****
Contract Number    : *****
Item Description    : Red Hat Enterprise Linux <Edition>
RHEL Subscription Number : *****
Quantity           : #
Service Dates      : 12-JUN-10 through 11-JUN-11
Customer Name      : *****
Account Number     : *****
Log into the new portal here: access.redhat.com
Login: *****
Password: *****
Email address: *****
```

That information can then be used with `rhn_register` to activate a new subscription

## 3rd Party Yum Repositories

These are other repositories of installable software, updates, or bugfixes. The yum command can be configured to use them in addition to or instead of the RHN.

- Configuration of repositories other than the RHN is accomplished through text configuration files located in the directory: `/etc/yum.repos.d/`
- A configuration file for each repository (or group of related repos) should be created in `/etc/yum.repos.d/`
- The name of each repo config file should end in `".repo"`.
- This allows repos to be easily temporarily disabled simply by renaming the file to something like: `myrepo.repo.disabled`

# Yum Repository Mandatory Configuration Items

## Repository ID

Short name for identifying this repository in reports

```
[MyRepo]
```

## Name

Longer description of this repository

```
name=My Custom Repository
```

## Baseurl

Description of protocol and location needed to locate the repo files.

```
baseurl=ftp://192.168.5.200/pub/rhel6
```



# Yum Repository Common Optional Configuration Items

## gpgcheck

Defines whether yum should attempt to validate package signatures. "0" = "off", "1" = "on".

```
gpgcheck=1
```

## gpgkey

Defines (via URL) where the keys for signature validation are located (typically file:///etc/pki/rpm-gpg/<key name>)

```
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-redhat-release
```

## enabled

(Optional) Defines whether this repository should be currently active. "0" = "off", "1" = "on".

```
enabled=1
```

# Managing Software: Using yum

Common commands:

`yum help`

Displays usage information.

`yum list`

Lists all available packages and indicates which are installed.

`yum search KEYWORD`

Searches for packages with a keyword in the package metadata.

`yum info PACKAGENAME`

Displays information about a package taken from the package metadata.

`yum install PACKAGENAME`

Installs a package (obtained from the repository) and any required dependencies.

`yum localinstall RPMFILENAME`

Installs a local .rpm file, but uses the repository to satisfy dependencies.

`yum remove PACKAGENAME`

Uninstalls a package and any other packages dependent upon it.

`yum update PACKAGENAME`

Installs a newer version of the package, if available.

yum update

Updates an installed package for which a newer version is available.

# Yum-related man pages

```
# man -k yum
qrepocsync      (1) - synchronize yum repositories to a local directory
rhnplugin       (8) - Red Hat Network support for yum(8)
rhnplugin.conf [rhnplugin] (5) - Configuration file for the rhnplugin(8) yum(8) plugin
yum             (8) - Yellowdog Updater Modified
yum [yum-shell] (8) - Yellowdog Updater Modified shell
yum-groups-manager (1) - create and edit yum's group metadata
yum-utils       (1) - tools for manipulating repositories and extended package management
yum.conf [yum]  (5) - Configuration file for yum(8)
```

## RPM Architecture

rpm executable

RPM packages -- Files to install + SPEC file (metadata)

Local RPM database -- retains metadata from all installed packages

Database is kept in /var/lib/rpm

# RPM Package Naming

- name-version-release.architecture\*.rpm
- Version is the version of the "upstream" open source code
- Release refers to Red Hat internal patches to the source code
- Architecture is one of:
  - i386,i686 -- 32 bit x86 compatible
  - x86\_64 -- Intel/AMD 64 bit
  - ppc64 -- Power PC 64 bit
  - ia64 -- Intel Itanium 64 bit
  - noarch -- Arch-independent code (scripts, docs, images, etc)
  - src -- Source code

## Package Naming Example

bash-3.2-24.el5.x86\_64.rpm

Name	Project Version	RH Release	Arch
bash	3.2	24.el5	x86_64

This package starts with version 3.2 of bash (from [ftp.gnu.org/gnu/bash](http://ftp.gnu.org/gnu/bash)), applies a RH patch identified as 24.el5 to it, and is then built to run on an Intel/AMD 64 bit processor.

# Installing and Upgrading Packages

```
# rpm -i[v,h] name-ver-rel.arch.rpm
```

Installs a package

```
# rpm -U[v,h] name-ver-rel.arch.rpm
```

Upgrades a package if an older version was previously installed. Otherwise, simply installs the new version.

```
# rpm -F[v,h] name-ver-rel.arch.rpm
```

Upgrades a package if an older version is installed. Otherwise, does nothing -- **does not install new packages if no older version was installed.**



## Upgrading a Kernel

- Always use `#rpm -i ...`
- This leaves the previously installed kernel on the system and in the GRUB menu as a fall-back in case the new version has problems.

## RPM and Modified Config Files

Scenario: niftyapp-1.0-1.el5.rpm uses a config file, `/etc/nifty.conf`. You tweaked `/etc/nifty.conf` to fit your system. Now niftyapp-2.0-1.el5.rpm is available with new features that require changes in the `.conf` file and provides a new default config file. What to do?

- If the previous version provided a default config file, the changes are detected. Your modified version of the `.conf` file is saved as `/etc/nifty.conf.rpmnew` and the new default config is installed. You can compare the files and modify as needed.
- If the previous version did NOT provide a default config file, your version of the `.conf` file is saved as `/etc/nifty.conf.rpmorig` and the new default config is installed. You can compare the files and modify as needed.

# Uninstalling

```
# rpm -e name[-ver][-rel]
```

- Package removal is never verbose, never shows progress ( -v, -h have no effect)
- Package removal only needs the name (or when multiple versions of the same package are installed, sometimes the version or release) but not the architecture or the .rpm extension.

## RPM over a Network

```
# rpm -ivh ftp://{Host}/path/to/package-name-ver-rel.arch.rpm
```

```
# rpm -ivh http://{Host}/path/to/package-name-ver-rel.arch.rpm
```

And wildcard "globbing" is allowed:

```
# rpm -ivh http://{Host}/path/to/package-name*
```

## Common RPM Queries

Query	Result
<code>rpm -qa</code>	lists all installed packages.
<code>rpm -q pkg</code>	Reports the version of the package.
<code>rpm -qf /path/file</code>	Reports which package provided the file.
<code>rpm -qc pkg</code>	Lists all configuration files of the package.
<code>rpm -qd pkg</code>	Lists all documentation of the package.
<code>rpm -qi pkg</code>	Reports a description of the package.
<code>rpm -ql pkg</code>	Lists all files contained in the package.
<code>rpm -qR pkg</code>	Lists all dependencies.
<code>rpm -q --scripts</code>	Lists the scripts that run when installing/removing.
<b><code>rpm -q{c d i l R}p /path/to/package-name-ver-rel-arch.rpm</code></b>	
Reports the same info as above, but pulls info from the .rpm file instead of the rpm database.	

## RPM Verification

The RPM system satisfies two types of security concerns:

1. Is this package *authentic*? How do I know it came from Red Hat?
2. Has this package retained *integrity*? How do I know they haven't been modified?

Authenticity and integrity of packages can be confirmed prior to installation with GPG signing and MD5 checksums of the RPM packages.

Integrity of files can be confirmed after installation with verification of installed files against the recorded metadata in the package.

# Validate Package Signatures

1. Import the Red Hat GPG public key (It can be found on the installation CD or in the `/etc/pki/rpm-gpg/` directory):

```
# rpm --import /media/disk/RPM-GPG-KEY-redhat-release
```

or:

```
# rpm --import /etc/pki/rpm-gpg/RPM-GPG-KEY-redhat-release
```

2. Check the signature of the package in question:

```
# rpm --checksig /path/to/package-ver-rel.arch.rpm
```

# RPM Checksig Sample Output

```
$ rpm --checksig ftp://linuxlib.us.dell.com/pub/Distros/RedHat/RHEL5/5.3/Server/x86_64/  
install-x86_64/Server/ImageMagick-6.2.8.0-4.el5_1.1.i386.rpm  
  
ftp://linuxlib.us.dell.com/pub/Distros/RedHat/RHEL5/5.3/Server/x86_64/install-x86_64/Server  
/ImageMagick-6.2.8.0-4.el5_1.1.i386.rpm: (sha1) dsa sha1 md5 gpg OK
```



## Verify Installed Files

`rpm -V` (or `--verify`) will compare existing files on the system to their pristine state in the packages they came from.

There are 8 points of comparison as shown in the following table, in the Michael Jang book and in the `rpm` man page:

## Change Codes from rpm --verify

Change Code	Meaning
5	MD5 checksum
S	File size
L	Symbolic Link
T	Modification time
D	Device
U	User
G	Group
M	Mode

# RPM Verify Sample Output

```
#rpm -Va
...

S.5....T  c /etc/ntp.conf
..?..... c /etc/ntp/keys
S.5....T   /usr/bin/aspell
.....T    /usr/share/ImageMagick-6.2.8/config/magic.xml
.....T  d  /usr/share/doc/ImageMagick-6.2.8/images/arc.png
.....T  d  /usr/share/doc/ImageMagick-6.2.8/images/background.jpg

...
```

## Identifying Installed Packages

View a list of the packages originally installed on the system:

```
# less /root/install.log
```

View a list of the packages installed through yum:

```
# less /var/log/yum.log
```

Query the RPM database for the packages installed right now:

```
# rpm -qa
```

# Managing Software: Building RPMs

As of this writing, Red Hat is pointing users to the following RPM Guide from the Fedora project for more information on RPM creation:

[http://docs.fedoraproject.org/en-US/Fedora\\_Draft\\_Documentation/0.1/html/RPM](http://docs.fedoraproject.org/en-US/Fedora_Draft_Documentation/0.1/html/RPM)

## Inside an RPM package

- files
- scripts
- metadata

The package is defined by a "build specification file" or *spec file*.

A good example of a spec file can be obtained from the source rpm for redhat-release.

[ftp://ftp.redhat.com/pub/redhat/linux/enterprise/6Server/en/os/SRPMS/redhat-release-sources-6.0-1.src.rpm](http://ftp.redhat.com/pub/redhat/linux/enterprise/6Server/en/os/SRPMS/redhat-release-sources-6.0-1.src.rpm)

### ***Tip***

Open .spec files in vim for color highlighting

## Main contents of a .spec file

- Introduction or preamble: Contains metadata about the package
- Build instructions on how to compile the source code or otherwise prepare the package payload.
- Scriptlets that perform the installation, uninstallation, or upgrade.
- Manifest of files to be installed, along with their permissions.
- Changelog recording the changes made to the package with each revision.

## Preamble directives

### Name

Name of the package

### Version

Version identifier

### Release

Indicates incremental changes within a version.

### Group

The package group that should include this package. This can come from the list at `/usr/share/doc/rpm-*/GROUPS` or can be unique to you. Not related to yum package groups.

### License

Short License Identifier as described at  
<http://fedoraproject.org/wiki/Packaging/LicensingGuidelines>

### Summary

Short (<=50 chars) one-line description.

### Source

The file to be used as the source code. Add'l sources can be specified as Source0, Source1, etc.



**BuildArch**

Arch to use when building. Defaults to the existing system arch. May also be "noarch" for arch-independent packages.

**Requires**

Requirements that this package needs to run. Can be in the form of files or other packages

**BuildRequires**

Requirements needed to build this package.

## Required Spec file sections

%description

%prep

%build

%install

%clean

%files

%changelog

## Package Building Tools

These packages will provide tools for setting up a build environment and the ability to create your own packages.

- rpm-build
- rpmdevtools
- rpmlint

# Setting up a Build Environment

As a non-privileged user, run:

```
$ rpmdev-setuptree
```

This should create the following directory structure in your home directory:

```
~/rpmbuild
|-- BUILD
|-- RPMS
|-- SOURCES
|-- SPECS
\-- SRPMS
```

In that structure, your source files (in a tarball) should be placed `~/rpmbuild/SOURCES/` and your `.spec` file in `~/rpmbuild/SPECS/`. The `~/rpmbuild/BUILD/` directory will be a temporary working directory for the build process. And, after the `rpmbuild` process is complete, the finished binary and source RPMs will be placed in `~/rpmbuild/RPMS/` and `~/rpmbuild/SRPMS/`, respectively.

## Viewing the Build Environment

When diagnosing build problems, it is sometimes useful to see what files are actually being created in the build environment in order to identify deviations of actual behavior from expected behavior. The tree utility is useful for that.

Install tree with `# yum install tree`.

Invoke tree with `$ tree ~/rpmbuild` to show the contents of the build environment.

## Building the RPM

With the source files in place and a properly configured `.spec` file written, the `rpmbuild` command can be used to build the rpm either at once, or (for troubleshooting) in stages

```
$ rpmbuild -bp <spec file>
```

Builds through the `%prep` section -- unpacks sources and applies patches.

```
$ rpmbuild -bc <spec file>
```

Builds through compile -- processes the `%prep` and `%build` sections.

```
$ rpmbuild -bi <spec file>
```

Builds through `%install` -- processes `%prep`, `%build`, and `%install`.

```
$ rpmbuild -bb <spec file>
```

Builds only the binary rpm file.

```
$ rpmbuild -bs <spec file>
```

Builds only the source rpm file.

```
$ rpmbuild -ba <spec file>
```

Builds both the binary and source rpm files.

Use `rpmbuild --help` or `man rpmbuild` for other options.

## RPM Building Exercise

As root, install rpm-build, rpmlint, rpmdevtools:

```
# yum -y install rpmbuild rpmdevtools rpmlint
```

As a non-privileged user, create a project directory, named according to the convention: <projname>--<majorver>.<minorver>:

```
$ mkdir ~/hello-1.0
```

Create bash script: ~/hello-1.0/hello.sh

```
#!/bin/bash  
# hello.sh  
echo 'hello'  
exit 0
```

Create a tarball of the project directory:

```
$ tar cvzf hello-1.0.tar.gz ~/hello-1.0/
```

Create an rpm development environment:

```
$ rpmdev-setuptree
```

Move the tarball to the SOURCES directory

Create a .spec file in the SPECS directory:

```
$ vim pkgname.spec
```

or:

```
$ rpmdev-newspec -o pkgname.spec
```

Insert a name (Match the pkgname on the tarball and directory)

Insert a version (Match the version)

Leave the release alone

Insert a summary (one line)

Insert a group (package group)

Insert a license

Insert a URL or delete the line

Insert on the Source0 line, the name of your tarball

Leave the BuildRoot line alone

Unless your package has prerequisites needed before it can be compiled, delete the BuildRequires line



Unless your package has prerequisites needed before it can work, delete the Requires line

On a blank line below %description, insert a brief description of your package

Leave the %prep and %setup lines alone

If your package does not need to be "built" (compiled), delete the %build, %configure, and make lines.

Leave the %install section header alone.

Under the %install section, leave the rm line alone.

If your package does not need to be built, modify the make install line to something like this:

```
install -D myfile $RPM_BUILD_ROOT/path/to/install/dest/myfile
```

Leave the %clean and the rm -rf lines alone.

Under %files, use the following syntax to list each of the files your package will place on the target system:

```
%attr(770,owner,group)/path/to/file
```

Use the following syntax to list each of the directories your package will place on the target system:

```
%dir /root/bin
```

The changelog section can be deleted or left alone.

# Signing Your RPMs

Your RPMs can be digitally signed to protect users from the possibility of forged packages (any RPM package can execute scripts w/ root privileges when installed!). To implement this, first generate and identify a gpg key:

```
$ gpg --gen-key
gpg (GnuPG) 2.0.14; Copyright (C) 2009 Free Software Foundation, Inc.
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.
```

Please select what kind of key you want:

- (1) RSA and RSA (default)
- (2) DSA and Elgamal
- (3) DSA (sign only)
- (4) RSA (sign only)

Your selection?

RSA keys may be between 1024 and 4096 bits long.

What keysize do you want? (2048)

Requested keysize is 2048 bits

Please specify how long the key should be valid.

- 0 = key does not expire
- <n> = key expires in n days
- <n>w = key expires in n weeks
- <n>m = key expires in n months
- <n>y = key expires in n years

```
Key is valid for? (0)
Key does not expire at all
Is this correct? (y/N) y
```

GnuPG needs to construct a user ID to identify your key.

```
Real name: Scott Purcell
Email address: scott@texastwister.info
Comment:
You selected this USER-ID:
    "Scott Purcell <scott@texastwister.info>"
```

```
Change (N)ame, (C)omment, (E)mail or (O)kay/(Q)uit? O
You need a Passphrase to protect your secret key.
```

We need to generate a lot of random bytes. It is a good idea to perform some other action (type on the keyboard, move the mouse, utilize the disks) during the prime generation; this gives the random number generator a better chance to gain enough entropy.

```
gpg: key B9AED1DE marked as ultimately trusted
public and secret key created and signed.
```

```
gpg: checking the trustdb
gpg: 3 marginal(s) needed, 1 complete(s) needed, PGP trust model
gpg: depth: 0  valid:   1  signed:   0  trust: 0-, 0q, 0n, 0m, 0f, 1u
pub   2048R/B9AED1DE 2011-02-22
```

```
Key fingerprint = 9987 B276 A24A 1210 13A7 4D05 9F3F 8934 B9AE D1DE
uid          Scott Purcell <scott@texastwister.info>
sub          2048R/0DA4CCE9 2011-02-22

[scott@Client1 rhel6]$
```

The key ID can be seen in the output above, or can be found with `gpg --fingerprint`

Export the key to a file:

```
$ gpg --armor --output ~/RPM-GPG-KEY-ScottPurcell --export B9AED1DE
```

```
[scott@Client1 ~]$ cat RPM-GPG-KEY-ScottPurcell -----BEGIN PGP PUBLIC KEY BLOCK-----
Version: GnuPG v2.0.14 (GNU/Linux)

mQENBE1jVagBCADVDT0vRl3Z5xPZb6AAI2D3bM/H4kEhyJ+yk1pbVPmu8yu0Cbst
. . . R+J9rjvN8rNpQwm40Gx6RpM7qtP/LodzD46dNfbr87IJ4F+4A3U= =f4Gq
-----END PGP PUBLIC KEY BLOCK-----
```

Configure rpm-related tools to use your signature:

```
$ echo '%_gpg_name Scott Purcell'>> ~/.rpmmacros
```

or:

```
$ echo '%_gpg_name B9AED1DE'>> ~/.rpmmacros
```

Now packages can be created and signed at the same time with rpmbuild using the `--sign` option. Or existing packages can be retroactively signed with rpm using the `--addsign` or `--resign` options.

With a signed package in place, the user intending to install it now needs to import the key:

```
# rpm --import /home/scott/RPM-GPG-KEY-ScottPurcell
```

And with the key imported, the package can be verified:

```
$ rpm -K rpmbuild/RPMS/x86_64/rhel6rhce-0.5-1.el6.x86_64.rpm  
rpmbuild/RPMS/x86_64/rhel6rhce-0.5-1.el6.x86_64.rpm: rsa sha1 (md5) pgp md5 OK
```

## Create a Repo with your files

(Assumes httpd already installed)

```
# yum -y install createrepo
# mkdir -p /var/www/html/repo/Packages
# cp MyPackage.rpm /var/www/html/repo/Packages
# createrepo -v /var/www/html/repo
# cp /home/me/RPM-GPG-KEY-me /var/www/html/repo
```

## RPM Packaging, Other Documentation:

Red Hat Enterprise Linux Deployment Guide, section on "Querying RPM"  
Man Pages:

- rpm (8)
- rpm2cpio (8)
- cpio (1)



# Manage Processes and Services

## Start a service:

- `service <servicename> start`
- `/etc/init.d/<servicescript> start`

## Stop a service:

- `service <servicename> stop`
- `/etc/init.d/<servicescript> stop`

## Check status of a service:

- `service <servicename> status`
- `/etc/init.d/<servicescript> status`

## Reload a service's config:

- `service <servicename> reload`
- `/etc/init.d/<servicescript> reload`

# Persistent Configuration of Services

Configure a service to start at boot:

- `chkconfig <servicename> on`
- `system-config-services`
- `ntsysv`

## Manage Processes and Services: Configure systems to boot into a specific runlevel automatically

/etc/inittab

# Monitoring Processes

ps

Highly configurable command to list running processes

top

Command to provide realtime reports of the most active running processes

# Killing Processes

kill

Kills a process by PID. Optionally sends "signals" other than "kill".

kill-all

Kills a process by name. Use care not to match names you don't intend to kill.

pkill

Also kills processes by name. Use care not to match names you don't intend to kill.

pgrep

Searches processes by name. Useful for verifying which processes would be killed by pkill.

## Prioritizing Processes

The kernel calculates the priority of each process through a variety of factors. One input into that calculation is a user-modifiable value called "niceness".

- A process with higher niceness has lower priority and is thus more willing to share resources with other processes.
- niceness can range from -20 (highest priority) to 19 (lowest priority).

## nice and renice commands

### nice

Launches commands with a specified "niceness" value affecting process priority.

- Default niceness is "0".
- Root can set any value.
- Non-privileged users can only use positive values.

### renice

Modifies the niceness of an already-running process.

- Root can modify the niceness of any process in either direction.
- Non-privileged users can only modify their own processes and by increasing niceness (lowering priority)

## Manage system performance

- Use `/proc/sys` and `sysctl` to modify and set kernel run-time parameters
- Produce and deliver reports on system utilization (processor, memory, disk, and network)
- Use `iostat` and `vmstat` to report on system performance
- Use shell scripting to automate system maintenance tasks



# Session 4 Networking and Routing

**OpenHCE**

# Network Configuration and Troubleshooting

Class discussion -- Populate a table explaining for each of the following aspects of network configuration: 1) How to view or verify the existing configuration, and 2) How to change the configuration.

- IP Address and Subnet Mask
- Routing and Default Gateway
- Hostname
- Name Resolution

## IP Address and Subnet Mask

- Verifying configuration

`ip a, ifconfig`

- Changing configuration

`nm-applet, system-config-network, manual editing of interface config files`

## Routing and Default Gateway

- Verifying configuration  
route, ip r
- Changing configuration  
route, ip r, manual editing of route config files,

## Hostname

- Verifying configuration
- Changing configuration

## Name Resolution

- Verifying configuration
- Changing configuration

# Two Controlling Services

## NetworkManager

- RHEL6 default
- Ideal for client systems and systems with dynamic network conditions
- No support for bonding/bridging/aliases, etc.

## network

- RHEL5 and earlier default
- Ideal for systems with static network conditions
- Bonding/bridging/aliases supported.

# Switching between Controlling Services

To disable NetworkManager and enable network:

```
# service NetworkManager stop; chkconfig NetworkManager off
# service network start; chkconfig network on
```

To disable network and enable NetworkManager:

```
# service network stop; chkconfig network off
# service NetworkManager start; chkconfig NetworkManager on
```

To exempt a particular interface from control by NetworkManager, but leave it in control of other interfaces:

- In the interface configuration file of the interface to be exempted, insert the line:

```
NM_CONTROLLED=no
```

- Ensure both services are configured on and running.
- Configured interfaces can be brought up with `ifup eth<x>` or down with `ifdown eth<x>` regardless of whether they are managed by NetworkManager or not.



# Network Configuration Files

## **/etc/hosts**

Static hostname-to-IP resolution.

## **/etc/resolv.conf**

Client configuration for DNS.

## **/etc/sysconfig/network**

Main system networking config file. Enables/disables networking in general, sets the hostname, and configures routing.

## **/etc/sysconfig/network-scripts/ifcfg-*<iface>***

Config file for each configured interface.

## **/etc/sysconfig/network-scripts/route-*<name>***

Config file for static routes (where needed)

### ***Note***

`/etc/sysconfig/networking/` is used by `system-config-network` and should not be manually edited.

## Reference

`/usr/share/doc/initscripts-9.03.17/sysconfig.txt`

# Future (Near!) Network Device Naming Scheme

[http://linux.dell.com/files/whitepapers/consistent\\_network\\_device\\_naming\\_in\\_l](http://linux.dell.com/files/whitepapers/consistent_network_device_naming_in_l)

OpenRHC

# Session 5 Firewalls and SELinux

**OpenRHCE**

## Firewalling in RHEL6

RHEL6 implements a packet filtering firewall called iptables. You should know several key terms:

### rule

A one-line rule defining a packet type and how it should be handled.

### chain

A list of rules.

### table

A list of rules aggregating all of the chains and rules taking a particular path through the network stack.

### policy

A default rule that applies in the absence of other rules.

# iptables Built-in Chains

## INPUT

Applies to traffic with your server as the destination.

## OUTPUT

Applies to traffic origination on your server as the source.

## FORWARD

Applies to traffic being routed by your system from one network to another

## iptables Targets

### ACCEPT

Allows the packet to proceed to its destination.

### DROP

Silently drop the packet.

### REJECT

Drop the packet with a rejection message

### LOG

Log the packet and move to next rule in the chain (which may then accept, drop, or reject)

## Connection Tracking States

Iptables can filter packets based on their relationship with previous traffic.

### **NEW**

The packet has started a new connection.

### **ESTABLISHED**

Applies to packets that are part of an established TCP connection (packets have already been delivered in both directions).

### **RELATED**

The packet is starting a new connection, but associated with an existing connection.

### **INVALID**

The packet is associated with no known connection.



## Iptables Command Options

-vnl --line-numbers

List all rules with line numbering

-A <chain> <rule> -j <target>

Adds a rule to the end of the chain

-D <chain> <rule#>

Deletes a rule by number

-F <chain>

Flushes all rules from the chain

## Matching packets

A source IP or network:

```
-s 192.0.2.0/24
```

A destination IP or network:

```
-d 10.0.0.1
```

UDP/TCP and ports:

```
-p udp --sport 68 --dport 67
```

ICMP and types:

```
-p icmp --icmp-type echo-reply
```

Inbound network interface:

```
-i ETH0
```

Outbound network interface:

```
-o ETH0
```

State tracking:

```
-m state --state ESTABLISHED,RELATED
```

OpenRHC

## Iptables Tips

Use `system-config-firewall` to enable and select FTP and SSH to generate a sample set of rules and load the connection tracking module.

Show connections being accepted or rejected in realtime:

```
# watch -d -n 2 `iptables -nvL`
```

# SELinux

SELinux is a set of security rules that determine which processes can access which files, directories, ports, and other system resources.

Purposes:

- Provide another method of securing a system.
- Implement Mandatory Access Control policies (required in some institutional contexts).
- Protect the system and its data from system services that have been compromised.

## SELinux in Action

- httpd allows remote anonymous access.
- This allows the possibility of attempts to compromise the httpd daemon with security exploits.
- httpd runs with the identity of the user "apache" and the group "apache" -- a successful exploit gains system access with the permissions granted to that user and group.
- In addition to the filesystem areas needed to run a webserver, the apache user and group also have access to other "world-readable" and "world-writeable" location such as /tmp.
- SELinux ensures that a compromised service cannot gain access to these filesystem location where it should not need access in the normal course of events.

# SELinux Enforcement Modes

## Disabled

No rules are enforced and the SELinux filesystem contexts are stripped away. Moving to or from this mode to one of the others requires a reboot -- during which the entire filesystem will be processed to add or remove the SELinux filesystem context labels.

## Permissive

Rules are in place, violations are logged, but access is permitted (rules not enforced). Useful for troubleshooting.

## Enforcing

Rules are in place and enforced. Attempted violations are logged and access is denied.

## Important SELinux Filesystem locations

/etc/sysconfig/selinux

Used to set enforcement mode and policy set.

/var/log/audit/audit.log

Extensive log of SELinux messages

/var/log/messages

Contains short summaries of SELinux messages when setroubleshoot-server is installed and active

- Watch for "AVC" (Access Vector Cache) in log messages.



## Related Packages

### **coreutils**

Always installed. Provides some default elements of SELinux.

### **policycoreutils**

Provides restorecon, secon, setfiles, et al.

### **libselinux-utils**

Provides getenforce, setenforce, getsebool, setsebool, et al.

### **policycoreutils-gui**

Provides system-config-selinux and sepolgen, et al.

### **policycoreutils-python**

Provides semanage, audit2allow, audit2why, et al.

### **setroubleshoot**

Provides seapplet

### **setroubleshoot-server**

Provides sealert, sedispatch, setroubleshootd, et al.

## Useful Commands

`sestatus`

Displays information about the current SELinux parameters.

`chcon`

Changes context labels on files (but non-persistently! Use with `semanage` for persistent changes.

`semanage`

Modifies SELinux contexts persistently.

## Additional Documentation

[http://docs.redhat.com/docs/en-US/Red\\_Hat\\_Enterprise\\_Linux/6/html/Security-](http://docs.redhat.com/docs/en-US/Red_Hat_Enterprise_Linux/6/html/Security-)

## Setting the SELinux Enforcement Mode

View the current setting:

```
# getenforce  
Enforcing
```

Change the current setting:

```
# setenforce <mode>
```

To make persistent changes, edit `/etc/sysconfig/selinux`

# SELinux Policy Types

## Targeted (default)

Default policy set that aims to protect the most high-risk system services.

## Strict

(Deprecated? Unable to find RHEL6 information about this policy type.  
Replaced by MLS?)

## MLS

Implements Multi-Level Security policies -- a much stricter policy set than the default

## Minimum

A less intrusive implementation of minimal aspects of SELinux

The RHCE exam will likely only be concerned with the default "Targeted" policy set.

## SELinux Contexts

When SELinux is not disabled, every file, directory, and process has an SELinux context label. These labels are used to determine which protected service(s) can operate in this location.

View SELinux contexts of processes:

```
ps -eZ, ps -axZ, ps -Zc <process name>, etc.
```

View SELinux contexts of files and directories:

```
ls -Zd /path/to/dir/, ls -Z /path/to/file, etc.
```

View SELinux contexts of users:

```
id -Z
```

## Setting SELinux file contexts

The initial contexts are created based on a set of rules, which are also used by `restorecon` to restore contexts to the default. When using the default "targeted" policy, these rules are stored in `/etc/selinux/targeted/contexts/files/file_contexts`. New customized rules are stored in `/etc/selinux/targeted/contexts/files/file_contexts.local`.

View these rules with:

```
# semanage fcontext -l
```

Or search for a specific service or path:

<code># semanage fcontext -l   grep "/var/ftp"</code>		
<code>/var/ftp(/.*)?</code>	all files	system_u:object_r:public_content_t:s0
<code>/var/ftp/bin(/.*)?</code>	all files	system_u:object_r:bin_t:s0
<code>/var/ftp/etc(/.*)?</code>	all files	system_u:object_r:etc_t:s0
<code>/var/ftp/lib(64)?(/.*)?</code>	all files	system_u:object_r:lib_t:s0
<code>/var/ftp/lib(64)?/ld[^/]*\.(so\.[^/]*)*</code>	regular file	system_u:object_r:ld_so_t:s0

In these rules the regular expression `(/.)?` is a match for the preceding directory and everything within it, recursively.

Add/delete/modify rules with:

```
#semanage fcontext -[a|d|m] -f <ftype> -t <context> '<regex>'
```

## SELinux Booleans

SELinux uses a collection of boolean variables to allow users to change SELinux policy in pre-defined ways without the need to reload or recompile SELinux policies.

Show all booleans and their current values:

```
# getsebool -a
```

Show all booleans with current values and meanings:

```
# semanage boolean -l
```

Show a specific boolean value:

```
# getsebool <boolean-name>
```



## Modifying SELinux Booleans

Modify a boolean non-persistently (for testing, or temporary use):

```
# setsebool <variablename> <value>
```

Modify a boolean persistently:

```
# setsebool -P <variablename> <value>
```

Use the graphical tool: `system-config-selinux`

# Help for SELinux with regard to specific services

Many targeted services have specialised man pages dealing with SELinux configuration.

Display these pages with:

```
# man -k '_selinux'
ftpd_selinux      (8) - Security-Enhanced Linux policy for ftp daemons
httpd_selinux     (8) - Security Enhanced Linux Policy for the httpd daemon
kerberos_selinux  (8) - Security Enhanced Linux Policy for Kerberos
named_selinux     (8) - Security Enhanced Linux Policy for the Internet Name server (named) daemon
nfs_selinux       (8) - Security Enhanced Linux Policy for NFS
pam_selinux       (8) - PAM module to set the default security context
rsync_selinux     (8) - Security Enhanced Linux Policy for the rsync daemon
samba_selinux     (8) - Security Enhanced Linux Policy for Samba
ypbind_selinux    (8) - Security Enhanced Linux Policy for NIS
```

## Monitor SELinux Violations

Installing `setroubleshoot-server` sends SELinux error messages to `/var/log/messages`. These can be further parsed with `sealert`.

`audit2why` and `audit2allow` can be used to parse the messages in `/var/log/audit/audit.log` and explain why access was denied, and how to modify your configuration to allow it.

# Session 6 Virtualization

**OpenRHCE**

# Virtualization Terms

## Physical Machine

The actual physical machine with RAM, disk space, etc.

## Virtual Machine

A logical construct provided by hardware and/or software capabilities that can run an independent OS and perform work as though it were a physical machine.

## Hypervisor

A specialized OS that provides virtual machines.

## Xen

A hypervisor previously available on Red Hat operating systems that was implemented as a modified version of the Linux kernel.

## KVM

Kernel Virtual Machine, the hypervisor Red Hat currently supports on RHEL6. It is implemented within (as a set of kernel modules) the mainstream Linux kernel.

## Guest

The operating system that runs on a virtual machine.

## Host

The operating system that runs on a physical machine hosting virtual machines (i.e. the hypervisor).

## RHEL6 KVM requirements

- 64-bit Intel or AMD processor

To confirm, search `/proc/cpuinfo` for the string `lm` on the flags line.

- CPU Hardware assisted virtualization extensions (enabled in BIOS)

To confirm, search `/proc/cpuinfo` for the string `vmx` (for Intel) or `svm` (for AMD)

- 64-bit version of RHEL6

To confirm, look for `x86_64` in the output of `uname -m`.

# KVM Virtualization Components

- KVM kernel modules
- libvirt
- virsh virtualization shell
- virt-manager

# Installing Virtualization Capabilities

## At OS Installation:

Select the Virtual Host server role --or-- customize packages and select the Virtualization package group. In a kickstart file, these packages can be installed as a group with the @kvm group name.

## After Installation:

With entitlement to the Virtualization packages, or access to them through a 3rd party repository,: `yum install kvm`

Other recommended packages:

- python-virtinst
- libvirt
- libvirt-python
- virt-manager
- libvirt-client



## Virsh Commands

Power on a virtual machine:

```
virsh start <vm name>
```

Gracefully shut down a virtual machine:

```
virsh shutdown <vm name or id>
```

Power off a virtual machine:

```
virsh destroy <vm name or id>
```

Connect to a virtual machine console (requires guest configuration):

```
virsh console <vm name or id>
```

Disconnect from a console of a virtual machine:

```
^] ( "ctrl + ]" )
```

Set a VM to start at boot:

```
virsh autostart <vm name or id>
```

**OpenRHC**

# Creating Virtual Machines with Virt-Manager

Demonstrated and practiced in the classroom.

OpenRICE

## Creating Virtual Machines with virt-install

`virt-install` is a command-line tool used to create virtual machines.

See the syntax with `man virt-install` or `virt-install --help`.

Sample command:

```
# virt-install --name StXVM3 --ram 768 \  
--disk path=/var/lib/libvirt/images/StXVM3disk1.img,size=8\  
--network network=default --cdrom /dev/cdrom
```

# SELinux considerations

- SELinux expects file-based guest images to be stored in `/var/lib/libvirt/images/`. Use of other locations with SELinux enforcing will require adding the location to the SELinux policies.

1. Find the context applied to the expected location:

```
# ll -Z /var/lib/libvirt/  
  
drwx--x--x. root root system_u:object_r:virt_image_t:s0 images
```

2. Add a new context policy:

```
# semanage fcontext -a -t virt_image_t "/virtstorage(/.*)?"
```

3. Set the context to match the newly created policy:

```
# restorecon -R -v /virtstorage/  
restorecon reset /virtstorage context unconfined_u:object_r:  
default_t:s0->system_u:object_r:virt_image_t:s0
```

# Session 7 Logging and remote access

**OpenRHCE**

## RHEL 6 Logging with Rsyslog

Red Hat uses `rsyslog` for its logging facility. `rsyslog` can be configured to for local logging only, to send log messages to a remote destination as well, and to receive log messages from other systems as well.

### Terms

#### facility

A name that indicates what the message concerns or from what service it originates.

#### priority

A name that indicates the importance of the messages in that category.

The man pages for `logger(1)` and `syslog(3)` have more information.

`rsyslog` is configured in `/etc/rsyslog.conf` and defaults to using port 514 (TCP or UDP) to send and receive messages.

## Accepting Remote Logs

By default, `rsyslog` is configured for only local logging. To enable it to receive log messages from other systems, uncomment one of the following groups of lines in the config file (depending on which transport protocol, `tcp` or `udp`, you prefer to use):

For UDP (more widely supported but less reliable):

```
# Provides UDP syslog reception
#$ModLoad imudp.so
#$UDPServerRun 514
```

For TCP (less widely supported but more reliable):

```
# Provides TCP syslog reception
#$ModLoad imtcp.so
#$InputTCPServerRun 514
```

After changing the appropriate lines, restart the service.



## Rsyslog Configuration: Message Selection

In `/etc/rsyslog.conf` in the "RULES" section, ensure that a rule exists (or write one) for the kind of messages you want to send. The format is:

```
<facility>.<priority>          <action>
```

### facility

One of: auth, authpriv, cron, daemon, kern, lpr, mail, news, syslog, user, uucp, local0-7, or "\*"

### priority

One of (in ascending priority): debug, info, notice, warning (warn), err (error), crit, alert, emerg (panic), none, or ""

- Multiple facilities can be specified with the same priority with the use of a comma.

```
uucp,news.crit          /var/log/spooler
```

- Multiple selectors (facility/priority pairs) can be specified for the same action with the use of a semicolon.

```
*.info;mail.none;authpriv.none;cron.none    /var/log/messages
```

# Rsyslog Configuration: Actions

## action

One of the following:

- A file, specified with a full path name.
- A named pipe (fifo)
- A terminal (tty) or console
- A remote machine's IP or hostname, prefaced with "@" (for UDP), "@@" (for TCP), or ":omrelp:" for the RELP protocol.
- A list of users (comma-delimited). This notifies them via console message if they are logged in. An asterisk (\*) includes all logged-in users
- A tilde, to indicate that these messages should be discarded.
- See the documentation for others.

## Practice

Configure one system to receive remote log messages. Configure the other to log only a particular facility or priority to the remote syslog server.

Use `logger` to generate test messages.

Remember to investigate firewall and SELinux considerations.

## Remote Access via SSH

RedHat installs by default both the OpenSSH client package (openssh) and the server package (openssh-server)

Client behavior is configured in /etc/ssh/ssh\_config

Server behavior is configured in /etc/ssh/sshd\_config

Start the service:

```
# service sshd start
```

Configure it persistently on:

```
# chkconfig sshd on
```

# Investigate SELinux implications for SSH

Find SELinux Filesystem contexts that might affect ssh:

```
semanage fcontext -l | grep "ssh"
```

Find SELinux port contexts that might affect ssh:

```
semanage port -l | grep "ssh"
```

Find SELinux booleans that might affect ssh:

```
getsebool -a | grep ssh
```

# SSH key-based authentication

Generate a key with `ssh-keygen`

Transmit a key to a remote system with `ssh-copy-id`

- The key you want is usually named `~/.ssh/id_rsa.pub`. Be certain to use the `.pub` version of the key instead of the private key!

# SSH Security Considerations

## Allow root logins?

Disallow with `PermitRootLogin no` in `/etc/ssh/sshd_config`

## Listen on specific interfaces?

Specify with `ListenAddress x.x.x.x` in `/etc/ssh/sshd_config`

## Allow legacy versions?

Specify allowed versions of the protocol in `/etc/ssh/sshd_config` (read comments).

## Allow X11 forwarding?

Configure with `X11Forwarding yes|no` in `/etc/ssh/sshd_config`

## Specify alternate port?

Configure with `Port xx` in `/etc/ssh/sshd_config`. Multiple ports on multiple lines accepted. Don't forget firewall and SELinux implications though!

## Remote Access via VNC

For remote management when a GUI is desired or required, Red Hat provides VNC services through tigervnc.

Install the package with `yum -y install tigervnc-server`.

Configure the service at `/etc/sysconfig/vncservers`

Start the service:

```
# service vncserver start
```

Configure it persistently on:

```
# chkconfig vncserver on
```



## Configuring a VNC remote display

In `/etc/sysconfig/vncservers` uncomment and modify the lines below:

```
# VNCSERVERS="2:myusername"  
# VNCSERVERARGS[2]="-geometry 800x600 -nolisten tcp -localhost"
```

As the user who will connect, set a VNC password with `vncpasswd`.  
Start or restart the service.

Connect to the remote system using a vnc client with the `-via` option:

```
vncviewer localhost:<x> -via y.y.y.y
```

Where X is the display number and y.y.y.y is the IP address of the remote machine.

# Investigate SELinux implications for VNC

Find SELinux Filesystem contexts that might affect vnc:

```
# semanage fcontext -l | grep "vnc"
```

Find SELinux port contexts that might affect vnc:

```
# semanage port -l | grep "vnc"
```

Find SELinux booleans that might affect vnc:

```
# getsebool -a | grep vnc
```

# Session 8 Network Time Protocol and System Performance Reports

**OpenRHCE**

# NTP Overview

NTP (Network Time Protocol) provides a standardized way for systems to provide and obtain correct time over the network.

This service is increasingly critical for today's networking environments. Synchronized time information is required for accurate handling of email, for clustering, for cloud computing, and for virtualization (just to name a few).

## NTP Packages

### **ntp**

Provides the daemon and utilities

### **system-config-date**

Provides a graphical interface for changing the time and configuring an NTP client.

### **ntpdate**

Provides a command line utility for setting the date and time with NTP

# NTP Documentation

Many man pages:

- ntp.conf (5)
- ntp\_misc (5)
- ntp\_acc (5)
- ntp\_auth (5)
- ntp\_clock (5)
- ntp\_mon (5)
- ntpd (8)

# Installing, Starting, and Configuring Persistence

Install the service (likely already installed):

```
# yum -y install ntp
```

Starting the service:

```
# service ntpd start
```

Configuring it to be on persistently:

```
# chkconfig ntpd on
```

# Defining NTP Terms

## Stratum0

A clock device such as an atomic, radio, or GPS clock device. Not usually attached to the network but connected to a server.

## Stratum1

A server attached to a high accuracy time device that also allows queries for its time information.

## Stratum{2..16}

Servers that acquire time information from servers above them in the hierarchy and share that information with peers or clients.

## Server (in ntp.conf)

A time server that is a more authoritative time-source (higher stratum) than the system being configured, and from which this system obtains time information.

## Peer (in ntp.conf)

A time server that is considered equally authoritative (same stratum) with the system being configured, and with which this system shares time information.



# Configuration of NTP

Configured in /etc/ntp.conf

**restrict lines**

Define the access to be allowed or restricted for other hosts that communicate with this service. Each server or peer configured must be included in a restrict line.

**server lines**

Define a host to be queried as a more authoritative time source.

**peer lines**

Define a host to be queried as an equally authoritative time source.

**broadcast or multicast lines**

Define ways to obtain or provide time information apart from unicast queries.

## NTP "restrict" options

```
restrict <address> [mask <subnet mask> ] [flag] [flag] ...
```

### address and optional mask

The address, in dotted-quad notation, of the host or network to be restricted. Alternatively, the address can be a valid DNS name.

### ignore (flag)

Disallows all packets

### kod (flag)

Sends a "kiss of death" packet to misbehaving (usually fire-walled) clients.

### nomodify (flag)

Allows queries for information, but denies attempts to modify the time.

### noquery (flag)

Deny ntpq and ntpdc queries. The time service is unaffected.

### nopeer (flag)

Deny packets related to peering

### notrap (flag)

Deny "trap" messages (used in logging).

# Configure as a Client

1. Include at least one server (three are preferred) in /etc/ntp.conf:

```
server <server1 IP> iburst  
server <server2 IP> iburst
```

2. With the ntp service stopped, synchronize time with ntpdate:

```
# ntpdate -v <IP of ntp server>
```

3. Start the ntp service.
4. Verify that the service sees the configured servers (this may take a few minutes):

```
# ntpq -p
```

## Configure as a Server

1. Follow the steps for Client Configuration.
2. Add one or more restrict lines to allow appropriate access from those systems that will be clients (or peers):

```
restrict 10.37.112.0 mask 255.255.240.0 nomodify notrap  
restrict 10.37.112.13
```

3. Restart the service after making changes.

## Configure as a Peer

1. Follow the steps for Client Configuration
2. Add one or more restrict lines to allow appropriate access from those systems that will be clients (or peers):

```
restrict 10.37.112.0 mask 255.255.240.0 nomodify notrap  
restrict 10.37.112.13
```

3. Add one or more peer lines:

```
peer <peer IP or hostname> [options]
```

4. Restart the service after making changes.
5. Verify that the service sees the configured peers and servers (this may take a few minutes):

```
# ntpq -p
```

# Investigate SELinux implications for NTP

Find SELinux Filesystem contexts that might affect NTP:

```
# semanage fcontext -l | grep "ntp"
```

Find SELinux port contexts that might affect NTP:

```
# semanage port -l | grep "ntp"
```

Find SELinux booleans that might affect NTP:

```
# semanage boolean -l | grep ntp
```

# Investigate Firewall Implications for NTP

Find ports that may need to be opened for NTP:

```
# grep ntp /etc/services
```

Rules to open up the required ports:

```
-A INPUT -m state --state NEW -m tcp -p tcp --dport 123 -j ACCEPT  
-A INPUT -m state --state NEW -m udp -p udp --dport 123 -j ACCEPT
```

OpenRICE

## Reporting on System Performance

One of the more vague of the RHCE Objectives says: "Produce and deliver reports on system utilization (processor, memory, disk, and network)."

This loosely defined objective can be very wide-ranging -- this section will cover some of the tools that might be useful in meeting it.



# Tools for System Utilization Reporting

## **df**

"diskfree", reports on disk space utilization for all mounted filesystems.  
Part of the coreutils package.

## **iostat**

Provided by the sysstat package.

## **vmstat**

Provided by the procps package.

## **top**

Provided by the procps package.

Explore the man pages for these utilities and be prepared to use them with scripting to write reports to a file.

# Session 9 HTTP and FTP

**OpenHCE**

# Apache Web Server

Service name: httpd

Package name: httpd-{ver}.{arch}.rpm

Main config: /etc/httpd/conf/httpd.conf

Module config: /etc/httpd/conf.d

Default DocRoot: /var/www/html

# Installation and Basic Configuration

1. Install the web-server package group:

```
# yum groupinstall web-server
```

Note that this install several packages including the Apache Manual which is then locally accessible at <http://localhost/manual>

2. Install the mod\_ssl package:

```
# yum install mod_ssl
```

3. Start and configure persistence:

```
# service httpd start; chkconfig httpd on
```

In this default configuration, you can create an index.html page in /var/www/html/ and it will be served out as your home page. Additionally, you can use <https://> to connect securely to your webserver, but you will have to manually accept a self-signed certificate.

## Installing a Signed SSL Certificate

1. Place the certificate and private key in the appropriate locations in `/etc/pki/tls/`.
2. Ensure that both files have the `cert_t` SELinux file context and that the private key is readable only by root.
3. Modify `/etc/httpd/conf.d/ssl.conf`:
  - `SSLCertificateFile` points to your newly installed certificate.
  - `SSLCertificateKeyFile` points to the corresponding private key.
4. Restart the service.

Now your website will present a certificate signed by an accepted CA.

# Virtual Host Configuration

"Virtual Hosts" come in two forms:

## Standard Virtual Hosts

Exist on hosts that have been assigned multiple IP addresses. Queries for each separate IP address are served pages from a particular virtual host.

## Name Virtual Hosts

Exist on hosts with multiple names aliased to one IP address (usually through DNS aliases, but can also be accomplished with `/etc/hosts`). Queries for each separate name (regardless of IP address) are served as different virtual hosts.

## Name Virtual Host Configuration

Near the end of httpd.conf, uncomment the line:

```
#NameVirtualHost *:80
```

Create a section for each vhost:

```
#<VirtualHost *:80>
#   ServerAdmin webmaster@dummy-host.example.com
#   DocumentRoot /www/docs/dummy-host.example.com
#   ServerName dummy-host.example.com
#   ErrorLog logs/dummy-host.example.com-error_log
#   CustomLog logs/dummy-host.example.com-access_log common
#</VirtualHost>
```

- Uncomment the first and last lines in that block. Uncomment and modify the lines for ServerName, DocumentRoot, and others that you want to customize.
- Include a Vhost stanza for your default server instance and for each alternate name.

# Example Virtual Host Configuration

```
#NameVirtualHost *:80
#
# NOTE: NameVirtualHost cannot be used without a port specifier
# (e.g. :80) if mod_ssl is being used, due to the nature of the
# SSL protocol.
#
#
# VirtualHost example:
# Almost any Apache directive may go into a VirtualHost container.
# The first VirtualHost section is used for requests without a known
# server name.
#
#<VirtualHost
<VirtualHost *:80>
#   ServerAdmin webmaster@dummy-host.example.com
#   DocumentRoot /www/docs/dummy-host.example.com
#   ServerName dummy-host.example.com
#   ErrorLog logs/dummy-host.example.com-error_log
#   CustomLog logs/dummy-host.example.com-access_log common
#</VirtualHost>
</VirtualHost>

<VirtualHost *:80>
    DocumentRoot /var/www/virtual/Blade7/
    ServerName Blade7
</VirtualHost>

<VirtualHost *:80>
    DocumentRoot /var/www/virtual/www7/
    ServerName www7
</VirtualHost>
```



## Configuring for CGI-BIN scripts

Refer to the Apache Manual (package: httpd-manual) for full details and a tutorial on *CGI: Dynamic Content*.

The `ScriptAlias` line in `httpd.conf` designates the directory in which Apache expects to find CGI scripts.

CGI scripts can be implemented in directories **outside** of the `DocumentRoot` path -- but this will require modification of the `ScriptAlias` line and the `fcontext` rules for SELinux.

# Apache Access Control

Per-directory options (example):

```
<Directory /var/www/>  
    Order Deny,Allow  
    Deny from all  
    Allow from dev.example.com  
</Directory>
```

- Three-pass access control:
  1. Parse all statements of type specified first.
  2. Parse all statements of type specified second. Matches overrides matches of previous type.
  3. Process requests which matched nothing.
- In `Order` statements, whichever directive comes **last** is the default in case of no match.

## Host Based Security directive formats

Deny from example.com

Allow from 192.168.0.15

Deny from 192.168.0.0/255.255.255.0

Deny from 192.168.1.0/24

## Access Control with .htaccess files

If permitted by httpd.conf, access may be controlled on a per-directory basis with .htaccess files in the directories where the content needs to be protected:

```
<Files ~ "^\.ht">  
    Order allow,deny  
    Allow from 192.168.5.200  
    Deny from all  
</Files>
```

## User Based Security with htpasswd flat file

```
<Directory "/var/www/html/site">  
  AuthType Basic  
  AuthName "Password Protected"  
  AuthUserFile /etc/httpd/.htpasswd  
  Require valid-user  
</Directory>
```

## Configuring Passwords

- `htpasswd -cm /etc/httpd/.htpasswd good_user`
- `htpasswd -m /etc/httpd/.htpasswd another_user`

# User Based Security with LDAP authentication

1. Obtain the LDAP certificate.
2. Add a line to your http.conf (usually in your Vhost definition):

```
LDAPTrustedGlobalCert CA_BASE64 /path/to/cert
```

3. Configure a Directory Block:

```
<Directory /var/www/html/private>  
    AuthName "Private with LDAP access"  
    AuthType basic  
    AuthBasicProvider ldap  
    AuthLDAPUrl "ldap://fqdn/prefix" TLS  
    Require valid-user  
</Directory>
```

Modify the cert path, and the FQDN and prefix of the LDAP Server to match your infrastructure.

# SELinux Implications for HTTP

Find SELinux Filesystem contexts that might affect HTTP:

```
# semanage fcontext -l | grep "http"
```

Find SELinux port contexts that might affect HTTP:

```
# semanage port -l | grep "http"
```

Find SELinux booleans that might affect HTTP:

```
# semanage boolean -l | grep http
```

Read the man page `httpd_selinux (8)`

Make SELinux more verbose:

```
# semanage dontaudit off
```

This disables `setroubleshot-server`, `sealert`, and the issuing of SELinux messages into `/var/log/messages` -- so you'll need to view the messages in `/var/log/audit/audit.log`.



## Important SELinux Contexts

**httpd\_sys\_content\_t**

For general files and directories to be served by httpd.

**httpd\_sys\_script\_exec\_t**

For scripts (CGI) to be executed by the web server.

**public\_content\_t**

For files that are to be shared with other SELinux protected services

# Firewall and SELinux for httpd

**OpenRHCE**

# Very Secure File Transfer Protocol Daemon

vsftpd is Red Hat's preferred FTP daemon. The "Very Secure" descriptor refers to the daemon and not to the protocol!

The only mention of FTP in the RHCSA objectives is concerned with enabling a default configuration

The only mention of FTP in the RHCE objectives is concerned with securely configuring anonymous access.

# Installation and Basic Configuration

Package: vsftpd

Install:

```
# yum -y install vsftpd
```

Start and Configure Persistence:

```
# service vsftpd start; chkconfig vsftpd on
```

In this default configuration, anonymous downloads are allowed from /pub (as shown to the client) and are placed in /var/ftp/pub/ (as viewed on the server). Additionally, system users are able to login by username and password and access their home directories with read/write permissions. No anonymous uploads are permitted by default.

# FTP Documentation

Man Pages:

- vsftpd.conf (5)
- ftpd\_selinux (8)

# Investigate SELinux implications for FTP

Find SELinux Filesystem contexts that might affect FTP:

```
# semanage fcontext -l | grep "ftp"
```

Find SELinux port contexts that might affect FTP:

```
# semanage port -l | grep "ftp"
```

Find SELinux booleans that might affect FTP:

```
# semanage boolean -l | grep ftp
```

# Investigate Firewall Implications for FTP

Find ports that may need to be opened for FTP:

```
# grep ftp /etc/services
```

OpenRICE

# Configuring a Secure "Drop-box" for Anon Upload

1. Create an upload directory owned by root.ftp and with 730 permissions:

```
cd /var/ftp
mkdir incoming
chgrp ftp incoming
chmod 730 incoming
```

2. Modify SELinux

- Set context of public\_content\_rw\_t on the upload directory:

```
semanage fcontext -a -t public_content_rw_t '/var/ftp/incoming(/.*)?'
restorecon -rvv /var/ftp/
```

- Enable the allow\_ftp\_anon\_write boolean:

```
setsebool -P allow_ftp_anon_write on
```

3. Modify /etc/vsftpd/vsftpd.conf as follows:



```
anonymous_enable=YES  
local_enable=NO  
write_enable=YES  
anon_upload_enable=YES  
chown_uploads=YES  
chown_username=daemon  
anon_umask = 077
```

#### 4. Modify iptables for inbound ftp

- in /etc/sysconfig/iptables-config:

```
IPTABLES_MODULES="nf_conntrack_ftp nf_nat_ftp"
```

- Set rules:

```
# iptables -A INPUT -p tcp --dport 21 -j ALLOW  
# iptables -A INPUT -m state --state ESTABLISHED,RELATED -j ALLOW
```

# Session 10 NFS and Samba

# Network File System (NFS)

Three available versions:

- NFS v2 -- Original public NFS.
- NFS v3 -- Extensions and enhancements to v2.
- NFS v4 -- Complete redesign, Red Hat default, preferred except where backward compatibility is required.

## Packages

Group: nfs-file-server

Packages:

nfs-utils

nfs4-acl-tools

## Configuration

/etc/sysconfig/nfs

/etc/exports

OpenRHC

# Configuring an NFS server (Network File System)

```
service nfs start  
chkconfig nfs on
```

## /etc/exports

```
/home 192.168.0.0/24(rw,root_squash) server1.example.com(rw,no_root_squash)
/pub  *(ro,root_squash)
```

- Note: There is no space between the host or subnet and the options defined between the parentheses ().
- If you put a space between them, then you will get a global export.

## Commands

`exportfs -a`

`exportfs -r`

`exportfs -u`

`showmount -e server`



SELinux

OpenRHCE

# Mounting

```
mount nfsserv:/home /mnt/homes
```

## Automounter

Automatically mounts a directory when it is accessed.

Unmounts the directory after a specified idle time.

Autofs service controls this behavior.

**A master configuration file called.**

`/etc/auto.master`

**Sub configuration files**

Usually called `/etc/auto.*`

## Auto.master

Specifies directories to mount under when accessed.

Specifies the auto.\* file to use for the directories.

### Example:

#### **/etc/auto.master**

/misc

/etc/auto.misc

/data

/etc/auto.data

When a directory under /misc is accessed, the /etc/auto.misc file indicates how to mount it.

When a directory under /data is accessed, the /etc/auto.data file indicates how to mount it.

## Auto.\*

Specifies directory name.

Specifies options to use when mounting.

Specifies what to mount.

### Example:

#### **/etc/auto.data**

```
pictures -rw,soft,intr nfs.example.com:/export/pics mp3s -ro  
/dev/sdd1
```

When the /data/pictures directory is accessed, the system will mount the nfs export /export/pics on nfs.example.com.

When the /data/mp3s directory is accessed, the system will mount the local partition /dev/sdd1.

# Understanding Automount

You must access the destination directory in order for it to automount.

If nothing is automounted and you run "ls /data" then you will get no files listed.

If you run "ls /data/mp3", you will get a listing. You can now run "ls /data" and you will see the mp3s directory listed. At least until the idle timeout is reached.

Some commands will cause the directory to be mounted when ran but they do not produce any results. In this case, you may need to run the command a second time.

# Samba

Samba is a project providing software capable of utilizing the SMB (Server Message Block) and CIFS (Common Internet File System) protocols to interoperate with systems using MS-Windows-style file and printer sharing.

Linux systems can use Samba to:

- Act as a client to SMB/CIFS servers
- Provide file and printer sharing services to clients
- Provide domain controller functionality in a limited subset of possible configurations.

# Accessing SMB/CIFS Shares

- Graphically, using Nautilus:

Use **Places | Connect to Server**, choose Windows share as the **Service Type** and provide the required credentials.

- Occasional, FTP-like access from the command line:

```
# smbclient //server/share/ -U username \  
-W [domain or workgroup]
```

- Through filesystem mounts:

```
# mount -t cifs //server1/tmp /mnt/share \  
-o credentials=/root/credentials``
```

- /etc/fstab entry:

```
# //server/share /mnt/point cifs \  
credentials=/root/credentials 0 0``
```

- Credentials File contents:

```
user=<username>  
pass=<password>
```



```
domain=<domainname>
```

# OpenRHC

## Samba Packages:

- samba
- samba-client
- samba-common
- samba-windbind
- samba-domainjoin-gui (Optional Repository)

# SELinux

SELinux notes are at the top of the config file (/etc/samba/smb.conf) and the man page samba\_selinux (8).

SELinux Port Settings for Samba:

```
# semanage port -l |grep smb
smbd_port_t                tcp          137-139, 445
```

SELinux Booleans for Samba:

```
# semanage boolean -l |grep "smb\|samba"
```

SELinux fcontexts for Samba:

```
# semanage fcontext -l |grep "smb\|samba"
```

## Services

```
service smb start  
chkconfig smb on
```

## **/etc/samba/smb.conf (Global)**

### **workgroup**

Specifies a shared Windows Workgroup or Domain name.

### **server string**

Provides a description of the server.

### **netbios name**

Specifies a name for the server for in implementations where NetBIOS is still used.

### **Interfaces**

Used to bind the service only to particular network adapters or IP addresses.

### **Hosts Allow**

Used for host-based access control.

## /etc/samba/smb.conf Security Types

The security line establishes the security model for the server. This would be one of the following:

### **user**

Indicates that user credentials are held on the local server.

### **share**

Indicates that credentials are not kept globally on an individual basis. All who report membership in the same workgroup are permitted access to the server and user authentication is configured in the share settings.

### **domain**

Used when the Samba Server has been added to a Windows NT Domain. User access is authenticated through a primary or secondary domain controller.

### **server**

User access is authenticated through a peer server that is not a domain controller.

### **ads**

User access is authenticated through an Active Directory controller. Kerberos must be installed and configured to authenticate this machine's membership in the Domain.

## Samba Users and Passwords

When the security model set to user, local Samba users and passwords must be created. Typically, these accounts use the same user names as those configured on the local system. `smbpasswd` is the command used:

```
# smbpasswd -a winuser
```

## /etc/samba/smb.conf (Shares)

```
[public]
comment = Public Share
path = /var/ftp/public
browsable = yes
writable = yes
```

Path must have appropriate filesystem permissions.



## Testing Configuration

Syntax of the smb.conf file can be tested before restarting the service:

```
# testparm
```

# Samba Firewalling Considerations

Samba, in its latest version, uses TCP port 445.

For backwards compatibility, UDP ports 137 and 138 and TCP port 139 may also need to be opened in some instances.

OpenRHCE

## HowTo: Enable Home Directory sharing via Samba

1. Install the appropriate packages.
2. Start and enable the service.
3. Configure the workgroup name in smb.conf.
4. Create the required Samba users and passwords.
5. Enable the SELinux boolean permitting home directory access.
6. Configure the firewall.
7. Restart the service.
8. Test from another system.

## HowTo: Configure a Group Share

1. Create the appropriate group if required.
2. Create a collaborative directory.
3. Set the SELinux contexts on the shared directory.
4. Define the share in smb.conf.

Set the following values:

```
valid users = @groupname  
writeable = yes
```

(Ensure that the directory permissions are 2770.)  
or, to allow broader read-only permission:

```
writeable = no  
write list = @groupname
```

(And relax the directory permissions to 2775.)

5. Restart the service.
6. Test from another system.

# Session 11 DNS and SMTP

**OpenHCE**

# Types of DNS servers

## Authoritative

- Master (primary)
- Slave (secondary)

## Non-authoritative

- Caching-only

Current RHCE Objectives only require ability to configure a few behaviors of a caching-only name server. The default configuration is now a caching-only nameserver listening only to localhost.

## Installing and enabling Bind

```
# yum -y install bind  
# service named start  
# chkconfig named on
```

## Useful Commands

### host

Queries for DNS resolution. Uses /etc/nsswitch and /etc/resolv.conf.

### dig

Queries a DNS server directly. By-passing local config files if you want.

**dig www.dell.com**

Gets dns server from resolv.conf

**dig @dns\_server www.dell.com**

Queries DNS server directly.



# Email TLAs: MTA, MUA, MDA

MTA - Mail Transfer Agent

Conveys mail from Server to Server (ex: sendmail, postfix)

MUA - Mail User Agent

Conveys mail between Client and Server (ex: Evolution, Thunderbird, mutt, mail, elm)

MDA - Mail Delivery Agent

Conveys mail from Server to local mail spools

# Red Hat's New Default MTA: Postfix

## Packages

postfix

/etc/postfix/main.cf

myhostname = server.dell.com

mydomain = dell.com

myorigin = \$mydomain

inet\_interfaces = all

mynetworks = 192.168.0.0/16, 10.0.0.0/8

# Postfix configuration tool

postconf

Applies configuration changes on the fly (not persistent). Can also display available directives and default directives.

# Reading Mail

mail  
mutt

OpenHCE

# Session 12 Finish uncompleted topics, Review, or Practice Exam

**OpenRICE**

# Supplemental Topics

## Manage Processes and Services: Schedule tasks using cron

# Cron

Scheduler

man 5 crontab

anacron

crond

/etc/cron.\*

/var/spool/cron



## Format of a crontab file

variable=value variable2=value

minute hour dayofmonth month dayofweek command

example:

```
*/5 * * * * cleanup
```

Runs cleanup every 5 minutes

```
1 23 * * 0 cleanup
```

Runs cleanup 11:01 pm every Sunday

```
1 23 5 * 0 cleanup
```

Runs cleanup at 11:01 on the 5th of each month, but only if it falls on a Sunday.

## Controlling Cron

`cron -u username`

`cron -l`

`cron -r`

`cron -e`

## at Jobs

Runs job once at specified time.

Understands now, midnight, noon, teatime, minutes, hours, day, week

Examples:

```
echo "/sbin/init 6" | at now + 10 minutes
```

or

```
at now + 10 minutes
at> /sbin/init 6
at> <CTRL-D>
```

atq

atrm

## Securing cron and at

/etc/cron.allow

/etc/cron.deny

/etc/at.allow

/etc/at.deny

## User Admin with Config Files

### `/etc/passwd`

World-readable file of user information

### `/etc/shadow`

Restricted-access file with password and expiry info.

### `/etc/group`

World-readable file of group information

### `/etc/gshadow`

Restricted-access group password, admin, membership info

If editing directly, `vipw` and `vigr` should be used.

# Structure of /etc/passwd

Name:Password:UID:GID:Comments:Homedir:Shell

Sample Contents \_\_\_\_\_ -

```
$ cat /etc/passwd
root:x:0:0:root:/root:/bin/bash
sshd:x:74:74:Privilege-separated SSH:/var/empty/sshd:/sbin/nologin
ntp:x:38:38::/etc/ntp:/sbin/nologin
gdm:x:42:42::/var/gdm:/sbin/nologin
scott:x:500:500:Scott Purcell:/home/scott:/bin/bash
```

## Structure of /etc/shadow

Name:Password:Lstchg:May:Must:Warn:Disable:Expire

## *Sample Contents*

```
# cat /etc/shadow
root:$1$IyApEyOS$dZ5SMuC7Yw9/PDMyWi1H11:14373:0:99999:7:::
sshd:!!:14373:0:99999:7:::
ntp:!!:14373:0:99999:7:::
gdm:!!:14373:0:99999:7:::
scott:$1${...}:14374:0:99999:7:::
bob:$1${...}:14398:7:30:7:7:14457:
```



# Structure of /etc/group

Name:Password:GID:Users

## *Sample Contents*

```
# cat /etc/group
root:x:0:root
scott:x:500:
bob:x:501:
mary:x:502:
sales:x:503:bob,mary
training:x:504:scott
```

# Structure of /etc/gshadow

Name:Password:Admins:Members

## *Sample Contents*

```
# cat /etc/gshadow
root:::root
scott:!!::
bob:!::
mary:!::
sales:!::bob,mary
training:!::scott
```

## User Admin with CLI tools

**useradd, usermod, userdel**

Create, delete, and modify user accounts

**groupadd, groupmod, groupdel**


Create, delete, and modify group accounts

**chage**

Modify password aging and expiration

# User Admin with GUI tools

The GUI tool for managing users and groups is the Red Hat User Manager. It can be launched from the menu at **System | Administration | Users and Groups** or from the CLI as `system-config-users`.

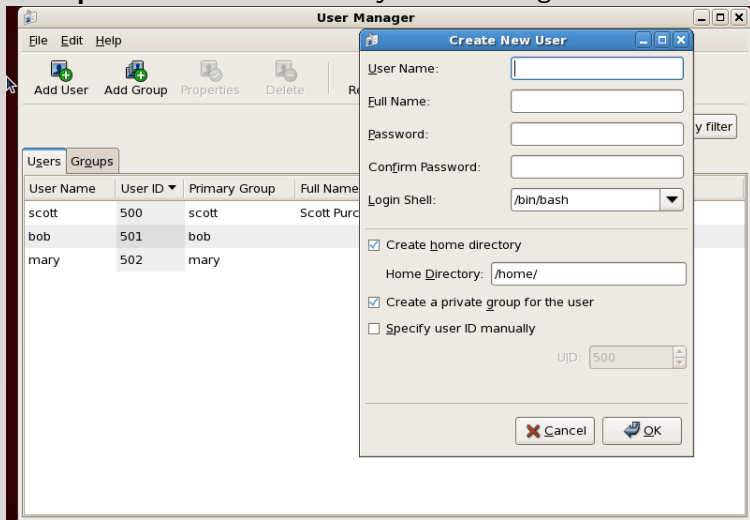

# User environment

## Home directories

/home/{user}/ or /root/

## /etc/skel

Contents copied to home directory of each new user.

## *Common Contents:*

- .bashrc
- .bash\_logout
- .bash\_profile



# System-wide Shell Config Files

## **/etc/profile**

Executed with each user login. Sets paths, variables, etc. Runs scripts in /etc/profile.d.

## **/etc/profile.d**

Scripts that extend /etc/profile, usually added by applications.

## **/etc/bashrc**

System-wide functions and aliases

## User-configurable Environment Files

`~/.bashrc`

User aliases and functions

`~/.bash_profile`

User paths, variables, and environment settings

# CUPS Printing System

uses IPP

Do not firewall port 631 udp/tcp from localhost or you will not print even to local printers.

system-config-printer

Use it. Requires X.

OpenRHC

## Controlling Jobs from the Command Line

lpr

send a job to a printer

lpq

See what is in the print queue.

lprm

Remove a job from the print queue.

lpc

Check the status of the queues. "lpc status"

# CUPS Web-Based Interface

<http://localhost:631>

**OpenRHCE**

# Troubleshooting

Read the entire error or message and read it carefully.

- Pay attention to what it says.

Look at the logs.

- /var/log/messages
- /var/log/secure

Look for typos in the command line or configuration file.

- A simple missing semicolon (;) or a dot (.) instead of a dash (-) could be the issue.

Break the problem down into smaller parts and troubleshoot them.

## Booting

Think about the boot process and at which point you are failing.

- MBR (GRUB Stage 1)
- GRUB Stage 1.5 (Driver to read filesystem)
- GRUB Stage 2 (Menu)
  - Kernel
  - initrd (initial ramdisk)
- init process
  - inittab
- rc.sysinit
- services

## Booting - (MBR)

The MBR boots the system and loads the next GRUB Stage.

If MBR is on a partition, is it marked bootable according to fdisk ?



## Booting - GRUB Stage 1.5 (Driver to read filesystem)

If this does not exist or is corrupt, then Stage 2 may not be able to be loaded.

## Booting - GRUB Stage 2 (Menu)

This stage reads the grub.conf and displays the grub menu.

Tells GRUB where and which kernel and initial ramdisk to load.

Passes extra boot options to the kernel.

root (hd0,0) indicates the files from /boot are located on the first partition of the first drive.

- The kernel and initial ramdisk are loaded from this partition.
- The paths should begin / and not /boot.

## Booting - Kernel

Be careful to not create a typo when specifying the kernel.

- A common typo is a dash instead of a period.
- Make sure the "root=" specifies the correct location of the device containing root (/).

## Booting - initrd (initial ramdisk)

Be careful to not create a typo when specifying the kernel.

- A common typo is a dash instead of a period.

The initial ramdisk NEEDS ALL DRIVERS needed for loading the filesystem.

- That means storage drivers must be in it.
- That means network drivers must be in it for booting across the network.

## Booting - init process

/sbin/init needs to exist and be executable.

Its the parent of all processes.

## Booting - inittab

This is inits configuration file.

It calls rc.sysinit.

It runs services for the appropriate run levels.

This is a very important and very easy file to corrupt.

If you get "Process spawning too rapidly" during boot, check this file or check to see if the commands it calls are there.

## Booting - rc.sysinit

Sets hostname

Runs filesystem checks if needed

Mounts file systems in fstab

remounts / as read/write

## Booting - services

Maybe the boot issue is caused by a service.

Boot into run level 1 and see if it boots.

- Run level 1 runs rc.sysinit and a couple of services.

Boot into runlevel S.

- Run level S does not start any services and does not run rc.sysinit.



# Networking

/etc/resolv.conf

- dns resolution

/etc/nsswitch

/etc/sysconfig/network

/etc/sysconfig/network-scripts/ifcfg-eth\*

**X**

```
system-config-display --reconfig --noui
```

**OpenRHC**

## TCP\_Wrappers

tcp\_wrappers is an easy-to-configure security mechanism that protects some (but not all!) services using the hosts access files, /etc/hosts.allow and /etc/hosts.deny.

- hosts.allow is processed first, then hosts.deny.
- Each file is read from top down and the first matching rule is applied -- all subsequent rules are ignored.
- If no matching rule is found, **access is granted!**
- Changes take immediate effect -- no services need restarting.

## Which Services are Protected?

- **ALL** services managed by xinetd
  - telnetd
  - tftpd
- Other services compiled against the libwrap.a library
  - sshd
  - sendmail
  - vsftpd
- Notably **NOT** included: httpd

# Identifying Protected Services

- Identify the binary used by the service in question:

```
# which sendmail  
/usr/sbin/sendmail
```

- Run `ldd` and `strings` against the binary and examine the output for "libwrap":

```
# strings `which sendmail` |grep libwrap  
# ldd `which sendmail` |grep libwrap  
libwrap.so.0 => /lib64/libwrap.so.0 ...
```

- Nul output confirms the service does NOT use `tcp_wrappers`:

```
# ldd `which httpd` |grep libwrap  
#
```

## Hosts Access Files Syntax

Basic format: <daemon list>: <client list> [: <option>: <option>: ...]

- Lists are comma-separated.
- The daemon list uses process names -- not always the same as the name of the service or daemon. Wild cards and operators are available.
- The client list is hostnames, IP addresses, patterns or wildcards
- More details in `man hosts_options`

# Source Repository

**Info:** See <<https://github.com/texastwister/OpenRHCE>>  
for the latest version of this doc.

**Author:** Scott Purcell <[scott@texastwister.info](mailto:scott@texastwister.info)>

**Date:** December 12, 2011

**OpenRHCE**