

Presses, feature flags: MS & !MSR & !MSL

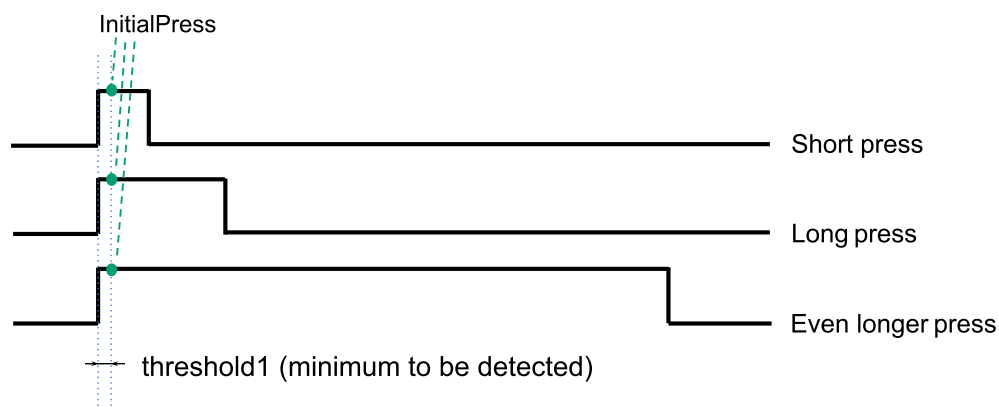


Figure 5. Switch device delivering only 'InitialPress' events (single press case)

1.13.8. Sequence of events for MultiPress

Multi-press detection is a feature of momentary switches (indicated with feature flag MSM being set, with optional AS feature flag set) that they can count and report sequences of press-release cycles within a certain time frame, for example to indicate that the user has pressed the switch once, twice or three (or even more) times in succession. The definition of the time window for this detection is manufacturer-specific since it depends on the switch physics. The maximum number of presses which can be detected and reported SHALL be indicated in attribute MultiPressMax. The minimum value and default value for MultiPressMax are both 2.

A switch supporting MultiPress SHALL set feature flags MS & MSM, and MAY optionally, according to conformance rules of each flag, set flags MSL, MSR, and AS.

The ActionSwitch (AS) feature flag is a behavior selector which, when set, reduces the number of events generated by the switch.

A press cycle when MSM is set is **either** a long-press cycle (if MSL set), **or** a multi-press cycle.

- If the MSL feature flag is set and the cycle is deemed "long" during the first press cycle after InitialPress, then the switch SHALL react as described in [Section 1.13.7.1, "Switches with long-press detection support \(MSL feature flag set\)"](#), and SHALL NOT consider this to be the start of a multi-press sequence (see penultimate case illustrated in [Figure 7, "Switch device with MSM and AS feature flags \(multi-press case\)"](#)).
- If the MSL feature flag is not set or if the first button press cycle is short, then the switch SHALL count presses until the switch becomes sufficiently idle, and SHALL NOT generate LongPress and LongRelease events for intermediate presses within the multi-press cycle that are "long".