


```

faofernando@war-machine:~$ docker run -d -p 8080:80 webserver
468dadadca14cde66afd5c3a1689b5b3462c4fc2e8b7b56d026adbd2122e7acc
faofernando@war-machine:~$ docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED      STATUS      PORTS                               NAMES
468dadadca14   webserver "apache2ctl -D FOREG..." 5 seconds ago Up 4 seconds 0.0.0.0:8080->80/tcp, :::8080->80/tcp elegant_saha

```

Executa o container detachado (-d) na porta(-p) 8080

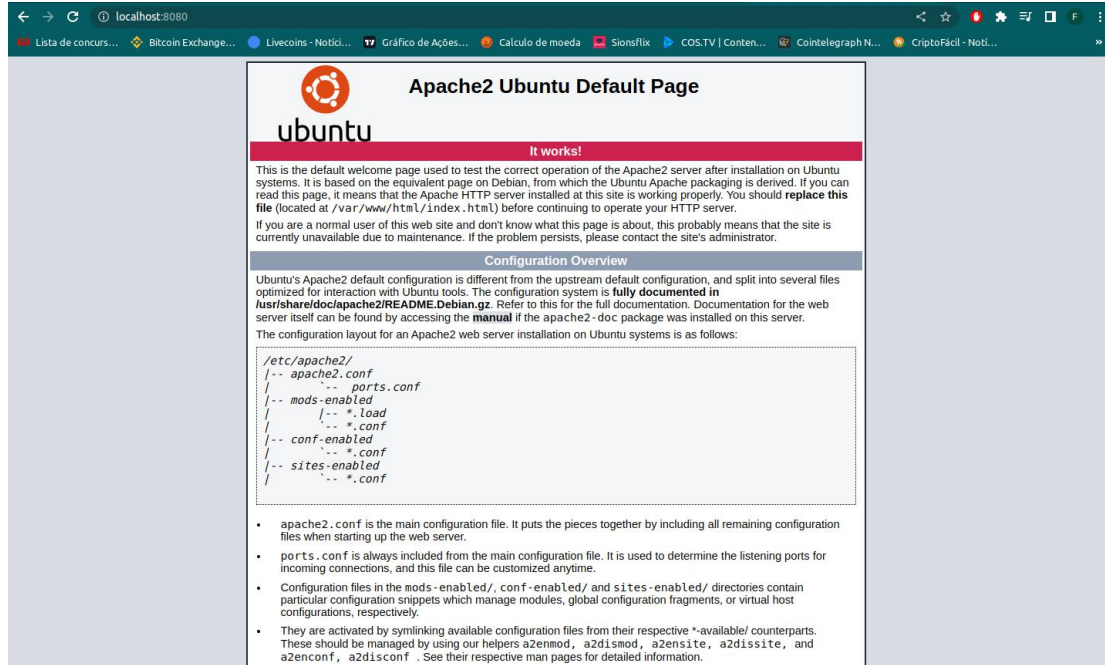

```

faofernando@war-machine:~$ docker ps
CONTAINER ID   IMAGE     COMMAND                  CREATED      STATUS      PORTS                               NAMES
468dadadca14   webserver "apache2ctl -D FOREG..." 5 seconds ago Up 4 seconds 0.0.0.0:8080->80/tcp, :::8080->80/tcp elegant_saha
faofernando@war-machine:~$ docker stop 468dadadca14
468dadadca14

```

docker stop - Para o conainter