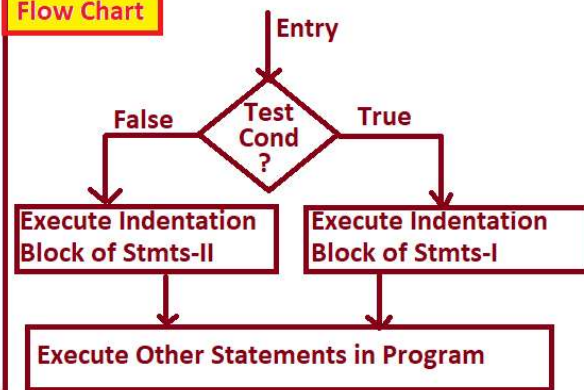


**2. if..else statement****Syntax:**

```

if (Test Cond) :
|-----Statement-1-----| Indentation
|-----Statement-2-----| Block-I
|-----Statement-n-----|
else:
|-----Statement-11-----| Indentation
|-----Statement-12-----| Block-II
|-----Statement-1n-----|
Other Statements
in Program
  
```

**Flow Chart****Explanation:**

=>Here if and else are the keywords

=>If the Test Cond is True then PVM Executes Indentation Block of Statements-I and later executes Other Statements in program.

=>If the Test Cond is False then PVM Executes Indentation Block of Statements-II and later executes Other Statements in program.