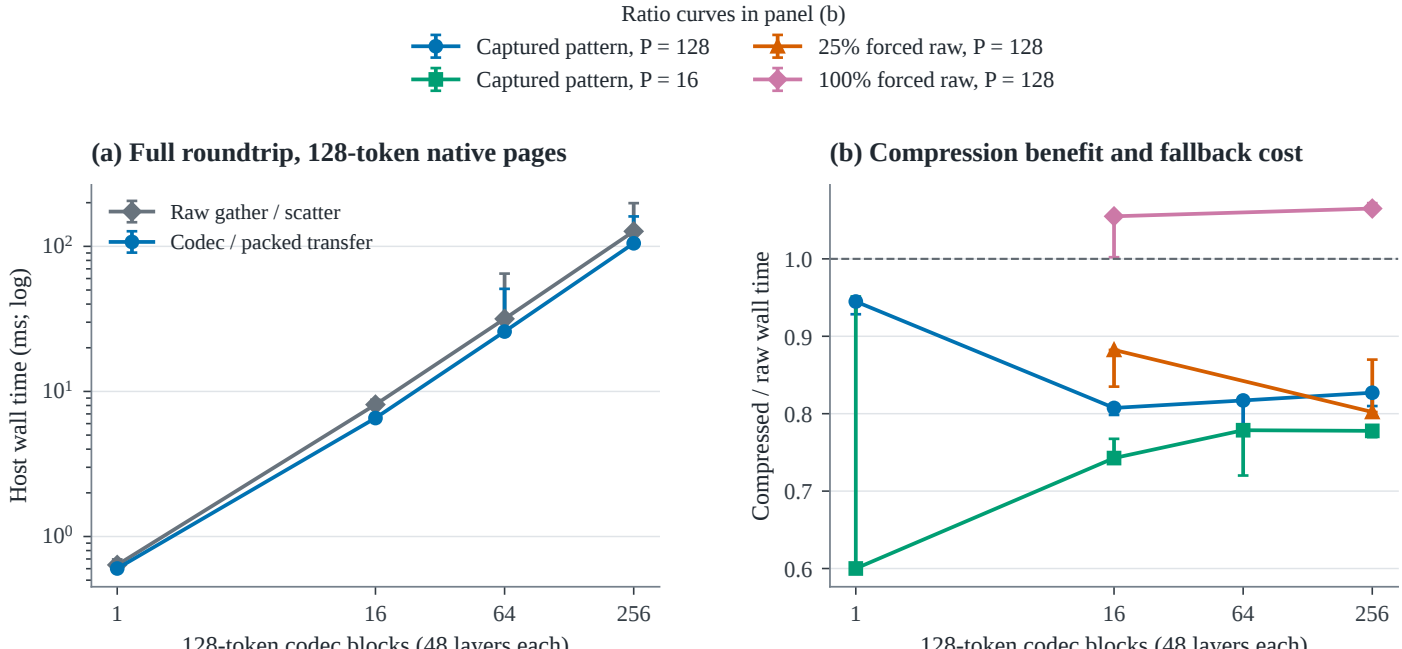

Encode + pack + actual D2H/H2D + restore; serial, preallocated, pinned host buffers.
Repeated captured BF16 KV; forced-fallback records contain finite out-of-table values.
Primary process medians; whiskers span two process medians. Ratio below 1 favors compression.