


user root aanpassen: % ipv localhost voor Host

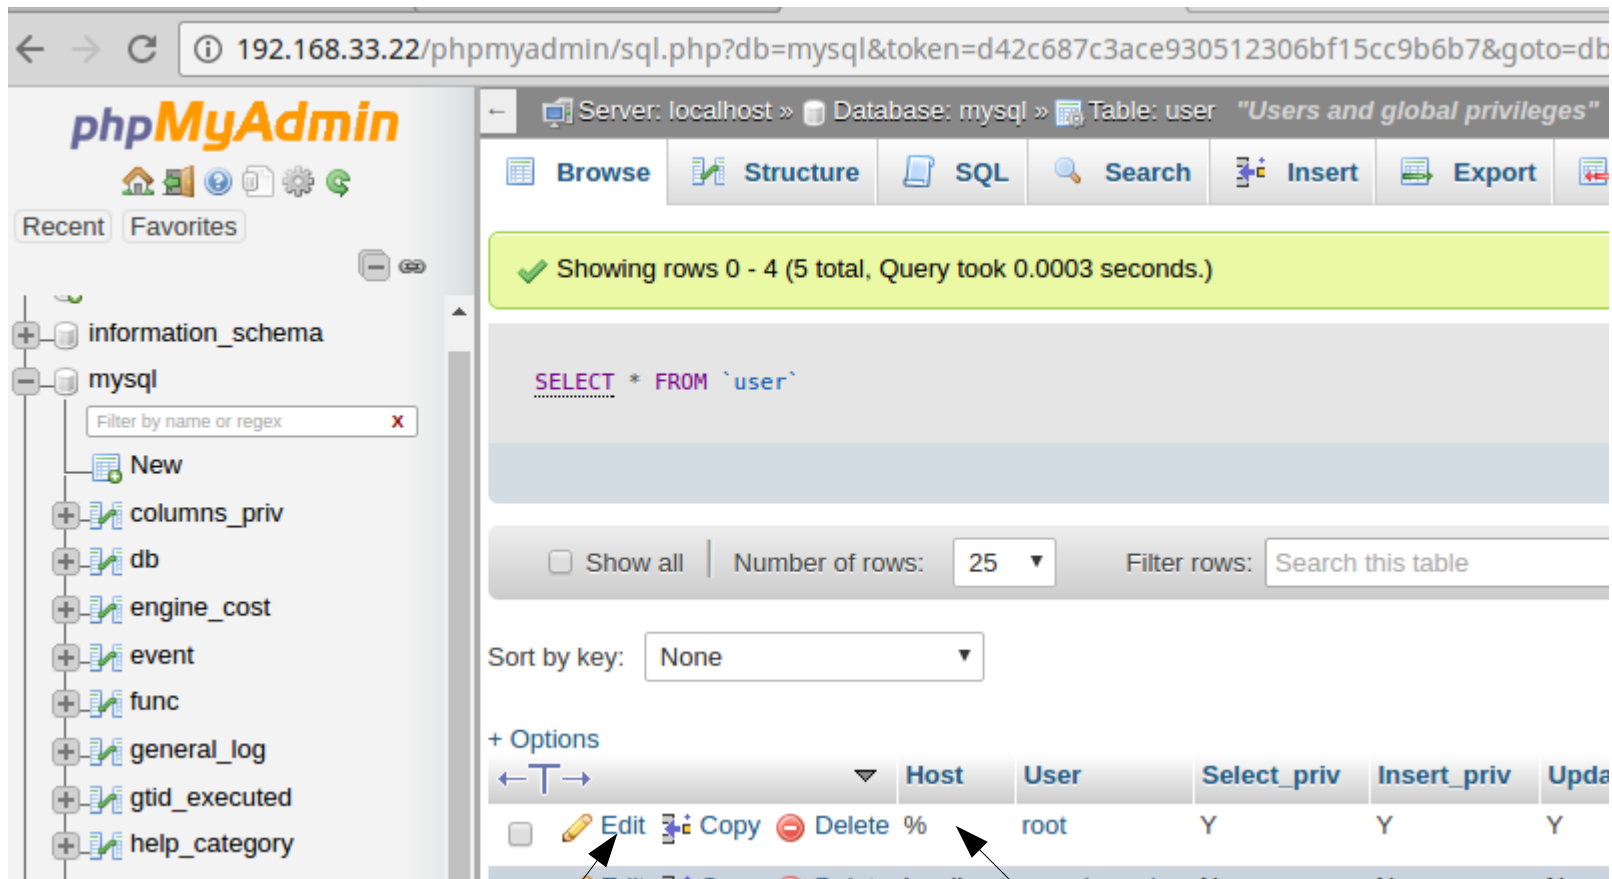

phpMyAdmin interface showing the 'user' table in the 'mysql' database. The table structure is visible, and the 'Host' column is highlighted. The 'Host' column contains the value '%', which is being pointed to by an arrow from the text below. The 'User' column contains the value 'root', which is also being pointed to by an arrow from the text below.

sudo vi /etc/mysql/mysql.conf.d/mysqld.cnf

```
# Instead of skip-networking the default is now to listen only on
# localhost which is more compatible and is not less secure.
bind-address            = 0.0.0.0
```

sudo service apache2 restart
sudo service mysql restart