



Coinsult

Advanced Manual Smart Contract Audit



Project: Infinity Gnomes

Website: <https://infinitygnomes.com/>

Low-Risk

5 low-risk code
issues found

Medium-Risk

0 medium-risk code
issues found

High-Risk

0 high-risk code
issues found

Contract Address

0x7D336b58285feb20366f65C329a37E8EBED71cd1

Disclaimer: Coinsult is not responsible for any financial losses. Nothing in this contract audit is financial advice, please do your own research.

Disclaimer

Coinsult is not responsible if a project turns out to be a scam, rug-pull or honeypot. We only provide a detailed analysis for your own research.

Coinsult is not responsible for any financial losses. Nothing in this contract audit is financial advice, please do your own research.

The information provided in this audit is for informational purposes only and should not be considered investment advice. Coinsult does not endorse, recommend, support or suggest to invest in any project.

Coinsult can not be held responsible for when a project turns out to be a rug-pull, honeypot or scam.

Tokenomics

Rank	Address	Quantity (Token)	Percentage
1	0x00000813a9204b0b252003d8c9f90da9d9cf1f9e	1,000,000,000	100.0000%

Source Code

Coinsult was comissioned by Infinity Gnomes to perform an audit based on the following smart contract:

<https://etherscan.io/address/0x7D336b58285feb20366f65C329a37E8EBED71cd1#code>

Manual Code Review

In this audit report we will highlight all these issues:

Low-Risk

5 low-risk code
issues found

Medium-Risk

0 medium-risk code
issues found

High-Risk

0 high-risk code
issues found

The detailed report continues on the next page...

● **Low-Risk:** Could be fixed, will not bring problems.

Avoid relying on `block.timestamp`

`block.timestamp` can be manipulated by miners.

```
function swapTokensForEth(uint256 tokenAmount) private {
    // generate the uniswap pair path of token -> weth
    address[] memory path = new address[](2);
    path[0] = address(this);
    path[1] = uniswapV2Router.WETH();

    _approve(address(this), address(uniswapV2Router), tokenAmount);

    // make the swap
    uniswapV2Router.swapExactTokensForETHSupportingFeeOnTransferTokens(
        tokenAmount,
        0, // accept any amount of ETH
        path,
        address(this),
        block.timestamp
    );
}
```

Recommendation

Do not use `block.timestamp`, `now` or `blockhash` as a source of randomness

Exploit scenario

```
contract Game {

    uint reward_determining_number;

    function guessing() external{
        reward_determining_number = uint256(block.blockhash(10000)) % 10;
    }
}
```

Eve is a miner. Eve calls `guessing` and re-orders the block containing the transaction. As a result, Eve wins the game.

● **Low-Risk:** Could be fixed, will not bring problems.

Too many digits

Literals with many digits are difficult to read and review.

```
swapTokensAtAmount = (supply_.div(10000) + 1) * (10**decimals_);
```

Recommendation

Use: Ether suffix, Time suffix, or The scientific notation

Exploit scenario

```
contract MyContract{
    uint 1_ether = 1000000000000000000;
}
```

While 1_ether looks like 1 ether, it is 10 ether. As a result, it's likely to be used incorrectly.

● **Low-Risk:** Could be fixed, will not bring problems.

No zero address validation for some functions

Detect missing zero address validation.

```
function setMarketingWallet(address payable wallet) external onlyOwner {  
    marketingWallet = wallet;  
}
```

Recommendation

Check that the new address is not zero.

Exploit scenario

```
contract C {  
  
    modifier onlyAdmin {  
        if (msg.sender != owner) throw;  
        _;  
    }  
  
    function updateOwner(address newOwner) onlyAdmin external {  
        owner = newOwner;  
    }  
}
```

Bob calls updateOwner without specifying the newOwner, so Bob loses ownership of the contract.

● **Low-Risk:** Could be fixed, will not bring problems.

Missing events arithmetic

Detect missing events for critical arithmetic parameters.

```
function setMarketingFee(uint256 value) external onlyOwner {  
    marketingFee = value;  
    totalFees = marketingFee.add(liquidityFee);  
}
```

Recommendation

Emit an event for critical parameter changes.

Exploit scenario

```
contract C {  
  
    modifier onlyAdmin {  
        if (msg.sender != owner) throw;  
        _;  
    }  
  
    function updateOwner(address newOwner) onlyAdmin external {  
        owner = newOwner;  
    }  
}
```

updateOwner() has no event, so it is difficult to track off-chain changes in the buy price.

● **Low-Risk:** Could be fixed, will not bring problems.

Redundant Statements

Detect the usage of redundant statements that have no effect.

```
function _msgData() internal view virtual returns (bytes memory) {  
    this; // silence state mutability warning without generating bytecode - see https://github.com/ethereum/solidity/issues/2318  
    return msg.data;  
}
```

Recommendation







Remove redundant statements if they congest code but offer no value.

Exploit scenario

```
contract RedundantStatementsContract {  
  
    constructor() public {  
        uint; // Elementary Type Name  
        bool; // Elementary Type Name  
        RedundantStatementsContract; // Identifier  
    }  
  
    function test() public returns (uint) {  
        uint; // Elementary Type Name  
        assert; // Identifier  
        test; // Identifier  
        return 777;  
    }  
}
```

Each commented line references types/identifiers, but performs no action with them, so no code will be generated for such statements and they can be removed.

Owner privileges

-  Owner cannot pause trading
-  Owner can change max transaction amount
-  Owner can set fees higher than 25%
-  Owner can exclude from fees
-  Owner can blacklist addresses
-  Owner can set max wallet amount

Extra notes by the team

No notes

Contract Snapshot

```
contract ERC20 is Context, IERC20, IERC20Metadata {
    using SafeMath for uint256;

    mapping(address => uint256) private _balances;


    mapping(address => mapping(address => uint256)) private _allowances;

    uint256 private _totalSupply;

    string private _name;
    string private _symbol;
    uint8 private _decimals;
```

Website Review

Coinsult checks the website completely manually and looks for visual, technical and textual errors. We also look at the security, speed and accessibility of the website. In short, a complete check to see if the website meets the current standard of the web development industry.

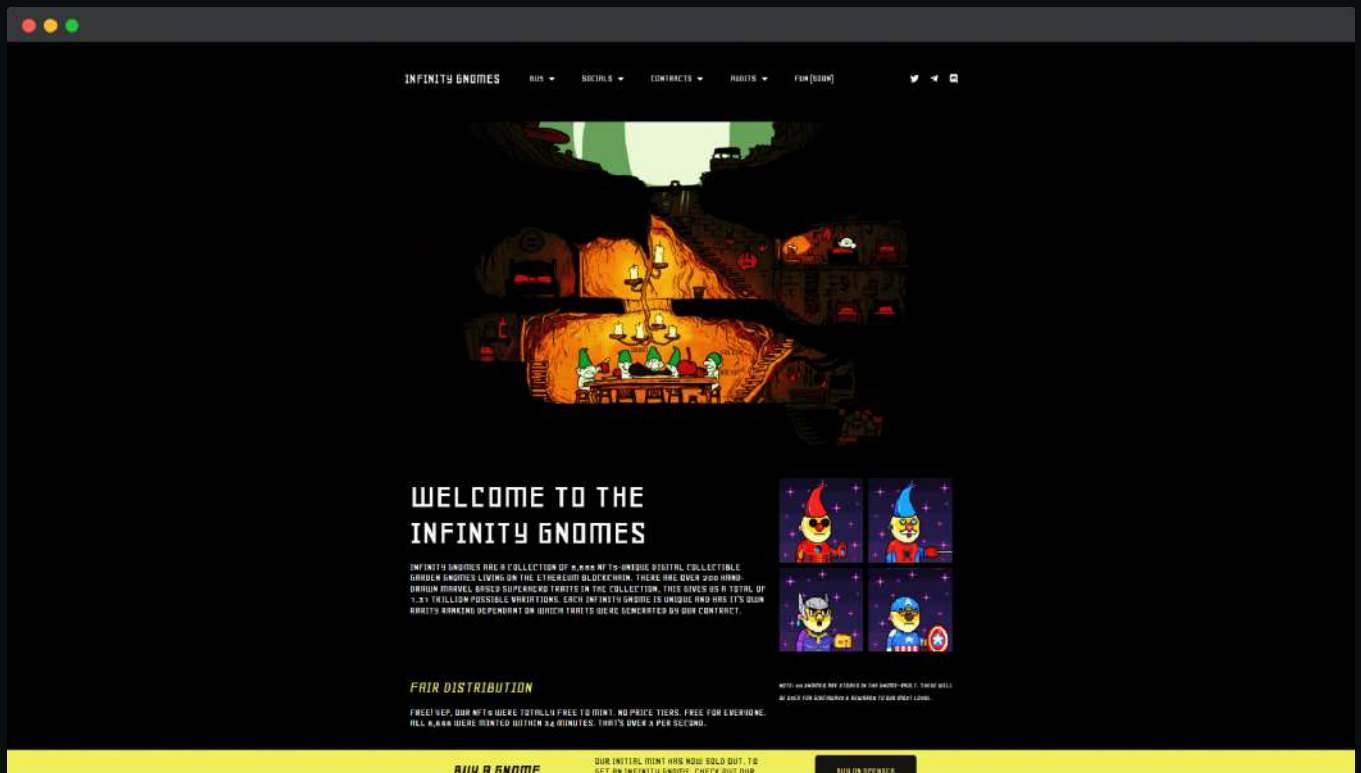

- Mobile Friendly
- Does not contain jQuery errors
- SSL Secured
- No major spelling errors

Project Overview

● Not KYC verified by Coinsult

Infinity Gnomes

Audited by Coinsult.net



Date: 22 August 2022

✓ Advanced Manual Smart Contract Audit