AGREED BY

_____/ /
_____ **2026**

APPROVED BY
Department Director
Operator-CRPT, LLC

_____/ /
September 24, 2026

OMS-CLOUD 5.0

Special software

Programmer’s guide

Key Functions

Version 5.03

API Version 3.0.40

Revision 67

RU 15861920.620111-04 33 07

Sheets 667

Signature and date	
Dupl. Inv. No.	
Repl. Inv. No.	
Signature and date	
Orig. Inv. No.	

2026

ANNOTATION

This document “OMS-CLOUD 5.0. Special software. Programmer’s guide” RU 15861920.620111-04 33 07 is intended to introduce the functions of application programming interface of special software (SSW) of automated system “OMS-CLOUD 5.0” (OMS-Cloud 5.0 AS).

CONTENTS

1. program purpose 11
1.1. Program Purpose 11
1.2. Program Functions 11
2. Program Application Environment 12
2.1. Applied Hardware 12
2.1.1. Required characteristics of PC for the operation of software component from OMS-Cloud 5.0 AS SSW executed at OMS-Cloud 5.0 AS SSW HWC 12
2.1.2. Required characteristics of PC to use “Web-Interface Module” software component from OMS-Cloud 5.0 AS SSW 12
2.2. Software required for program functioning 13
2.2.1. Software required for the functioning of software component from OMS-Cloud 5.0 AS SSW executed at OMS-Cloud 5.0 AS SSW HWC 13
2.2.2. Software required for the functioning of “Web-Interface Module” software component from OMS-Cloud 5.0 AS SSW 13
2.3. Software required for program operation 13
2.3.1. General requirements to request signing 13
2.3.2. Generating GS1 DataMatrix 15
2.3.3. Requirements JSON-format processing 16
3. Program Characteristics 17
3.1. Applicability Indicators 17
3.2. Operation Mode 17
3.3. Means of Correct Operation Control and Self-Restorability of Program 17
3.3.1. Means of Correct Operation Control 17
3.3.2. Self-Restorability Means 18
4. Program Call 19
4.1. Introduction 19
4.2. OMS-Method Call Sequences 19
4.3. Description of MC-Emission Process 21
4.3.1. Process “01.01.00.00 Create MC-Emission Order” 21
4.3.2. Process “01.02.00.00 Obtain MC-Array Status from Order” 24
4.3.3. Process “01.03.00.00 Obtain MC from Order” 26
4.3.4. Process “01.04.00.00 Send Report on MC-Utilization” 28
4.4. Methods of OMS API 30
4.4.1. Method “Create Marking Code Emission Order” 31
4.4.1.1. Request 31
4.4.1.2. Response to Request 151
4.4.2. Method “Get a status of MC array from the order” 152
4.4.2.1. Request 152
4.4.2.2. Response to Request 154
4.4.3. Method “Obtain a List of Marking Code Orders” 158
4.4.3.1. Request 158
4.4.3.2. Response to Request 159
4.4.4. Method “Obtain MC from the MC order” 162
4.4.4.1. Request 162
4.4.4.2. Response to Request 163

4.4.5. Method “Obtain a List of Marking Code Package Identifiers” 164
4.4.5.1. Restrictions 164
4.4.5.2. Request 164
4.4.5.3. Response to Request 166
4.4.6. Method “Re-obtain marking codes from marking code order” 168
4.4.6.1. Restrictions 169
4.4.6.2. Request 169
4.4.6.3. Response to Request 170
4.4.7. Method “Get Goods Attributes” 171
4.4.7.1. Request 171
4.4.7.2. Response 173
4.4.8. Method “Close MC order/suborder” 175
4.4.8.1. Request 175
4.4.8.2. Response to Request 177
4.4.9. Method “Send Report on MC Disposal / Rejection” 178
4.4.9.1. Request 179
4.4.9.2. Response to Request 188
4.4.10. Method “Send Report on MC Aggregation” 189
4.4.10.1. Request 190
4.4.10.2. Response to Request 215
4.4.11. Method “Send Report on MC Utilization (Application)” 216
4.4.11.1. Request 218
4.4.11.2. Response to Request 318
4.4.12. Method “Send a Notification of Acceptance of ICs for Record-keeping Purposes” 319
4.4.12.1. Request 319
4.4.12.2. Request Response 323
4.4.13. Method “Obtain the Report Processing Status” 325
4.4.13.1. Request 325
4.4.13.2. Response to Request 327
4.4.14. Method “Getting a list of Service Providers” 329
4.4.14.1. Request 329
4.4.14.2. Response 330
4.4.15. Method “Obtaining the list of identifiers of the reports “Application data”” 332
4.4.15.1. Request 332

4.4.15.2. Response 334
4.4.16. Method “Obtaining the list of ICs from the “Application data” report” 335
4.4.16.1. Request 335
4.4.16.2. Response 337
4.4.17. Method “Receiving the business places” 338
4.4.17.1. Request 339
4.4.17.2. Response 340
4.4.18. Method “Receive a receipt by unique document identifier” 342
4.4.18.1. Request 342
4.4.18.2. Response 344
4.4.19. Method “Obtaining receipt by set filters” 346
4.4.19.1. Restrictions 346
4.4.19.2. Request 346
4.4.19.3. Response 350
4.4.20. Method “Receiving a document related to receipt” 352
4.4.20.1. Request 353
4.4.20.2. Response 355
4.4.21. Method “Search of documents” 356
4.4.21.1. Request 356
4.4.21.2. Response 358
4.4.22. Method “Get document contents” 360
4.4.22.1. Request 360
4.4.22.2. Response 361
4.4.23. Method “Delete document” 363
4.4.23.1. Request 363
4.4.23.2. Response 364
4.4.24. Method “Sign document” 365
4.4.24.1. Request 365
4.4.24.2. Response 367
4.4.25. Method “Check OMS availability” 368
4.4.25.1. Request 368
4.4.25.2. Response to request 369
4.4.26. Method “Provision of the list of installations of the integration solution (external connection)” 370
4.4.26.1. Request 370

4.4.26.2. Response to request 371
4.4.27. Method “Delete installation of the integration solution instance” 373
4.4.27.1. Request 374
4.4.27.2. Response 375
4.4.28. Method “Get an ID of GCP’s profile” 375
4.4.28.1. Request 375
4.4.28.2. Response 376
4.4.29. Method “Get information on MC orders by filters” 378
4.4.29.1. Request 378
4.4.29.2. Response 381
5. Input and Output Data 386
5.1. Nature, Arrangement and Initial Preparation of Input and Output Data 386
5.1.1. Information Sources 386
5.1.2. Methods of Data Collection, Transmission, Control and Correction Arrangement 386
5.2. Format, Description and Encoding Method of the Input and Output Data when Using API 388
5.3. Guides Accessible via API 389
5.3.1. Guides to Control the Marking Codes 389
5.3.1.1. Guide “Method of Goods Introduction into Circulation” (releaseMethodType) 389
5.3.1.2. Guide “Method of Individual Serial Number Generation” (serialNumberType) 390
5.3.1.3. Guide “Manufacturing Method” (createMethodType) 391
5.3.1.4. Guide “MC Templates” (templateId) 391
5.3.1.5. Guide “MC Array Status” (status) 397
5.3.1.6. Guide “MC Buffer Status” (bufferStatus) 398
5.3.1.7. Guide “Report Processing Status” (reportStatus) 399
5.3.1.8. Guide “Order Status” (orderStatus) 400
5.3.1.9. Guide “Dropout Reason” (dropoutReason) 401
5.3.1.10. Guide “Marking Code Type” (cisType) 402
5.3.1.11. Guide “Country code of MC emission” 406
5.3.1.12. Guide “Cancellation of unused MCs” 406
5.3.1.13. Guide “Printing Quality Class” 409
5.3.1.14. Guide “Types of receipts” 410
5.3.1.15. Guide “Types of events” 410
5.3.1.16. Guide “Goods Groups” 412
5.3.1.17. Guide “Receipt statuses” 413
5.3.1.18. Guide “Codes of marking codes processing result” 413
6. Messages 418

6.1. Messages to the Operator transmitted via GUI 418
6.1.1. Information windows 418
6.2. Error Format and Codes 419
6.2.1. Error format 419
6.2.2. Description of Errors 420
7. OMS API 3.0 Use Examples 421
7.1. Signing Requests with the Electronic Digital Signature 421
7.1.1. Library “CryptoPro JCP” 421
7.1.2. Example with the Use of Library to Sign the Request 425
8. STRUCTURES AND FORMATS OF marking CODES, IDENTIFICATION CODES, AND VERIFICATION CODES 428
8.1. “Tobacco products” 428
8.1.1. Consumer package (non GS1) 428
8.1.2. Group package (GS1) 428
8.2. “Light industry” 429
8.3. “Footwear” 430
8.4. “New pneumatic rubber tires and tire casings” 431
8.5. “Perfume and Eau de Toilette” 432
8.6. “Photo cameras (except cine cameras), flash lights and flash bulbs” 433
8.7. “Medicines for human use” 434
8.8. “Dairy products” 434
8.9. “Bicycles and bicycle frames” 435
8.10. "Medical products" 436
8.11. “Alternative tobacco products” 437
8.11.1. Consumer package (non GS1) 437
8.11.2. Consumer package (GS1) 438
8.11.3. Group package (GS1) 439
8.12. “Packed water” 439
8.13. “Beer, beer-based and low-alcohol beverages” 440
8.14. “Nicotine products” 441
8.14.1. Group package (GS1) 441
8.14.2. Consumer package (non GS1) 442
8.15. “Specialized food products and biologically active food additives” 443
8.16. “Antiseptic/antibacterial skin cleansers and hand sanitizers” 444
8.17. “Non-alcoholic beer” 446
8.18. “Juice products and non-alcoholic beverages” 447
8.19. “Seafood” 448
8.20. “Pet foods” 450
8.21. “Games and toys for children” 453
8.22. “Titanium metal products” 455
8.23. “Radio-electronic products” 456
8.24. “Optical fiber and fiber optic products” 459
8.25. “Vegetable oils” 462
8.26. “Cosmetics, household chemicals, and personal hygiene products” 463
8.27. “Canned foods” 465
8.28. “Veterinary medicines” 467
8.29. “Building materials” 468
8.30. “Pyrotechnic articles and fire safety and firefighting equipment” 470
8.31. “Printed goods” 472
8.32. “Heaters” 473
8.33. “Groceries” 475
8.34. “Cabling and wiring products” 477

8.35. “Engine oils” 479
8.36. “Polymer pipes” 481
8.37. “Confectionery products” 483
8.38. “Auto parts and components for vehicles” 485
8.39. “Radio-electronic products. Electronic nicotine delivery systems” 487
8.40. “Radio-electronic products. Laptops and smartphones” 489
8.41. “Meat products” 491
8.42. “Feed additives” 493
8.43. “Home and kitchen goods” 495
8.44. “Industrial equipment” 497
8.45. “Fertilizers in consumer packaging” 499
8.46. “Semi-finished and frozen food products” 501
8.47. “Real fur” 503
8.48. “Pyrotechnic articles” 504
9. AUTHORIZATION AND AUTHENTICATION 507
9.1. Getting a client token 507
9.1.1. Process “01.00.00.00 Registration of installation of integration decision in the OMS” 508
9.1.2. Process “01.00.00.01 Getting a client token by means of the TT GIS” 509
9.1.3. Process “01.00.00.02 Getting a client token by means of MDLP IS” 511
9.2. Registering the installation of the integration decision instance 514
9.2.1. Method “Requesting registration of installation of the integration decision instance” 514
9.2.1.1. Request 514
9.2.1.2. Response 516
9.3. Getting a client token by means of single authentication methods 518
9.3.1. Getting a client token by applying to single authentication methods of MDLP IS 518
9.3.1.1. Method for getting the authentication code 518
9.3.1.2. Method for getting the session key 521
9.3.2. Getting a client token by applying to single authentication methods of True API 524
9.3.2.1. Request of authorization in single authentication 524
9.3.2.2. Receiving an Authentication Token 526
10. RECEIPTING 2.0 529
10.1. Description of the user data of the event 531
10.1.1. Receipt “Marking code order” (CREATE_ORDER) 531
10.1.1.1. Event “Order receipt” (CREATE_ORDER_RECEIVED) 539
10.1.1.2. Event “Dispatch of order for verification” (CREATE_ORDER_VALIDATION) 540
10.1.1.3. Event “Order verification result” (CREATE_ORDER_VALIDATION_RESULT) 541
10.1.1.4. Event “Dispatch of task to ER/MER” (CREATE_ORDER_EMISSION_TASK_SEND) 542
10.1.1.5. Event “Saving a suborder received” (CREATE_ORDER_GIS_CREATED) 542

10.1.1.6. Event “Generation of report Generated/10300 by suborder” (CREATE_ORDER_GIS_GENERATED) 543
10.1.1.7. Event “Result of sending of suborder for processing” (CREATE_ORDER_GIS_SEND_TO_PROCESSING) 543
10.1.1.8. Event “Suborder result” (CREATE_ORDER_SUBORDER_RESULT) 544
10.1.2. Receipt “Report on MC usage” (REPORT_UTILIZE)..... 545
10.1.2.1. Event “Receipt of report on MC application” (REPORT_UTILIZE_RECEIVED) 549
10.1.2.2. Event “Dispatch of report metadata for verification in MDLP” (REPORT_UTILIZE_VALIDATION) 550
10.1.2.3. Event “Results of report metadata verification in MDLP” (REPORT_UTILIZE_VALIDATION_RESULT) 550
10.1.2.4. Event “Dispatch of report to ER/MER” (REPORT_UTILIZE_EMISSION_SEND) 550
10.1.2.5. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED) 551
10.1.2.6. Event “Report processing result” (RNMS_GIS_PROCESSED) .. 551
10.1.3. Receipt “Marking code aggregation” (REPORT_AGGREGATION) 552
10.1.3.1. Event “Receipt of aggregation report” (REPORT_AGGREGATION_RECEIVED) 555
10.1.3.2. Event “Dispatch of report to marking system” (REPORT_AGGREGATION_GIS_SEND)..... 555
10.1.3.3. Event “Dispatch of report for processing” (REPORT_AGGREGATION_GIS_ROUTED)..... 556
10.1.3.4. Event “Report processing result” (REPORT_AGGREGATION_GIS_PROCESSED) 556
10.1.4. Receipt “Marking code cancellation” (ANNULMENT_CODES)..... 557
10.1.4.1. Event “MC cancellation” (ANNULMENT_CODES) 558
10.1.4.2. Event “Dispatch of report to ER/MER” (ANNULMENT_CODES_EMISSION_SEND) 559
10.1.4.3. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED) 560
10.1.4.4. Event “Report processing result” (RNMS_GIS_PROCESSED) .. 560
10.1.5. Receipt “Dropout of rejected products” (REPORT_DROPOUT)..... 560
10.1.5.1. Event “Receipt of rejection report” (REPORT_DROPOUT_RECEIVED)..... 566

10.1.5.2. Event “Dispatch of report to ER/MER/marking system” (REPORT_DROPOUT_EMISSION_SEND) 566
10.1.5.3. Event “Dispatch of report for processing” (REPORT_DROPOUT_GIS_ROUTED) 567
10.1.5.4. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED) 568
10.1.5.5. Event “Report processing result” (REPORT_DROPOUT_GIS_PROCCESSED) 568
10.1.5.6. Event “Report processing result” (RNMS_GIS_PROCESSED) .. 569
10.1.6. Receipt “MC issue” (GET_CODES) 569
10.1.6.1. Event “Result of MC issue” (GET_CODES_RESULT) 572
10.1.6.2. Event “Dispatch of automatically generated report on the MC application” (GET_CODES_GENERATED_REPORT) 573
10.1.6.3. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED) 573
10.1.6.4. Event “Report processing result” (RNMS_GIS_PROCESSED) .. 573
10.1.7. Receipt “Report “Application data”” (REPORT_QUALITY) 573
10.1.7.1. Event “Receipt of report “Application information”” (REPORT_QUALITY_RECEIVED) 574
10.1.8. Receipt “Closing of order” (CLOSE_ORDER) 575
10.1.8.1. Event “Closing of order” (CLOSE_ORDER) 576
10.1.9. Receipt “Notification of acceptance of ICs for record-keeping purposes” (REPORT_SURPLUS) 577
10.1.9.1. Event “Receiving a notification of acceptance of ICs for record-keeping purposes” (REPORT_SURPLUS_RECEIVED) 579
10.1.9.2. Event “Transmission of Notification to ER/MER” (REPORT_SURPLUS_EMISSION_SEND) 580
10.1.9.3. Event “Sending the notification for processing” (REPORT_SURPLUS_GIS_ROUTED) 581
10.1.9.4. Event “Notification processing result” (DOCUMENT_PROCESSED) 581
LIST OF APPLICATION PROGRAMMING INTERFACE CHANGES 582
LIST OF TERMS 638
LIST OF ABBREVIATIONS 643
LIST OF FIGURES 644
LIST OF TABLES 651

1. PROGRAM PURPOSE

1.1. Program Purpose

The specialized software is intended to enable the performance of target functions of OMS-Cloud 5.0 AS including:

1) Ordering emission of marking codes.

2) Provision of emitted marking codes for application to products.

3) Verification of MC application.

1) Aggregation of ready and packed products with applied identification means (IM).

2) Writing-off of rejected products.

1.2. Program Functions

OMS-Cloud 5.0 AS SSW enables the following functions:

1) Obtaining orders and providing emitted marking codes.

2) Obtaining notifications on the use (application) of marking codes and recording marking code status in the Goods Group System.

3) Obtaining notifications on the aggregation of marking codes and recording packed products aggregation in the Goods Group System.

4) Obtaining notifications on the rejection of marking codes and rejected products registration in the Goods Group System.

2. PROGRAM APPLICATION ENVIRONMENT

2.1. Applied Hardware

2.1.1. Required characteristics of PC for the operation of software component from OMS-Cloud 5.0 AS SSW executed at OMS-Cloud 5.0 AS SSW HWC

In order to operate a software component from OMS-Cloud 5.0 AS SSW executed at OMS-Cloud 5.0 AS SSW HWC, the following hardware (HW) shall be used:

1) CPU: Intel x86 architecture, clock rate of 3 GHz;
2) Platform: 64-bit;
3) RAM capacity: 16 Gb;
4) Hard-disk drive: 100 GB;
5) Network interface: Ethernet 100 Mbit/s.

Minimum network interface settings for OMS:

1) 1 static IP address;
2) Netmask;
3) Default gateway;
4) DNS settings.

Access to OMS-server:

1) In firewall, SSH-port shall be open (22 by default or another configured by network administrator), as well as ports for Web-console of Imagenarium software and Web-interface of OMS-software.

In order to ensure fail-safety, it is recommended to use three clustered physical or virtual machines. Machines shall have identical configuration. All machines shall have the same SSH-ports.

2.1.2. Required characteristics of PC to use “Web-Interface Module” software component from OMS-Cloud 5.0 AS SSW

To operate the information services provided by OMS-Cloud 5.0 AS SSW, the following hardware (HW) shall be used:

1) Non-shared HW:

– user AWS with the functional role of “OMS Operator / Administrator” (OMS Operator / Administrator AWS) that is a PC with characteristics relevant to the recommended requirements of Microsoft Windows OS 8.1 and later editions, and a network adapter providing information-and-communication channel with HWC, OMS-Cloud 5.0 AS.

2.2. Software required for program functioning

2.2.1. Software required for the functioning of software component from OMS-Cloud 5.0 AS SSW executed at OMS-Cloud 5.0 AS SSW HWC

In order to use the system, the server / virtual machine shall have the following basic programs and components installed:

1) Operating system Linux CentOS 7;

2) SSH Server (authentication mode by name and password);

3) Command-line utility and system program packages: (bash, ifconfig, sysctl, curl, yum, systemctl, yum-config-manager, unzip).

In order to install OMS-Cloud 5.0 AS SSW, operating system Linux CentOS 7 shall be installed, and SSH Server, command-line utility and system program packages, as listed above shall be set up.

2.2.2. Software required for the functioning of “Web-Interface Module” software component from OMS-Cloud 5.0 AS SSW

To operate the information services provided by “Web-Interface Module” software component from OMS-Cloud 5.0 AS SSW, the following general software components are required:

1) Microsoft Windows OS 8.1 and later editions;

2) Web-browser:

– Mozilla Firefox 40 and later versions.

– Internet Explorer 9 and later versions.

– Google Chrome 37 and later versions.

2.3. Software required for program operation

2.3.1. General requirements to request signing

In order to ensure legal value of sent messages by means of OMS API 3.0 interface, optional parameter X-Signature has been added to the HTTP-header of request to OMS to include a detached digital signature of request data (GCP’s detached signature is included into HTTP-header within X-Signature parameter, in Base64 encoding).

Signature format is a detached signature in CMS-format. The Cryptographic Message Syntax, CMS [IETF RFC 5652], is used for digital signature, hashing, authentication and arbitrary message encryption. CMS utilizes encryption algorithms according to standards GOST 28147-89, GOST R 34.10-2012 and GOST 34.11-2012, as well as to the document of Technical Committee “Cryptographic Data Security” (TK 26), ““Information Technology. Cryptographic Data

Security. Standardization Recommendations. Use of Algorithms of GOST 28147-89, GOST R 34.11 and GOST R 34.10 in CMS-Format Cryptographic Messages”.

CMS-values are generated by means of ASN.1 language as per GOST R ISO/IEC 8824-1 using basic encoding rules (BER) as per GOST R ISO/IEC 8825-1.

For testing purposes, a test Certifying Center LLC CRYPTO-PRO will be supported (*https://www.cryptopro.ru/certsrv/*).

The circulation participant generates a request, signs it and generates a detached signature using GCP-certificate. The GCP's detached signature is included into HTTP-header within X-Signature parameter, in Base64 encoding. Then, circulation participant sends the request to Operator’s System.

Data Used to Sign HTTP-Requests:

1) For HTTP-message of GET-type, the signature will utilize the path, including request string parameters (REQUEST_PATH + QUERY STRING, e.g. /ordrs?param=..), without consideration of host-name, port or HTTP-headers;
2) For HTTP message of POST type, signature uses data posted within the body.

When OMS, within an HTTP request, receives “X-Signature” parameter containing a detached signature of request and/or message-body parameters, it runs signature validation and, if the signature is valid, it processes the request, otherwise the document will be rejected. You can see an example of detached digital signature included in request in Table 1.

Note: the system does not support attached signature, therefore error and HTTP code 413 are returned when specifying this signature in “X-Signature” parameter.

Table 1 – Example of Request with Handover of a Detached Signature

Description
POST /api/v3/orders HTTP/1.1 **Accept**: application/json **clientToken:** 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f **Content-Type:** application/json **X-Signature**: MIIE5QYJKoZIhvcNAQcCoIIE1jCCBNICAQExDjAMBggqhQMHAQECAgUAMAsGCSqGSIb3DQEHAaCCA64wggOqMIIDWaADAgECAhMSADtoj1yy/t4ybprnAAEAO2iPMAgGBiqFAwICAzB/MSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGNyeXB0b3Byby5ydTELMAkGA1UEBhMCUlUxDzANBgNVBAcTBk1vc2NvdzEXMBUGA1UEChMOQ1JZUFRPLVBSTyBMTEMxITAfBgNVBAMTGENSWVBUTy1QUk8gVGVzdCBDZW50ZXIgMjAeFw0xOTA5MjkxMzIzMjdaFw0xOTEyMjkxMzMzMjdaMIGuMScwJQYJKoZIhvcNAQkBFhhteWxvbmdsb25nbmFtZUBnbWFpbC5jb20xFTATBgNVBAMMDFZsYWRpbWlyV2ViMjENMAsGA1UECwwEaG9tZTENMAsGA1UECgwEaG9tZTETMBEGA1UEBwwK0J/QtdC90LfQsDEsMCoGA1UECAwj0J/QtdC90LfQtdC90YHQutCw0Y8g0L7QsdC70LDRgdGC0YwxCzAJBgNVBAYTAlJVMGYwHwYIKoUDBwEBAQEwEwYHKoUDAgIkAAYIKoUDBwEBAgIDQwAEQBsvZTPYdD+mZxp1TU8iWNXsC6o5M9YcLJ w4AIludme1J4K9iEjYf/I/rmbjf43Ds2/CKYs/tyvSBSBn2KzBnaOjggF3MIIBczAPBgNVHQ8BAf8EBQMDB/AAMBMGA1UdJQQMMAoGCCsGAQUFBwMDMB0GA1UdDgQWBBSpoGfZxUJ4YK4 RcSViA3G5FkFTrDAfBgNVHSMEGDAWgBROgz4Uae/sXXqVK18R/jcyFklVKzBcBgNVHR8EVTBTMFGgT6BNhktodHRwOi8vdGVzdGNhLmNyeXB0b3Byby5ydS9DZXJ0RW5yb2xsL0NSWVBUTy1QUk8lMjBUZXN0JTIwQ2VudGVyJTIwMigxKS5jcmwwgawGCCsGAQUFBwEBBIGfMIGc MGQGCCsGAQUFBzAChlhodHRwOi8vdGVzdGNhLmNyeXB0b3Byby5ydS9DZXJ0RW5yb2xsL3Rlc3QtY2EtMjAxNF9DUllQVE8tUFJPJTIwVGVzdCUyMENlbnRlciUyMDIoMSkuY3J0MDQGC CsGAQUFBzABhihodHRwOi8vdGVzdGNhLmNyeXB0b3Byby5ydS9vY3NwL29jc3Auc3JmMAgGBiqFAwICAwNBAHIfklsYgixUVKVy75nXFgOK1vnJjJYj3RjK3fwsQFbfmRwkzBVXHF0R/FIvbM mUgTNLC7+Gw3kEsRCZ2tu5yeMxgf0wgfoCAQEwgZYwfzEjMCEGCSqGSIb3DQEJARYUc3VwcG9ydEBjcnlwdG9wcm8ucnUxCzAJBgNVBAYTAlJVMQ8wDQYDVQQHEwZNb3Njb3cxFzAVBgNVBAoTDkNSWVBUTy1QUk8gTExDMSEwHwYDVQQDExhDUllQVE8tUFJPIFRlc3QgQ2Vu dGVyIDICExIAO2iPXLL+3jJumucAAQA7aI8wDAYIKoUDBwEBAgIFADAMBggqhQMHAQEDAg UABEBqxixPd0wnkxB22kdt4fMhdgoH2TaGqwY3u3ZD62LK4WHDX1NbN18mIODeAXOuuZLPz TlWWSKyrHXRBsruvPc0= {body content is omitted}

2.3.2. Generating GS1 DataMatrix

In accordance with the requirements of GS1 General Specification, correct generation of GS1 DataMatrix requires insertion of indication of symbols—ASCII232 in the beginning of the obtained marking code string prior to conversion to DataMatrix; otherwise, technical means will not recognize the code correctly and will be unable to process it correctly. Links to specifications are given below:

1) GS1 General Specification (https://www.gs1.org/docs/barcodes/GS1_General_Specifications.pdf);

2) GS1 DataMatrix Guideline (https://www.gs1.org/docs/barcodes/GS1_DataMatrix_Guideline.pdf).

2.3.3. Requirements JSON-format processing

As the marking code contains special symbols, circulation participant, while integrating their solutions, shall correctly process JSON-format with tools compliant with RFC 8259, and never process it as Plain Text. The use of tools compliant with RFC 8259 within such solutions ensures marking codes with special symbols are transferred and obtained correctly (special symbols are screened).

Likewise, if circulation participants use XML format in their solutions, the special symbols contained in a string shall be converted in accordance with XML specifications.

3. PROGRAM CHARACTERISTICS

3.1. Applicability Indicators

OMS-Cloud 5.0 AS SSW ensures implementation of OMS-Cloud 5.0 AS target functions in accordance with the following system applicability indicators:

1) For the list of applicability indicators which OMS 5.0 shall be compliant with, see Table 2.

Table 2 — List of Applicability Indicators which the System shall be Compliant with

Applicability indicators which OMS shall be compliant with	Indicator value
Quantity of goods items per one marking code order Note: For goods group category “Medicines for human use”, the quantity of goods items per one marking code order shall not exceed one (1 marking code order = 1 GTIN).	Not exceeding 10
Quantity of marking codes for one goods item (GTIN) per marking code order	Not exceeding two million of marking codes
Quantity of marking codes per marking code application report	Not exceeding 30,000 marking codes
Quantity of marking codes per marking code disposal / rejection report.	Not exceeding 30,000 marking codes
Number of the aggregated identification codes or shipping packages in the marking codes aggregation report.	Not exceeding 30,000 marking codes

3.2. Operation Mode

OMS-Cloud 5.0 AS SSW operation mode is 24/7/365.

3.3. Means of Correct Operation Control and Self-Restorability of Program

3.3.1. Means of Correct Operation Control

Correct operation of OMS-Cloud 5.0 AS SSW is controlled by means of:

1) Internal diagnostic tools.

2) Validation of corresponding program.

3.3.2. Self-Restorability Means

OMS-Cloud 5.0 AS SSW is self-restored by means of:

1) Internal restoration tools.

2) Automatic backup tools.

3) Built-in tools of operating system.

4. PROGRAM CALL

4.1. Introduction

API REST controller authenticates clients using the so-called client token sent by client in HTTP-request header. The security marker (ClientToken) is sent in client token HTTP-header “clientToken”.

Some API-methods use HTTP POST method during data submission. In such cases, additional HTTP-header indication “Content-Type: application/json” shall be used.

OMS API methods use OMS-identifier “omsId” as parameters; OMS-identifier “omsId” is available in OMS-settings.

For valid MC-symbols, see Table 3. These symbols shall be used in the following groups of marking codes data: “Serial Number”, “Key Identifier”, “Verification Code”.

The API REST controller authenticates users with the help of so-called token sent by a user in the HTTP request header. The security marker (token) is transmitted in the HTTP header in the “clientToken” parameter (it can be transferred in the “Authorization” parameter for the “Medicines for human use” goods group).

Table 3 – Valid MC-Symbols

Valid MC-symbols. Valid characters IC
ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789!"%&'()*+,-./_:;=<>?

4.2. OMS-Method Call Sequences

The sequence of OMS-method call during the creation of a new MC-order is as follows:

1) Create marking code emission order (see cl. 4.4.1).

2) Obtain MC-array status from the order (see cl. 4.4.2).

3) Obtain MC from the order (see cl. 4.4.3).

4) Send report on MC-utilization (see cl. 4.4.11).

5) Send report on MC-aggregation (see cl. 4.4.10).

6) Send report on MC-disposal / rejection (see cl. 4.4.8).

For the diagram of OMS-method call sequence, see Figure 1.

The OMS API also provides auxiliary methods:

1) Obtain the report processing status (see section 4.4.13).

2) Close the order/suborder for the GTIN specified (see section 4.4.8).

3) Check availability of the OMS (see section 4.4.25).


4) Obtain a list of marking code package identifiers (see section 4.4.5).

5) Re-obtain marking codes from a marking code order (see section 4.4.6).

Notes.

1. In case there are any unused marking codes when the order is closed, a report on the marking code cancellation will be generated and sent.

2. An order or suborder should be closed immediately after receiving the MCs, since if a goods circulation participant does not close it, it will be automatically closed by the system only after 48 hours (provided that all MCs have been taken from a suborder). This may result in blocking of creation of new orders, as a goods circulation participant has a limit of 100 active orders.

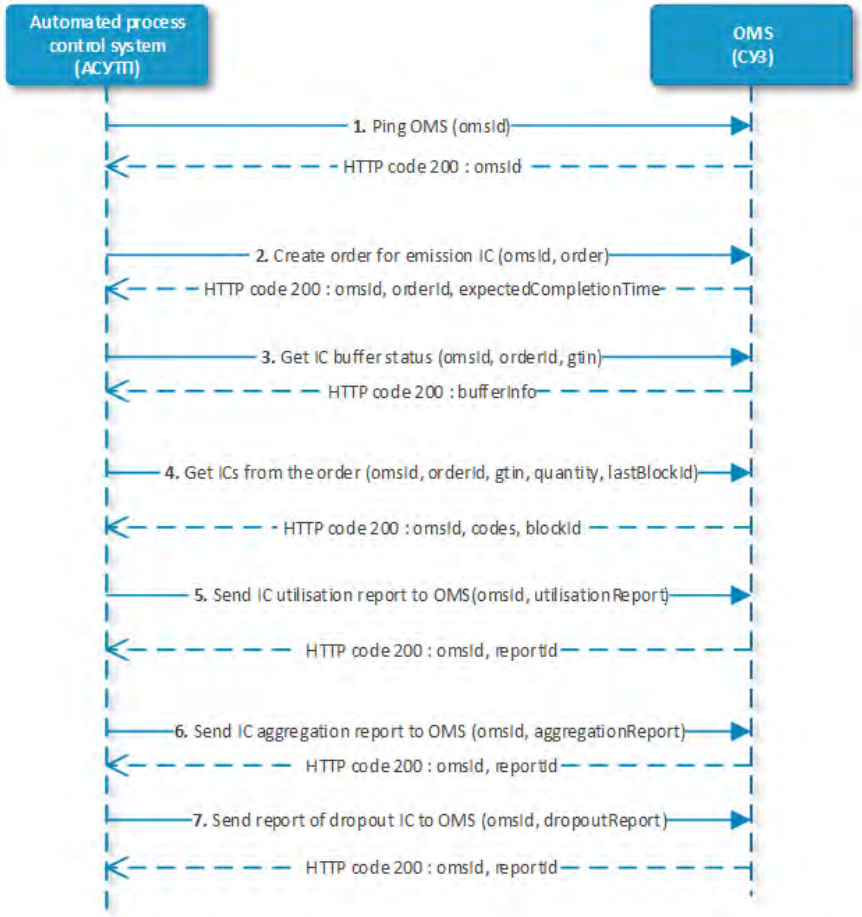

OMS-Method Call Sequence

Figure 1

4.3. Description of MC-Emission Process

This subsection provides general description of marking code emission process. General MC-emission process includes four key stages:

1) “01.01.00.00 Create MC-Emission Order”;

2) “01.02.00.00 Obtain MC-Array Status from Order”;


3) “01.03.00.00 Obtain MC from Order”;

4) “01.04.00.00 Send Report on MC-Utilization”.

The process of sending reports on aggregation and disposal / rejection is similar to the process “01.04.00.00 Send Report on MC-Utilization”.

4.3.1. Process “01.01.00.00 Create MC-Emission Order”

For the diagram of MC-emission order creation process, see Figure 2.

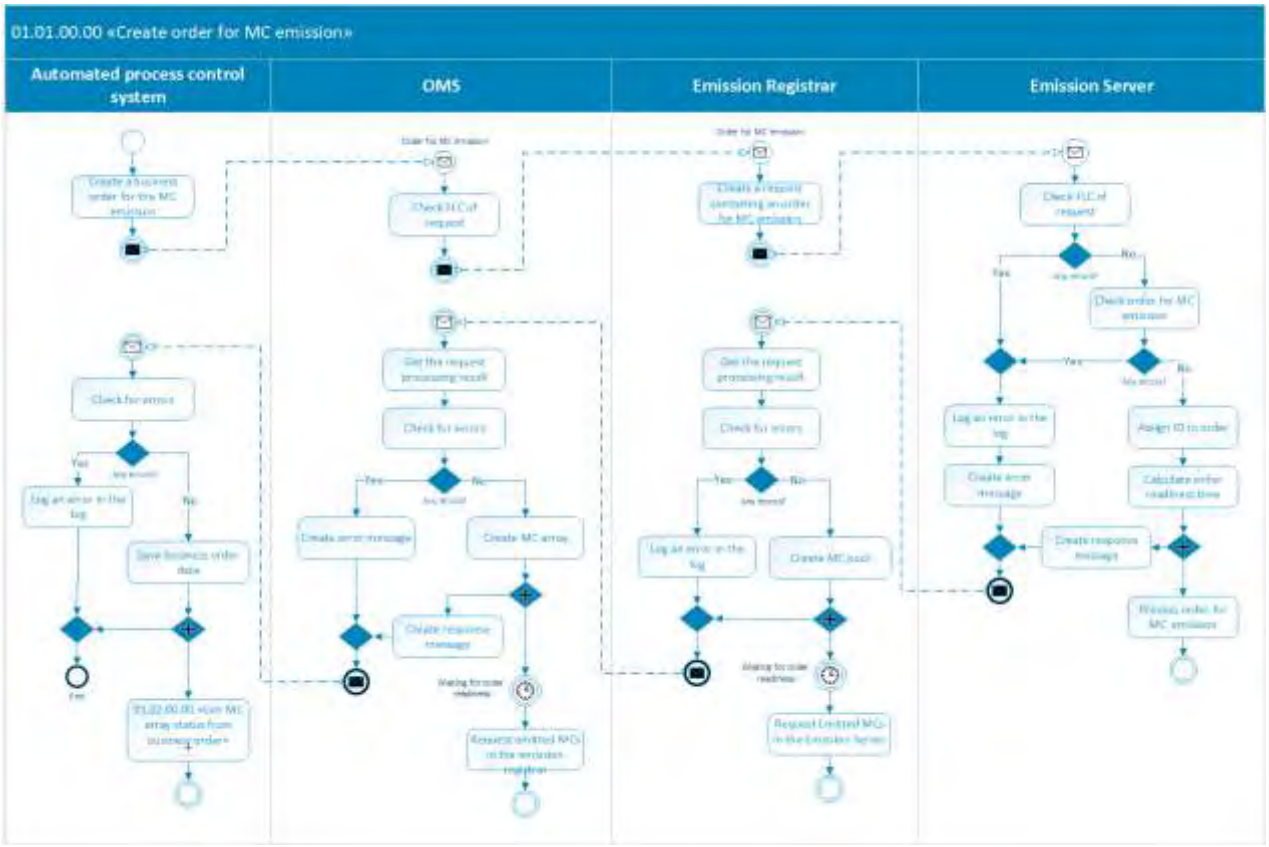

Process “Create MC-Emission Order”

Figure 2

Description:

1) APCS generates an order and sends it to OMS;

2) OMS verifies the request and sends order to Emission Registrar;

3) Emission Registrar generates a request containing the MC-emission order and sends it to Emission Server;

4) Upon obtaining request containing MC-emission order, Emission Server verifies the request.

– In case of any errors within the request, Emission Server registers them in a log;

– Emission Server generates an error message and sends it to Emission Registrar;

– Moving to Step 8) of main scenario.

5) In case of no errors, Emission Server verifies MC-emission order.

– In case of any errors within the request, Emission Server registers them in a log;

– Emission Server generates an error message and sends it to Emission Registrar;

– Moving to Step 8) of main scenario.

6) In case of no errors within the MC-emission order, Emission Server assigns an identifier to the order and calculates order completion time;

– Emission Server sends the order for processing (the action is asynchronous);

7) Emission Server generates a response message and sends it to Emission Registrar;

8) Emission Registrar verifies request processing result;

9) Emission Registrar performs check for errors:

– In case of any errors within the message, Emission Server registers them in a log;

– Emission Registrar generates an error message and sends it to OMS;

– Moving to Step 12) of main scenario.

10) In case of no errors, Emission Registrar generates an empty MC-pool;

– Emission Registrar waits for the order completion time and requests emitted MC from Emission Server (the action is asynchronous).

11) Emission Registrar sends a response message to OMS;

12) OMS obtains request processing result from Emission Registrar;

13) OMS performs check for errors;

– In case of any errors, OMS registers them in a log;

– OMS generates an error message and sends it to APCS;

– Moving to Step 16) of main scenario.

14) In case of no errors, OMS creates an MC-array;

– OMS waits for the order completion time and requests emitted MC from Emission Registrar (the action is asynchronous).

15) OMS generates a response message and sends it to APCS;

16) APCS obtains request processing result from OMS;

17) APCS performs check for errors;

– In case of any errors, APCS registers them in a log;

– The process is terminated.


18) In case of no errors, APCS saves order data;

– APCS initiates process 01.02.00.00 “Obtain MC-Array Status from Order” (the action is asynchronous).

19) The process is terminated.

4.3.2. Process “01.02.00.00 Obtain MC-Array Status from Order”

For the diagram of MC-array status obtainment process, see Figure 3.

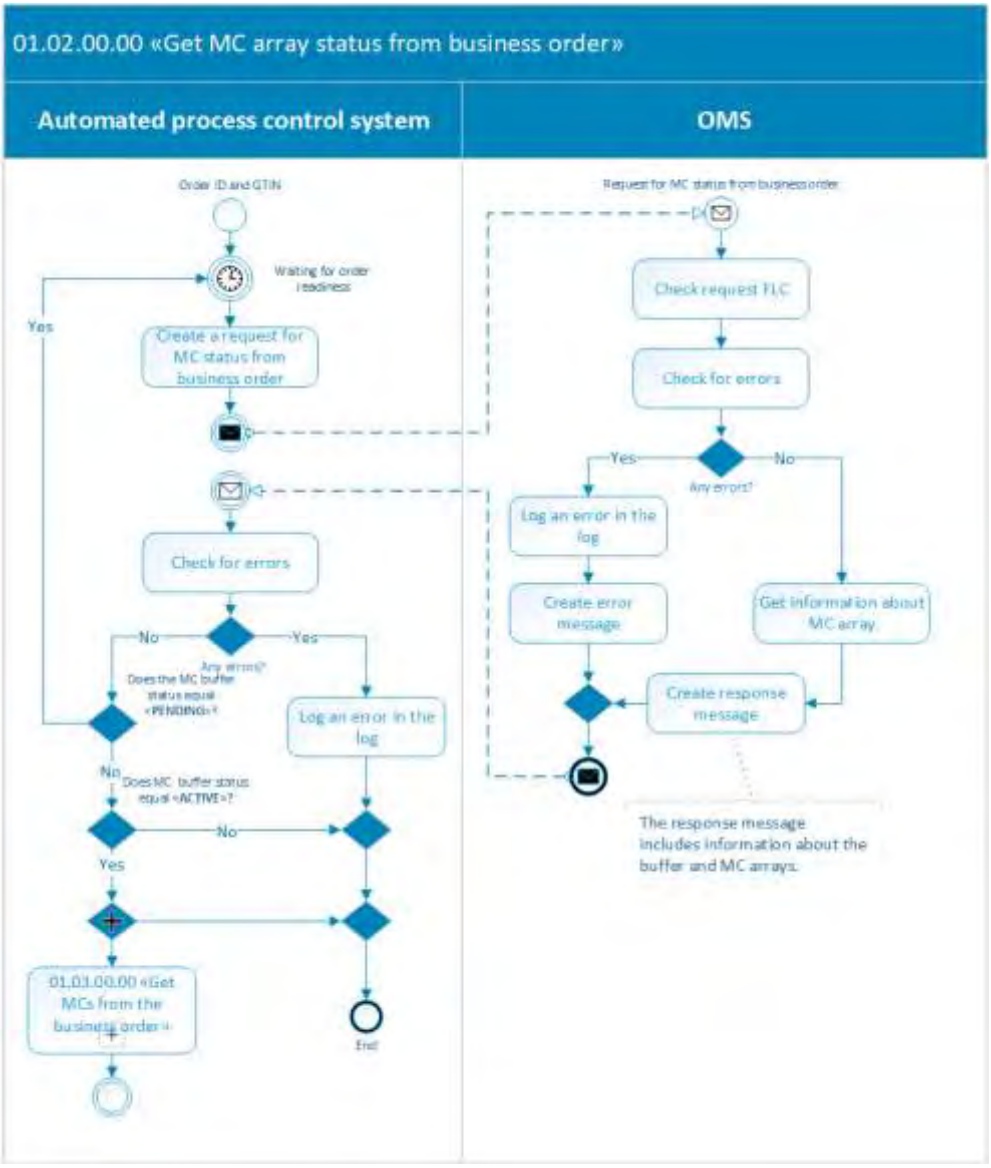

Process “Obtain MC-Array Status from Order”

Figure 3

Description:

1) APCS waits for order completion time;

2) APCS generates a request to obtain MC-array status and sends it to OMS;

3) OMS verifies the request;

4) OMS performs check for errors:

– In case of any errors within the request, OMS registers them in a log;

– OMS generates an error message and sends it to APCS;

– Moving to Step 7 of main scenario.

5) OMS obtains information on MC-array;

6) OMS generates a response message and sends it to APCS;

7) APCS receives response message;

8) APCS performs check for errors:

– In case of any errors within the request, APCS registers them in a log;

– The process is terminated.

9) In case of no errors, APCS checks that MC-buffer status is “PENDING”:

– In case the MC-buffer status is “PENDING”, APCS initiates repeated request for MC-array status.

– Moving to Step 1 of main scenario.

10) In case of no errors, APCS checks that MC-buffer status is “ACTIVE”:


– In case MC-buffer status is not “ACTIVE”, the process is terminated

11) In case MC-buffer status is “ACTIVE”, APCS initiates process 01.03.00.00 “Obtain MC from Order” (the action is asynchronous);

12) The process is terminated.

4.3.3. Process “01.03.00.00 Obtain MC from Order”

For the diagram of MC obtainment from business order process, see Figure 4.

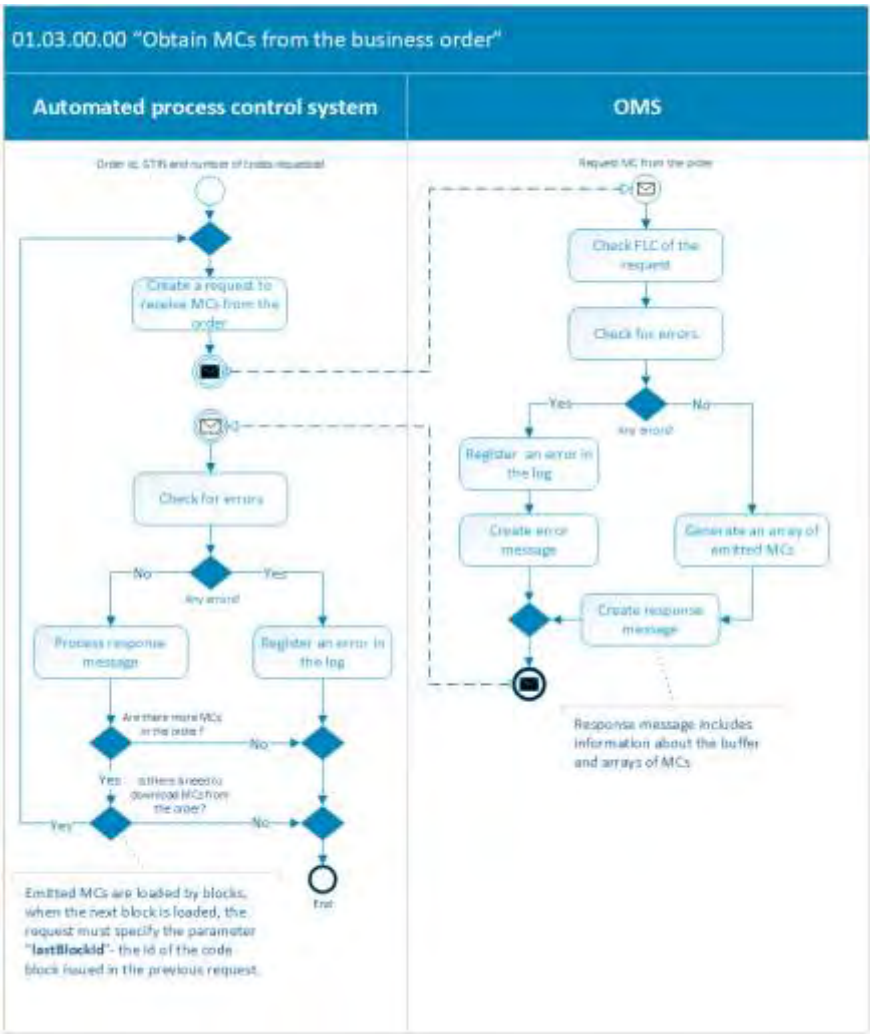

Process “Obtain MC from Order”

Figure 4

Description:

1) APCS generates a request to obtain MC from business order and sends it to OMS;

2) OMS verifies the request;

3) OMS performs check for errors:

– In case of any errors within the request, OMS registers them in a log;

– OMS generates an error message and sends it to APCS;

– Moving to Step 6 of main scenario.

4) OMS generates an array of emitted MC;

5) OMS generates a response message and sends it to APCS;

6) APCS receives response message;

7) APCS performs check for errors:

– In case of any errors within the request, APCS registers them in a log;

– The process is terminated.

8) APCS processes the received message.

9) APCS checks for any other MC in the order.

– In case there are no other MC in the order, the process is terminated.

10) In case the order contains other MC, APCS checks whether the remaining MC should be downloaded.


– In case the MC remaining in the order should be downloaded, APCS re-initiates process 01.03.00.00 “Obtain MC from Order”;

– Moving to Step 1 of main scenario.

11) In case the remaining MC do not have to be downloaded, the process is terminated.

4.3.4. Process “01.04.00.00 Send Report on MC-Utilization”

For the diagram of MC-utilization report sending process, see Figure 5.

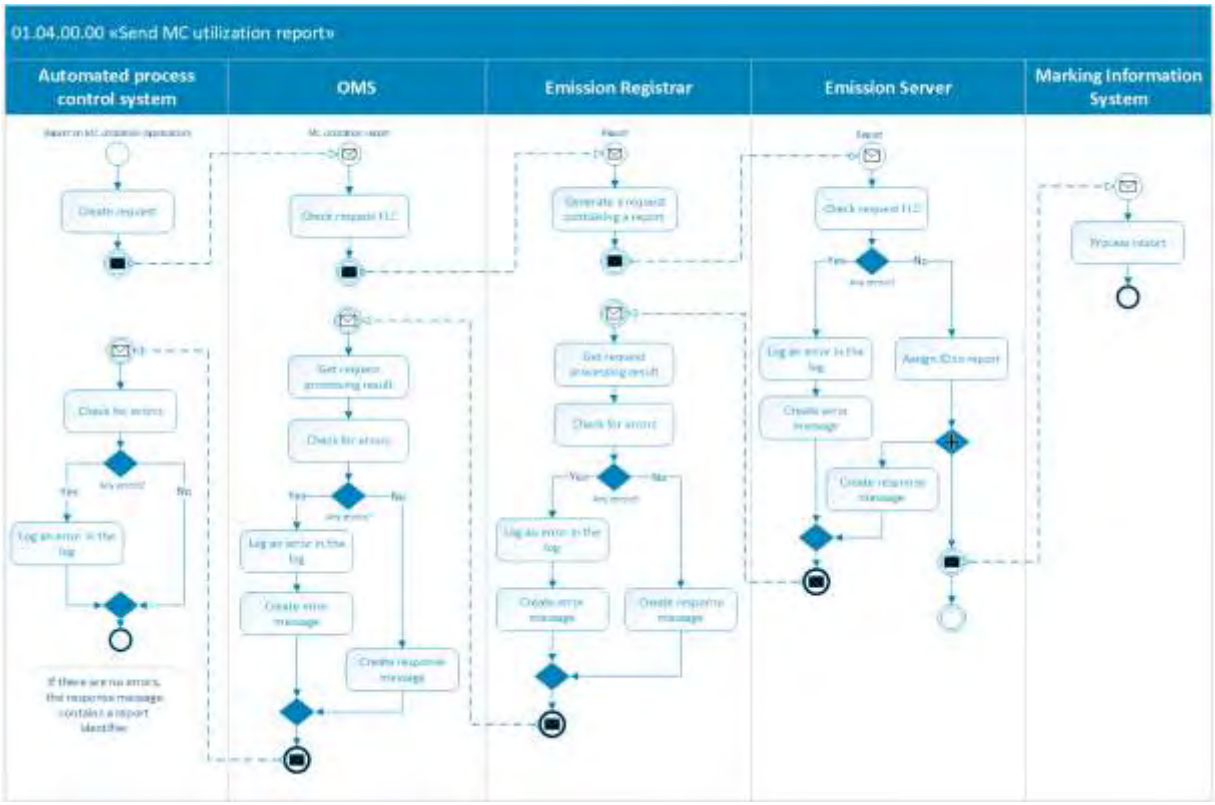

Process “Send Report on MC-Utilization”

Figure 5

Description:

1) APCS generates a request containing MC-utilization report and sends it to OMS;
2) OMS verifies the request and sends the request containing MC-utilization report to Emission Registrar;
3) Emission Registrar generates a request containing the MC-utilization report and sends it to Emission Server;
4) Upon obtaining request containing MC-utilization report, Emission Server verifies the request.

– In case of any errors within the request, Emission Server registers them in a log;
– Emission Server generates an error message and sends it to Emission Registrar;
– Moving to Step 7 of main scenario.

5) In case of no errors, Emission Server assigns an identifier to the report;
6) Emission Server sends the report for processing to TT GIS (the action is asynchronous);
7) Emission Server generates a response message and sends it to Emission Registrar;

8) Emission Registrar verifies request processing result;

9) Emission Registrar performs check for errors:

– In case of any errors within the message, Emission Server registers them in a log;

– Emission Registrar generates an error message and sends it to OMS;

– Moving to Step 10 of main scenario.

10) In case of no errors, Emission Registrar generates a response message and sends it to OMS;

11) OMS obtains request processing result from Emission Registrar;

12) OMS performs check for errors;

– In case of any errors, OMS registers them in a log;

– OMS generates an error message and sends it to APCS;

– Moving to Step 13 of main scenario.

13) In case of no errors, OMS generates a response message and sends it to APCS;

14) APCS obtains request processing result from OMS;

15) APCS performs check for errors;

– In case of any errors, APCS registers them in a log;

– The process is terminated.

16) In case of no errors, APCS saves report identifier, the process is terminated.

4.4. Methods of OMS API

A URL structure of the OMS API looks as follows: `<url of environment>/api/v3/`, where `<url of environment>` – base address of the environment which hosts API.

The following OMS API addresses are available:

1) https://suz.sandbox.crptech.ru – new base address of the demo environment (including “Medicines for human use” goods group).

2) https://suzgrid.crpt.ru – base address of the production environment.

3) https://api.suz.sandbox.crptech.ru – base address of the demo environment with GOST TLS support.

4) https://api.suzgrid.crpt.ru – base address of the production environment with GOST TLS support (pilot deployment stage), full-scale production use will begin in Q2 2027.

GOST TLS guarantees protection against data tampering and interception, and ensures compliance with national requirements for information security.

Note: Methods of OMS-Cloud API are advised to be called no more than 100 times per second for each “IP and omsId” pair (source). If the total number of calls for a single omsId exceeds 100 requests per second (regardless of the number of the IP addresses used), the source may be temporarily blocked.

4.4.1. Method “Create Marking Code Emission Order”

This method is used to create and send marking code emission orders. Description on how to receive the security marker is provided in section 9.

Notes:

1. One goods item (goods code, GTIN) in one order should not exceed 2 000 000 marking codes. If there are more than one MC in the order (goods code, GTIN), then a quantity of the MCs should not exceed 150 000 marking codes for each goods code.

2. Maximum quantity of the goods codes in one MC order should not exceed 10, if several goods codes are specified in one order, the goods codes should not be duplicated.

3. Quantity of the active orders cannot exceed 100 at once. Active orders include those orders with READY status that have MC-buffer with ACTIVE, PENDING status.

A queue can also contain not more than 100 orders. These orders include orders with statuses CREATED, PENDING, APPROVED.

If one of the limits is reached, no orders can be created.

4. This method can be called for each pair (“IP and omsId”) no more than 100 times per second (for more details, see 4.4).

4.4.1.1. Request

For REST Request Parameters see Table 4.

Table 4 – Parameters of REST request

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/order?omsId={omsId}

HTTP Header Parameters can be found in Table 5.

Table 5 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes
Accept	application/json	Yes

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except “Medicines for Human Use” goods group	No (conditionally mandatory)

Request string parameters are given in Table 6.

Table 6 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

For the description of JSON format of request for creation and sending of order for MC emission (object “Order”), see Table 7.

Table 7 – Description of JSON Format of Request for Creation and Sending of MC Emission Order, object “Order”, message body (HTTP Body)

Field	Description	Type	Mandatory
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes

Field	Description	Type	Mandatory
products	Array of goods of the MC order	Array of OrderProduct objects (Array of OrderProduct)	Yes
serviceProviderId	Service provider identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12} To receive a role (role) and identifier of the service provider, use the method “Getting a list of Service Providers” (See subsection 4.4.14)	String (36) (UUID)	No (Conditionally mandatory)

attributes	A dictionary consisting of key/value pairs where each key is a unique identifier within the dictionary.
	Example:
	"attributes": {
	"attribute1": "value1",
	"attribute2": "value2"
	}
	A list of allowed attributes for a specific goods group can be found in the corresponding subsections of the section.
		Dictionary (Json Object)	No (Conditionally mandatory)

Note: “serviceProviderId” parameter cannot be indicated in the orders for emission of the marking codes for the “Alternative tobacco products”, “Nicotine products”, “Tobacco products” and “Titanium metal products” goods groups in connection with the fact that these goods groups are not involved in the marking code distribution.

For description of JSON format of the “OrderProduct” object of the request for creation and sending of the order for MC emission (“Order” object), see Table 8.

Table 8 – Description of JSON format of the “OrderProduct” object

Field	Description	Type	Mandatory
gtin	Goods code (GTIN). String value. minLength = 14	String (14) [0-9]{14}	Yes

Field	Description	Type	Mandatory
	maxLength = 14 Template: [0-9]{14}		
quantity	MC Quantity. A positive number that is greater than zero.	Number ($int32)	Yes
serialNumberType	Serial number generation method. Allowed values are specified in the guide “Method of Individual Serial Number Generation” (See subsection 5.3.1.2)	String (See subsection 5.3.1.2)	Yes
serialNumbers	Array of serial numbers. This field is specified if a value of “serialNumberType” = “SELF_MADE” (See subsection 5.3.1.2)	String array (JSON Array of String*) (See subsection 5.3.1.2)	No Conditionally mandatory
templateId	MC template identifier A positive number that is greater than zero. Allowed values are specified in the guide “Manufacturing method” guide (See subsection 5.3.1.3)	Number ($int32) (See subsection 5.3.1.3)	Yes
cisType	Marking code type. Allowed values are specified in the guide “Marking Code Type” (See subsection 5.3.1.10)	String (See subsection 5.3.1.10)	Yes

attributes	A dictionary consisting of key/value pairs where each key is a unique identifier within the dictionary.
	Example:
	"attributes": {
	"attribute1": "value1",
	"attribute2": "value2"
	}
	A list of allowed attributes for a specific goods group can be found in the corresponding subsections of the section.
		Dictionary (Json Object)	No
			(Conditionally mandatory)

Note:

When specifying serialNumberType = SELF_MADE in the order, the length of serial numbers in serialNumbers array shall correspond to the number of characters defined for a specific goods

group (see Table 9, column “Serial number length if serialNumberType = SELF_MADE”). When issuing marking codes, the serial numbers specified will be supplemented by a country code of 5 (Russian Federation code). The country code is indicated by the system and shall be specified before the serial number received (see subsection 5.3.1.11). If serialNumberType = SELF_MADE, the length of MC serial number remains unchanged for the goods groups that are not listed in the table.

Table 9 – List of the goods groups with indication of the serial number length

No.	Goods group	Abbreviated name of the goods group	Length of the MC serial number	Serial number length if serialNumberType = SELF_MADE
1	“Light industry”	lp	13	12
2	“Footwear”	shoes	13	12
3	“Tobacco products”	tobacco	7	7
4	“Medicines for human use”	pharma	13	13
5	“Perfume and eau de toilette”	perfumery	13	12
6	“Tires and new pneumatic rubber tire casings”	tires	13	12
7	“Photo cameras (except cine cameras), flash lights and flash bulbs”	electronics	20	19
8	“Bicycles and bicycle frames”	bicycle	13	12
9	“Medical products”	wheelchairs	13	12
10	“Alternative tobacco products”	otp	7	7
11	“Packaged water”	water	13	12
12	“Beer, beer-based and low-alcohol beverages”	beer	7	6
13	“Specialized food products and biologically active food additives”	bio	13	12
14	“Dairy products”	milk	6	5
15	“Nicotine products”	ncp	7	7
16	“Antiseptic/antibacterial skin cleansers and hand sanitizers”	antiseptic	13	12
17	“Juice products and non-alcoholic beverages”	softdrinks	13	12
18	“Non-alcoholic beer”	nabeer	7	6
19	“Seafood”	seafood	6	5
20	“Pet foods”	petfood	6	5
22	“Games and toys for children” (template 34)	toys	13	12
	“Games and toys for children” (template 59)	toys	6	5
23	“Titanium metal products”	titan	13	12
23	“Radio-electronic products”	radio	20	19
24	“Optical fiber and fiber optic products”	opticfiber	13	12
25	Vegetable oils	vegetableoil	13	12
26	Cosmetics, household chemicals, and personal hygiene products	chemistry	6	5
27	Canned foods	conserve	6	5
28	Veterinary medicines	vetpharma	13	12
29	Building materials	construction	13	12
30	Fire safety and firefighting equipment (template 55)	fire	6	5

31	Fire safety and firefighting equipment (template 56)	fire	13	12
32	Printed goods	books	13	12
33	Heaters	heater	6	5
34	Groceries	grocery	13	12
35	Cabling and wiring products	cableraw	13	12
36	Engine oils	autofluids	13	12
37	Polymer pipes	polymer	6	5
38	Confectionery products (template 66)	sweets	6	5
39	Confectionery products (template 67)	sweets	13	12
40	Auto parts and components for vehicles (template 68)	carparts	6	5
41	Auto parts and components for vehicles (template 69)	carparts	13	12
42	Radio-electronic products. Electronic nicotine delivery systems (template 70)	nicotindev	13	12
43	Radio-electronic products. Electronic nicotine delivery systems (template 71)	nicotindev	13	12
44	Radio-electronic products. Laptops and smartphones (template 72)	gadgets	20	19
45	Radio-electronic products. Laptops and smartphones (template 73)	gadgets	20	19
46	Meat products (template 32)	meat	6	5
47	Meat products (template 74)	meat	13	12
48	Feed additives (template 75)	vetbio	6	5
49	Feed additives (template 76)	vetbio	13	12
50	Home and kitchen goods (template 77)	homeware	6	5
51	Home and kitchen goods (template 78)	homeware	13	12
52	Industrial equipment (template 79)	industrial	6	5
53	Industrial equipment (template 80)	industrial	13	12
54	Fertilizers in consumer packaging (template 81)	fertilizers	13	12
55	Fertilizers in consumer packaging (template 82)	fertilizers	13	12
56	Semi-finished and frozen food products (template 83)	frozen	6	5
57	Semi-finished and frozen food products (template 84)	frozen	13	12
58	Real fur	furslp	13	12
59	Pyrotechnic articles (template 86)	pyrotechnics	6	5
60	Pyrotechnic articles (template 87)	pyrotechnics	13	12

4.4.1.1.1 List of Attributes for “Tobacco Products” Goods Group

Example of the REST request for the “Tobacco products” goods group is shown in Figure 6.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
   "productGroup":"tobacco",
   "products":[{
      "gtin":"01334567894339",
      "quantity": 2,
      "serialNumberType": "SELF_MADE",
      "serialNumbers":[ "Z9bmNYR", "8i8PjF3"],
      "templateId":3,
      "cisType": "GROUP",
      "attributes": {
          "mrp":"31055"
      }
   }],
   "attributes": {
      "factoryId":"Identifier",
      "factoryName":"Tobacco Fac",
      "factoryAddress":"Address",
      "factoryCountry":"Country",
      "productCode":"6789",
      "productDescription":"Simple ",
      "poNumber":"12345",
      "releaseMethodType": "IMPORT",
      "approvalNumber": "AN-1",
      "expectedStartDate":"2019-03-01"
      }
}
```

Example of the REST request for the “Tobacco products” goods group

Figure 6

A possibility of goods code-sharing has been excluded for the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups. An order will be rejected if a goods group of the order does not correspond to the goods group (of the goods code) specified in the goods card in the NC.

A possibility of emission is checked in line with licenses for consumer and group packages when ordering MCs for the “Tobacco products” goods group. If a GCP has a valid license, the check will succeed. If there is no valid license, the order will be rejected.

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Tobacco products” goods group can be found in Table 10.

Table 10 – Structure of the attributes parameter of the “Order” object for the “Tobacco products” goods group

Field	Description	Type	Mandatory
factoryId	Factory identifier. (Global location number)	String (2-128)	Yes
factoryName	Factory name	String (2-256)	No
factoryAddress	Factory address	String (2-256)	No
factoryCountry	Factory country	String (2-128)	Yes
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productCode	Product code (SKU)	String (1-256)	Yes
productDescription	Product description	String (1-512)	Yes
poNumber	Production order number.	String (1-256)	No
expectedStartDate	Start date for production under this order. Date format: yyyy-MM-dd	String (yyyy-MM-dd)	No
releaseMethodType	Method of goods release into circulation. Guide value “Method of goods introduction into circulation” (See subsection 5.3.1.1). releaseMethodType field shall be filled in the order with “IMPORT” value when the goods are imported into the Russian Federation	String	No
approvalNumber	Approval No. It can be specified when releaseMethodType = IMPORT	String (1-128)	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Tobacco products” goods group can be found in Table 11.

Table 11 – Structure of the attributes parameter of the “OrderProduct” object for the “Tobacco products” goods group

Field	Description	Type	Mandatory
mrp	Maximum retail price “mrp” field (Maximum retail price) is obligatory, a maximum retail price shall be indicated in kopecks, up to ones, e.g., if the price is 105 rubles and 1 kopeck, that makes 10501. For a block this is the sum of all packs, also in kopecks. A value of the “Maximum retail price” parameter shall correspond to the allowed range specified in the GCP’s profile and shall be greater than the Single minimum price (the SMP). From January 1, 2026 to December 31, 2026, the SMP will be 153 rubles.	String (4–6)	Yes

4.4.1.1.2 List of Attributes for “Light industry” Goods Group

For description of the REST-request for “Light industry” goods group, see Figure 7.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"lp",
  "products":[{
     "gtin":"01334567894339",
     "quantity":2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["QIQ8BQCXmSJJ","GLTP9kqZn5QR"],
     "templateId": 10,
     "cisType": "UNIT",
   }],
  "serviceProviderId":"c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "IMPORT",
    "createMethodType": "CM",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
   }
}
```

Example of REST Request for “Light industry” Goods Group

Figure 7

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Light industry” goods group can be found in Table 12.

Table 12 – Description of attributes parameter of the “Order” object for “Light industry” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a	String (1-256)	No

Field	Description	Type	Mandatory
	value. Non-printable special characters cannot be specified as well.		

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Light industry” goods group can be found in Table 13.

Table 13 – Structure of the attributes parameter of the “OrderProduct” object for the ‘‘Light industry’’ goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK” or “REMAINS”. A period of availability of the REMAINS is specified in a note of the description of the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1).	String	No Conditionally mandatory

Notes:

1. Remarking and marking of the remaining items are available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.
2. Remarking and marking of remaining items are available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
3. Marking of remaining items is available for cards with a short set of attributes for the technical range (029) and the “UNIT” marking code type, but only during the third payment wave.
4. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking or marking of the remaining items), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.3 List of Attributes for “Footwear” Goods Group

Example of the REST request for light industry, for the “Footwear” goods group, can be found in Figure 8.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"shoes",
  "products":[{
     "gtin":"01334567894339",
     "quantity":2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["QIQ8BQCXmSJJ","GLTP9kqZn5QR"],
     "templateId":1,
     "cisType": "UNIT"
   }],
  "serviceProviderId":"c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "IMPORT",
    "createMethodType": "CM",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
   }
}
```

Example of REST request for light industry, “Footwear” Goods Group Category

Figure 8

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Footwear” goods group can be found in Table 14.

Table 14 – Description of attributes parameter of the “Order” object for “Footwear” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)

Field	Description	Type	Mandatory
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Footwear” goods group can be found in Table 15.

Table 15 – Structure of the attributes parameter of the “OrderProduct” object for the “Footwear” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK”.	String	No Conditionally mandatory

Notes:

1. Remarking of goods is available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.
2. Remarking of goods is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
3. In case of emission of the marking codes for a goods card for which there is no permit, there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.4 List of Attributes for “New pneumatic rubber tires and tire casings” Goods Group

For REST request example for the “**New pneumatic rubber tires and tire casings**” goods group, see Figure 9.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"tires",
  "products":[{
     "gtin": "01334567894339",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers": ["QIQ8BQCXmSJJ","GLTP9kqZn5QR"],
     "templateId": 7,
     "cisType": "UNIT",
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "IMPORT",
    "createMethodType": "CM",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
   }
}
```

Example of the REST request for the “New pneumatic rubber tires and tire casings” goods group

Figure 9

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “New pneumatic rubber tires and tire casings” goods group can be found in Table 16.

Table 16 – Description of attributes parameter of the “Order” object for Tire Manufacturers, “New Pneumatic Rubber Tires and Tire Casings” Goods Group Category

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes

Field	Description	Type	Mandatory
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.1.5 List of Attributes for “Perfume and Eau de Toilette” Goods Group

Example of the REST request for perfumery products manufacturers, “Perfume and Eau de Toilette” goods group category can be found in Figure 10.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"perfumery",
  "products":[{
     "gtin":"01334567894339",
     "quantity":2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["QIQ8BQCXmSJJ","GLTP9kqZn5QR"],
     "templateId": 9,
     "cisType": "UNIT",
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
     "contactPerson":"Иванов П.А.",
     "releaseMethodType": "IMPORT",
     "createMethodType": "CM",
     "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
   }
}
```

Example of REST Request for “Perfume and Eau de Toilette” Goods Group

Figure 10

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Perfume and Eau de Toilette” goods group can be found in Table 17.

Table 17 – Description of attributes parameter of the “Order” object for “Perfume and Eau de Toilette” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

The description of the parameters transferred in the “Perfume and Eau de Toilette” goods group, can be found in Table 18.

Table 18 – Structure of the attributes parameter of the “OrderProduct” object for the “Perfume and Eau de Toilette” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType equals “REMARK”.	String	No Conditionally mandatory

Notes:

1. Remarking is available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.

2. Remarking of goods is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

3. In the case of emission of marking codes for a goods card for which there is no permit (as part of remarking), the request must not include serial numbers. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.6 List of Attributes for “Photo Cameras (Except Cine Cameras), Flash Lights and Flash Bulbs” Goods Group

For REST request example for the “Photo cameras (except cine cameras), flash lights and flash bulbs” goods group, see Figure 11.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"electronics",
  "products":[{
     "gtin": "01334567894339",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["Q456IQ8B67QCXm78SJJ", "GLT456P9kq67Zn5Q65R"],
     "templateId":8,
     "cisType": "UNIT",
   }],
  "serviceProviderId":"c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType":"IMPORT",
    "createMethodType":"CM",
    "productionOrderId":"08528091-808a-41ba-a55d-d6230c64b333"
  }
        }
```

Example of the REST request for the “Photo cameras (except cine cameras), flash lights and flash bulbs” goods group

Figure 11

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Photo cameras (except cine cameras), flash lights and flash bulbs” goods group can be found in Table 19.

Table 19 – Description of attributes parameter of “Order” object for “Photo Cameras (Except Cine Cameras), FlashLights and Flash Bulbs” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.1.7 **List of Attributes for “Medicines for human use” Goods Group**

Example of the REST request for the “Medicines for human use” goods group can be found in Figure 12.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
Authorization: token 15544d88-dea7-4274-b7ac-0f1f2cc12c11
Content-Type: application/json

{
  "productGroup":"pharma",
  "products":[{
     "gtin":"01334567894339",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["77X4DdOGGDc9d","6KfL3i7igypkd"],
     "templateId":5,
     "cisType": "UNIT"
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "freeCode": false,
    "paymentType": 2
   }
}
```

Example of the REST request for the “Medicines for human use” goods group

Figure 12

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Medicines for human use” goods group can be found in Table 20.

Table 20 - Description of the attributes parameter of the “Order” object for the “Medicines for human use” goods group

Field	Description	Type	Mandatory
freeCode	MC emission payment indicator: – true - non-payable MC; – false - MC is payable (default value)	Boolean (boolean)	No
paymentType	Payment type. Valid values: – 1 - Payment upon emission. – 2 - Payment upon application (default)	Number (Int32)	No

Note: “subjectId” parameter was deleted from a list of the parameters in “attributes” of the “Order” object for the “Medicines” goods group.

4.4.1.1.8 **List of Attributes for “Dairy products” Goods Group**

Example of the REST request for the “Dairy products” goods group is shown in Figure 13.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"milk",
  "products":[{
     "gtin":"04603721568000",
     "quantity":5,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": [ "MZmNY", "MZX78", "yZqzO", "AMQTE", "MXFAB"],
     "templateId": 20,
     "cisType": "UNIT",
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "IMPORT",
    "createMethodType": "CM",
    "paymentType": 2,
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b333"
   }
}
```

Example of the REST request for the “Dairy products” goods group

Figure 13

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Dairy products” goods group can be found in Table 21.

Table 21 – Description of the attributes parameter of the “Order” object for the “Dairy products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: – 1 - Payment upon emission; – 2 - Payment upon application (default)	Number (Int32)	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

– GTIN of the first fee implementation group is available from June 1, 2021.

– GTIN of the second fee implementation group is available from September 1, 2021.

– GTIN of the third fee implementation group is available from December 1, 2021.

– GTIN of the fourth fee implementation group will be available from November 1, 2026.

– GTIN of the fifth fee implementation group will be available from July 1, 2026.

2. Emission of marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:

– Group 4 GTINs included in the pilot program will be available from January 30, 2026 to October 31, 2026;

3. An attribute of the “Farmer” is supported for the “Dairy products” goods group based on the All-Russia Classifier of Organizational Legal Forms, defining a "Farmer" category of the goods circulation participant. For the “Farmer” category, the “Payment upon emission” and “Payment upon application” are available for GTINs of the first, second and the third fee implementation groups from September 1, 2024, the “Payment upon emission” will be available for GTINs of the fourth fee implementation group from November 1, 2026.

4.4.1.1.9 **List of Attributes for “Bicycles and bicycle frames” Goods Group**

Example of the REST request for the “Bicycles and bicycle frames” goods group can be found in Figure 14.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"bicycle",
  "products":[{
     "gtin":"04603721568000",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers": ["MZX78RZ9bmNY","MZX78R8i8PjF"],
     "templateId" : 11,
     "cisType": "UNIT"
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "CM",
    "paymentType": 2,
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b333"
   }
}
```

Example of the REST request for the “Bicycles and bicycle frames” goods group

Figure 14

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Bicycles and bicycle frames” goods group can be found in Table 22.

Table 22 – Description of attributes parameter of the “Order” object for “Bicycles and Bicycle Frames” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Number (Int32)	No

Description of the parameters, which are transferred in the “Bicycles and bicycle frames” goods group, can be found in Table 23

Table 23 – Structure of the attributes parameter of the “OrderProduct” object for the “Bicycles and bicycle frames” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType equals “REMARK” or “REAPPLY”.	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from June 1, 2024.

2. Remarking and marking of goods outside production or import are available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.

3. Remarking and marking of goods outside production or import are available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. Marking of goods outside production or import is unavailable for technical gtin (range 029).

5. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking or marking of goods outside production or import), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

6. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT.

4.4.1.1.10 List of Attributes for “Medical products” Goods Group

Example of the REST request for the “Medical products” goods group can be found in Figure 15.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"wheelchairs",
  "products":[{
    "gtin": "04603721568000",
    "quantity":2,
    "serialNumberType":"SELF_MADE",
    "serialNumbers": ["MZX78RZ9bmNR", "MZX78R8i8PjF"],
    "templateId": 12,
    "cisType": "UNIT"
   }],
  "serviceProviderId":"c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А. ",
    "releaseMethodType": "IMPORT",
    "createMethodType": "CM",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b333"
   }
}
```

Example of the REST request for the “Medical products” goods group

Figure 15

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Medical products” goods group can be found in Table 24.

Table 24 – Description of the attributes parameter of the “Order” object for the manufacturers of medical products

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Medical products” goods group can be found in Table 25.

Table 25 – Structure of the attributes parameter of the “OrderProduct” object for the “Medical products” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK” or “REMAINS”.	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

- GTIN of the first fee implementation group is available from October 1, 2023.
- GTIN of the third fee implementation group is available from October 1, 2024.
- GTIN of the fourth fee implementation group is available from September 1, 2026.
- GTIN of the fifth fee implementation group is available from September 1, 2024.
- GTIN of the sixth fee implementation group is available from October 1, 2025.
- GTIN of the seventh fee implementation group will be available from March 1, 2027.
- GTIN of the ninth fee implementation group is available from September 1, 2026.
- GTIN of the tenth fee implementation group will be available from February 1, 2026.
- GTIN of the eleventh fee implementation group is available from September 1, 2026.
- GTIN of the twelfth fee implementation group is available from September 1, 2026.

2. Emission of the marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:

— Group 2 GTINs included in the pilot program is available from October 15, 2023 to December 31, 2025;

— Group 4 GTINs included in the pilot program is available from September 1, 2024 to August 31, 2026;

— Group 7 GTINs included in the pilot program is available from December 15, 2025 to February 28, 2027;

— Group 8 GTINs included in the pilot program is available from April 29, 2026 to February 29, 2027;

— Group 13 GTINs included in the pilot program is available from August 15, 2026 to August 31, 2027.

3. Remarking and marking of remaining items are available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.

4. Remarking and marking of remaining items are available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

5. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking or marking of remaining items), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

6. Issuance for marking of remaining items is available for consumer package, group package, and sets.

4.4.1.1.11 List of Attributes for “Alternative Tobacco Products” Goods Group

Example of the REST request for the “Alternative tobacco products” goods group can be found in Figure 16.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup":"otp",
  "products":[{
    "gtin": "01334567894339",
    "quantity": 2,
    "serialNumberType": "SELF_MADE",
    "serialNumbers": ["YNt23nN","YNt24nN"],
    "templateId": 15,
    "cisType": "UNIT",
    "attributes": {
          "mrp":"12345",
      }
   }],
  "attributes": {
    "releaseMethodType": "IMPORT",
    "approvalNumber": "AN-1",
    "contactPerson": "John Smith (Иванов Петр Сидорович)",
    "createMethodType": "SELF_MADE",
    "expectedStartDate": "2020-01-01",
    "factoryAddress": "Uryupinsk",
    "factoryCountry": "Uruguay",
    "factoryId": 123456,
    "factoryName": "Some production",
    "poNumber": 123456,
    "productCode": "12-34-56",
    "productDescription": "Description",
    "productionOrderId": "63b5d1cd-919b-4cef-b117-2ce59059bc33"
  }
}
```

Example of the REST request for the “Alternative tobacco products” goods group

Figure 16

A possibility of goods code-sharing has been excluded for the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups. An order will be rejected if a goods group of the order does not correspond to the goods group (of the goods code) specified in the goods card in the NC.

A possibility of emission is checked in line with licenses for consumer and group packages when ordering MCs for the “Alternative tobacco products” goods group. If a GCP has a valid license, the check will succeed. If there is no valid license, the order will be rejected.

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Alternative tobacco products” goods group can be found in Table 26.

Table 26 – Description of the attributes parameter of the “Order” object for the “Alternative tobacco products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
factoryId	Factory identifier. (Global location number)	String (2-128)	Yes
factoryName	Factory name	String (2-256)	No
factoryAddress	Factory address	String (2-256)	No
factoryCountry	Factory country	String (2-128)	Yes
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productCode	Goods code (SKU)	String (1-256)	Yes
productDescription	Product description	String (1-512)	Yes
poNumber	Production order number	String (1-256)	No
expectedStartDate	Start date for production under this order. Date format: yyyy-MM-dd	String (yyyy-MM-dd)	No

Field	Description	Type	Mandatory
approvalNumber	Approval No. It can be specified when releaseMethodType = IMPORT	String (1-128)	No

Note:

1) The “cisType” value is set for the following contidions:

- if “cisType”= UNIT , then permissible values of the “templateId” attribute are 14 and 15;
- if “cisType”= GROUP, then permissible value of the “templateId” attribute is 14.

2) If the value (>=0) is specified in the parameter of the maximum retail price (mrp), then, when emitting a marking code by using a template templateId = 14, an MRP (AI 8005) will be automatically filled in a structure of the marking code for each goods item and will contain a digital format corresponding to 6 zeros – 000000. If the parameter is missing, there will be no MRP (AI 8005) in a structure of the marking codes.

3) If a marking code is emitted by means of template templateId = 15, regardless of availability of the filled parameter of the maximum retail price (mrp) or its lack, the MRP will be automatically filled in a structure of the marking code for each goods item and will contain a character format (in the recoded format, it will correspond to 4A – AAAA).

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Alternative tobacco products” goods group can be found in Table 27.

Table 27 – Structure of the attributes parameter of the “OrderProduct” object for the “Alternative tobacco products” goods group

Field	Description	Type	Mandatory
mrp	Maximum retail price For the alternative tobacco products goods group, AAAA default value is transferred in the “mrp” attribute, it contains maximum retail price (in the recoded format) of the consumer package expressed with a precision of one kopeck, while the price which is specified is equal to zero rubles and zero kopecks. It is filled out automatically when template 15 is specified.	String (4–6)	No (Conditionally mandatory)

4.4.1.1.12 List of Attributes for “Packaged water” Goods Group

Example of REST request for the “Packaged water” goods group can be found in Figure 17.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"water"
  "products":[{
     "gtin":"04606791012510",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["XT6c84e39gXj","2kY39OmdmHTw"],
     "templateId": 16,
     "cisType": "UNIT"
   }],
  "serviceProviderId": "c5fe527a-564a-4075-b7dd-72f08cb9a8b1",
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "CM",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b333",
    "paymentType":2
   }
}
```

Example of the REST request for the “Packaged water” goods group

Figure 17

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Packaged water” goods group can be found in Table 28.

Table 28 – Description of the attributes parameter of the “Order” object for the “Packaged water” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

Note: Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType= 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from December 1, 2021.

— GTINs of the second fee implementation group is available from March 1, 2022.

— GTINs of the third fee implementation group is available from September 1, 2023.

4.4.1.1.13 List of Attributes for “Beer, beer-based and low-alcohol beverages” Goods Group

Example of the REST request for the “Beer, beer-based and low-alcohol beverages” goods group can be found in Figure 18.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"beer",
  "products":[{
     "gtin":"04600682409427",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers": ["QIQ8BQ","GLTP9k"],
     "templateId": 18,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Beer, beer-based and low-alcohol beverages” goods group

Figure 18

Note: TT GIS Operator refuses to issue marking codes if a goods code does not belong to an ordering party.

Description of the parameters transferred in the “attributes” attribute of the “Order” object for the “Beer, beer-based and low-alcohol beverages” good group can be found in Table 29.

Table 29 – Description of attributes parameter of the “Order” object for the “Beer, beer-based and low-alcohol beverages” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of goods introduction into circulation”, see section 5.3.1.1	String (see section 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer	String	No (deprecated)

Field	Description	Type	Mandatory
	validated against guide values.		
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from April 1, 2023.
— GTINs of the second fee implementation group is available from October 1, 2023.
— GTINs of the third fee implementation group is available from January 15, 2024.

2. Restrictions are imposed on emission of the marking codes of the “Beer, beer-based and low-alcohol beverages” goods group. Participants that have “Wholesale trading” and “Retail and another” roles can issue marking codes only with the use of the “REAPPLY” (“Marking outside of production or import”) method of introduction into circulation. Emission of the marking codes by using other methods of introduction into circulation is unavailable for these participants categories.

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Beer, beer-based and low-alcohol beverages” goods group can be found in Table 30.

Table 30 – Structure of the attributes parameter of the “OrderProduct” object for the “Beer, beer-based and low-alcohol beverages” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Marking of goods outside of production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.
2. Marking of goods outside of production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
3. Marking of goods outside of production or import is unavailable for technical gtin (range 029).
4. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside of production or import), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside of production.
5. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT and with a payment type - Payment upon emission (“paymentType” = 1).

4.4.1.1.14 List of Attributes for “Nicotine products” Goods Group

Example of the REST request for the “Nicotine products” goods group can be found in Figure 19.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"ncp",
  "products":[{
    "gtin":"01334567894339",
    "quantity": 2,
    "serialNumberType": "SELF_MADE",
    "serialNumbers": [ "Z9bmNYR", "8i8PjF3"],
    "templateId": 21,
    "cisType": "SET"
   }],
  "attributes": {
    "factoryId":"Identifier",
    "factoryName":"NCP Fac",
    "factoryAddress":"Address",
    "factoryCountry":"Country",
    "productCode":"6789",
    "productDescription":"Simple ",
    "poNumber":"12345",
    "expectedStartDate":"2019-03-01",
    "releaseMethodType": "IMPORT",
    "approvalNumber": "AN-1"
    }
}
```

Example of the REST request for the “Nicotine products” goods group

Figure 19

A possibility of goods code-sharing has been excluded for the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups. An order will be rejected if a goods group of the order does not correspond to the goods group (of the goods code) specified in the goods card in the NC.

A possibility of emission is checked in line with licenses for consumer and group packages, as well as sets when ordering MCs for the “Nicotine products” goods group. If a GCP has a valid license, the check will succeed. If there is no valid license, the order will be rejected.

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Nicotine products” goods group can be found in Table 31.

Table 31 – Description of the attributes parameter of the “Order” object for the “Nicotine products” goods group

Field	Description	Type	Mandatory
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
factoryId	Factory identifier. (Global location number)	String (2-128)	Yes
factoryName	Factory name	String (2-256)	No
factoryAddress	Factory address	String (2-256)	No
factoryCountry	Factory country	String (2-128)	Yes
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productCode	Goods code (SKU)	String (1-256)	Yes
productDescription	Product description	String (1-512)	Yes
poNumber	Production order number	String (1-256)	No
expectedStartDate	Start date for production under this order. Date format: yyyy-MM-dd	String (yyyy-MM-dd)	No
approvalNumber	Approval No. It can be specified when releaseMethodType = IMPORT	String (1-128)	No

Note: “mrp” field (maximum retail price) in the request structure for the category of “Nicotine products” goods group is missing:

— When emitting the MC for goods with marking codes template - templateId = 21 (blocks), the maximum retail price (mrp) for each item is automatically filled in and contains a number format corresponding to 6 zeros – 000000.

— When emitting the MC for goods with marking codes template - templateId = 22 (packs), the maximum retail price (mrp) for each item is automatically filled in and contains a character format (in recoded form corresponding to 4A – AAAA).

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Nicotine products” goods group can be found in Table 32.

Table 32 – Structure of the attributes parameter of the “OrderProduct” object for the “Nicotine products” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner. It is indicated only if marking of the remaining items is available.	String	No Conditionally mandatory

4.4.1.1.15 List of Attributes for “Specialized food products and biologically active food additives” Goods Group

Example of the REST request for the “Specialized food products and biologically active food additives” goods group can be found in Figure 20.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"bio",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["QIQ8BQCXmSJJ","GLTP9kqZn5QR"],
     "templateId":23,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType":"PRODUCTION",
    "createMethodType":"SELF_MADE",
    "productionOrderId":"08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Specialized food products and biologically active food additives” goods group

Figure 20

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Specialized food products and biologically active food additives” goods group can be found in Table 33.

Table 33 – Structure of the attributes parameter of the “Order” object for the “Specialized food products and biologically active food additives” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Specialized food products and biologically active food additives” goods group can be found in Table 34.

Table 34 – Structure of the attributes parameter of the “OrderProduct” object for the “Specialized food products and biologically active food additives” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK” and “REAPPLY”.	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from October 1, 2023.

— GTINs of the second fee implementation group is available from June 1, 2024.

— GTINs of the third fee implementation group is available from September 1, 2025.

— GTINs of the fourth fee implementation group is available from March 31, 2026.

2. Emission of the marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:
— Group 3 GTINs included in the pilot program is available from June 1, 2025 to August 31, 2025.

3. Remarking and marking of goods outside production or import are available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.
4. Remarking and marking of goods outside production or import are available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

5. Marking of goods outside production or import is unavailable for technical gtin (range 029).

6. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking or marking of goods outside production or import), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

7. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT.

4.4.1.1.16 List of Attributes for “Antiseptic/antibacterial skin cleansers and hand sanitizers” Goods Group

Example of the REST request for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group can be found in Figure 21.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"antiseptic",
  "products":[{
     "gtin":"04600682409427",
     "quantity":2,
     "serialNumberType":"SELF_MADE",
     "serialNumbers":["IQ8BQCXmSJJ1","GLTP9kqZn5Q1"],
     "templateId":25,
     "cisType":"UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group

Figure 21

Description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group can be found in Table 35.

Table 35 – Structure of the attributes parameter of the “Order” object for “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of goods introduction into circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group can be found in Table 36.

Table 36 – Structure of the attributes parameter of the “OrderProduct” object for the “Antibacterial skin cleansers and hand sanitizers” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK”.	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from October 1, 2023.

— GTINs of the second fee implementation group is available from June 1, 2024.

2. Remarking is available for the original gtin if a goods card belongs to a participant that has sent the order or has been granted access through the mechanism of the sub-account.

3. Remarking is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.17 List of Attributes for “Pet foods” Goods Group

Example of the REST request for the “Pet foods” goods group can be found in Figure 22.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"petfood",
  "products":[{
    "gtin": "04600682409427",
    "quantity": 2,
    "serialNumberType":"SELF_MADE",
    "serialNumbers":["IQ8BQ", "GLTP9"],
    "templateId":26,
    "cisType":"UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Pet foods” goods group

Figure 22

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Pet foods” goods group can be found in Table 37.

Table 37 – Structure of the attributes parameter of the “Order” object for the “Pet foods” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

Note: emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from October 1, 2024.

— GTINs of the second fee implementation group is available from March 1, 2025.

4.4.1.1.18 List of Attributes for “Seafood” Goods Group

Example of the REST request for the “Seafood” goods group is shown in Figure 23.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"seafood",
  "products":[{
    "gtin": "04600682409427",
    "quantity": 2,
    "serialNumberType": "SELF_MADE",
    "serialNumbers": ["IQ8BQ", "GLTP9"],
    "templateId": 27,
    "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Seafood” goods group

Figure 23

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Seafood” goods group can be found in Table 38.

Table 38 – Structure of the attributes parameter of the “Order” object for the “Seafood” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Note: emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from May 1, 2024.

4.4.1.1.19 List of Attributes for “Non-alcoholic beer” Goods Group

Example of the REST request for the “Non-alcoholic beer” goods group can be found in Figure 24.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"nabeer",
  "products":[{
   "gtin":"04600682409427",
   "quantity": 2,
   "serialNumberType":"SELF_MADE",
   "serialNumbers": ["IQ8BQC", "GLTP9k"],
   "templateId": 28,
   "cisType": "UNIT"
  }],
  "attributes": {
   "contactPerson":"Иванов П.А.",
   "releaseMethodType": "PRODUCTION",
   "createMethodType": "SELF_MADE",
   "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
   }

}
```

Example of the REST request for the “Non-alcoholic beer” goods group

Figure 24

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Non-alcoholic beer” goods group can be found in Table 39.

Table 39 – Structure of the attributes parameter of the “Order” object for the “Non-alcoholic beer” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Non-alcoholic beer” goods group can be found in Table 40.

Table 40 – Structure of the attributes parameter of the “OrderProduct” object for the “Non-alcoholic beer” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK”. A period of availability of the REMARK is specified in a note of the description of the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1).	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from October 1, 2024.

2. Remarking of the goods is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.

3. Remarking of goods is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.20 List of Attributes for “Juice products and non-alcoholic beverages” Goods Group

Example of the REST request for the “Juice products and non-alcoholic beverages” goods group can be found in Figure 25.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"softdrinks",
  "products":[{
     "gtin":"04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 29,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Juice products and non-alcoholic beverages” goods group

Figure 25

A description of the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Juice products and non-alcoholic beverages” goods group can be found in Table 41.

Table 41 – Structure of the attributes parameter of the “Order” Object for “Juice products and non-alcoholic beverages” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of goods introduction into circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Note: emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from December 1, 2023.

— GTINs of the second fee implementation group is available from March 1, 2024.

— GTINs of the third fee implementation group is available from June 1, 2024.

4.4.1.1.21 List of Attributes for “Games and toys for children” goods group

Example of the REST request for the “Games and toys for children” goods group can be found in Figure 26

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"toys",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers":[“IQ8BQFTKQWER”, “GLTP934TRE12”],
     "templateId": 34,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of REST request for “Games and toys for children” goods group

Figure 26

A description of the attributes parameter of the “Order” object for the “Games and toys for children” goods group can be found in Table 42.

Table 42 – Structure of the attributes parameter of the “Order” object for the “Games and toys for children” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer	String	No (deprecated)

Field	Description	Type	Mandatory
	validated against guide values.		
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Number (Int32)	No

The description of the parameters transferred in the “attributes” attribute of the “OrderProduct” object for the “Games and toys for children” goods group can be found in Table 43.

Table 43 – Structure of the attributes parameter of the “OrderProduct” object for “Games and toys for children” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. Fees will be introduced from December 1, 2025.

2. Marking of goods outside production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.

3. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. Marking of goods outside production or import is unavailable for technical gtin (range 029).

5. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first character is the State identifier used to mark goods outside production.

6. Emission using the “REAPPLY” method of release of goods into circulation is available only for consumer packaging with “cisType” = UNIT and with the payment type “Payment upon emission” (“paymentType” = 1).

4.4.1.1.22 List of Attributes for “Titanium metal products” Goods Group

Example of the REST request for the “Titanium metal products” goods group can be found in Figure 27.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"titan",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 39,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Ivanov P.A.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Titanium metal products” goods group

Figure 27

A description of the attributes parameter of the “Order” object for the “Titanium metal products” goods group can be found in Table 44.

Table 44 – Structure of the attributes parameter of the “Order” object for the “Titanium metal products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note: Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.23 List of Attributes for “Radio-electronic products” Goods Group

Example of the REST request for the “Radio-electronic products” goods group can be

found in Figure 28.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"radio",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJeKa12b2","GLTP9kqZn5QRqyx6w2"],
     "templateId": 36,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Radio-electronic products” goods group

Figure 28

A description of the attributes parameter of the “Order” object for the “Radio-electronic products” goods group can be found in Table 45.

Table 45 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from May 1, 2026.
— GTINs of the third fee implementation group is available from May 1, 2026.
— GTINs of the fourth fee implementation group (a date is not defined).

2. Emission of the marking codes of the pilot goods group is available with a payment type (paymentType = 2, “Payment upon application”) for the GTIN fee implementation groups upon the relevant date.

— GTIN of the first fee implementation group is available from December 1, 2023 to December 1, 2024.

— GTIN of the third fee implementation group is available from June 1, 2024 to September 1, 2025.

— GTIN of the fourth fee implementation group is available from March 25, 2025 to March 1, 2026.

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Radio-electronic products” goods group can be found in Table 46.

Table 46 – Structure of the attributes parameter of the “OrderProduct” object for the “Radio-electronic products” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Marking of goods outside production or import is available for the original gtin if a goods card belongs to the participant who has sent the order or has been granted access through the sub-account mechanism.

2. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

3. Marking of goods outside production or import is unavailable for technical gtin (range 029).

4. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first character is the State identifier used to mark goods outside production.

5. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT.

6. Marking of goods outside production or import with a payment type “Payment upon emission” will be available from the start of the payment period. Until May 1, 2026, emission with a method of release of goods into circulation - “REAPPLY” will be available w/o indicating a payment type.

4.4.1.1.24 List of Attributes for “Optical fiber and fiber optic products” Goods Group

Example of the REST request for the “Optical fiber and fiber optic products” goods group can be found in Figure 29.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"opticfiber",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 44,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Optical fiber and fiber optic products” goods group

Figure 29

A description of the attributes parameter of the “Order” object for the “Optical fiber and fiber optic products” goods group can be found in Table 47.

Table 47 – Structure of the attributes parameter of the “Order” object for the “Optical fiber and fiber optic products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note: Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.25 List of Attributes for “Vegetable oils” Goods Group

Example of the REST request for the “Vegetable oils” goods group can be found in Figure 30.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"vegetableoil",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 40,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Vegetable oils” goods group

Figure 30

A description of the attributes parameter of the “Order” object for the “Vegetable oils” goods group can be found in Table 48.

Table 48 – Structure of the attributes parameter of the “Order” object for the “Vegetable oils” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

Note: emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group is available from October 1, 2024.

— GTINs of the second fee implementation group is available from February 1, 2025.

4.4.1.1.26 List of Attributes for “Cosmetics, household chemicals, and personal hygiene products” Goods Group

Example of the REST request for the “Cosmetics, household chemicals, and personal hygiene products” goods group can be found in Figure 31.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"chemistry",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 46,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Cosmetics, household chemicals, and personal hygiene products” goods group

Figure 31

A description of the attributes parameter of the “Order” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group can be found in Table 49.

Table 49 – Structure of the attributes parameter of the “Order” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Release into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from May 1, 2025.
— GTIN of the second fee implementation group is available from July 1, 2025.
— GTIN of the third fee implementation group is available from October 1, 2025.
— GTIN of the fourth fee implementation group is available from December 1, 2025.
— GTIN of the fifth fee implementation group will be available from October 1, 2026.

2. Emission of the marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:

— Group 4 GTINs included in the pilot program is available from June 1, 2025 to August 31, 2025.

— Group 5 GTINs included in the pilot program is available from September 1, 2025 to August 31, 2026.

A description of the parameters transferred in the “attributes” attribute of the “OrderProduct” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group can be found in Table 50.

Table 50 – Structure of the attributes parameter of the “OrderProduct” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Marking of the goods outside of production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.

2. Marking of the goods outside of production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

3. Marking of goods outside of production or import is unavailable for technical gtin (range 029).

4. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

5. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT and with a payment type - Payment upon emission (“paymentType” = 1).

4.4.1.1.27 List of Attributes for “Canned foods” Goods Group

Example of the REST request for the “Canned foods” goods group can be found in Figure 32.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"conserve",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 48,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Canned foods” goods group

Figure 32

A description of the attributes parameter of the “Order” object for the “Canned foods” goods group can be found in Table 51.

Table 51 – Structure of the attributes parameter of the “Order” object for the “Canned foods” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from December 1, 2024.

— GTIN of the second fee implementation group is available from March 1, 2025.

— GTIN of the third fee implementation group will be available from November 1, 2026.

2. Emission of the marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:

— Group 3 GTINs included in the pilot program will be available from January 30, 2026 to October 31, 2026.

3. An attribute of the “Farmer” is supported for the “Canned foods” goods group based on the All-Russia Classifier of Organizational Legal Forms, defining a "Farmer" category of the goods circulation participant. The “Payment upon application” and “Payment upon emission” are available for the “Farmer” category.

4.4.1.1.28 List of Attributes for “Veterinary medicines” Goods Group

Example of the REST request for the “Veterinary medicines” goods group can be found in Figure 33.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"vetpharma",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 50,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Veterinary medicines” goods group

Figure 33

A description of the attributes parameter of the “Order” object for the “Veterinary medicines” goods group can be found in Table 52.

Table 52 – Structure of the attributes parameter of the “Order” object for the “Veterinary medicines” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

Description of the parameters, which are transferred in the “Veterinary medicines” goods group, can be found in Table 53

Table 53 – Structure of the attributes parameter of the “OrderProduct” object for the “Veterinary medicines” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REMARK”	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from October 1, 2024;
— GTIN of the second fee implementation group will be available from December 15, 2025.

2. Remarking is available for the original gtin if a goods card belongs to a participant who has sent an order or has been granted access through the mechanism of the sub-account.

3. Remarking is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. In case of emission of the marking codes for a goods card for which there is no permit (as part of remarking), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

4.4.1.1.29 List of Attributes for “Building materials” Goods Group

Example of the REST request for the “Building materials” goods group can be found in Figure 34.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"construction",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQCXmSJJe","GLTP9kqZn5QR"],
     "templateId": 53,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Building materials” goods group

Figure 34

A description of the attributes parameter of the “Order” object for the “Building materials” goods group can be found in Table 54.

Table 54 – Structure of the attributes parameter of the “Order” object for the “Building materials” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Number (Int32)	No

The description of parameters transferred in the “attributes” attribute of the “OrderProduct” object for the “Building materials” goods group can be found in Table 55.

Table 55 – Structure of the attributes parameter of the “OrderProduct” object for the “Building materials” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group will be available from October 1, 2025.
— GTIN of the second fee implementation group will be available from December 1, 2025.
2. Marking of the goods outside production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.
3. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
4. Marking of goods outside production or import is unavailable for technical gtin (range 029).
5. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first character is the State identifier used to mark goods outside production.
6. Emission using the “REAPPLY” method of release of goods into circulation is available only for consumer packages “cisType” = UNIT and with the payment type “Payment upon emission” (“paymentType” = 1).

4.4.1.1.30 List of Attributes for “Fire safety and firefighting equipment” Goods Group

Example of the REST request for the “Fire safety and firefighting equipment” goods group can be found in Figure 35.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"fire",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 55,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Fire safety and firefighting equipment” goods group

Figure 35

A description of the attributes parameter of the “Order” object for the “Fire safety and firefighting equipment” goods group can be found in Table 56.

Table 56 – Structure of the attributes parameter of the “Order” object for the “Fire safety and firefighting equipment” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.1.31 List of Attributes for “Printed goods” Goods Group

Example of the REST request for the “Printed goods” goods group can be found in Figure 36.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"books",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ1234543","GLTP94323456"],
     "templateId": 52,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Printed goods” goods group

Figure 36

A description of the attributes parameter of the “Order” object for the “Printed goods” goods group can be found in Table 57.

Table 57 – Structure of the attributes parameter of the “Order” object for the “Printed goods” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.1.32 List of Attributes for “Heaters” Goods Group

Example of the REST request for the “Heaters” goods group can be found in Figure 37

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"heater",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 57,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Heaters” goods group

Figure 37

A description of the attributes parameter of the “Order” object for the “Heaters” goods group can be found in Table 58.

Table 58 – Structure of the attributes parameter of the “Order” object for the “Heaters” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note: Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.33 List of Attributes for “Groceries” Goods Group

An example of the REST request for the “Groceries” goods group can be found in Figure

38.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"grocery",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ1234543","GLTP94323456"],
     "templateId": 42,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Groceries” goods group

Figure 38

A description of the attributes parameter of the “Order” object for the “Groceries” goods group can be found in Table 59.

Table 59 – Structure of the attributes parameter of the “Order” object for the “Groceries” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from May 1, 2025.
— GTIN of the second fee implementation group is available from July 1, 2025.
— GTIN of the third fee implementation group is available from December 1, 2025.
— GTIN of the fourth fee implementation group is available from April 1, 2026.

— GTIN of the fifth fee implementation group is available from June 1, 2026.
— GTIN of the sixth fee implementation group will be available from September 1, 2026.
— GTIN of the seventh fee implementation group will be available from December 1, 2026.
— GTIN of the eighth fee implementation group (date uncertain).
— GTIN of the ninth fee implementation group (date uncertain).

2. Emission of the marking codes with payment type (“paymentType”) = 2 (“Payment upon application”) for:

— Group 3 GTINs included in the pilot program is available from June 1, 2025 to August 31, 2025.
— Group 4 GTINs included in the pilot program is available from June 1, 2025 to August 31, 2025.
— Group 5 GTINs included in the pilot program is available from June 1, 2025 to August 31, 2025.
— Group 6 GTINs included in the pilot program is available from August 20, 2025 to February 28, 2026.
— Group 7 GTINs included in the pilot program is available from August 20, 2025 to February 28, 2026.
— Group 8 GTINs included in the pilot program is available from August 20, 2025 to February 28, 2026.
— Group 9 GTINs included in the pilot program is available from August 20, 2025 to February 28, 2026.

4.4.1.1.34 List of Attributes for “Cabling and wiring products” Goods Group

An example of the REST request for the “Cabling and wiring products” goods group can

be found in Figure 39.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"cableraw",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ1234543","GLTP94323456"],
     "templateId": 62,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Cabling and wiring products” goods group

Figure 39

A description of the attributes parameter of the “Order” object for the “Cabling and wiring products” goods group can be found in Table 60.

Table 60 – Structure of the attributes parameter of the “Order” object for the “Cabling and wiring products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note. Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.35 List of Attributes for “Engine oils” Goods Group

An example of the REST request for the “Engine oils” goods group can be found in Figure

40.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"autofluids",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ1234543","GLTP94323456"],
     "templateId": 60,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Engine oils” goods group

Figure 40

A description of the attributes parameter of the “Order” object for the “Engine oils” goods group can be found in Table 61.

Table 61 – Structure of the attributes parameter of the “Order” object for the “Engine oils” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods release into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default value)	Int32	No

A description of the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Engine oils” goods group can be found in Table 62.

Table 62 – Structure of the attributes parameter of the “OrderProduct” object for the “Engine oils” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String	No Conditionally mandatory

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtin from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTIN of the first fee implementation group is available from September 1, 2025.

2. Marking of goods outside production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the sub-account mechanism.

3. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.

4. Marking of goods outside production or import is unavailable for goods cards of the technical range (029).

5. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), there should be no serial numbers in a request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.

6. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT and with a payment type - Payment upon emission (“paymentType” = 1).

4.4.1.1.36 List of Attributes for “Polymer pipes” Goods Group

An example of the REST request for the “Polymer pipes” goods group can be found in

Figure 41.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"polymer",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 64,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Polymer pipes” goods group

Figure 41

A description of the attributes parameter of the “Order” object for the “Polymer pipes” goods group can be found in Table 63.

Table 63 – Structure of the attributes parameter of the “Order” object for the “Polymer pipes” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note. Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.37 List of Attributes for “Confectionery products” Goods Group

An example of the REST request for the “Confectionery products” goods group can be

found in Figure 42.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"sweets",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 66,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Confectionery products” goods group

Figure 42

A description of the attributes parameter of the “Order” object for the “Confectionery products” goods group can be found in Table 64.

Table 64 – Structure of the attributes parameter of the “Order” object for the “Confectionery products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtins from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group will be available from March 1, 2026.

— GTINs of the second fee implementation group will be available from May 1, 2026.

— GTINs of the third fee implementation group will be available from July 1, 2026.

2. Emission for a method of introduction into circulation - “Manufacture in the Russian Federation” is available for the goods codes of the technical range (029).

4.4.1.1.38 List of Attributes for “Auto parts and components for vehicles” Goods Group

An example of the REST request for the “Auto parts and components for vehicles” goods group can be found in Figure 43.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"carparts",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["IQ8BQ","GLTP9"],
     "templateId": 68,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Auto parts and components for vehicles” goods group

Figure 43

A description of the attributes parameter of the “Order” object for the “Auto parts and components for vehicles” goods group can be found in Table 65.

Table 65 – Structure of the attributes parameter of the “Order” object for the “Auto parts and components for vehicles” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.1.39 List of Attributes for “Radio-electronic products. Electronic nicotine delivery systems” Goods Group

An example of the REST request for the “Radio-electronic products. Electronic nicotine

delivery systems” goods group can be found in Figure 44.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"nicotindev",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["I87952Q8BQOB","GLTP827nakw9"],
     "templateId": 70,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Radio-electronic products. Electronic nicotine delivery systems” goods group

Figure 44

A description of the attributes parameter of the “Order” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group can be found in Table 66.

Table 66 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

Note: Emission of the marking codes of the goods group, which participates in the experiment, is available for the following GTIN fee implementation groups upon the relevant date.

— GTIN of the first fee implementation group is available from December 1, 2023 to September 31, 2026.

4.4.1.1.40 List of Attributes for “Radio-electronic products. Laptops and smartphones” Goods Group

An example of the REST request for the “Radio-electronic products. Laptops and

smartphones” goods group can be found in Figure 45.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":"gadgets",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3cLkR7QwX1mYp0T","M4Xq7Zp1TrA9LkB2YvE"],
     "templateId": 72,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Radio-electronic products. Laptops and smartphones” goods group

Figure 45

A description of the attributes parameter of the “Order” object for the “Radio-electronic products. Laptops and smartphones” goods group can be found in Table 67.

Table 67 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products. Laptops and smartphones” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Note: emission of marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for GTIN payment groups as of their applicable start date. The GTIN payment group can be determined in a goods card:

— GTIN of the first payment group is available from May 1, 2026.

The description of parameters transferred in the “attributes” attribute of the “OrderProduct” object for the “Radio-electronic products. Laptops and smartphones” goods group can be found in Table 68.

Table 68 – Structure of the attributes parameter of the “OrderProduct” object for the “Radio-electronic products. Laptops and smartphones” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Marking of goods outside production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.

2. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
3. Marking of goods outside production or import is unavailable for technical gtin (range 029).
4. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first character is the State identifier used to mark goods outside production.
5. Emission using the method of release of goods into circulation, “REAPPLY”, is available only for consumer packages where “cisType” = UNIT.
6. Marking of goods outside production or import with the “Payment upon emission” payment type will be available from May 1, 2026 (payment implementation start date).

4.4.1.1.41 List of Attributes for “Meat products” Goods Group

An example of the REST request for the “Meat products” goods group can be found in

Figure 46.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"meat",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 32,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Meat products” goods group

Figure 46

A description of the attributes parameter of the “Order” object for the “Meat products” goods group can be found in Table 69.

Table 69 – Structure of the attributes parameter of the “Order” object for the “Meat products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

Notes:

1. Emission of the marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for the GTIN fee implementation groups upon the relevant date. When paymentType = 1 ("Payment upon emission") is specified, gtins from different fee implementation groups can be specified in the order, if on that date they have become available for payment upon emission. GTIN fee implementation group can be determined in a goods card:

— GTINs of the first fee implementation group will be available from August 1, 2026.

— GTINs of the second fee implementation group will be available from October 1, 2026.

2. The “Farmer” attribute is supported for the “Meat products” goods group based on the All-Russia Classifier of Organizational Legal Forms, which defines the “Farmer” category of the goods circulation participant. Starting from October 1, 2026, “Payment upon emission” and “Payment upon application” are available for the “Farmer” category for GTINs of the first and second fee implementation groups.

4.4.1.1.42 List of Attributes for “Feed additives” Goods Group

An example of the REST request for the “Feed additives” goods group can be found in Figure 47.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"vetbio",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 75,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Feed additives” goods group

Figure 47

A description of the attributes parameter of the “Order” object for the “Feed additives” goods group can be found in Table 70.

Table 70 – Structure of the attributes parameter of the “Order” object for the “Feed additives” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No

4.4.1.1.43 List of Attributes for “Home and kitchen goods” Goods Group

An example of the REST request for the “Home and kitchen goods” goods group can be found in Figure 48.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"homeware",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 77,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Home and kitchen goods” goods group

Figure 48

A description of the attributes parameter of the “Order” object for the “Home and kitchen goods” goods group can be found in Table 71.

Table 71 – Structure of the attributes parameter of the “Order” object for the “Home and kitchen goods” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No

4.4.1.1.44 List of Attributes for “Industrial equipment” Goods Group

An example of the REST request for the “Industrial equipment” goods group can be found in Figure 49.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"industrial",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 79,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for “Industrial equipment” goods group

Figure 49

A description of the attributes parameter of the “Order” object for the “Industrial equipment” goods group can be found in Table 72.

Table 72 – Structure of the attributes parameter of the “Order” object for the “Industrial equipment” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No

4.4.1.1.45 List of Attributes for “Fertilizers in consumer packaging” Goods Group

An example of the REST request for the “Fertilizers in consumer packaging” goods group can be found in Figure 50.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"fertilizers",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8827shB3A1","M4Xq7s7M12sL"],
     "templateId": 81,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for “Fertilizers in consumer packaging” goods group

Figure 50

A description of the attributes parameter of the “Order” object for the “Fertilizers in consumer packaging” goods group can be found in Table 73.

Table 73 – Structure of the attributes parameter of the “Order” object for the “Fertilizers in consumer packaging” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No
paymentType	Payment type. Allowed values: 1 - Payment upon emission; 2 - Payment upon application (default)	Number (Int32)	No

The description of the parameters transferred for the “Fertilizers in consumer packaging” goods group, can be found in Table 74.

Table 74 – Structure of the attributes parameter of the “OrderProduct” object for the “Fertilizers in consumer packaging” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType equals “REAPPLY”.	String	No Conditionally mandatory

Notes:

1. Marking code emission with payment type (paymentType = 1, “Payment upon emission”) is available for GTIN payment groups from the applicable date. When paymentType= 1 ("Payment upon emission") is specified, the order may include GTINs from different payment groups if payment upon emission has become available for those groups. The GTIN payment group is specified in the goods card:
   - GTINs in payment group 1 will be available starting November 1, 2026.
2. Marking code emission with payment type (paymentType = 2, “Payment upon application”) is available for:
   - GTINs in the first pilot group, from October 1, 2025, to August 31, 2026;
3. Marking of goods outside production or import is available for the original gtin if the goods card belongs to the participant who has sent the order or has been granted access through the sub-account mechanism.
4. Marking of goods outside production or import is available for the original gtin (global range – other than 046, 004, and 029). If the goods circulation participant is not the goods card owner or does not have access through the sub-account mechanism, the INN of the goods card owner must be specified in the request structure in the “producer” parameter.
5. Marking of goods outside production or import is unavailable for a technical gtin (range 029).
6. In case of emission of marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be present in the request structure. When the system generates serial numbers, the first symbol is the State identifier used to mark goods outside production.
7. Emission with a method of release of goods into circulation, “REAPPLY”, is available only for consumer packages “cisType” = UNIT.

4.4.1.1.46 List of Attributes for “Semi-finished and frozen food products” Goods Group

An example of the REST request for the “Semi-finished and frozen food products” goods

group can be found in Figure 51.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"frozen",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 83,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Semi-finished and frozen food products” goods group

Figure 51

A description of the attributes parameter of the “Order” object for the “Semi-finished and frozen food products” goods group can be found in Table 75.

Table 75 – Structure of the attributes parameter of the “Order” object for the “Semi-finished and frozen food products” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (String) (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (String) (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (String) (1-256)	No

4.4.1.1.47 List of Attributes for “Real fur” Goods Group

An example of the REST request for the “Real fur” goods group can be found in Figure 52.

```
POST /api/v3/order?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json;charset=UTF-8
X-Signature: {подпись}

{
  "productGroup":" furslp",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["XmSJJeKa12b2","qZn5QRqyx6w2"],
     "templateId": 85,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Real fur” goods group

Figure 52

The description of the attributes parameter of the “Order” object for the “Real fur” goods group can be found in Table 76.

Table 76 – Structure of the attributes parameter of the “Order” object for the “Real fur” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the guide “Method of Goods Introduction into Circulation” (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
paymentType	Payment type. Valid values: 1 - Payment upon emission; 2 - Payment upon application (default)	Int32	No

Note: emission of marking codes with a payment type (paymentType = 1, “Payment upon emission”) is available for GTIN payment groups upon the relevant date. The GTIN payment group can be determined in a goods card:

— GTINs of the first payment group become available as of March 1, 2026.

A description of the parameters transferred in the “attributes” attribute of the “OrderProduct” object for the “Real fur” goods group can be found in Table 77.

Table 77 – Structure of the attributes parameter of the “OrderProduct” object for the “Real fur” goods group

Field	Description	Type	Mandatory
producer	INN of the goods card owner It is specified only if releaseMethodType = “REAPPLY”.	String (1-20)	No Conditionally mandatory

Notes:

1. Marking of goods outside production or import is available for the original gtin if a goods card belongs to a participant who has sent the order or has been granted access through the mechanism of the sub-account.
2. Marking of goods outside production or import is available for the original gtin (global range – excluding ranges 046, 004, and 029). If a goods circulation participant is not the goods card owner or does not have sub-account access, the INN of the goods card owner must be specified in a request structure in the “producer” parameter.
3. Marking of goods outside production or import is unavailable for technical gtin (range 029).
4. In case of emission of the marking codes for a goods card for which there is no permit (as part of marking of goods outside production or import), serial numbers must not be included in the request. When the system generates serial numbers, the first character is the State identifier used to mark goods outside production.
5. Emission with a method of release of goods into circulation - “REAPPLY” is available only for consumer packages “cisType” = UNIT.
6. Marking of goods outside production or import with the “Payment upon emission” payment type will be available as of March 1, 2026, when fee liability takes effect.

4.4.1.1.48 List of Attributes for “Pyrotechnic articles” Goods Group

An example of the REST request for the “Pyrotechnic articles” goods group can be found in Figure 53.

```
POST /api/v3/order?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"pyrotechnics",
  "products":[{
     "gtin": "04600682409427",
     "quantity": 2,
     "serialNumberType": "SELF_MADE",
     "serialNumbers": ["aZ8B3","M4Xq7"],
     "templateId": 86,
     "cisType": "UNIT"
   }],
  "attributes": {
    "contactPerson":"Иванов П.А.",
    "releaseMethodType": "PRODUCTION",
    "createMethodType": "SELF_MADE",
    "productionOrderId": "08528091-808a-41ba-a55d-d6230c64b332"
    }
}
```

Example of the REST request for the “Pyrotechnic articles” goods group

Figure 53

The description of the attributes parameter of the “Order” object for the “Pyrotechnic articles” goods group can be found in Table 78.

Table 78 – Structure of the attributes parameter of the “Order” object for the “Pyrotechnic articles” goods group

Field	Description	Type	Mandatory
contactPerson	Contact person	String (1-128)	No
releaseMethodType	Method of goods introduction into circulation. Allowed values are specified in the “Method of Goods Introduction into Circulation” guide (See subsection 5.3.1.1)	String (See subsection 5.3.1.1)	Yes
createMethodType	IM creation method. This parameter is no longer validated against guide values.	String	No (deprecated)
productionOrderId	Production order identifier. A blank line or a line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No

4.4.1.2. Response to Request

Example of JSON response is shown in Figure 54.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Content-Length: 111
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"CDF12109-10D3-11E6-8B6F-0050569977A1",
  "orderId": "b024ae09-ef7c-449e-b461-
  05d8eb116c79", "expectedCompleteTimestamp": 5100
}
```

Example of JSON Response

Figure 54

The method returns a unique order identifier and order expected completion time in milliseconds (divide the result time by 1,000 for seconds, and by 60 for minutes). Value “orderId” is used to obtain MC from the order upon its completion (see clause 4.4.3). For error codes, see subsection 6.2.

Table 79 – Format of Response to Request

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Unique identifier of the MC emission order String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
expectedCompleteTimestamp	Order expected completion time, in milliseconds	Number Integer ($int64)	Yes

4.4.2. Method “Get a status of MC array from the order”

This method is used to get the current status of the MC array from the order and requires the following parameters: security marker (token), OMS identifier, “orderId” order identifier. Description on how to receive a security marker is provided in section 9

4.4.2.1. Request

Example of REST request is shown in Figure 55.

```
GET /api/v3/order/status?orderId=b024ae09-ef7c-449e-b461-05d8eb116c79&omsId=cdf12109-10d3-11e6-8b6f-0050569977a1&gtin=01334567894339 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of REST Request

Figure 55

Structure of the request for obtaining a status of MC array from the order.

REST request parameters can be found in Table 80.

Table 80 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/order/status?omsId={omsId}&orderId={orderId}&gtin={gtin}

HTTP Header Parameters can be found in Table 81.

Table 81 – HTTP Headers Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 82.

Table 82 – Request String Parameters

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Identifier of the MC emission order. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
gtin	GTIN of the goods, the order status of which is required. Template: [0-9]{14}	String (14)	No

4.4.2.2. Response to Request

Example of JSON response (buffer exists) can be found in Figure 56.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Length: 659
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

[
  {
    "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
    "orderId": "b024ae09-ef7c-449e-b461-05d8eb116c79",
    "leftInBuffer": 0,
    "totalCodes": 20,
    "poolsExhausted": false,
    "unavailableCodes": 0,
    "availableCodes": 20,
    "gtin": "01334567894339",
    "bufferStatus": "ACTIVE",
    "totalPassed": 0,
    "expiredDate": "1596792681987",
    "templateId": 50
  }
]
```

Example of JSON response (buffer exists)

Figure 56

Example of JSON response (for declined order) can be found in Figure 57.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Length: 659
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

[
  {
    "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
    "orderId": "b024ae09-ef7c-449e-b461-05d8eb116c79",
    "leftInBuffer" : -1,
    "poolsExhausted": false,
    "totalCodes" : -1,
    "unavailableCodes" : -1,
    "availableCodes" : -1,
    "gtin" : "04606038003172",
    "bufferStatus" : "REJECTED",
    "rejectionReason": "Order declined: Контрольно-
  логическая проверка заказа не пройдена. 0106: Значение 04606038003172 в поле 'GTIN' в документе 'За
  каз КМ'{1} не найдено в реестре GTIN.",
    "totalPassed": -1,
    "templateId": 50
  }
]
```

Example of JSON response (for declined order)

Figure 57

Example of JSON response for a case when the buffer is inactive can be found in Figure 58.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Length: 659
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

[
  {
    "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
    "orderId": "b024ae09-ef7c-449e-b461-05d8eb116c79",
    "leftInBuffer" : -1,
    "poolsExhausted": false,
    "totalCodes" : -1,
    "unavailableCodes" : -1,
    "availableCodes" : -1,
    "gtin" : "04606038003172",
    "bufferStatus" : "PENDING",
    "totalPassed": -1,
    "templateId": 50
  }
]
```

Example of JSON response (buffer is inactive)

Figure 58

Format of JSON response to request to obtain the MC array status can be found in Table 83. For error codes, see subsection **6.2**.

Table 83 – Format of Response to Request, object “BufferInfo”

Field	Description	Type	Mandatory
omsId	Unique OMS identifier	String (36) (UUID)	No
orderId	Identifier of the MC emission order	String (36) (UUID)	No
availableCodes	The total quantity of the MCs available for goods in buffer and registrar pools	Integer ($int32)	Yes
bufferStatus	Buffer status. Allowed values are specified in the guide “MC Buffer Status” (See section 5.3.1.6)	String (See subsection 5.3.1.6)	Yes
gtin	GTIN on which the request was made	String (14) [0-9]{14}	Yes
leftInBuffer	Number of unused MCs. (local buffer)	Integer ($int32)	Yes
poolsExhausted	MC pools in registrars are exhausted	Boolean	Yes
rejectionReason	Reason for rejection of the buffer by the OMS	String	No
totalCodes	Ordered quantity of MCs in the order	Integer ($int32)	Yes
totalPassed	Total quantity of the MCs received from the buffer	Integer ($int32)	Yes
unavailableCodes	Quantity of unavailable codes	Integer ($int32)	Yes
expiredDate	MC expiration date Format: UnixTime (in milliseconds)	integer($int64)	No
productionOrderId	Production order identifier	String	No
cisType	Marking code type. Allowed values are specified in the guide “Marking Code Type” (see section 5.3.1.10)	String	No
templateId	MC template identifier. Allowed values are specified in the guide “MC Templates” (see section 5.3.1.4)	Integer ($int32)	Yes

Note: If an order has been rejected, rejectionReason field will contain “Order declined: “ value with a reason for order decline.

4.4.3. Method “Obtain a List of Marking Code Orders”

This method is used to get a business orders status by using the following parameters: security marker (token), OMS identifier. Description on how to receive a security marker is provided in section 9.

Notes:

1. The method is intended for APCS recovery after a total data loss; use of its functional capabilities during normal operating processes with the OMS is prohibited.

2. This method (as well as the method of creating orders) can be addressed from one source not more than 100 times per second.

4.4.3.1. Request

Example of REST request is shown in Figure 59.

```
GET /api/v3/order/list?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of REST Request

Figure 59

REST request parameters can be found in Table 84.

Table 84 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/order/list?omsId={omsId}

HTTP Header Parameters can be found in Table 85.

Table 85 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameter is given in Table 86.

Table 86 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.3.2. Response to Request

Example of JSON response is shown in Figure 60.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Length: 953
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
  "orderInfos": [
    {
      "orderId": "b024ae09-ef7c-449e-b461-05d8eb116c79",
      "orderStatus": "READY",
      "createdTimestamp": 1550650989568,
      "productGroup": "vetpharma",
      "buffers": [{
        "leftInBuffer": 20,
        "totalCodes": 20,
        "unavailableCodes": 0,
        "gtin": "01334567894339",
        "bufferStatus": "ACTIVE",
        "templateId": 50
      }]
    }
  ]
}
```

Example of JSON Response

Figure 60

Upon successful request completion, the server returns HTTP code -200 and data on business orders status and unique identifier in the OMS. For a format of the response to request, see Table 87. For error codes, see subsection **6.2**.

Table 87 – Format of Response to Request for Order Status

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderInfos	Array of orders and their statuses	Array of objects (JSON Array of OrderSummaryInfo Table 88)	No

Table 88 – "OrderSummaryInfo" Object Format

Field	Description	Type	Mandatory
orderId	Identifier of the MC emission order. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderStatus	Order status. Allowed values are specified in the guide "Order status" (See subsection 5.3.1.8)	String (See subsection 5.3.1.8)	Yes
buffers	Information on buffer status	BufferInfo (Table 83)	Yes
createdTimestamp	Order creation time	Integer ($int64)	Yes
declineReason	Reason for order decline	String	No
productionOrderId	Production order identifier	String	No
productGroup	Goods group. Allowed values are specified in the guide "Goods groups" (see section 5.3.1.16)	String	Yes
paymentType	Payment type	Integer ($int32)	No

4.4.4. Method “Obtain MC from the MC order”

This method is used to obtain the MC array of the specific order by using the following parameters: security marker (token), OMS identifier, order identifier, GTIN, quantity of the requested codes. Description on how to receive a security marker is provided in section 9.

4.4.4.1. Request

Example of REST request is shown in Figure 61.

```
GET /api/v3/codes?orderId=b024ae09-ef7c-449e-b461-
05d8eb116c79&gtin=01334567894339&quantity=15&omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of REST Request

Figure 61

REST request parameters can be found in Table 89.

Table 89 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/codes?omsId={omsId}&orderId={orderId} &quantity={quantity}&gtin={gtin}

HTTP Header Parameters can be found in Table 90.

Table 90 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 91.

Table 91 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Identifier of the order for MC emission in the OMS. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
quantity	Quantity of the requested codes (shall not exceed 150,000 marking codes). Positive number.	Integer ($int32)	Yes
gtin	Goods code (GTIN). String value. minLength = 14 maxLength = 14 Template: [0-9]{14}	String (14) [0-9]{14}	Yes

Note:

A circulation participant receives emitted marking codes, in this case, closing the order is the final step, which is executed automatically when printing the last MC. Manual closing of the order is performed optionally by a circulation participant, when not all MCs have been printed (See section 4.4.8).

4.4.4.2. Response to Request

Example of JSON response is shown in Figure 62.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Length: 820
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
  "codes": [
    "0104601653030046 21=rxDV3M\u001d93VXQI"
  ],
  "blockId": "012cc7b0-c9e4-4511-8058-2de1f97a87b0"
}
```

Example of JSON Response

Figure 62

Upon successful completion of the request, the server returns HTTP code -200 and MC array. For a format of the response to request for MC obtainment for the goods specified, see Table 92. For error codes, see subsection **6.2**.

Table 92 – Format of Response to Request for MC for the Goods Specified

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
codes	MC array.	JSON Array of Strings	Yes
blockId	MC package identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.5. Method “Obtain a List of Marking Code Package Identifiers”

This method is used to obtain a list of the marking code package identifiers issued previously from the marking code order that are necessary for repeated request for marking codes by calling a method “Re-obtain marking codes from marking code order” (See section 4.4.6).

The method uses the following parameters: OMS identifier and MC order identifier. Description on how to receive a security marker is provided in section 9.

4.4.5.1. Restrictions

A list of previously issued marking code package identifiers may be obtained only if the marking code suborder has not been closed and the first print request has been processed via API.

4.4.5.2. Request

Example of request is shown in Figure 63.

```
GET /api/v3/order/codes/blocks?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1&orderId=b024ae09-ef7c-449e-
b461-05d8eb116c79&gtin=04601234567898 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 63

REST request parameters can be found in Table 93.

Table 93 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/order/codes/blocks?omsId={omsId}&orderId={orderId}&gtin={gtin}

HTTP Header Parameters can be found in Table 94.

Table 94 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 95.

Table 95 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Marking code order identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
gtin	Goods code (GTIN). String value. minLength = 14 maxLength = 14 Template: [0-9]{14}	String (14) [0-9]{14}	Yes

4.4.5.3. Response to Request

Example of response is shown in Figure 64.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
X-RequestId: 1a59cc06-4371-4981-9e9e-019b435bfa72
Content-Length: 310

{
  "orderId": "b024ae09-ef7c-449e-b461-05d8eb116c79",
  "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
  "gtin": "01334567894339",
  "blocks": [
    {
      "blockId": "a024ae09-ef7c-449e-b461-05d8eb116c90",
      "blockDateTime": 1573986891,
      "quantity": 100
    },
    {
      "blockId": "a024ae09-ef7c-449e-b461-05d8eb116c93",
      "blockDateTime": 1573986910,
      "quantity": 100
    }
  ]
}
```

Response Example

Figure 64

Upon successful request completion, the server returns HTTP code 200, a list of marking code package identifiers. For a format of the response to request for the list of the marking code package identifiers for the specified order of marking and goods codes, see Table 96. For error codes, see subsection **6.2**.

Table 96 – Format of Response to Request for a List of MC Packet Identifiers for the Marking and Goods Code Order Specified

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Marking code order identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
gtin	Goods code (GTIN) for which marking code package identifiers are requested. Template: [0-9]{14}	String (14) [0-9]{14}	Yes
blocks	List of marking code packages	Array of Block objects (JSON Array of Block)	Yes

Table 97 – Format of MC Packet List, “Block” Object

Field	Description	Type	Mandatory
blockId	Marking code package identifier sent within the request. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
blockDateTime	Date, time of marking code package creation. Format: UnixTime	Integer ($int64)	Yes
quantity	Quantity of marking codes in marking code package	Integer ($int32)	Yes

4.4.6. Method “Re-obtain marking codes from marking code order”

This method is used to re-obtain emitted MC array from the marking code order in case when marking codes were not obtained due to communications errors when interacting with the OMS.

The method uses the following parameters: OMS identifier, marking code package identifier. Description on how to receive a security marker is provided in section 9.

A list of previously issued marking code package identifiers is obtained by calling the method “Obtain a List of Marking Code Package Identifiers” (See section 4.4.5).

4.4.6.1. Restrictions

Marking codes can be repeatedly requested only if

1) they have been previously requested via API;

2) marking code order has not been closed;

3) the method of goods release into circulation or the group of FEACN codes for which the marking codes were issued was not closed and/or blocked. For example, the method of goods release into circulation, “REMAINS” (Marking of remaining items), is available only for a limited period and for certain groups of FEACN codes.

4.4.6.2. Request

Example of request is shown in Figure 65.

```
GET /api/v3/order/codes/retry?omsId=a024ae09-ef7c-449e-b461-05d8eb116c90&blockId=a024ae09-ef7c-449e-b461-05d8eb116c90 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 65

REST request parameters can be found in Table 98.

Table 98 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/order/codes/retry?omsId={omsId}&blockId={blockId}

HTTP Header Parameters can be found in Table 99.

Table 99 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 100.

Table 100 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
blockId	Code block identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.6.3. Response to Request

Example of response is shown in Figure 66.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 310

{
  "omsId": "bb179f1f-d6d5-4e09-8012-2a28648474e9",
  "codes": [
    "01046016530300462l=rxDV3M\u001d93VXQI"
  ],
  "blockId": "a024ae09-ef7c-449e-b461-05d8eb116c90"
}
```

Response Example

Figure 66

Upon successful request completion, the server returns HTTP code 200 and marking code package. A format of the response to request for re-obtainment of the MC for the goods specified can be found in Table 101. For error codes, see subsection **6.2**.

Table 101 – Format of Response to Request for Re-obtainment of MC for the Goods Specified

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
codes	Marking code package.	Strings array (JSON Array of Strings)	Yes
blockId	Marking code package identifier sent within the request. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.7. Method “Get Goods Attributes”

This method is used to receive a list of attributes for each goods item within MC emission order.

4.4.7.1. Request

Example of REST request is shown in Figure 67.

```
GET/api/v3/order/product?orderId=b024ae09-ef7c-449e-b461-05d8eb116c79&omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of REST Request

Figure 67

REST request parameters can be found in Table 102.

Table 102 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/order/product?omsId={omsId}&orderId={orderId}

HTTP Header Parameters can be found in Table 103.

Table 103 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Accept	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)

Request string parameters are given in Table 104.

Table 104 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Identifier of the MC emission order. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.7.2. Response

Example of the response in case when goods attributes were found, can be found in Figure 68.


```
{
  "03844473573770": {
    "fat": "2",
    "name": "Regress SUZ Молоко платность 3",
    "brand": "crpt",
    "fullName": "Regress SUZ Молоко платность 3",
    "rawOrigin": "КОЗА",
    "structure": "тестовый состав сыра",
    "tnVedCode": "0402",
    "packageType": "НЕ УКАЗАН",
    "tnVedCode10": "0402291500",
    "packMaterial": "НЕ УКАЗАН",
    "paymentGroup": 3,
    "productGroup": 8,
    "volumeWeight": "100 мл",
    "babyFoodProduct": "ДА (ОТ 3 ЛЕТ)",
    "milkProductType": "сыр",
    "isShelfLife40Days": "ДА",
    "veterinaryControl": "НЕТ",
    "isSpecializedFoodProduct": "ДА"
  },
  "03844473573772": {
    "fat": "2",
    "name": "Regress SUZ Молоко платность 3",
    "brand": "crpt",
    "fullName": "Regress SUZ Молоко платность 3",
    "rawOrigin": "КОЗА",
    "structure": "тестовый состав сыра",
    "tnVedCode": "0402",
    "packageType": "НЕ УКАЗАН",
    "tnVedCode10": "0402291500",
    "packMaterial": "НЕ УКАЗАН",
    "paymentGroup": 3,
    "productGroup": 8,
    "volumeWeight": "100 мл",
    "babyFoodProduct": "ДА (ОТ 3 ЛЕТ)",
    "milkProductType": "сыр",
    "isShelfLife40Days": "ДА",
    "veterinaryControl": "НЕТ",
    "isSpecializedFoodProduct": "ДА"
  }
}
```


Example of response in case when goods attributes were found

Figure 68

Upon successful completion of the request, the server returns HTTP code 200 and a list of goods attributes. A structure of the response to request is given in Table 105. For error codes, see subsection **6.2**.

Table 105 – Format of Response to Request

Field	Description	Type	Mandatory
-	Requested goods attributes. It returns as a dictionary, where a key is a goods code (gtin) and a value is an object containing a dictionary, in which the key is an attribute name and a value is an attribute value. Note: attributes may vary for different goods. If attributes of the goods have not been found, an empty object will return	JSON objects	Yes

4.4.8. Method “Close MC order/suborder”

This method is used to close order by using the following parameters: security marker (token), OMS identifier, order identifier. Description on how to receive a security marker is provided in section 9.

4.4.8.1. Request

Example of REST request is shown in Figure 69.

```
POST /api/v3/order/close?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1  HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
   "orderId":"b024ae09-ef7c-449e-b461-05d8eb116c79"
}
```

Example of REST Request

Figure 69

REST request parameters can be found in Table 106.

Table 106 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/order/close?omsId={omsId}

HTTP Header Parameters can be found in Table 107.

Table 107 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes
Content-type	application/json	Yes
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except “Medicines for medical use”	No (conditionally mandatory)

Request string parameters are given in Table 108.

Table 108 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

A description of the JSON format of the request for closing the order can be found in Table 109.

Table 109 – Description of JSON format of the request for closing the order, "Order" object, message body (HTTP Body)

Field	Description	Type	Mandatory
orderId	Identifier of the order for MC emission in the OMS. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
gtin	Goods code (GTIN) by which MC issue must be stopped. Goods code (GTIN) is required only if the suborder is closed. If it is missing in the request parameters, all suborders of the current order will be closed.	String (14) [0-9]{14}	No

4.4.8.2. Response to Request

Example of JSON response is shown in Figure 70.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Content-Length: 19
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"cdf12109-10d3-11e6-8b6f-0050569977a1"
}
```

Example of JSON Response

Figure 70

Upon successful request completion, the server returns HTTP code -200 and unique identifier in the OMS. For a structure of the response to request to close the suborder, see Table 110. For error codes, see subsection **6.2**.

Table 110 – Format of Response to Request to Close Suborder by GTIN Specified

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.9. Method “Send Report on MC Disposal / Rejection”

This method is used to send report on MC disposal / rejection to OMS. Description on how to receive the security marker is provided in section 9

Note: currently, this method is available for the following goods groups:

- "Tobacco Products”.
- “Dairy products”. A structure of the request sent for the dairy products shall contain the “DropoutReport” basic object without attributes in the “attributes” parameter for the goods group.
- “Packaged water”. A structure of the request sent for the packaged water shall contain the “DropoutReport” basic object without attributes in the “attributes” parameter for the goods group.
- “Beer, beer-based and low-alcohol beverages”. A structure of the request sent for this goods group shall contain “DropoutReport” basic object without attributes in the “attributes” parameter for the goods group.
- “Nicotine products”.
- “Specialized food products and biologically active food additives”. A structure of the request sent for specialized food products and biologically active food additives shall contain the “DropoutReport” basic object without attributes in the “attributes” parameter for the goods group.
- “Antiseptic/antibacterial skin cleansers and hand sanitizers”. A structure of the request sent for antiseptic/antibacterial skin cleansers and hand sanitizers shall contain the “DropoutReport” basic object without attributes in the “attributes” parameter for the goods group.
- “Alternative tobacco products”.

4.4.9.1. Request

Examples of the REST-request containing a DropoutReport base object and no attributes in the “attributes” parameter can be found in Figure 71 (for “Dairy Products”), Figure 72 (for “Packed water”), Figure 73 (for “Beer, beer-based and low-alcohol beverages” goods group), Figure 74 (for “Specialized food products and biologically active food additives” goods group) and Figure 75 (for “Antiseptic/antibacterial skin cleansers and hand sanitizers”).

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"milk",
  "dropoutReason":"DEFECT",
  "sntins":["0104008638435016215JDYQZ\u001D93dGVz", "0104008638435016215sm8zf\u001D93dGVz"]
}
```

Example of REST request for Dairy Products

Figure 71

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"water",
  "dropoutReason":"DEFECT",
  "sntins":["0104606791012510215BcD/GmaGIs3x\u001D93aABb",
            "0104606791012510215bcdHywb*B!n+\u001D93tTBb"]
}
```

Example of REST request for Packed water products

Figure 72

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"beer",
  "dropoutReason":"DEFECT",
  "sntins":["0104606791012510215BcD/GmaGIs3x\u001D93aABb",
            "0104606791012510215bcdHywb*B!n+\u001D93tTBb"]
}
```

Example of REST request for manufacturers of beer, beer-based and low-alcohol beverages

Figure 73

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"bio",
  "dropoutReason":"DEFECT",
  "sntins":["01040086384350162152 3er45635241\u001D93dGVz",
"01040086384350162 15sdretw546374\u001D93dGVz"]
}
```

Example of REST request for specialized food products and biologically active food additives

Figure 74

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"antiseptic",
  "dropoutReason":"DEFECT",
  "sntins":["01046086384350162152 3er45635qwe\u001D93dGVz",
"01046086384350162 15sdretw5463ii\u001D93dGVz"]
}
```

Example of REST request for antiseptic/antibacterial skin cleansers and hand sanitizers

Figure 75

Structure of JSON-request used to send report on MC disposal / rejection to OMS.

For REST Request Parameters, see Table 111

Table 111 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/dropout?omsId={omsId}

HTTP Header Parameters can be found in Table 112.

Table 112 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes

Parameter	Value	Mandatory
Accept	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except “Medicines for Human Use”	No (conditionally mandatory)

For request string parameters, see Table 113.

Table 113 – Request String Parameters (Query string parameters)

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

For description of the structure of “DropoutReport” object for sending a report on MC disposal / rejection to OMS, see Table 114.

Table 114 – “DropoutReport” Object Structure, message body (HTTP Body)

Field	Description	Type	Mandatory
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String (See subsection 5.3.1.16)	Yes
dropoutReason	Dropout reason. Allowed values are specified in the	String (See subsection 5.3.1.9)	Yes

	guide “Dropout reason” (See subsection 5.3.1.9)		
sntins	Array of dropped out MCs - full marking codes (including verification code)	JSON (Array of String)	Yes

attributes	A dictionary consisting of key/value pairs where each key is a unique identifier within the dictionary.
	Example:
	"attributes": {
	"attribute1": "value1",
	"attribute2": "value2"
	}
	A list of allowed attributes for a specific goods group can be found in the corresponding subsections of the section.
		Dictionary (Json Object)	No (Conditionally mandatory)

Notes.

1)The quantity of MC per report on disposal shall not exceed 30,000 codes.

2) For “Tobacco products”, “Alternative tobacco products” and “Nicotine products” GGs, it is permissible to indicate the shipping containers and group packings in the array of disposed MC with indication of the attribute for writing-off of all contained elements

3) An array of disposed MCs of consumer and group packages for the “Tobacco products”, “Alternative tobacco products” and “Nicotine products” GGs shall contain an identification code (GTIN + Serial).

4.4.9.1.1 List of Attributes for “Tobacco products” Goods Group

Example of the REST request for tobacco industry is shown in Figure 76.

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"tobacco",
  "dropoutReason":"DEFECT",
  "sntins":[ "SNTIN1", "SNTIN2" ],
  "attributes": {
    "sourceDocNum":"12345",
    "sourceDocDate":"2018-05-01",
    "address":"198206 г Санкт-Петербург ш Петергофское, 71 ",
    "withChild": false,
```

```
    "participantId": "3543033591",
    "productionOrderId":"123",
    "productionLineId":"7098"
  }
}
```

Example of REST Request for Tobacco Industry

Figure 76

Description of the “attributes” parameter of the “DropoutReport” object for the tobacco industry can be found in Table 115.

Table 115 – Description of “attributes” Parameter for “DropoutReport” Object for Tobacco Industry

Field	Description	Type	Mandatory
sourceDocDate	Document date Date format: yyyy-MM-dd	String (yyyy-MM-dd)	No
sourceDocNum	Identifier of document on which the writing-off is based	String (1-128)	No
address	Address of writing-off	String (2-256)	Yes
withChild	Attribute for writing-off of all contained elements.	Boolean (Default value=false)	Yes
participantId	Tax identification number	String	Yes
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
productionLineId	Production line identifier	String (1-256)	No

Note: In case fields “sourceDocDate” and “sourceDocNum” are absent, OMS will fill them automatically with the following values:

1) sourceDocDate with current date in unixTime UTC:0, in milliseconds;
2) sourceDocNum with current date in unixTime UTC:0, in milliseconds;

4.4.9.1.2 List of Attributes for “Nicotine Products” Goods Group

Example of REST request (for nicotine products) is shown in Figure 77.

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup":"ncp",
  "dropoutReason":"DEFECT",
  "sntins":[ "SNTIN1", "SNTIN2" ],
  "attributes": {
    "sourceDocNum":"12345",
    "sourceDocDate":"2018-05-01",
    "address":"198206 г Санкт-Петербург ш Петергофское, 71 ",
    "withChild": false,
    "participantId": "3543033591",
    "productionOrderId":"123",
    "productionLineId":"7098"
  }
}
```

Example of REST request (for nicotine products)

Figure 77

Description of “attributes” parameter of “DropoutReport” object for nicotine products can be found in Table 116.

Table 116 – Description of “attributes” parameter of “DropoutReport” object for nicotine products

Field	Description	Type	Mandatory
sourceDocDate	Document date. Date format: yyyy-mm-dd	String (yyyy-mm-dd)	No
sourceDocNum	Identifier of the document on which the writing-off is based	String (1-128)	No
address	Address of writing-off	String (2-256)	Yes
withChild	Indicator for writing-off of all nested elements	Boolean (Default value=false)	Yes
participantId	Tax Identification Number	String	Yes
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
productionLineId	Production line identifier	String (1-256)	No

Note: If sourceDocDate and sourceDocNum fields are not filled in, the OMS will automatically fill them in with the following values:

1) sourceDocDate is the current date in unixTime UTC:0 in milliseconds;

2) sourceDocNum is the current date in unixTime UTC:0 in milliseconds.

4.4.9.1.3 List of Attributes for “Alternative Tobacco Products” Goods Group

Example of REST request (for alternative tobacco products) is shown in Figure 78.

```
POST /api/v3/dropout?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup":"otp",
  "dropoutReason":"DEFECT",
  "sntins":[ "SNTIN1", "SNTIN2" ],
  "attributes": {
    "sourceDocNum":"12345",
    "sourceDocDate":"2018-05-01",
    "address":"198206 г Санкт-Петербург ш Петергофское, 71 ",
    "withChild": false,
    "participantId": "3543033591",
    "productionOrderId":"123",
    "productionLineId":"7098"
  }
}
```

Example of REST request (for alternative tobacco products)

Figure 78

Description of “attributes” parameter of “DropoutReport” object for alternative tobacco products can be found in Table 117.

Table 117 – Description of “attributes” parameter of “DropoutReport” object for alternative tobacco products

Field	Description	Type	Mandatory
sourceDocDate	Document date	String (yyyy-mm-dd)	No
sourceDocNum	Identifier of the document on which the writing-off is based	String (1-128)	No
address	Address of writing-off	String (2-256)	Yes
withChild	Indicator for writing-off of all nested elements	Boolean (Default value=false)	Yes
participantId	Tax Identification Number	String	Yes
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
productionLineId	Production line identifier	String (1-256)	No

Notes:

1. If sourceDocDate and sourceDocNum fields are not filled in, the OMS will automatically fill them in with the following values:

— sourceDocDate - current date in unixTime UTC:0 in milliseconds.

— sourceDocNum - current date in unixTime UTC:0 in milliseconds.

4.4.9.2. Response to Request

For an example of JSON-response, see Figure 79.

```
HTTP/1.1 200 OK
Content-Length: 74
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"CDF12109-10D3-11E6-8B6F-0050569977A1",
  "reportId":"46795d19-5024-404e-9275-
  959ac89ccb57"
}
```

JSON-Response Example

Figure 79

Upon successful completion of request, the server returns HTTP code -200 and a unique identifier of report on MC disposal / rejection assigned by OMS. The obtained identifier of report on MC disposal / rejection is used to obtain report processing status (see cl. 4.4.13). For the structure of response to request to send information on MC disposal / rejection, see Table 118. For error codes, see subsection 6.2.

Table 118 – Format of Response to Request to Send Notification on MC Disposal / Rejection

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	Unique identifier of the report on MC dropout / rejection (OMS) String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.10. Method “Send Report on MC Aggregation”

This method is used to send report on MC aggregation to OMS and is used to aggregate into the sets, group and shipping packages. Within the report, MC are sent without verification code. In one document it is possible to form a maximum of 3 levels of aggregates, for example: UNIT-> GROUP, GROUP -> SET, SET -> SSCC. New aggregation documents with unitSerialNumber which were previously used for aggregation with three levels of nesting, will be processed with error. For the further aggregation of more than 3 levels of nesting it is recommended to use the "Aggregation” document in "True_API" of the TT GIS. Description on how to receive the security marker is provided in section 9

Note: currently, this method is available for the following goods groups:

- “Tobacco Products”
- “Dairy Products”
- “Alternative tobacco products”.
- “Packaged water”. A structure of the request sent for the packaged water shall contain the “AggregationReport” basic object without extensions for the goods group.
- “Beer, beer-based and low-alcohol beverages”. A structure of the request sent for beer-based beverages shall contain the “AggregationReport” basic object without extensions for the goods group.
- “Nicotine products”.
- “Specialized food products and biologically active food additives”. A structure of the request sent for specialized food products and biologically active food additives shall contain the “AggregationReport” basic object without extensions for the goods group.
- “Antiseptic/antibacterial skin cleansers and hand sanitizers”. A structure of the request sent for antiseptic/antibacterial skin cleansers and hand sanitizers shall contain the “AggregationReport” basic object without extensions for the goods group.
- “Medical products”. A structure of the request sent for medical products shall contain the “AggregationReport” basic object without extensions for the goods group.
- “Juice products and non-alcoholic beverages”. A structure of the request sent for medical products shall contain the “AggregationReport” basic object without extensions for the goods group;
- “Radio-electronic products”. A structure of the request sent for medical products shall contain the “AggregationReport” basic object without extensions for the goods group;
- “Optical fiber and fiber optic products”. A structure of the request sent for medical products shall contain the “AggregationReport” basic object without extensions for the goods group;

- “Veterinary medicines”. A structure of the request sent for medical products shall contain the “AggregationReport” basic object without extensions for the goods group.

4.4.10.1. Request

Example of the REST request which contains “AggregationReport” basic object without attributes in attributes parameter for the goods group, can be found in Figure 80.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json


{
  "productGroup": "bio",
  "participantId": "3543033591",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104650128986753215J8MqnkT4+pPq",
        "0104650128986753215pyhJRD>!oArj"
      ],
      "unitSerialNumber": "010000000111222333"
    }
  ]
}
```

Example of REST request for the “Specialized food products and biologically active food additives” goods group

Figure 80

Structure of JSON-request used to send report on MC aggregation to OMS.

For REST Request Parameters, see Table 119

Table 119 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/aggregation?omsId={omsId}

HTTP Header Parameters can be found in Table 120.

Table 120 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes
Accept	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except “Medicines for Human Use”	No (conditionally mandatory)

For request string parameters, see Table 121.

Table 121 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (UUID)	Yes

For the description of the “AggregationReport” object structure of request to send information on aggregation, see Table 122.

Table 122 – “AggregationReport” Object Structure, message body (HTTP Body)

Field	Description	Type	Mandatory
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes
participantId	Tax identification number	String	Yes

attributes	Dictionary consisting of key/value pairs where each key is a unique identifier within the dictionary.
	Example:
	"attributes": {
	"attribute1": "value1",
	"attribute2": "value2"
	}
	A list of allowed attributes for a specific goods group can be found in the corresponding subsections of the section.
		Dictionary (Json Object)	No (Conditionally mandatory)

aggregationUnits	Array of aggregation units	Array of objects (Array of AggregationUnit Table 123)	Yes

For the description of the “AggregationUnit" object structure, see Table 123.

Table 123 – Object “AggregationUnit” Structure

Field	Description	Type	Mandatory
aggregatedItemsCount	Actual quantity (in pcs) per aggregation unit (the value equal to the number of goods)	Integer ($int32)	Yes
aggregationType	Aggregation type. Allowed values of “AGGREGATION”	String	Yes
aggregationUnitCapacity	Packing unit capacity (the nominal value of the packing capacity of the unit)	Integer ($int32)	Yes
sntins	Array of aggregated identification codes or shipping packages	Array of strings (JSON Array of String)	Yes
unitSerialNumber	Identification code of aggregation unit. Application identifiers AI (00, 01, 21) of the goods code or shipping	String (18-74)	Yes

Field	Description	Type	Mandatory
	package should not be bracketed		

4.4.10.1.1 List of Attributes for “Tobacco products” Goods Group

Example of the REST request for tobacco industry is shown in Figure 81.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "tobacco",
  "participantId": "3543033591",
  "attributes": {
    "productionDate": "2021-10-13T17:50:02±0550",
    "brandcode": "Brandcode123",
    "productionOrderId": "123"
  },
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 10,
      "sntins": [
        "00000000666999QbUMR5M",
        "00000000666999r2Aw4Ge"
      ],
      "unitSerialNumber": "0100000000777999213l1SMYX"
    },
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 10,
      "sntins": [
        "00000000666988QbUMR5M",
        "00000000666988r2Aw4Ge"
      ],
      "unitSerialNumber": "0100000000777999213l1SMYT"
    }
  ]
}
```

Example of REST request for tobacco Industry

Figure 81

For the description of attributes parameter for “AggregationReport” object for tobacco industry, see Table 124.

Table 124 – Description of attributes Parameter for “AggregationReport” Object for Tobacco Industry

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String	No

Field	Description	Type	Mandatory
		(1-256)	(deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
productionDate	Date of production. Format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No
brandcode	Product brandname	String (1-256)	No

The following specific features shall be taken into account when generating an aggregation report for “Tobacco products” goods group:

1. “unitSerialNumber” (aggregation code) field.
This parameter may contain:

- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier),
- group package identification code (blocks);
- shipping package code of the format determined by the circulation participant (from 34 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

2. “sntins” (goods code) field.
This parameter may contain:

- identification code of consumer package and group package (see section 8.1);
- shipping package code of the format determined by the circulation participant (from 34 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. Nesting logic.

- The group package identification codes (blocks) and shipping package codes of the format determined by the goods circulation participant (from 34 to 74 characters long) may be aggregated in the SSCC shipping package.

- Consumer package identification codes (packs) may be aggregated in the group packing.
- The group package identification codes (blocks) and consumer package identification codes (packs) may be aggregated in the shipping packages of the format determined by the goods circulation participant (from 34 to 74 characters long).

4.4.10.1.2 List of Attributes for “Dairy products” Goods Group

For an example of REST-request for dairy manufacturers (fully filled aggregate), see Figure 82.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "milk",
  "participantId": "3543033591",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 4,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 4,
      "sntins": [
        "0104690228004056215l2tr5",
        "0104690228004056215l02mr9",
        "010469022800405621502mr9",
        "0104690228004056215h<eDd",
        "0104690228004056215l2ijg7"
      ],
      "unitSerialNumber": "010000000077799921"
    }
  ]
}
```

Example of REST Request for Dairy Manufacturers (Fully Filled Aggregate).

Figure 82

For an example of REST-request for dairy manufacturers (partially filled aggregate), see Figure 83.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "milk",
  "participantId": "3543033591",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 1,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 1,
      "sntins": [
        "0104601662000030215fhy64",
        "0104601662000030215w124e",
```

```
        "0104601662000030215hg876",
        "0104601662000030215io098"
      ],
      "unitSerialNumber": "010000000077799922"
    }
  ]
}
```


Example of REST Request for Dairy Manufacturers (Partially Filled Aggregate)

Figure 83

A structure of the report on MC aggregation for dairy manufacturers contains “AggregationReport” basic object without attributes in the “attributes” parameter for the goods group, but it has specific features. If the aggregate is filled partially, a value to be sent in “aggregationUnitCapacity” and “aggregatedItemsCount” fields is 1. Below are examples of REST requests for dairy manufacturers (if the aggregate is filled partially or completely).

Notes:

1. “unitSerialNumber” (aggregation code) field.
This field may contain:

- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
- shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).
- group package identification code.

2. “sntins” (goods code) field:
This field may contain:

- identification code of consumer, group package (see section 8.8);
- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
- shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

3. SSCC shipping packages, shipping packages of the format determined by a goods circulation participant (from 18 to 74 characters long), identification codes of consumer and group packages may be aggregated in the SSCC shipping package.

4. The identification codes of consumer, group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a circulation participant (from 18 to 74 characters long).

5. Consumer package identification codes may be aggregated into the group package.

4.4.10.1.3 List of Attributes for “Alternative Tobacco Products” Goods Group

Example of the REST-request for alternative tobacco products can be found in Figure 84.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "otp",
  "participantId": "3543033591",
  "attributes": {
    "productionDate": "2021-10-13T17:50:02±0550",
    "brandcode": "Brandcode123",
    "productionOrderId": "1"
  },
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0100000046209849215nWNbqv",
        "0100000046209849215gBDbQs"
      ],
      "unitSerialNumber": "0100000046209849215DtRwbEs"
    }
  ]
}
```

Example of REST-request for alternative tobacco products

Figure 84

For a description of attributes parameter of “AggregationReport” object for alternative tobacco products, see Table 125.

Table 125 – Description of attributes Parameter for “AggregationReport” Object for Alternative Tobacco Products

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String (1-256)	No (deprecated)
productionOrderId	Production order identifier. Blank line or	String (1-256)	No

Field	Description	Type	Mandatory
	line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.		
productionDate	Date of production. Format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No
brandcode	Product brandname	String (1-256)	No

The following specific features shall be taken into account when generating an aggregation report for “Alternative tobacco products” goods group:

1. “unitSerialNumber” (aggregation code) field.
This parameter may contain:

- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier), shipping package code of the format determined by the goods circulation participant (code of more than 34 characters containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).
- group package identification code.

2. “sntins” (goods code) field.
This parameter may contain:

- identification code of consumer package and group package (see section 8.11);
- shipping package code of the format determined by the goods circulation participant (code of more than 34 characters containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).
- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

3. Nesting logic.

- The codes of SSCC shipping packages, codes of shipping packages of the format determined by the goods circulation participant (more than 34 characters), the identification codes of group and consumer packages may be aggregated in the SSCC shipping package.
- The codes of shipping packages of the format determined by the goods circulation participant (more than 34 characters), the identification codes of group and consumer packages may be aggregated in the shipping package of the format determined by the goods circulation participant (more than 34 characters).
- Consumer package identification codes may be aggregated in the group consumer packing.

4.4.10.1.4 List of Attributes for “Packaged water” Goods Group

Example of REST request (for manufacturers of packaged water) is shown in Figure 85

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "water",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104606791012510215T6c84e39gXjW",
        "010460679101251021 54ebssJPznnLg"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of REST request for the “Packaged water” goods group

Figure 85

A structure of the report on MC aggregation for manufacturers of packaged water contains “AggregationReport” basic object without attributes in “attributes” parameter for goods group. Aggregation for this goods group is created for:

- Group packages;
- Shipping packages.

The following specific features shall be taken into account when generating an aggregation report for “Packaged water” goods group:

1. “unitSerialNumber” (aggregation code) field.
This parameter may contain:

- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier);
- shipping package code of the format determined by the circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !);
- group package identification code.

2. “sntins” (goods code) field.
This parameter may contain:

- identification code of consumer and group package (see section 8.12);
- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier);
- shipping package code of the format determined by the circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

3. Nesting logic.

- The SSCC shipping packages, shipping packages of the format determined by the goods circulation participant (from 18 to 74 characters long), the identification codes of consumer and group packages may be aggregated in the SSCC shipping package.
- The identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by the participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by the goods circulation participant (from 18 to 74 characters long);
- Consumer package identification codes may be aggregated into the group package.

4.4.10.1.5 List of Attributes for “Beer, Beer-based and Low-alcohol beverages” Goods Group

Example of REST request for manufacturers of beer, beer-based and low-alcohol beverages can be found in Figure 86.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "beer",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "01046067910125102l5bcdHywb*B!n+",
        "01046067910125102l5bcdHywb*B!nH"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of REST request for “Beer, beer-based and low-alcohol beverages” goods group

Figure 86

A structure of the report on MC aggregation for manufacturers of beer, beer-based and low-alcohol beverages contains “AggregationReport” basic object without attributes in the “attributes” parameter for goods group, yet has specific features:

1. “unitSerialNumber” (aggregation code) field.
This field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

— Group package identification code (without verification code).

2. “sntins” (goods code) field.
This field may contain:

- identification code of consumer or group package (see section 8.13)
- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

3. The following may be aggregated in the SSCC shipping package:

— Codes of SSCC shipping packages.

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

— Identification codes of group and consumer packages.

4. The following may be aggregated into packages of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters):

— Shipping packages of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters) A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !.

— SSCC shipping packages.

— Identification codes of group and consumer packages.

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.6 List of Attributes for “Nicotine Products” Gooods Group

Example of REST request for nicotine products is shown in Figure 87.

```
POST /api/v3/aggregation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "ncp",
  "participantId": "3543033591",
  "attributes": {
    "productionDate": "2021-10-13T17:50:02±0550",
    "brandcode": "Brandcode123",
    "productionOrderId": "1"
  },
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "046656567897905qtg65iAAAA",
        "046656567897905I1?j7GAAAA"
      ],
      "unitSerialNumber": "010466565678979021aUt083h8005000000"
    }
```

```
  ]
}
```

Example of REST request for nicotine products

Figure 87

Description of “attributes” parameter of “AggregationReport” object for nicotine products can be found in Table 126.

Table 126 – Description of “attributes” parameter of “AggregationReport” object for nicotine products

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String (1-256)	No (deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
productionDate	Date of production. Format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No
brandcode	Product brandname	String (1-256)	No

The following specific features shall be taken into account when generating an aggregation report for “Nicotine products” goods group:

1. “unitSerialNumber” (aggregation code) field.
This parameter may contain:

- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier),
- identification code of the group package;
- shipping package code of the format determined by the goods circulation participant (from 34 to 74 characters long), containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

2. “sntins” (goods code) field.
This parameter may contain:

- identification code of consumer package, group package (see section 8.14);
- shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier);
- shipping package code of the format determined by the goods circulation participant (from 34 to 74 characters long), containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. Nesting logic

- The codes of SSCC shipping package, identification codes of group and consumer packages or shipping package codes of the format determined by the goods circulation participant (from 34 to 74 characters long) may be aggregated in the SSCC shipping package.
- Consumer package identification codes may be aggregated into the group package.
- The identification codes of group and consumer packages or shipping package codes of the format determined by the goods circulation participant (from 34 to 74 characters long) may be aggregated in the shipping packages of the format determined by the goods circulation participant (from 34 to 74 characters long).
- When aggregating identification codes emitted by templateId=21 and templateId=22 templates, IC in “sntins” (goods code) and “unitSerialNumber” (aggregate code) parameters must contain a maximum retail sale price according to the goods group template (a special divider ASCII 29 between a serial number and a maximum retail sale price shall be excluded for identification codes emitted by templateId=21).

4.4.10.1.7 List of Attributes for “Specialized Food Products and Biologically Active Food Additives” Goods Group

An example of the REST request for manufacturers of specialized food products and biologically active food additives can be found in Figure 88.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}

{
  "productGroup": "bio",
  "participantId": "1233033692",
  "aggregationUnits": [
```

```
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104606791012510215bcdHywb*B!n+",
        "0104606791012510215bcdHywb*B!nH"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```


REST request example for “Specialized food products and biologically active food additives” goods group

Figure 88

A structure of the report on MC aggregation for manufacturers of specialized food products and biologically active food additives contains the “AggregationReport” basic object without attributes in “attributes” parameter for goods group, but with specific features.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Group package identification code.

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

2. “sntins” (goods code) field may contain:

— Identification code of consumer package, group package (see subsection 8.15).

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

3. The SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), identification codes of consumer, group packages and sets may be aggregated in the SSCC shipping package.

4. The identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a circulation participant (from 18 to 74 characters long);

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.8 List of Attributes for “Antiseptic/Antibacterial Skin Cleansers And Hand Sanitizers” Goods Group

Example of REST request for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers is shown in Figure 89.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "antiseptic",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104606791012510215bcdHywb*B!n+",
        "0104606791012510215bcdHywb*B!nH"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of REST request for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers

Figure 89

A structure of the report on MC aggregation for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers contains “AggregationReport” basic object without attributes in the “attributes” parameter for the goods group, yet has specific features.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Group package identification code.

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

2. “sntins” (goods code) field may contain:

— Identification code of consumer package, group package (see subsection 8.16).

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

3. The SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), identification codes of consumer, group packages and sets may be aggregated in the SSCC shipping package.

4. The identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a circulation participant (from 18 to 74 characters long);

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.9 List of Attributes for “Medical products” goods group

Example of the REST request for manufacturers of the medical products can be found in Figure 90.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "wheelchairs",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104650117240163215000000005NgF",
        "0104650117240163215000NNN0005NgF"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of the REST request for the “Medical products” goods group

Figure 90

A structure of the MC aggregation report for manufacturers of the medical products contains the “AggregationReport” basic object without extensions for the goods group. Aggregation for this goods group is created for group and shipping packages.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

— Group package identification code.

2. “sntins” (goods code) field may contain:

— Identification code of consumer or group package (see subsection 8.10).

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. The SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), the identification codes of consumer and group packages may be aggregated in the SSCC shipping package.

4. The identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by the participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a goods circulation participant (from 18 to 74 characters long);

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.10 List of Attributes for “Juice products and non-alcoholic beverages” Goods Group

Example of the REST request for manufacturers of juice products and non-alcoholic beverages is shown in Figure 91.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "softdrinks",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0100000046209849215nnnnnnnWNbqv",
        "0100000046209849215nnnnnnnWNbqv"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of the REST request for the “Juice products and non-alcoholic beverages” goods group

Figure 91

A structure of the MC aggregation report for manufacturers of juice products and non-alcoholic beverages contains the “AggregationReport” basic object without extensions for the goods group. Aggregation for this goods group is created for group and shipping packages.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).
— Group package identification code.

2. “sntins” (goods code) field may contain:

— Identification code of consumer or group package (see subsection 8.18).
— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
— Shipping package code of the format determined by the circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. The SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), the identification codes of consumer and group packages may be aggregated in the SSCC shipping package.
4. The identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a circulation participant (from 18 to 74 characters long).
5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.11 List of Attributes for “Radio-electronic products” Goods Group

An example of the REST request for manufacturers of radio-electronic products is shown in Figure 92.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "radio",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104008638435016215NNNNNNNNNNNNNNNNNNN",
        "0104008638435016215MMMMMMMMMMMMMMMMMM"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of the REST request for the “Radio-electronic products” goods group

Figure 92

A structure of the MC aggregation report for manufacturers of the radio-electronic products contains the “AggregationReport” basic object without extensions for the goods group. Aggregation for this goods group is created for group and shipping packages.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

— Group package identification code.

2. “sntins” (goods code) field may contain:

— Identification code of consumer or group package (see subsection 8.18).

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), the identification codes of consumer and group packages may be aggregated in the SSCC shipping package.

4. Identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by the goods circulation participant (from 18 to 74 characters long);

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.12 List of Attributes for “Optical fiber and fiber optic products” Goods Group

Example of the REST request for manufacturers of fiber optic products is shown in Figure 93.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "opticfiber",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104008638435016215NNNNNNNNNNN",
        "0104008638435016215MMMMMMMMMMM"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of the REST request for the “Optical fiber and fiber optic products” goods group

Figure 93

A structure of the MC aggregation report for manufacturers of the fiber optic products contains “AggregationReport” basic object without extensions for the goods group. Aggregation for this goods group is created for group and shipping packages.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).
— Group package identification code.

2. “sntins” (goods code) field may contain:

— Identification code of consumer or group package (see subsection 8.18).
— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).
— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : . < = > ? !).

3. SSCC shipping packages, shipping packages of the format determined by a goods circulation participant (from 18 to 74 characters long), the identification codes of consumer and group packages may be aggregated in the SSCC shipping package.
4. Identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by the goods circulation participant (from 18 to 74 characters long).
5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.1.13 List of Attributes for “Veterinary medicines” Goods Group

Example of the REST request for manufacturers of veterinary medicines is shown in Figure 94.

```
POST /api/v3/aggregation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "vetpharma",
  "participantId": "1233033692",
  "aggregationUnits": [
    {
      "aggregatedItemsCount": 2,
      "aggregationType": "AGGREGATION",
      "aggregationUnitCapacity": 2,
      "sntins": [
        "0104008638435016215NNNNNNNNNNN",
        "0104008638435016215MMMMMMMMMMM"
      ],
      "unitSerialNumber": "099900000111222333"
    }
  ]
}
```

Example of the REST request for the “Veterinary medicines” goods group

Figure 94

A structure of the MC aggregation report for manufacturers of veterinary medicines contains the “AggregationReport” basic object without extensions for the goods group. Aggregation for this goods group is created for group and shipping packages.

Notes:

1. “unitSerialNumber” (aggregate code) field may contain:

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

— Group package identification code.

2. “sntins” (goods code) field may contain:

— Identification code of consumer or group package (see subsection 8.28).

— Shipping package code (SSCC - length of 20 numeric symbols with GS1 AI 00 application identifier).

— Shipping package code of the format determined by a circulation participant (from 18 to 74 characters long containing digits and letters of the Latin alphabet, as well as special characters A-Z a-z 0-9 % & ' " ( ) * + , - _ . / : ; < = > ? !).

3. SSCC shipping packages, shipping packages of the format determined by a circulation participant (from 18 to 74 characters long), identification codes of consumer and group packages may be aggregated in the SSCC shipping package.

4. Identification codes of consumer and group packages, the SSCC shipping packages, shipping packages of the format determined by a participant (from 18 to 74 characters long) may be aggregated in the shipping packages of the format determined by a circulation participant (from 18 to 74 characters long).

5. Identification codes of the consumer packages, marking codes ordered for one goods code (GTIN) may be aggregated into the group package.

4.4.10.2. Response to Request

Example of JSON response can be found in Figure 95.

```
HTTP/1.1 200 OK
Content-Length: 74
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"CDF12109-10D3-11E6-8B6F-0050569977A1",
  "reportId":"fab1c0e4-9590-4ed7-8d58-18862d6a9aab"
}
```

JSON Response Example

Figure 95

Upon successful completion of request, the server returns HTTP code -200 and a unique identifier of report assigned by OMS. The obtained identifier of report on MC aggregation is used to obtain report processing status (see cl. 4.4.13). For the structure of response to request to send information on aggregation, see Table 127. For error codes, see subsection 6.2.

Table 127 – Format of Response to Request to Send Information on Aggregation

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

Field	Description	Type	Mandatory
reportId	Unique identifier of the OMS report. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.11. Method “Send Report on MC Utilization (Application)”

This method is used to send a report on MC utilization to the OMS. Description on how to receive the security marker is provided in section 9.

Notes:

1. This method is currently available to the participants for the following goods groups:

— “Tobacco products”;

— “Dairy products”;

— “Medicines for human use”;

— “Alternative tobacco products”;

— “Packaged water”;

— “Beer, beer-based and low-alcohol beverages”;

— “Nicotine products”;

— “Specialized food products and biologically active food additives”;

— “Antiseptic/antibacterial skin cleansers and hand sanitizers”;

— “Non-alcoholic beer”;

— “Medical products”;

— “Juice products and non-alcoholic beverages”;

— “Seafood”;

— “Pet foods”;

— “Games and toys for children”;

— “Titanium metal products”;

— “Radio-electronic products”;

— “Optical fiber and fiber optic products”;

— “Vegetable oils”;

— “Cosmetics, household chemicals, and personal hygiene products”;

— “Canned foods”;

— “Veterinary medicines”;

— “Bicycles and bicycle frames”;

— “Building materials”;

— “Fire safety and firefighting equipment”;

— “Printed goods”;

— “Heaters”;

— “Groceries”;

— “Cabling and wiring products”;

— “Engine oils”;

— “Polymer pipes”;

— “Confectionery products”;

— “Auto parts and components for vehicles”;

— “Radio-electronic products. Electronic nicotine delivery systems”;

— “Radio-electronic products. Laptops and smartphones”;

— “Meat products”;

— “Feed additives”;

— “Home and kitchen goods”;

— “Industrial equipment”;

— “Fertilizers in consumer packaging”;

— “Semi-finished and frozen food products”;

— “Real fur”;

— “Pyrotechnic articles”.

2. The report is generated automatically for the following goods groups:

— “Light industry”

— “Footwear”

— “Perfume and eau de toilette”

— “New pneumatic rubber tires and tire casings”

— “Photo cameras (except cine cameras), flash lights and flash bulbs”

Following the results of sending of the report on the MC utilization to the OMS, it is necessary to receive the report processing status (by using Method “Obtain the Report Processing Status”). After having received the response, it is possible to use the “Receive receipt by unique document identifier” method (see section 4.4.18 to receive a receipt).

4.4.11.1. Request

Example of the REST request which contains “UtilisationReport” basic object without attributes in the “attributes” parameter for the goods group (on the example of the “Games and toys for children” goods group), can be found in Figure 96.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "toys",
  "sntins": [
    "0104604060002439215CQ9F6alYHJNc\u001d91FFD0\u001d92dGVzdLxK0Uy5CjmimCobix8MKu5C/EIMLSbpUoU0h2k=",
    "0104604060002439215nQXgxFY1VC8A\u001d91FFD0\u001d92dGVzdA+KZOgQ6TEX2miRwNAilbvzimN9Wc0NFcj4EaU="
  ]
}
```

Example of the REST request which contains “UtilisationReport” basic object without attributes in the “attributes” parameter for the goods group (on the example of the “Games and toys for children” goods group)

Figure 96

A structure of JSON-request used to send a report on MC utilization to OMS.

For REST request parameters, see Table 128.

Table 128 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/utilisation?omsId={omsId}

HTTP Header Parameters can be found in Table 129.

Table 129 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes
Accept	application/json	Yes

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except “Medicines for Human Use”	No (conditionally mandatory)

For request string parameters, see Table 130.

Table 130 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

A description of the structure of “UtilisationReport” object used to send a report on MC utilization to OMS can be found in Table 131.

Notes:

1) In parameters “sntins”, the sent marking codes shall include the full marking code with verification code because this report is sent to emission registrar where marking code is verified. The quantity of MC per report on utilization shall not exceed 30,000 codes.

2) For the “Dairy products” goods group, the actual weight of the product unit may also be transferred in the marking code structure (templateId=20) (for more details, see section 4.4.11.1.3).

3) For the “Beer, beer-based and low-alcohol beverages” goods group, the actual volume of the products may also be transferred (templateId=18) (for more details, see section 4.4.11.1.7).

4) For the “Non-alcoholic beer” goods group, the actual volume of the products may also be transferred (templateId=28) (for more details, see section 4.4.11.1.9).

5) For the “Seafood” goods group, the actual weight of the product unit may also be transferred in the marking code structure (templateId=27 and templateId=38) (for more details, see section 4.4.11.1.13).

6) For the “Pet foods” goods group, the actual weight of the product unit may also be transferred in the marking code structure (templateId=26 and templateId=41) (for more details, see section 4.4.11.1.17).

7) For the “Medical products” goods group, a factory serial number of products may also be transferred (templateId=12) (for more details, see section 4.4.11.1.10);

8) For the “Radio-electronic products” goods group, one of the variable characteristics may also be transferred (templateId=36, templateId=37) (for more details, see section 4.4.11.1.15).

9) For the “Meat products” goods group, the actual weight of the product unit may also be transferred in the marking code structure (templateId=32 and templateId=74) (for more details, see section 4.4.11.1.36).

10) For the “Semi-finished and frozen food products” goods group, the actual weight of the product unit may also be transferred in the marking code structure (templateId=83 and templateId=84) (for more details, see section 4.4.11.1.41).

Table 131 – “UtilisationReport” Object Structure, message body (HTTP Body)

Field	Description	Type	Mandatory
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes

Field	Description	Type	Mandatory
utilisationType	A type of the application report Valid values: UTILISATION – the application report; RESORT - the application report for a misgrading operation; SPLITMARK – the MCs application report for an operation of marking of goods from the composition of disaggregated set; DIVISIONMARK – the application report for the goods separation operation; REMARK – the application report for the remarking operation. Default value: UTILISATION	String	No (Conditionally mandatory)
sntins	Array of strings (full marking code, including a verification code)	String array (JSON Array of String)	Yes

attributes	A dictionary consisting of key/value pairs where each key is a unique identifier within the dictionary.
	Example:
	"attributes": {
	"attribute1": "value1",
	"attribute2": "value2"
	}
	A list of allowed attributes for a specific goods group can be found in the corresponding subsections of the section.
		Dictionary
		(Json Object)
			No
			(Conditionally mandatory)

Note: the “utilisationType” attribute is mandatory if you send an application report:

— for the “RESORT” misgrading operation for the “Beer, beer-based and low-alcohol beverages” goods group;

— for the operation of marking of goods from the composition of disaggregated set “SPLITMARK” for the “Cosmetics, household chemicals, and personal hygiene products”, “Radio-electronic products” and “Games and toys for children” goods groups;

— for the “DIVISIONMARK” goods separation operation for the “Radio-electronic products” goods group;

— for the “REMARK” remarking operation for the “Cosmetics, household chemicals, and personal hygiene products” goods group starting August 27, 2026.

4.4.11.1.1 List of Attributes for “Tobacco products” Goods Group

Example of REST request for tobacco industry can be found in Figure 97.

```
POST /api/v3/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "tobacco",
  "sntins": [
    "0123859334576487215Lo/hON\u001d8005123456\u001d93dGVz",
    "0123859334576487215wJTxjr\u001d8005123456\u001d93dGVz"
  ],
  "attributes": {
    "productionOrderId": "123",
    "productionDate": "2021-10-13T17:50:02±0550",
    "brandcode": "2212Brandcode",
    "kpp":"123456789",
    "sourceReportId": "8ed74f90-0119-48f2-b289-379707934e2f"
  }
}
```

Example of REST Request for Tobacco Industry

Figure 97

For description of “attributes” parameter for “UtilisationReport” object for tobacco industry, see Table 132.

Table 132 – Description of attributes Parameter for “UtilisationReport” Object for Tobacco Industry

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces	String (1-256)	No

Field	Description	Type	Mandatory
	only cannot be specified as a value. Non-printable special characters cannot be specified as well.		
brandcode	Product brandname	String (1-256)	No
sourceReportId	Identifier of report on application to APCS	String (36)	No
productionDate	Production date. The date shall be specified with taking into account the time zone. Date specified in accordance with GOST ISO 8601–2001 Date format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No Conditionally mandatory See the note below
kpp	Code of reason for the registration of the business place. It is filled for a legal entity only. It must be ignored for a physical entity.	String (1-9)	No Conditionally mandatory See the note below
fiasId	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS). It is filled for a physical entity only. It must be ignored for a legal entity.	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” may be used to receive information about business places or production sites (kpp and fiasId) for the “Tobacco products” goods group.
2. In the report on MC utilization (application), the production date must be specified in the “productionDate” attribute for units of goods. For group packages, the “productionDate” attribute may be unfilled. The report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.2 List of Attributes for “Medicines for Human Use” Goods Group

Example of the REST request for manufacturers of pharmaceutical industry with production in the territory of the Russian Federation can be found Figure 98.

```
POST /api/v3/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
Authorization: token 15544d88-dea7-4274-b7ac-0f1f2cc12c11
Content-Type: application/json


{
  "productGroup": "pharma",
  "sntins": [
    "0104604060002439215CQ9F6alYHJNc\u001d91FFD0\u001d92dGVzdLxK0Uy5CjmimCobix8MKu5C/EIMLSbpUoU0h2k=",
    "0104604060002439215nQXgxFY1VC8A\u001d91FFD0\u001d92dGVzdA+KZOgQ6TEX2miRwNAilbvzimN9Wc0NFcj4EaU="
  ],
  "attributes": {
    "expirationDate": "2023-10-13",
    "orderType": "2",
    "ownerId": "0c290e4a-aabb-40ae-8ef2-ce462561ce7f",
    "seriesNumber": "123",
    "subjectId": "00000000000397",
    "productionDate": "2021-10-13T17:50:02±0550"
  }
}
```

Example of REST Request (for Pharmaceutical Industry with Production in the Territory of the Russian Federation)

Figure 98

For examples of REST-request (for pharmaceutical industry with production outside the territory of the Russian Federation), see Figure 99.

```
/* In cases when medicines are marked in the customs control area*/ POST
/api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
Authorization: token 15544d88-dea7-4274-b7ac-0f1f2cc12c11
Content-Type: application/json


{
  "productGroup": "pharma",
  "sntins": [
    "0104604060002439215CQ9F6alYHJNc\u001d91FFD0\u001d92dGVzdLxK0Uy5CjmimCobix8MKu5C/EIMLSbpUoU0h2k=
",
    "0104604060002439215nQXgxFY1VC8A\u001d91FFD0\u001d92dGVzdA+KZOgQ6TEX2miRwNAilbvzimN9Wc0NFcj4EaU=
"
  ],
  "attributes": {
    "expirationDate": "2023-10-13",
    "seriesNumber": "123",
    "subjectId": "1c858e4m-uucb-77re-1te2-ce345231ce9m",
    "packingId": "0c456e4a-aacb-42ae-8ef2-ce462662ce8a",
    "customsReceiverId": "b2jy241f-a959-1a65-9d64-5dd1378bec83",
    "controlId": "a6fb141f-d958-4a95-8f57-7ff2319ceb95",
    "productionDate": "2021-10-13T17:50:02±0550"
  }
}

/* Excluding cases when medicines are marked in the customs control area*/ POST
/api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
Authorization: token 15544d88-dea7-4274-b7ac-0f1f2cc12c11
```

```
Content-Type: application/json


{
  "productGroup": "pharma",
  "sntins": [
    "0104604060002439215CQ9F6alYHJNc\u001d91FFD0\u001d92dGVzdLxK0Uy5CjmimCobix8MKu5C/EIMLSbpUoU0h2k=
",
    "0104604060002439215nQXgxFY1VC8A\u001d91FFD0\u001d92dGVzdA+KZOgQ6TEX2miRwNAilbvzimN9Wc0NFcj4EaU=
"
  ],
  "attributes": {
    "expirationDate": "2023-10-13",
    "seriesNumber": "123",
    "subjectId":  "1c858e4m-uucb-77re-1te2-ce345231ce9m",
    "packingId":  "0c456e4a-aacb-42ae-8ef2-ce462662ce8a",
    "productionDate": "2021-10-13T17:50:02±0550"
  }
}
```

Examples of REST Request (for Pharmaceutical Industry with Production Outside the Territory of the Russian Federation)

Figure 99

A description of the “attributes” parameter for “UtilisationReport” object for pharmaceutical industry can be found in Table 133.

Table 133 – Description of “attributes” Parameter for “UtilisationReport” Object for Pharamceutical Industry

Field	Description	Type	Mandatory
expirationDate	Expiration date Date format: yyyy-MM-dd	String (yyyy-MM-dd)	Yes
orderType	Order type	Integer (1 or 2)	No See the note below
ownerId	Owner identifier	String (36) (GUID)	No See the note below
seriesNumber	Production series number	String (1-20)	Yes
subjectId	Pharmaceutical entity (business place identifier)	String (14 or 36) [0-9]{14} or GUID	Yes See the note below
packingId	Identifier of manufacturer who performed packing / prepacking into secondary package (if none—into primary package)	String (36) (GUID)	No See the note below
controlId	Identifier of manufacturer who performs release quality control	String (36) (GUID)	No See the note below
productionDate	Date of production. It cannot be greater than the current date	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No

Field	Description	Type	Mandatory
	and time. Date format: yyyy-MM-ddTHH:mm:ss±hhmm		
customsReceiverId	Identifier of goods location in the customs control area	String (36) (GUID)	No See the note below

Note: Value `subjectId (value of subjectId):`

1) for medicines produced in the territory of the Russian Federation: 14-character business place identifier of party to circulation assigned upon the latter's registration of business place in MDLP FGIS;
2) for medicines produced outside the territory of the Russian Federation: 36-character number assigned to the marketing authorization holder (or representative office thereof) upon its registration in MDLP FGIS.

Attention!

1) For medicines produced in the territory of the Russian Federation:

– Field "orderType" is mandatory. This field shall contain a numerical value for manufacturing order type: (1) for in-house and (2) for contract manufacturing;

– When orderType=2 is indicated, the value of field "ownerId" shall indicate 36-character number assigned to the pharmaceutical entity which is the customer of contract manufacturing upon its registration in MDLP FGIS;

– Fields "packingId", "controlId" and "customsReceiverId" are left empty.

2) For medicines produced outside the territory of the Russian Federation:

– Field "packingId" is mandatory. It shall contain 36-character identifier assigned to foreign counterparties upon their registration in MDLP FGIS by the medicine marketing authorization holder (or by representative office thereof).

– Field "customsReceiverId" is non-mandatory. The field shall be filled in case the medicines are marked in the customs control area. It shall contain an MDLP FGIS 36-character identifier of goods location from the Registry of Places in the Customs-Controlled Area.

– Field "controlId" is non-mandatory.

Attribute "controlId" becomes mandatory upon filling in of "customReceiverId" field, i.e. the field shall be filled in if the medicines are marked in the customs control area.

The field “controlId” may be filled in for any medicines manufactured outside the Russian Federation even if the marking is performed beyond the customs control area (in this case the field shall be optional).

It shall contain a 36-character identifier assigned to foreign counterparties upon their registration in MDLP FGIS by the medicine marketing authorization holder (or by its representative office).

– Fields “orderType” and “ownerId” are left empty.

4.4.11.1.3 List of Attributes for “Dairy Products” Goods Group

Example of REST request for milk manufacturers without indicating actual weight of product unit in the MC structure can be found in Figure 100.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "milk",
  "sntins": [
    "0104008638435016215JDYQZ\u001d93dGVz",
    "0104008638435016215sm8zf\u001d93dGVz"
  ],
  "attributes": {
    "expDate": "2023-10-13",
    "usedInProduction": 0
  }
}
```

Example of REST request for milk manufacturers without indicating actual weight of product unit in the MC structure

Figure 100

Example of REST request for milk manufacturers with indicating actual weight of product unit in the MC structure can be found in Figure 101.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "milk",
  "sntins": [
    "0104008638435016215JDYQZ\u001d93dGVz\u001d3103012456",
    "0104008638435016215sm8zf\u001d93dGVz\u001d3103002350"
  ],
  "attributes": {
    "expDate": "2021-10-13",
    "usedInProduction": 0
  }
}
```

Example of REST request for milk manufacturers with indicating actual weight of product unit in the MC structure

Figure 101

Example of REST request for milk manufacturers with indicating shelf life and storage condition indexes can be found in Figure 102.

```
POST /api/v3/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "milk",
  "sntins": [
    "0104650128986936215398t5\u001D93dGVz",
    "0104650128986936215398t6\u001D93dGVz"
  ],
  "attributes": {
    "expDateConditions": {
      "1": "2021-10-15",
      "2": "2021-10-16",
      "3": "2021-10-17",
      "4": "2021-10-18"
    },
    "usedInProduction": 0
  }
}
```

Example of REST request for milk manufacturers with indication of shelf life and storage condition indexes

Figure 102

A description of the “attributes” parameter for “UtilisationReport” object for dairy manufacturers can be found in Table 134.

Table 134 – Description of “attributes” Parameter for “UtilisationReport” Object for Dairy Manufacturers

Field	Description	Type	Mandatory
expDate	Product expiration date (shelf life exceeding 72 hours). Format: yyyy-MM-dd	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expDate72	Product expiration date (shelf life under 72 hours). Format: yyyy-MM-ddTHH:mm	String (yyyy-MM-ddTHH:mm)	No Conditionally mandatory (conditionally mandatory) See the note below
expDateConditions	Product expiration date (shelf life exceeding 72 hours) with indication of storage condition index. A set of values of expiration dates shall be specified in this attribute. Each nesting of the set shall include storage condition index specified in the NCMG and expiration date (greater or equal to the current date) in a format of yyyy-MM-dd. Several expiration dates can be specified. Storage condition index in a set shall be unique within a value set.	Json Object	No Conditionally mandatory (conditionally mandatory) See the note below
usedInProduction	Indicator of MC use in production: 0 is default value; 1 means MC were used in production.	Integer ($int32)	No
productionDate	Production date. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Field	Description	Type	Mandatory
batchNumber	Lot number It must consist of three data groups: 1st group: a 14-digit product GTIN; 2nd group: a 6-character production date (YYMMDD); 3rd group: a 1-12-character serial number (internal lot number) that may contain Latin letters, digits, and special characters "/", ".", ",", "-"."	String (1-32)	No

Note.

1. In the report on MC utilization (application) a product expiration date must be specified for units of goods in the “expDate”, or “expDate72”, or “expDateConditions” attribute, and a production date must be specified for units of goods in the “productionDate” attribute. The “expDate”, or “expDate72”, or “expDateConditions”, and “productionDate” attributes shall not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.
2. When transferring a variable expiration date in the attribute “expDateConditions”, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will not be accepted.
3. In the report on MC utilization (application), the lot number must be specified in the “batchNumber” attribute starting November 1, 2026 for products with a shelf-life of more than 40 days and starting March 1, 2027 for products with a shelf-life of less than 40 days.
4. Starting November 1, 2026, for products with a shelf life of more than 40 days, and starting March 1, 2027, for products with a shelf life of less than 40 days, in the report on MC utilization (application), the lot number must be specified in the “batchNumber” attribute only for units of goods; specifying a lot number for sets and group packages is not permitted. The production date contained in the lot number (the “batchNumber” attribute) must match the production date specified in the “productionDate” attribute (if present).

Indication of actual weight in the marking code structure (templateId=20) in the application report

The actual weight of the unit of product can be indicated after mandatory data groups (after verification code with symbol ASCII 29) in the marking code structure by using application identifier AI = '3103'. In this way, the marking code structure (templateId=20) for the “Dairy products” goods group in the application report will be as follows:

Data group	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Good individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight (contains the weight in kilograms), optional attribute. Note: decimal point is assumed (but not specified) after three digits for fractional values.

Note:

1) one application report can contain marking codes with or without actual weight.
2) MCs with weight only for unit of goods (cisType = “UNIT”) may contain in the report on utilization (application) for the “Dairy products” goods group.

Example of the marking code (templateId=20) with actual weight can be found in Figure 103

```
0104640016748389215fp(IS\u001D93dGVz\u001D3103001324

(01)04640016748389 - Goods code
(21)5fp(IS\u001D - Individual serial number of the item with the country code at the beginning + symbol ASCII 29
(93)dGVz\u001D - Verification code + symbol ASCII 29
(3103)001324 - Actual weight (in this case 1 kg. 324 grams)
```

Example of the marking code (templateId=20) with the actual weight

Figure 103

4.4.11.1.4 List of Attributes for “Alternative Tobacco Products” Goods Group

Example of REST request for manufacturers of alternative tobacco products can be found in Figure 104.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "otp",
  "sntins": [
    "0104813612939608215Nt&?nN\u001d93dGVz",
    "0104813612939608215S6riG/\u001d93dGVz"
  ],
  "attributes": {
    "productionOrderId": "1",
    "brandcode": "Brandcode123",
    "kpp":"123456789",
    "sourceReportId": "8ed74f90-0119-48f2-b289-379707934e2f",
    "productionDate": "2021-10-13T17:50:02±0550"
  }
}
```

Example of REST-request (for manufacturers of alternative tobacco products)

Figure 104

For description of the “attributes” parameter for “UtilisationReport” object for manufacturers of alternative tobacco products, see Table 135.

Table 135 – Description of attributes parameter for “UtilisationReport” object for manufacturers of alternative tobacco products

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special characters cannot be specified as well.	String (1-256)	No
brandcode	Brand name	String (1-256)	No
sourceReportId	Identifier of report on APCS application	String(36)	No

Field	Description	Type	Mandatory
kpp	Code of reason for the registration of the business place. It is filled for a legal entity only. It must be ignored for a physical entity.	String (1-9)	No Conditionally mandatory See the note below
fiasId	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS). It is filled for a physical entity only. It must be ignored for a legal entity.	String (36) GUID	No Conditionally mandatory See the note below
productionDate	Date of production. A date is specified, taking into account a time zone. A date shall be specified in accordance with GOST ISO 8601–2001 Date format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” may be used to receive information about business places or production sites (kpp and fiasId) for the “Alternative tobacco products” goods group.
2. In the report on MC utilization (application), the production date must be specified in the “productionDate” attribute for units of goods. For group packages, the “productionDate” attribute may be unfilled. The report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.5 List of Attributes for “Packed Water” Goods Group

Example of REST request for manufacturers of packed water can be found in Figure 105.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "water",
  "sntins": [
    "0104008638435016215pe6n<HCVAEBL\u001d93dGVz",
    "0104008638435016215-iJEkLoM%FEf\u001d93dGVz"
  ],
  "attributes": {
    "usedInProduction": 1,
    "expirationDate": "2023-12-01"
  }
}
```

Example of REST-request (for manufacturers of “Packed water” products)

Figure 105

For description of “attributes” parameter of “UtilisationReport” object for manufacturers of packed water, see Table 136.

Table 136 – Description of attributes parameter for “UtilisationReport” object for manufacturers of packed water

Field	Description	Type	Mandatory
usedInProduction	Indication of MC usage at the production: 0 – value by default; 1 – MC were used at the production	Integer ($int32)	No
expirationDate	Expiration date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
productionDate	Production date. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date may be filled in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages. A report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.6 List of Attributes for “Nicotine Products” Goods Group

Example of REST request for nicotine products is shown in Figure 106.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "ncp",
  "sntins": [
    "0123859334576487215Lo/hON\u001d8005000000\u001d93dGVz",
    "0123859334576487215wJTxjr\u001d8005000000\u001d93dGVz"
  ],
  "attributes": {
    "productionOrderId": "123",
    "productionDate": "2021-10-13T17:50:02±0550",
    "brandcode": "2212Brandcode",
    "kpp":"123456789",
    "sourceReportId": "8ed74f90-0119-48f2-b289-379707934e2f"
  }
}
```

Example of REST request for nicotine products

Figure 106

Description of attributes parameter for “UtilisationReport” object for nicotine products can be found in Table 137.

Table 137 – Description of attributes parameter for “UtilisationReport” object for nicotine products

Field	Description	Type	Mandatory
productionLineId	Production line identifier	String (1-256)	No (consider as deprecated)
productionOrderId	Production order identifier. Blank line or line with spaces only cannot be specified as a value. Non-printable special	String (1-256)	No

Field	Description	Type	Mandatory
	characters cannot be specified as well.		
brandcode	Product brandname	String (1-256)	No
sourceReportId	Identifier of a report on APCS application	String (36)	No
productionDate	Date of production. Date is specified, taking into account the time zone. Date specified in accordance with GOST ISO 8601–2001 Date format: yyyy-MM-ddTHH:mm:ss±hhmm	String (yyyy-MM-ddTHH:mm:ss±hhmm)	No Conditionally mandatory See the note below
kpp	Code of reason for the registration of the business place. It is filled for a legal entity only. It must be ignored for a physical entity.	String (1-9)	No Conditionally mandatory See the note below
fiasId	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS). It is filled for a physical entity only. It must be ignored for a legal entity.	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” may be used to receive information about business places or production sites (kpp and fiasId) for the “Nicotine products” goods group.
2. In the report on MC utilization (application), the production date must be specified in the “productionDate” attribute for units of goods. For group packages, the “productionDate” attribute may be unfilled. The report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.7 List of Attributes for “Beer, Beer-based and Low-alcohol beverages” Goods Group

Example of REST request for manufacturers of beer, beer-based and low-alcohol

beverages can be found in Figure 107.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "beer",
  "sntins": [
    "0123859334576487215ew3212\u001d93dGVz",
    "0123859334576487215235egd\u001d93123w"
  ],
  "attributes": {
    "participantId": "1123456789",
    "kpp": "1234567898",
    "productionDate": "2021-10-13",
    "expirationDate": "2023-12-01",
    "fiasId": "8ed74f90-0119-48f2-b289-379707934e2f"
  }
}
```

Example of REST request for manufacturers of beer, beer-based and low-alcohol beverages

Figure 107

For the marking codes of the “Beer, beer-based and low-alcohol beverages” goods group (“templateId” = “18”) which are specified in sntins parameter, information on volume (actual volume, liters) can be transferred as well.

If information on a volume is not specified in the MC, the TT GIS can refuse an application report: indication of the actual volume is mandatory for a marking code for a goods code with “Keg” package characteristic.

An algorithm to indicate a volume in the MC is described below.

Example of the REST request for manufacturers of beer, beer-based beverages with indication of a volume with AI = '3351', AI = '3353’, AI = '3350' in the MC structure and the MC without volume can be found in Figure 108.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "beer",
  "sntins": [
    "0104640016748389215ffffff\u001D93dGVz\u001D3351001324",
    "0104640016748389215abffff\u001D93dGVz\u001D3353001584",
    "0104640016748389215gbfyff\u001D93dGVz\u001D3350000300",
    "0104640016748389215g4ffyf\u001D93dGVz"  ],
  "attributes": {
    "participantId": "1123456789",
    "kpp": "1234567898",
    "productionDate": "2021-10-13",
    "expirationDate": "2023-12-01",
    "fiasId": "8ed74f90-0119-48f2-b289-379707934e2f"
  }
}
```

Example of the REST request for manufacturers of beer, beer-based beverages with indication of a volume with AI = '3351'and AI = '3353’ in the MC structure

Figure 108

For the MCs specified in the example, a volume of the products will be 132,4 liters and 1,584 liters.

1. Example 1: A volume of 132,4 liters shall be written down as follows - AI 3351 001324;
2. Example 2: A volume of 1,584 liters shall be written down as follows - AI 3353 001584;
3. Example 3: A volume of 300 liters shall be written down as follows - AI 3350 000300.

A description of attributes parameter for “UtilisationReport” object for manufacturers of beer, beer-based and low-alcohol beverages can be found in Table 138.

Table 138 – Description of attributes parameter for “UtilisationReport” object for manufacturers of beer, beer-based and low-alcohol beverages

Field	Description	Type	Mandatory
participantId	Tax Identification Number (INN)	String	Yes
productionDate	Date of production. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
kpp	Code of reason for the registration of the business place. It is mandatory for legal entity only. It must be ignored for a physical entity.	String	No Conditionally mandatory See the note below
fiasId	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS). It is mandatory for physical entities only. It must be ignored for a legal entity.	String (36) GUID	No Conditionally mandatory See the note below
alcoholVolume	Actual content of ethyl alcohol. A value should correspond to the regular expression: ^([0-9]{1,2}|[0-9]{1,2}\.[0-9]{1})$	String	No Conditionally mandatory See the note below
documentNumber	Number of the primary accounting document, which proves that the goods have been produced	String (1-255)	No Conditionally mandatory See the note below
documentDate	Date of the primary accounting document	String (yyyy-MM-dd)	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (kpp and fiasId) for the “Beer, beer-based and low-alcohol beverages” goods group.
2. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes must not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.
3. A report on MC utilization (application) shall be submitted to the system not later than one calendar day from a day of manufacture of products.
4. The alcoholVolume parameter is mandatory for kegs, consumer packages, and group packages. Validation of this requirement is performed asynchronously. The processing result will be in a result receipt.
5. The documentNumber and documentDate parameters are mandatory for kegs, consumer packages, and group packages containing goods manufactured in the Russian Federation. Validation of these requirements is performed asynchronously. The processing result will be in a result receipt.

Indication of actual volume in the marking code structure

A volume can be specified in the MC structure after mandatory data groups (after a verification code with special divider having code 29 in ASCII character table) by using application identifier AI = '3350' or AI = '3351' or AI = '3352' or AI = '3353' or AI = '3354' or AI = '3355'. In this way, a marking code structure for the “Beer, beer-based and low-alcohol beverages” goods group (templateId=18) in the application report will be as follows:

Data group	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7 or 13	Symbol string	21	Good individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	335Y, where Y can have values from 0 to 5	Volume (contains volume in liters), optional attribute.

Notes:

1. One application report can contain marking codes with or without volume.

2. One report can contain MCs with volume which have different application identifiers: AI = '3350' or AI = '3351' or AI = '3352' or AI = '3353' or AI = '3354' or AI = '3355';

3. Y value (from 0 to 5) in AI application identifier indicates the number of decimal places in a value of the actual volume.

Example of the MC (templateId=18) with optional volume (with serial number of 7 characters) and application identifier AI = '3353' can be found in Figure 109.

```
0104640016748389215ffffff\u001D93dGVz\u001D3353001324

(01)04640016748389 - Goods code
(21)5ffffff\u001D - Individual serial number of the item with a country code at the beginning
+ symbol ASCII 29
(93)dGVz\u001D - Verification code + symbol ASCII 29
(3353)001324 - actual volume (in this case 1 l 324 ml)
```

Example of the MC (templateId=18) with optional volume (with serial number of 7 characters) and application identifier AI = '3353'

Figure 109

Marking codes uniqueness must be ensured by the marking code without taking into account the volume, otherwise the report will be rejected.

Example of non-unique marking codes in the application report for the “Beer, beer-based and low-alcohol beverages” goods group with different volumes can be found in Figure 110.

```
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000111
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000222
```

Example of non-unique marking codes with different volumes

Figure 110

Example of non-unique marking codes in the application report for the “Beer, beer-based and low-alcohol beverages” goods group (where there is a volume for one MC and there is no for another) can be found in Figure 111.

```
0104640002480019215AAAAAA\u001d93dGVz
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000222
```

Example of non-unique MCs with specified volume for one of the codes

Figure 111

Submission of the application report for a misgrading operation

An example of the REST request for manufacturers of beer, beer-based and low-alcohol beverages for a misgrading operation can be found in Figure 112.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "beer",
  "utilisationType": "RESORT",
  "sntins": [
    "0123859334576487215ew3212\u001d93dGVz\u001e0123859334576487215nm3212\u001d93dGVz",
    "0123859334576487215235egd\u001d93123w\u001e0123859334576487215ui3456\u001d93123w"
  ],
  "attributes": {
    "participantId": "1123456789",
    "kpp": "1234567898"
  }
}
```

Example of the REST request for manufacturers of beer, beer-based and low-alcohol beverages for a misgrading operation

Figure 112

Sending an application report for a misgrading operation utilisationType = RESORT is available for the goods group. To generate this type of the report, the following conditions shall be met:

1. The report shall contain the "participantId" mandatory attribute and "kpp" (for legal entities) or "fiasId" (for physical entities) conditionally mandatory attributes.

2. The report shall not contain the "productionDate", "expirationDate", "alcoholVolume", "documentNumber" and "documentDate" attributes.

3. The report shall contain unique marking codes. The marking codes in the "sntins" string array that correspond to the following format:

— A marking code shall contain the main code and misgrading code separated by ASCII code 30. The main marking code and misgrading marking code shall contain the full marking code, including a verification code, and shall conform to a goods group template;

— The main marking code and misgrading marking code shall have the same goods code;

— The marking code and misgrading marking code shall not contain information about volume of goods.

An example of the marking codes in the application report for a misgrading operation for the “Beer, beer-based and low-alcohol beverages” goods group can be found in Figure 113.

```
0104640002480019215AAAAAA\u001d93dGVz\u001e0104640002480019215NNNNNN\u001d93dGVz
```

Example of the marking codes for a misgrading operation

Figure 113

4.4.11.1.8 List of Attributes for “Specialized food products and biologically active food additives” Goods Group

An example of the REST request for manufacturers of specialized food products and biologically active food additives can be found in Figure 114.

```
POST /api/v3/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
   "productGroup": "bio",
  "sntins" : [ "0104650128986753215J8MqnkT4+pPq\u001D93dGVz",
"0104650128986753215pyhJRD>!oArj\u001D93dGVz"],
  "attributes": {
    "productionDate": "2021-10-13",
    "expirationDate":"2023-10-13"
  }
}
```

Example of REST request for manufacturers of specialized food products and biologically active food additives

Figure 114

The description of attributes parameter for “UtilisationReport” object for manufacturers of specialized food products and biologically active food additives can be found in Table 139.

Table 139 – Description of attributes Parameter for “UtilisationReport” Object for Manufacturers of Specialized Food Products and Biologically Active Food Additives

Field	Description	Type	Mandatory
productionDate	Production date. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
vetisGuid	ID of VetIS production site	String (36) (GUID)	No See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (vetisGuid) for the “Specialized food products and biologically active food additives” goods group.
2. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.
3. Identifier of VetIS production site (vetisGuid) that is formed by the veterinary information system must be specified in the report on utilization (application) of MCs (raw materials of GTIN of which are subject to traceability in VetIS). The exception is when a method of introduction into circulation is “Remarking”. In this case the “vetisGuid” attribute may be unfilled.

4.4.11.1.9 List of Attributes for “Non-alcoholic beer” Goods Group

Example of the REST request for manufacturers of non-alcoholic beer is shown in Figure 115.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "nabeer",
  "sntins": [
    "0104640016748389215ffffff\u001D93dGVz",
    "0104640016748389215abffff\u001D93dGVz"
  ],
  "attributes": {
    "productionDate": "2021-10-13",
    "expirationDate": "2023-12-01",
    "kpp": "123456789"
  }
}
```

Example of REST request for manufacturers of non-alcoholic beer

Figure 115

Information on volume (actual volume, liters) can be transferred as well in the marking codes (which are specified in the sntins parameter) of the “Non-alcoholic beer” goods group (templateId=28).

If information about volume is not specified in the MC, the TT GIS may reject an application report: indication of the actual volume is mandatory for a marking code for a goods code with the “Keg” package characteristic.

An algorithm to indicate a volume in the MC is described below.

Example of the REST request for manufacturers of non-alcoholic beer with indication of a volume with AI = '3351', AI = '3353' in the MC structure and a MC without volume can be found in Figure 116.

```
POST /api/v2/nabeer/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json


{
  "productGroup": "nabeer",
  "sntins": [
    "0104640016748389215ffffff\u001D93dGVz\u001D3351001324",
    "0104640016748389215abffff\u001D93dGVz\u001D3353001584"
  ],
  "attributes": {
    "productionDate": "2021-10-13",
    "expirationDate": "2023-12-01",
    "kpp": "123456789"
  }
}
```

Example of the REST request for manufacturers of non-alcoholic beer with indication of a volume with AI = '3351' and AI = '3353' in the MC structure

Figure 116

For the MCs specified in the example, a volume of the products will be 132,4 liters and 1,584 liters.

1. Example 1: A volume of 1,584 liters shall be written down as follows - AI 3353 001584;
2. Example 2: A volume of 132, 4 liters shall be written down as follows - AI 3351 001324;
3. Example 3: A volume of 300 liters shall be written down as follows - AI 3350 000300.

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of non-alcoholic beer can be found in Table 140.

Table 140 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of non-alcoholic beer

Field	Description	Type	Mandatory
productionDate	Date of production. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
kpp	Code of reason for the registration of the business place. It is mandatory for a legal entity only. It must be ignored for a physical entity.	String	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value.	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (kpp and fiasId) for the “Non-alcoholic beer” goods group.
2. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes must not be filled in for the group packages and sets. The report is processed asynchronously. The processing result will be in the result receipt.

Indication of actual volume in a marking code structure

A volume can be specified in the MC structure after mandatory data groups (after a verification code with special divider having code 29 in ASCII character table) by using application identifier AI = '3350' or AI = '3351' or AI = '3352' or AI = '3353' or AI = '3354' or AI = '3355'. In this way, a marking code structure for the “Non-alcoholic beer” goods group (templateId=28) in the application report will be as follows:

Data group	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Good individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	335Y, where Y can have values from 0 to 5	Volume (contains volume in liters), optional attribute. Y value (from 0 to 5) indicates the number of decimal places in a value of the actual volume

Notes:

1. One application report can contain marking codes with or without volume.
2. One report can contain MCs with volume which have different application identifiers: AI = '3350' or AI = '3351' or AI = '3352' or AI = '3353' or AI = '3354' or AI = '3355';
3. Y value (from 0 to 5) in AI application identifier indicates the number of decimal places in a value of the actual volume.

Example of the MC (templateId=28) with optional volume (with serial number of 7 characters) and application identifier AI = '3353’ can be found in Figure 117.

```
0104640016748389215ffffff\u001D93dGVz\u001D3353001324
(01)04640016748389 - Goods code
(21)5ffffff\u001D - Individual serial number of the item with a country code at the beginning + symbol ASCII 29
(93)dGVz\u001D - Verification code + symbol ASCII 29
(3353)001324 - actual volume (in this case 1 l 324 ml)
```

Example of the MC (templateId=28) with optional volume (with serial number of 7 characters) and application identifier AI = '3353'

Figure 117

Marking codes uniqueness must be ensured by a marking code without taking into account the volume, otherwise the report will be rejected.

Example of non-unique marking codes in the application report for the “Non-alcoholic beer” goods group with different volumes can be found in Figure 118.

```
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000111
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000222
```

Example of non-unique marking codes with different volumes

Figure 118

Example of non-unique marking codes in the application report for the “Non-alcoholic beer” goods group (where there is a volume for one MC and there is no for another) can be found in Figure 119.

```
0104640002480019215AAAAAA\u001d93dGVz
0104640002480019215AAAAAA\u001d93dGVz\u001d3353000222
```

Example of non-unique MCs with specified volume for one of the codes

Figure 119

4.4.11.1.10 List of Attributes for “Medical products” Goods Group

Example of the REST request for manufacturers of the medical products can be found in Figure 120.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "wheelchairs",
  "sntins": [
    "0104650117240163215000000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
",
    "0104650117240163215100000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
"
  ],
  "attributes": {
    "productionDate": "2023-06-01",
    "expirationDate": "2023-12-01",
    "batchNumber": "BN-2345",
    "seriesNumber": "SN-1"
  }
}
```

Example of the REST request for the “Medical products” goods group

Figure 120

Information on a factory serial number can be transferred as well in the marking codes (which are specified in the sntins parameter) of the “Medical products” goods group (templateId=12).

In the report on MC utilization (application), information on the batch number (the “seriesNumber” attribute), lot number (the “batchNumber” attribute), and factory serial number contained in the fifth group of the marking code structure may be specified for units of goods, group packages, and sets.

Example of the MC (templateId=12) with a factory serial number in application identifier AI = '97' can be found in Figure 121.

```
0104650117240163215100000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001
D97WmF2b2Rza295U2VyaXlueWlOb21lcjEyMzQ1Njc4

(01) 4650117240163- Goods code
(21)5100000005NgF\u001D - Individual serial number of the item with a country code at the beginning +
symbol ASCII 29
(91) 0024\u001D – Verification key + symbol ASCII 29
(92) u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D - Verification code + symbol ASCII 29
(97) WmF2b2Rza295U2VyaXlueWlOb21lcjEyMzQ1Njc4 - data of a factory serial number in AI97 (base 64)
```

Example of the MC (templateId=12) with a factory serial number in application identifier AI = '97'

Figure 121

Marking codes uniqueness must be ensured by a marking code without taking into account a factory serial number, otherwise the report will be rejected.

Uniqueness of a factory serial number must be ensured within one goods item (gtin).

Example of the REST request for manufacturers of medical products with indication of a volume with AI = '97' in the MC structure can be found in Figure 122.

```
POST /api/v2/wheelchairs/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A2 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json

{
  "productGroup": "wheelchairs",
  "sntins": [
    "0104650117240163215000000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
\u001D97WmF2b2Rza295U2VyaXlueWlOb21lcjEyMzQ1Njc4"
  ],
  "attributes": {
    "productionDate": "2023-06-01",
    "expirationDate": "2023-12-01",
    "batchNumber": "BN-2345",
    "seriesNumber": "SN-1"
  }
}
```

Example of the REST request for manufacturers of medical products with indication of AI = '97' in the MC structure

Figure 122

Indication of a factory serial number in a marking code structure

A factory serial number can be indicated after mandatory data groups (after a verification code with symbol ASCII 29) in the marking code structure by using application identifier AI = '97'. In this way, the marking code structure for the “Medical products” goods group (templateId=12) in the application report will be as follows:

Data group	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	84	Symbol string	97	Company internal information, data of a factory serial number in AI97 are encoded in base 64, a maximum length of a factory serial number in uncoded format is from 1 to 30 characters

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of medical products can be found in Table 141.

Table 141 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of medical products

Field	Description	Type	Mandatory
productionDate	Date of production. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
batchNumber	Lot number. It must contain allowed values: numbers, letters (Cyrillic characters, Latin characters), "/", " ", ".", ",", "-” characters	String (1-30)	No See the note below
seriesNumber	Batch No. It must contain allowed values: numbers, letters (Cyrillic characters, Latin characters), "/", " ", ".", ",", "-” characters	String (1-30)	No See the note below

Notes:

1. In the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute, and a product expiration date may be specified in the “expirationDate” attribute for the units of goods if the “Expiration date” parameter is specified in a goods card. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages and sets. The report is processed asynchronously. The processing result will be in the result receipt.

2. The report must contain information on batch No. in the “seriesNumber” attribute or lot number in the “batchNumber” attribute, or a factory serial number in a marking code structure which is specified in the fifth group for all marking codes for units of goods. Data may be unfilled for group packages and sets.

4.4.11.1.11 List of Attributes for “Juice products and non-alcoholic beverages” Goods Group

Example of the REST request for manufacturers of juice products and non-alcoholic beverages is shown in Figure 123.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "softdrinks",
  "sntins": [
    "0123859334576487215ew3212345654\u001d93dGVz",
    "0123859334576487215235egdt65ew4\u001d93123w"
  ],
  "attributes": {
    "participantId": "1123456789",
    "kpp": "123456789",
    "productionDate": "2023-06-01",
    "expirationDate": "2023-12-01",
    "fiasId": "8ed74f90-0119-48f2-b289-379707934e2f"
  }
}
```

Example of REST request (for manufacturers of juice products and non-alcoholic beverages)

Figure 123

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of juice products and non-alcoholic beverages can be found in Table 142.

Table 142 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of juice products and non-alcoholic beverages

Field	Description	Type	Mandatory
productionDate	Date of production. It cannot be later than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
participantId	Tax Identification Number (INN)	String	Yes
kpp	Code of reason for the registration of the business place. It is mandatory for legal entity only. It must be ignored for a physical entity.	String	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value.	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (kpp and fiasId) for the “Juice products and non-alcoholic beverages” goods group.

2. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes shall not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.

4.4.11.1.12 List of Attributes for “Antiseptic/antibacterial skin cleansers and hand sanitizers” Goods Group

Example of REST request for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers is shown in Figure 124.

```
POST /api/v3/utilisation?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
   "productGroup": "antiseptic",
  "sntins" : [ "0104650128986753215J8MqnkT4+pPq\u001D93dGVz",
"0104650128986753215pyhJRD>!oArj\u001D93dGVz"],
  "attributes": {
    "productionDate": "2021-06-13",
    "expirationDate":"2023-10-13"
  }
}
```

Example of REST request for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers

Figure 124

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers can be found in Table 143.

Table 143 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date. The date cannot be earlier than a date of the goods production.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages. The report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.13 List of Attributes for “Seafood” Goods Group

Example of the REST request for seafood manufacturers without indication of actual weight of the product unit in the MC structure is shown in Figure 125.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "seafood",
  "sntins": [
    "0104008638435016215JDYQZ\u001d93dGVz",
    "0104008638435016215sm8zf\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2023-12-01"
  }
}
```

Example of the REST request for seafood manufacturers without indication of actual weight of the product unit in the MC structure

Figure 125

Example of the REST request for manufacturers of seafood with indication of actual weight of product unit in the MC structure can be found in Figure 126.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "seafood",
  "sntins": [
    "0104008638435016215JDYQZ\u001d93dGVz\u001D3103002350",
    "0104008638435016215sm8zf\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2023-12-01"
  }
}
```

Example of REST request for manufacturers of seafood with indication of actual weight of product unit in the MC structure

Figure 126

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of seafood can be found in Table 144.

Table 144 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of seafood

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes shall not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.

Indication of actual weight in the marking code structure (templateId=27 or templateId=38) in the application report.

Actual weight of the unit of product can be indicated after mandatory data groups (after verification code with symbol ASCII 29) in the marking code structure by using application identifier AI = '3103'. In this way, a marking code structure for the “Seafood” goods group (templateId=27) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
3	44	Symbol string	92	Verification code
4	6	Figures	3103	Actual weight (contains weight in kilograms), optional attribute. Note: decimal point is assumed (but not specified) after three digits for fractional values.

Marking code structure for the “Seafood” goods group (templateId=38) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight (contains weight in kilograms), optional attribute. Note: decimal point is assumed (but not specified) after three digits for fractional values.

Note:

1. One application report can contain marking codes with or without actual weight.

2. One application report can contain marking codes emitted both through templateId=27 and templateId=38

3. An application report can contain marking codes with an actual weight only for the units of goods and an attribute of variable weight is specified in the goods card.

Example of the marking code (templateId=27) with the actual weight can be found in Figure 127.

```
0104650117240163215O5NgF\u001D910024\u001D92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D3103001324

(01)04650117240163  - Goods code
(21)505NgF\u001D  - (ASCII 29) Serial Number with a country code at the beginning
(91) 0024\u001D    - Verification key
(92)UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D  - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of the marking code (templateId=27) with the actual weight

Figure 127

Example of the marking code (templateId=38) with the actual weight can be found in Figure 128.

```
0104640016748389215O5NgF\u001D93dGVz\u001D3103001324

(01)04640016748389  - Goods code
(21)505NgF(IS\u001D - Individual serial number of the item with the country code at the beginning + symbol ASCII 29
(93)dGVz\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of the marking code (templateId=38) with the actual weight

Figure 128

4.4.11.1.14 List of Attributes for “Titanium metal products” Goods Group

An example of the REST request for manufacturers of titanium metal products can be found in Figure 129.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "titan",
  "sntins": [
    "0104008638435016215NNNNNNNNNNN\u001d93dGVz",
    "0104008638435016215MMMMMMMMMMM\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "documentNumber": " NS256",
    "documentDate": "2023-05-05",
    "documentSource": "Уполномоченный орган"
  }
}
```

Example of REST request for manufacturers of titanium metal products

Figure 129

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of titanium metal products can be found in Table 145.

Table 145 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of titanium metal products

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No
documentNumber	Number of conformance document.	String (1-255)	Yes
documentDate	Document date.	String (yyyy-MM-dd)	Yes
documentSource	Issuing authority	String (1-255)	Yes

4.4.11.1.15 List of Attributes for “Radio-electronic products” Goods Group

Example of the REST request for manufacturers of radio-electronic products is shown in Figure 130.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "radio",
  "sntins": [
    "0104008638435016215NNNNNNNNNNNNHHHHHHH\u001d93dGVz",
    "0104008638435016215MMMMMMMMMMMMYYYYYYY\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "kpp": "123432345"
  }
}
```

Example of REST request for manufacturers of radio-electronic products

Figure 130

A variable characteristic can be transferred as well in the marking codes (which are specified in the sntins parameter) of the “Radio-electronic products” goods group (templateId=36, templateId=37). The variable characteristic can contain one of the following:

1. Quantity of goods - to indicate goods quantity, (AI30) is supposed to be used:

— unit of measurement: quantity (pcs);

— minimum value: 1 - (example: 30 1);

— maximum value: 99 999 999 - (example: 30 99999999);

— regular expression: (\d{1,8});

— AI length: variable length from 1 to 8;

2. Weight of goods – to indicate weight of goods, AI310Y (3100-3105) is supposed to be used:

— unit of measurement: kilogram (kg);

— minimum value: 0.00001 - (example: 3105 000001);

— maximum value: 999 999 - (example: 3100 999999);

— regular expression: (\d{6});

— AI range: 3100-3105;

— AI length: fixed;

— note*: the fourth digit (0-5) of this AI specifies the number of decimal places.

3. Length of goods – to indicate length of goods, AI311Y (3110-3115) is supposed to be used:

— measurement unit: meter (m);

— minimum value: 0.00001 - (example: 3115 000001);

— maximum value: 999 999 - (example: 3110 999999);

— regular expression: (\d{6});

— AI range: 3110-3115;

— AI length: fixed;

— note*: the fourth digit (0-5) of this AI specifies the number of decimal places.

4. Volume of goods – to indicate volume of goods, AI335Y (3350 - 3355) is supposed to be used:

— unit of measurement: liters (l);

— minimum value: 0.00001 - (example: 3355 000001);

— maximum value: 999 999 - (example: 3350 999999);

— regular expression: (\d{6});

— AI range: 3350-3355;

— AI length: fixed;

— note*: the fourth digit (0-5) of this AI specifies the number of decimal places.

An algorithm to indicate a variable characteristic in the MC is described below.

An example of the REST request for manufacturers of radio-electronic products with indication of volume with AI = '30', AI = '3103', AI = '3113', AI = '3352' in the MC structure and an MC without volume can be found in Figure 131.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "radio",
  "sntins": [
    "0104008638435016215OOOOOOOOOOOO1111111\u001d93dGVz",
    "0104008638435016215NNNNNNNNNNNN2222222\u001d93dGVz\u001D302",
    "0104008638435016215MMMMMMMMMMM3333333\u001d93dGVz\u001D3103001584",
    "0104008638435016215YYYYYYYYYYYY4444444\u001d93dGVz\u001D3113020000",
    "0104008638435016215QQQQQQQQQQQQ5555555\u001d93dGVz\u001D3352001584"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of REST request for manufacturers of radio-electronic products

Figure 131

Additional information in variable characteristics is specified for the MCs described in the example as follows:

1. Example 1: Goods quantity (2 pieces) shall be written down as follows - AI 30 2;

2. Example 2: Weight of goods of 1.584 kilograms shall be written down as follows - AI 3103 001584;

3. Example 3: Length of goods of 20 meters shall be written down as follows - AI 3113 020000;

4. Example 3: Volume of goods of 15.84 liters shall be written down as follows - AI 3352 001584.

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of radio-electronic products can be found in Table 146.

Table 146 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of radio-electronic products

Field	Description	Type	Mandatory
participantId	Tax Identification Number (INN)	String	No Conditionally mandatory (conditionally mandatory)
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory)
kpp	Code of reason for the registration of the business place. It is mandatory for a legal entity only. It must be ignored for a physical entity.	String (9)	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. In the report on MC utilization (application) a production date shall be specified for the units of goods in the “productionDate” attribute. The “productionDate” attribute may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

2. Method “Receiving the business places” can be used to obtain information about business places (kpp and fiasId) for the “Radio-electronic products” goods group.

Submission of the application report for the operation of marking of goods from the composition of disaggregated set

An example of a REST request for manufacturers of radio-electronic products for the operation of marking of goods from the composition of disaggregated set is shown in Figure 132.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "radio",
  "utilisationType": "SPLITMARK",
  "sntins": [
    "0104008638435016215OOOOOOOOOOOO1111111\u001d93dGVz\u001e0104008638435016215NNNNNNNNNNNN2222222"
,
    "0104008638435016215MMMMMMMMMMM3333333\u001d93dGVz\u001e0104008638435016215YYYYYYYYYYYY4444444"
  ],
  "attributes": {
    "participantId": "1123456789"
  }
}
```

Example of the REST request for manufacturers of radio-electronic products for the operation of marking of goods from the composition of disaggregated set

Figure 132

For this goods group, submission of an application report for the operation of marking of goods from the composition of disaggregated set utilisationType = SPLITMARK is available. To generate this type of the report, the following conditions must be met:

1. The report must contain a conditionally mandatory attribute "participantId".

2. The report must not contain the "productionDate”, "kpp" and "fiasId" attributes.

3. The report must contain unique marking codes in the "sntins” string array, formatted as follows:

— A marking code must contain the main marking code and identification code, separated by ASCII code 30 character;

— Both the main marking code and the identification code must comply with the goods group template; the main marking code must include the verification code; the identification code must be provided without a verification code (GTIN+SERIAL);

— The main marking code and the identification code must have the same goods code.

An example of marking codes in an application report for operation of marking of goods from the composition of disaggregated set for the “Radio-electronic products” goods group is shown in Figure 133.

```
0104008638435016215000000000000001111111\u001d93dGVz\u001e0104008638435016215NNNNNNNNNNNN2222222
```

Example of the marking codes for operation of marking of goods from the composition of disaggregated set

Figure 133

Submission of the application report for goods separation operation

An example of the REST request for manufacturers of radio-electronic products for the goods separation operation can be found in Figure 134.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "radio",
  "utilisationType": "DIVISIONMARK",
  "sntins": [
    "0104008638435016215OOOOOOOOOOOO1111111\u001d93dGVz\u001D3103001584\u001e0104008638435016215NNNNNNNNNNNN2222222\u001d93dGVz",
    "0104008638435016215MMMMMMMMMMM3333333\u001d93dGVz\u001D302\u001e0104008638435016215YYYYYYYYYYYY4444444\u001d93dGVz"
  ],
  "attributes": {
    "participantId": "1123456789"
  }
}
```

Example of the REST request for manufacturers of radio-electronic products for the operation of separation of goods

Figure 134

Sending an application report for the goods separation operation utilisationType = DIVISIONMARK is available for the goods group. To generate this report type, the following conditions must be met:

1. The report must include the conditionally mandatory attribute "participantId".
2. The report must not contain the “productionDate”, “kpp”, and "fiasId” attributes.
3. The report must include unique marking codes in the "sntins” string array that correspond to the following format:

— Each marking code must contain the main marking code and the marking code of the original item, separated by the ASCII code 30. Both codes must comply with the goods group template, including the verification code;

— The main marking code must correspond to the goods group template, include a verification code, and be indicated with the following application identifiers that determine a variable characteristic value: 'AI310Y ' or 'AI311Y ' or 'AI335Y ' or 'AI30';

— The main marking code and the marking code of the original item must have the same goods code.

An example of the marking codes in the application report on operation of goods separation for the “Radio-electronic products” goods group can be found in Figure 135.

```
0104008638435016215OOOOOOOOOOOO1111111\u001d93dGVz\u001D3103001584\u001e0104008638435016215NNNNNNNNN
NNN2222222\u001d93dGVz
```

Example of marking codes on goods separation operation

Figure 135

4.4.11.1.16 List of Attributes for “Optical fiber and fiber optic products” Goods Group

Example of the REST request for manufacturers of fiber optic products is shown in Figure 136.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "opticfiber",
  "sntins": [
    "0104008638435016215NNNNNNNNNNN\u001d93dGVz",
    "0104008638435016215MMMMMMMMMMM\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023"
  }
}
```

Example of REST request for manufacturers of fiber optic products

Figure 136

The marking codes specified in the sntins parameter for the “Optical fiber and fiber optic products” goods group (templateId=44, templateId=45) may also include the variable characteristic of the length of goods. AI311Y (3110–3115) is used to specify the length of goods:

— measurement unit: meter (m);

— minimum value: 0.00001 - (example: 3115 000001);

— maximum value: 999,999 - (example: 3110 999999);

— regular expression: (\d{6});

— AI range: 3110-3115;

— AI length: fixed;

— note*: the fourth digit (0-5) of this AI specifies the number of decimal places.

An example of a REST request for manufacturers of the “Optical fiber and fiber optic products” goods group, with AI = '3113’ specified in the MC structure, can be found in Figure 137.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}


{
  "productGroup": "opticfiber",
  "sntins": [
    "0104008638435016215NNNNNNNNNNN\u001d93dGVz",
    "0104008638435016215MMMMMMMMMMM\u001d93dGVz\u001D3113020000"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for the “Optical fiber and fiber optic products” goods group

Figure 137

Additional information is specified in the variable characteristics for the MC shown in the example as follows: a length of goods item of 20 meters shall be written down as AI 3113 020000.

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of fiber optic products can be found in Table 147.

Table 147 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of fiber optic products

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No

4.4.11.1.17 List of Attributes for “Pet foods” Goods Group

An example of the REST request for pet food manufacturers without indicating the actual weight of the product unit in the MC structure can be found in Figure 138.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "petfood",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of the REST request for pet food manufacturers without indicating the actual weight of the product unit in the MC structure

Figure 138

An example of the REST request for pet food manufacturers with indication of the actual weight of the product unit in the MC structure can be found in Figure 139.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "petfood",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz\u001D3103002350",
    "0104008638435016215IQ8BQ\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2023-12-01"
  }
}
```

Example of the REST request for pet food manufacturers with indication of actual weight of product unit in the MC structure

Figure 139

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of pet foods can be found in Table 148.

Table 148 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of pet foods

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages and sets. The report is processed asynchronously. A processing result will be in the result receipt.

Indication of actual weight in the marking code structure (templateId=26 or templateId=41) in the application report.

The actual weight of the product unit can be indicated in a marking code structure after mandatory data groups (after a verification code with symbol ASCII 29) by using application identifier AI = '3103'. In this way, a marking code structure for the “Pet foods” goods group (templateId=26) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight (contains weight in kilograms), optional data group. Note: decimal point is assumed (but not specified) after three digits for fractional values.

A marking code structure for the “Pet foods” goods group (templateId=41) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight (contains weight in kilograms), optional data group. Note: decimal point is assumed (but not specified) after three digits for fractional values.

Note:

1. One application report can contain marking codes with or without actual weight.

2. One application report can contain marking codes emitted both through templateId=26 and templateId=41.

3. An application report can contain marking codes with an actual weight only for the units of goods and an attribute of variable weight is specified in a goods card.

An example of the marking code (templateId=26) with the actual weight can be found in Figure 140.

```
0104650117240163215O5NgF\u001D910024\u001D92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D310300
1324

(01)04650117240163  - Goods code
(21)505NgF\u001D  - (ASCII 29) Serial Number with a country code at the beginning
(91) 0024\u001D    - Verification key
(92)UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of the marking code (templateId=26) with the actual weight

Figure 140

An example of the marking code (templateId=41) with the actual weight can be found in Figure 141.

```
0104640016748389215O5NgF\u001D93dGVz\u001D3103001324

(01)04640016748389  - Goods code
(21)505NgF\u001D - Individual serial number of the item with a country code at the beginning + symbol
ASCII 29
(93)dGVz\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of the marking code (templateId=41) with the actual weight

Figure 141

4.4.11.1.18 List of Attributes for “Vegetable oils” Goods Group

Example of the REST request for manufacturers of vegetable oils is shown in Figure 142.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "vegetableoil",
  "sntins": [
    "0104008638435016215IQ8BQCXmSJJe\u001d93dGVz",
    "0104008638435016215RQ8BQCXmSJJe\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of REST request for manufacturers of vegetable oils

Figure 142

Example of the REST request for manufacturers of vegetable oils with indication of shelf life and storage condition indexes can be found in Figure 143.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "vegetableoil",
  "sntins": [
    "0104008638435016215IQ8BQCXmSJJe\u001d93dGVz",
    "0104008638435016215RQ8BQCXmSJJe\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expDateConditions": {
      "1": "10/15/2021",
      "2": "10/16/2021",
      "3": "10/17/2021",
      "4": "10/18/2021"
    }
  }
}
```

Example of the REST request for manufacturers of vegetable oil with indication of shelf life and storage condition indexes

Figure 143

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of vegetable oils can be found in Table 149.

Table 149 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of vegetable oils

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expDateConditions	Product expiration date (shelf life exceeding 72 hours) with indication of storage condition index. A set of values of expiration dates shall be specified in this attribute. Each nesting of the set shall include storage condition index specified in the NCMG and expiration date (greater or equal to the current date) in a format of yyyy-MM-dd. Several expiration dates can be specified. Storage condition index in a set shall be unique within a value set.	Object (Json Object)	No See the note below

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” or “expDateConditions” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. These attributes may not be filled in for group packages and sets. The report is processed asynchronously. The processing result will be in the result receipt.

2. When transferring a variable expiration date in the attribute “expDateConditions”, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will not be accepted.

4.4.11.1.19 List of Attributes for “Cosmetics, household chemicals, and personal hygiene products” Goods Group

An example of the REST request for manufacturers of household chemicals is shown in Figure 144.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "chemistry",
  "sntins": [
    "0104008638435016215IQ8B1\u001d93dGVz",
    "0104008638435016215RQ8B2\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01",
    "alcoholVolume ": "4"

  }
}
```

Example of REST request for manufacturers of household chemicals

Figure 144

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of household chemicals can be found in Table 150.

Table 150 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of household chemicals

Field	Description	Type	Mandatory
participantId	Tax Identification Number (INN)	String	No Conditionally mandatory (conditionally mandatory)
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
alcoholVolume	Actual ethyl alcohol content. A value should correspond to the regular expression: ^([0-9]{1,2}|[0-9]{1,2}\.[0-9]{1})$	String	No

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified for units of goods in the “expirationDate” attribute if in a goods card in the NCMG the “serviceLifeCharacteristic” attribute (“Characteristic of period of use of the goods”) is unfilled or the “Expiration date” parameter has been specified, a production date shall be specified in the “productionDate” attribute and information about actual ethyl alcohol content (volume share, in percentages) shall be specified in the “alcoholVolume” attribute. The “expirationDate”, “productionDate” and “alcoholVolume” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.
2. Information about an actual ethyl alcohol content is transferred as a whole number or decimal number (with rounding to 1 decimal place). If there is no ethyl alcohol in the composition, it is necessary to indicate 0 as a value.

Submission of the application report for the operation of marking of goods from the composition of disaggregated set

An example of the REST request for manufacturers of household chemicals for the operation of marking of goods from the composition of disaggregated set can be found in Figure 145.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "chemistry",
  "utilisationType": "SPLITMARK",
  "sntins": [
    "0104008638435016215IQ8B1\u001d93dGVz\u001e0123859334576487215nm321",
    "0104008638435016215RQ8B2\u001d93123w\u001e0123859334576487215ui345"
  ],
  "attributes": {
    "participantId": "1123456789"
  }
}
```

Example of the REST request for manufacturers of household chemicals for operation of marking of goods from the composition of disaggregated set

Figure 145

For this goods group, submission of the application report for the operation of marking of goods from the composition of disaggregated set utilisationType = SPLITMARK is available. To generate this type of the report, the following conditions shall be met:

1. The report must contain a conditionally mandatory attribute "participantId".

2. The report must not contain the "productionDate", "expirationDate", "alcoholVolume" attributes.

3. The report must contain unique marking codes in the "sntins" string array that correspond to the following format:

— The marking code must consist of the main code and the identification code, separated by ASCII code 30;

— Both the main marking code and the identification code must correspond to a goods group template; the main marking code must include the verification code; the identification code must be indicated without a verification code (GTIN+SERIAL);

— The main marking code and the identification code must have the same goods code.

An example of the marking codes in the application report for operation of marking of goods from the composition of disaggregated set for the “Cosmetics, household chemicals, and personal hygiene products” goods group is shown in Figure 146.

```
0104008638435016215IQ8B1\u001d93dGVz\u001e0104640002480019215nm321
```

Example of the marking codes for operation of marking of goods from the composition of disaggregated set

Figure 146

Submitting an application report for the remarking operation

An example of a REST request for manufacturers of household chemicals for the remarking operation is shown in Figure 147.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}


{
  "productGroup": "chemistry",
  "utilisationType": "REMARK",
  "sntins": [
    "0104008638435016215IQ8B1\u001d93dGVz\u001e0123859334576487215nm321",
    "0104008638435016215RQ8B2\u001d93123w\u001e0123859334576487215ui345"
  ],
  "attributes": {
    "participantId": "1123456789"
  }
}
```

Example of a REST request for manufacturers of household chemicals for the remarking operation

Figure 147

For this goods group, submission of an application report for the remarking operation (utilisationType = REMARK) is available. To generate this report type, the following conditions must be met:

1. The report must contain the conditionally mandatory “participantId” attribute.

2. The report must not contain the “productionDate”, “expirationDate”, “alcoholVolume” attributes.

3. The report must contain unique marking codes in the “sntins” string array in the following format:

— The marking code must contain a primary code and an identification code separated by ASCII code 30;

— The primary marking code and the identification code must match the goods group template. The primary marking code must include the verification code, and the identification code must be specified without the verification code (GTIN+SERIAL);

— The primary marking code and the identification code must have the same goods code.

An example of marking codes in the application report for the remarking operation for the “Cosmetics, household chemicals, and personal hygiene products” goods group is shown in Figure 148.

```
0104008638435016215IQ8B1\u001d93dGVz\u001e0104640002480019215nm321
```

Example of marking codes for the remarking operation

Figure 148

4.4.11.1.20 List of Attributes for “Canned foods” Goods Group

Example of the REST request for manufacturers of canned foods is shown in Figure 149.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "conserve",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of REST request for manufacturers of canned foods

Figure 149

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of canned foods can be found in Table 151.

Table 151 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of canned foods

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may not be filled in for the group packages and sets. The report is processed asynchronously. A processing result will be in the result receipt

4.4.11.1.21 List of Attributes for “Veterinary medicines” Goods Group

Example of the REST request for manufacturers of veterinary products is shown in Figure 150.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "vetpharma",
  "sntins": [
    "0104650117240163215000000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
",
    "0104650117240163215100000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024",
    "seriesNumber": "SN-1"
  }
}
```

Example of REST request for manufacturers of veterinary products

Figure 150

A description of the attributes parameter of the “UtilisationReport” object for manufacturers of veterinary products can be found in Table 152.

Table 152 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of veterinary products

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
seriesNumber	Batch No. It must contain allowed symbols: digits, letters (Cyrillic characters, Latin characters), "/", " ", ".", ",", "-” characters	String (30)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute, and a batch number in the “seriesNumber” attribute for the units of goods. The “expirationDate”, “productionDate” and “seriesNumber” attributes may not be filled in for the group packages. The report is processed asynchronously. The processing result will be in the result receipt.

4.4.11.1.22 List of Attributes for “Games and toys for children” Goods Group

Example of the REST request for manufacturers of the “Games and toys for children” goods group can be found in Figure 151.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "toys",
  "sntins": [
    "0104650117240163215O5NgFUUIUY12\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
",
    "0104650117240163215455NgF5678wrt\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/YUOEpdyuQ==
"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of the REST request for manufacturers of the “Games and toys for children” goods group

Figure 151

A description of the attributes parameter of the “UtilisationReport” object for the “Games and toys for children” goods group can be found in Table 153.

Table 153 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of games and toys for children

Field	Description	Type	Mandatory
participantId	Tax Identification Number (INN)	String	No Conditionally mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products’ expiration date. Expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute, and a product expiration date shall be specified in the “expirationDate” attribute for the units of goods if the “Expiration date” parameter is specified in a goods card. The

“expirationDate” and “productionDate” attributes may be unfilled for group packages and sets. The report is processed asynchronously. A processing result will be in the result receipt.

Submission of the application report for the operation of marking of goods from the composition of disaggregated set

An example of the REST request for manufacturers of games and toys for children for the operation of marking of goods from the composition of disaggregated set can be found in Figure 152.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "toys",
  "utilisationType": "SPLITMARK",
  "sntins": [
    "0104650117240163215O5NgFUUIUY12\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
\u001e 0104650117240163215NNNNNNNNNNN",
    "0104650117240163215O5NgF5678wrt\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/YUOEpdyuQ==
\u001e0104650117240163215YYYYYYYYYYY"
  ],
  "attributes": {
    "participantId": "1123456789"
  }
}
```

Example of the REST request for manufacturers of games and toys for children for operation of marking of goods from the composition of disaggregated set

Figure 152

For this goods group, submission of the application report for the operation of marking of goods from the composition of disaggregated set utilisationType = SPLITMARK is available. To generate this type of the report, the following conditions shall be met:

1. The report must contain a conditionally mandatory attribute "participantId".

2. The report must not contain the "productionDate” and "expirationDate" attributes.

3. The report must contain unique marking codes in the "sntins” string array that correspond to the following format:

— The marking code must contain the main marking code and the identification code, separated by ASCII code 30 character;

— Both the main marking code and the identification code must correspond to a goods group template; the main marking code must include the verification code; the identification code must be indicated without a verification code (GTIN+SERIAL);

— The main marking code and the identification code must have the same goods code.

An example of the marking codes in the application report for operation of marking of goods from the composition of disaggregated set for the “Games and toys for children” goods group is shown in Figure 153.

```
0104008638435016215000000000000\u001d93dGVz\u001e0104008638435016215NNNNNNNNNNN
```

Example of the marking codes for operations of marking of goods from the composition of disaggregated set

Figure 153

4.4.11.1.23 List of Attributes for “Bicycles and bicycle frames” Goods Group

Example of the REST request for manufacturers of the “Bicycles and bicycle frames” goods group can be found in Figure 154.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "bicycle",
  "sntins": [
   "01046501172401632154 5NgF1234567\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/YUOEpdyuQ=="
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for manufacturers of the “Bicycles and bicycle frames” goods group

Figure 154

A description of the attributes parameter of the “UtilisationReport” object for the “Bicycles and bicycle frames” goods group can be found in Table 154.

Table 154 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of bicycles and bicycle frames

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified for the units of goods in the “productionDate” attribute. The report is processed asynchronously. The processing result will be in the result receipt.

4.4.11.1.24 List of Attributes for “Building materials” Goods Group

Example of the REST request for manufacturers of the “Building materials” goods group can be found in Figure 155

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "construction",
  "sntins": [
    "0104008638435016215IQ8BQ1234543\u001d93dGVz",
    "0104008638435016215RQ8B11232345\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01",
    "kpp": "123432345"
  }
}
```

Example of the REST request for the “Building materials” goods group

Figure 155

A description of the attributes parameter of the “UtilisationReport” object for the “Building materials” goods group can be found in Table 155.

Table 155 – Description of the attributes parameter of the “UtilisationReport” object for the “Building materials” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products expiration date. An expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
kpp	Code of the reason for registration of the business place. It is mandatory for a legal entity only. It must be ignored for a physical entity.	String	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (kpp and fiasId) for the “Building materials” goods group.

2. In the report on MC utilization (application), the expiration date (the “expirationDate” attribute) and production date (the “productionDate” attribute) are specified for units of goods. These attributes must be unfilled for group packages and for goods related to FEACN 2523 (if a goods card contains the “Warranty period” parameter). The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.25 List of Attributes for “Fire safety and firefighting equipment” Goods Group

Example of the REST request for manufacturers of the “Fire safety and firefighting equipment” goods group can be found in Figure 156

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "fire",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of the REST request for the “Fire safety and firefighting equipment” goods group

Figure 156

A description of the attributes parameter of the “UtilisationReport” object for the “Fire safety and firefighting equipment” goods group can be found in Table 156.

Table 156 – Description of the attributes parameter of the “UtilisationReport” object for the “Fire safety and firefighting equipment” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Products expiration date. An expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: If the “Shelf life” parameter is filled in in the goods card, the product expiration date must be specified for units of goods in the “expirationDate” attribute in the report on MC utilization (application). If the goods card contains the “Service life” parameter, specifying this attribute is optional. The production date, which is passed in the "productionDate" attribute, must be filled in for the units of goods. The report is processed asynchronously, and the processing result is reflected in the resulting receipt.

4.4.11.1.26 List of Attributes for “Printed goods” Goods Group

Example of the REST request for manufacturers of the “Printed goods” goods group can be found in Figure 157.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "books",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215RQ8B11234567\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for the “Printed goods” goods group

Figure 157

A description of the attributes parameter of the “UtilisationReport” object for the “Printed goods” goods group can be found in Table 157.

Table 157 – Description of the attributes parameter of the “UtilisationReport” object for the “Printed goods” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.27 List of Attributes for “Heaters” Goods Group

Example of the REST request for manufacturers of the “Heaters” goods group can be found in Figure 158.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "heater",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for the “Heaters” goods group

Figure 158

A description of the attributes parameter of the “UtilisationReport” object for the “Heaters” goods group can be found in Table 158.

Table 158 – Description of the attributes parameter of the “UtilisationReport” object for the “Heaters” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.28 List of Attributes for “Groceries” Goods Group

An example of the REST request for manufacturers of the “Groceries” goods group can be found in Figure 159.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "grocery",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215RQ8B11234567\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023"
  }
}
```

Example of the REST request for the “Groceries” goods group

Figure 159

An example of the REST request for manufacturers of the “Groceries” goods group with indication of shelf life and storage condition indexes can be found in Figure 160.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "grocery",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215RQ8B11234567\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expDateConditions": {
      "1": "10/15/2021",
      "2": "10/16/2021",
      "3": "10/17/2021",
      "4": "10/18/2021"
  }
 }
}
```

Example of the REST request for the “Groceries” goods group with indication of shelf life and storage condition indexes

Figure 160

A description of the attributes parameter of the “UtilisationReport” object for the “Groceries” goods group can be found in Table 159.

Table 159 – Description of the attributes parameter of the “UtilisationReport” object for the “Groceries” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date of the products. An expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expDateConditions	Product expiration date (for a shelf life exceeding 72 hours) with indication of a storage condition index. A set of expiration dates values shall be specified in this attribute. Each nesting of the set shall include the storage condition index specified in the NCMG and expiration date (greater or equal to the current date) in a format of yyyy-MM-dd. Indication of the several expiration dates is allowed. A storage condition index in a set shall be unique within a value set.	Object (Json Object)	No See the note below

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” or “expDateConditions” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate”, “expDateConditions” and “productionDate” attributes may be unfilled for the sets. The report is processed asynchronously. A processing result will be in a result receipt.
2. When transferring a variable expiration date in the “expDateConditions” attribute, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will not be accepted.

4.4.11.1.29 List of Attributes for “Cabling and wiring products” Goods Group

An example of the REST request for manufacturers of the “Cabling and wiring products” goods group can be found in Figure 161.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "cableraw",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215RQ8B11234567\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023"
  }
}
```

Example of the REST request for the “Cabling and wiring products” goods group

Figure 161

A variable characteristic of goods length can also be specified in the marking codes of the “Cabling and wiring products” goods group (templateId=62, templateId=63), which are provided in the sntins parameter. To indicate length of goods, AI311Y (3110-3115) should be used:

— measurement unit: meters (m);

— minimum value: 0.00001 (example: 3115 000001);

— maximum value: 999,999 (example: 3110 999999);

— regular expression: (\d{6});

— AI range: 3110-3115;

— AI length: fixed;

— note*: the fourth digit (0-5) of this AI specifies the number of decimal places.

An example of the REST request for manufacturers of the “Cabling and wiring products” goods group with AI = '3113' indicated in the MC structure can be found in Figure 162.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}


{
  "productGroup": "cableraw",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215IR8BQ1234567\u001d93dGVz\u001D3113020000"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for the “Cabling and wiring products” goods group

Figure 162

For the MC specified in the example, the additional information in variable characteristics is specified as follows: a goods length of 20 meters shall be written down as AI 3113 020000;

A description of the attributes parameter of the “UtilisationReport” object for the “Cabling and wiring products” goods group can be found in Table 160.

Table 160 – Description of the attributes parameter of the “UtilisationReport” object for the “Cabling and wiring products” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.30 List of Attributes for “Engine oils” Goods Group

An example of the REST request for manufacturers of the “Engine oils” goods group can be found in Figure 163.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "autofluids",
  "sntins": [
    "0104008638435016215IQ8BQ1234567\u001d93dGVz",
    "0104008638435016215RQ8B11234567\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of the REST request for the “Engine oils” goods group

Figure 163

A description of the attributes parameter of the “UtilisationReport” object for the “Engine oils” goods group can be found in Table 161.

Table 161 – Description of the attributes parameter of the “UtilisationReport” object for the “Engine oils” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory See the note below
expirationDate	An expiration date of the products. The expiration date must be greater than the current date.	String (yyyy-MM-dd)	No Conditionally mandatory See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in the result receipt.

4.4.11.1.31 List of Attributes for “Polymer pipes” Goods Group

An example of the REST request for manufacturers of the “Polymer pipes” goods group can be found in Figure 164.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "polymer",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023"
  }
}
```

Example of the REST request for the “Polymer pipes” goods group

Figure 164

A description of the attributes parameter of the “UtilisationReport” object for the “Polymer pipes” goods group can be found in Table 162.

Table 162 – Description of the attributes parameter of the “UtilisationReport” object for the “Polymer pipes” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The report is processed asynchronously. The processing result will be in the result receipt.

4.4.11.1.32 List of Attributes for “Confectionery products” Goods Group

An example of the REST request for manufacturers of the “Confectionery products” goods group can be found in Figure 165.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "sweets",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of the REST request for the “Confectionery products” goods group

Figure 165

An example of the REST request that includes expiration dates and storage condition indexes for manufacturers of the “Confectionery products" goods group can be found in Figure 166.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "sweets",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expDateConditions": {
      "1": "2021-10-15",
      "2": "2021-10-16",
      "3": "2021-10-17",
      "4": "2021-10-18"
    }
  }
}
```

Example of the REST request for the “Confectionery products” goods group with expiration dates and storage condition indexes

Figure 166

A description of the attributes parameter of the “UtilisationReport” object for the “Confectionery products” goods group can be found in Table 163.

Table 163 – Description of the attributes parameter of the “UtilisationReport” object for the “Confectionery products” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to a current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expirationDate	Expiration date of the products. An expiration date must be greater than a current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
expDateConditions	Product expiration date (shelf life exceeding 72 hours) with a storage condition index. A set of expiration date values shall be specified in this attribute. Each nested item in the set shall include the storage condition index specified in the NCMG and an expiration date (greater than or equal to the current date) in yyyy-MM-dd format. Several expiration dates may be specified. The storage condition index in a set shall be unique within a set of values.	Object (Json Object)	No See the note below
batchNumber	Lot number. The lot number shall consist of three data groups: The first group consists of 14 digits and contains the product GTIN; The second group consists of 6 characters and contains the production date (YYMMDD): The third group consists of 1 to 12 characters and contains the serial number (internal lot number), and may contain Latin letters, digits, and the following special characters: "/", ".", ",", "-".	String (1-32)	No

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” or “expDateConditions” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.
2. When transferring the variable expiration date in the “expDateConditions” attribute, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will be rejected.
3. In the report on MC utilization (application), the lot number may be specified in the “batchNumber” attribute only for units of goods. Lot numbers cannot be specified for sets and group packages. If a lot number needs to be specified for a unit of goods, it must be reserved in the lot registry in advance.

4.4.11.1.33 List of Attributes for “Auto parts and components for vehicles” Goods Group

An example of the REST request for manufacturers of the “Auto parts and components for vehicles” goods group can be found in Figure 167.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "carparts",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023"
  }
}
```

Example of the REST request for the “Auto parts and components for vehicles” goods group

Figure 167

A description of the attributes parameter of the “UtilisationReport” object for the “Auto parts and components for vehicles” goods group can be found in Table 164.

Table 164 – Description of the attributes parameter of the “UtilisationReport” object for the “Auto parts and components for vehicles” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The “productionDate” attribute may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.34 List of Attributes for “Radio-electronic products. Electronic nicotine delivery systems” Goods Group

An example of the REST request for manufacturers of the “Radio-electronic products. Electronic nicotine delivery systems” goods group can be found in Figure 168.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "nicotindev",
  "sntins": [
    "0104008638435016215IQ8BQ\u001d93dGVz",
    "0104008638435016215RQ8B1\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2025"
  }
}
```

Example of the REST request for the “Radio-electronic products. Electronic nicotine delivery systems” goods group

Figure 168

A description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group can be found in Table 165.

Table 165 – Description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
kpp	Code of the reason for registration of the business place. It is mandatory for a legal entity only. It must be ignored for a physical entity.	String	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. Method “Receiving the business places” can be used to receive information about business places (kpp and fiasId) for the “Radio-electronic products. Electronic nicotine delivery systems” goods group.
2. Providing business place details is mandatory starting October 1, 2026.
3. In the report on MC utilization (application), a production date shall be specified in the “productionDate” attribute for the units of goods. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.35 List of Attributes for “Radio-electronic products. Laptops and smartphones” Goods Group

An example of the REST request for manufacturers of the “Radio-electronic products. Laptops and smartphones” goods group can be found in Figure 169.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "gadgets",
  "sntins": [
    "0104008638435016215aZ8B3cLkR7QwX1mYp0T\u001d93dGVz",
    "0104008638435016215M4Xq7Zp1TrA9LkB2YvE\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2025"
  }
}
```

Example of the REST request for the “Radio-electronic products. Laptops and smartphones” goods group

Figure 169

A description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Laptops and smartphones” goods group can be found in Table 166.

Table 166 – Description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Laptops and smartphones” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No Conditionally mandatory (conditionally mandatory) See the note below
kpp	Code of the reason for registration of the business place. It is mandatory only for legal entities. It must be ignored for physical entities.	String (1-9)	No Conditionally mandatory See the note below
fiasId	FIAS code – a unique FIAS identifier within the GIS. It is mandatory for physical entities and optional for legal entities. When the parameter is specified for a legal entity, it is used to search for business places together with the kpp value	String (36) GUID	No Conditionally mandatory See the note below

Notes:

1. In the report on MC utilization (application) a production date shall be specified for the units of goods in the “productionDate” attribute. The “productionDate” attribute

may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

2. The Method “Receiving the business places” can be used to obtain information about business places or production sites (kpp and fiasId) for the “Radio-electronic products. Laptops and smartphones” goods group.

4.4.11.1.36 List of Attributes for “Meat products” Goods Group

An example of the REST request for the “Meat products” goods group without indication of actual weight of the product unit in the MC structure can be found in Figure 170.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "meat",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of the REST request for “Meat products” goods group without indication of actual weight of the product unit in the MC structure

Figure 170

An example of the REST request for the “Meat products” goods group with indication of actual weight of the product unit in the MC structure can be found in Figure 171.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "meat",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz\u001D3103002350",
    "0104008638435016215M4Xq7\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2023-12-01"
  }
}
```

Example of the REST request for the “Meat products” goods group with indication of actual weight of product unit in the MC structure

Figure 171

An example of the REST request for the “Meat products” goods group with indication of shelf lives and storage condition indexes can be found in Figure 172.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "meat",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz\u001D3103002350",
    "0104008638435016215M4Xq7\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expDateConditions": {
      "1": "2021-10-15",
      "2": "2021-10-16",
      "3": "2021-10-17",
      "4": "2021-10-18"
    }
  }
}
```

Example of the REST request for the “Meat products” goods group with indication of shelf lives and storage condition indexes

Figure 172

A description of the attributes parameter of the “UtilisationReport” object for the “Meat products” goods group can be found in Table 167.

Table 167 – Description of the attributes parameter of the “UtilisationReport” object for the “Meat products” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. The production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expirationDate	Products’ expiration date. The expiration date must be greater than the current date.	String (String) (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expDateConditions	Product expiration date (for items with a shelf life exceeding 72 hours) with indication of a storage condition index. A set of expiration dates values shall be specified in this attribute. Each nested item of the set shall include the storage condition index specified in the NCMG, and expiration date (greater than or equal to the current date) in a format of yyyy-MM-dd. Indication of the several expiration dates is allowed. A storage condition index in a set shall be unique within a value set.	Object (Json Object)	No (Conditionally mandatory) See the note below
expDate72	Product expiration date (shelf life of less than 72 hours). Format: yyyy-MM-ddTHH:mm	String (yyyy-MM-ddTHH:mm)	No Conditionally mandatory (conditionally mandatory) See the note below

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” or “expDate72”, or “expDateConditions” attribute, and a production date shall be specified in the “productionDate” attribute for the units of

goods. The “expirationDate”, “expDate72”, “expDateConditions”, and “productionDate” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

2. When transferring the variable expiration date in the “expDateConditions” attribute, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will not be accepted.

Indication of the actual weight in the marking code structure (templateId=32 or templateId=74) in the application report.

The actual weight of the product unit can be specified after mandatory data groups (after a verification code with symbol ASCII 29) in the marking code structure by using application identifier AI = '3103'. In this way, the marking code structure for the “Meat products” goods group (templateId=74) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight (contains weight in kilograms), optional attribute. Note: decimal point is assumed (but not specified) after three digits for fractional values.

The marking code structure for the “Meat products” goods group (templateId=32) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight (contains weight in kilograms), optional attribute. Note: decimal point is assumed (but not specified) after three digits for fractional values.

Note:

1. One application report can contain marking codes with or without actual weight.

2. One application report can contain marking codes emitted both through templateId=32 and templateId=74.

3. The application report can contain marking codes with the actual weight indicated only for the units of goods and only when an attribute of variable weight is specified in a goods card.

An example of the marking code (templateId=74) with the actual weight can be found in Figure 173.

```
0104650117240163215000000005NgF\u001D910024\u001D92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001
D3103001324

(01)04650117240163  - Goods code
(21)5000000005NgF\u001D  - (ASCII 29) Serial Number with a country code at the beginning
(91) 0024\u001D    - Verification key
(92)UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of marking code (templateId=74) with actual weight

Figure 173

An example of the marking code (templateId=32) with the actual weight can be found in Figure 174.

```
0104640016748389215O5NgF\u001D93dGVz\u001D3103001324

(01)04640016748389  - Goods code
(21)505NgF(IS\u001D - Individual serial number of the item with the country code at the beginning + symbol
ASCII 29
(93)dGVz\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)
```

Example of marking code (templateId=32) with the actual weight

Figure 174

4.4.11.1.37 List of Attributes for “Feed additives” Goods Group

An example of the REST request for the “Feed additives” goods group can be found in

Figure 175.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "vetbio",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of the REST request for the “Feed additives” goods group

Figure 175

A description of the attributes parameter of the “UtilisationReport” object for the “Feed additives” goods group can be found in Table 168.

Table 168 – Description of the attributes parameter of the “UtilisationReport” object for the “Feed additives” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. The production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expirationDate	Products’ expiration date. The expiration date must be greater than the current date.	String (String) (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.38 List of Attributes for “Home and kitchen goods” Goods Group

An example of the REST request for the “Home and kitchen goods” goods group can be found in Figure 176.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "homeware",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for the “Home and kitchen goods” goods group

Figure 176

The description of the attributes parameter of the “UtilisationReport” object for the “Home and kitchen goods” goods group can be found in Table 169.

Table 169 – Description of the attributes parameter of “UtilisationReport” object for “Home and kitchen goods” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date should be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified for the units of goods in the “productionDate” attribute. The “productionDate” attribute may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.39 List of Attributes for “Industrial equipment” Goods Group

An example of the REST request for the “Industrial equipment” goods group can be found in Figure 177.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "industrial",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01"
  }
}
```

Example of the REST request for “Industrial equipment” goods group

Figure 177

The description of the attributes parameter of the “UtilisationReport” object for the “Industrial equipment” goods group can be found in Table 170.

Table 170 – Description of the attributes parameter of the “UtilisationReport” object for “Industrial equipment” Goods Group

Field	Description	Type	Mandatory
productionDate	Production date. A production date must be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a production date shall be specified in the “productionDate” attribute for the units of goods. The “productionDate” attribute may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.40 List of Attributes for “Fertilizers in consumer packaging” Goods Group

An example of the REST request for the “Fertilizers in consumer packaging” goods group can be found in Figure 178.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {signature}


{
  "productGroup": "fertilizers",
  "sntins": [
    "0104008638435016215aZ8B38ajBeQl\u001d93dGVz",
    "0104008638435016215M4jBeQlXq7ad\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expirationDate": "2024-12-01"
  }
}
```

Example of the REST request for “Fertilizers in consumer packaging” goods group

Figure 178

The description of the attributes parameter of the “UtilisationReport” object for the “Fertilizers in consumer packaging” goods group can be found in Table 171.

Table 171 – Description of the attributes parameter of “UtilisationReport” object for “Fertilizers in consumer packaging” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date must be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expirationDate	Products’ expiration date. An expiration date must be greater than the current date.	String (String) (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

Note: in the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes may be unfilled for the group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.

4.4.11.1.41 List of Attributes for “Semi-finished and frozen food products” Goods Group

An example of the REST request for the “Semi-finished and frozen food products” goods group without indicating the actual weight of product unit in the MC structure can be found in Figure 179.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "frozen",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of the REST request for the “Semi-finished and frozen food products” goods group without indicating the actual weight of product unit in the MC structure

Figure 179

An example of the REST request for the “Semi-finished and frozen food products” goods group with indication of the actual weight of the product unit in the MC structure can be found in Figure 180.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "frozen",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz\u001D3103002350",
    "0104008638435016215M4Xq7\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "1/1/2023",
    "expirationDate": "12/1/2024"
  }
}
```

Example of the REST request for the “Semi-finished and frozen food products” goods group with indication of actual weight of product unit in the MC structure

Figure 180

An example of the REST request for the “Semi-finished and frozen food products” goods group with indication of shelf lives and storage condition indexes can be found in Figure 181.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "frozen",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz\u001D3103002350",
    "0104008638435016215M4Xq7\u001d93dGVz\u001D3103002351"
  ],
  "attributes": {
    "productionDate": "2023-01-01",
    "expDateConditions": {
      "1": "2026-10-15",
      "2": "2026-10-16",
      "3": "2026-10-17",
      "4": "2026-10-18"
    }
  }
}
```

Example of the REST request for the “Semi-finished and frozen food products” goods group with indication of shelf lives and storage condition indexes

Figure 181

A description of the attributes parameter of the “UtilisationReport” object for the “Semi-finished and frozen food products” goods group can be found in Table 172.

Table 172 – Description of the attributes parameter of the “UtilisationReport” object for the “Semi-finished and frozen food products” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date must be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expirationDate	Products’ expiration date. An expiration date must be greater than the current date.	String (String) (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expDateConditions	Product expiration date (shelf life exceeding 72 hours) with a storage condition index. A set of expiration date values shall be specified in this attribute. Each nested item in the set shall include the storage condition index specified in the NCMG and an expiration date (greater than or equal to the current date) in yyyy-MM-dd format. Several expiration dates may be specified. The storage condition index in a set shall be unique within a set of values.	Object (Json Object)	No See the note below

Notes:

1. In the report on MC utilization (application) a product expiration date shall be specified in the “expirationDate” attribute, and a production date shall be specified in the “productionDate” attribute for the units of goods. The “expirationDate” and “productionDate” attributes must not be filled in for group packages and sets. The report is processed asynchronously. A processing result will be in a result receipt.
2. When transferring the variable expiration date in the “expDateConditions” attribute, all marking codes transferred in the report must contain the same GTIN. If marking codes contain different goods codes, the report will be rejected.

Indication of actual weight in the marking code structure (templateId=83 or templateId=84) in the application report.

The actual weight of the product unit may be indicated in the marking code structure after the mandatory data groups (after the verification code with symbol ASCII 29), using application identifier AI = '3103'. Accordingly, the marking code structure for the “Semi-finished and frozen food products” goods group (templateId=84) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight (in kilograms), optional attribute. Note: the decimal point is assumed (but not specified) after the third digit for fractional values.

The marking code structure for the “Semi-finished and frozen food products” goods group (templateId=83) in the application report will be as follows:

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight (in kilograms), optional attribute. Note: the decimal point is assumed (but not specified) after the third digit for fractional values.

Notes:

1. A single application report may contain marking codes both with and without actual weight.

2. A single application report may contain marking codes issued under both templateId=83 and templateId=84.

3. The application report can contain marking codes with the actual weight only for the units of goods, and an attribute of variable weight is specified in the goods card.

An example of the marking code (templateId=84) with the actual weight can be found in Figure 182.

0104650117240163215O5NgFFFFFFFF\u001D910024\u001D92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D3103001324

(01)04650117240163 - Goods code
(21)505NgFFFFFFFF\u001D - (ASCII 29) Serial Number with a country code at the beginning
(91) 0024\u001D - Verification key
(92)UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)

Example of the marking code (templateId=84) with actual weight

Figure 182

An example of the marking code (templateId=83) with the actual weight can be found in Figure 183.

0104640016748389215O5NgF\u001D93dGVz\u001D3103001324

(01)04640016748389 - Goods code
(21)505NgF(IS\u001D - Individual serial number of the goods item with the country code at the beginning + symbol ASCII 29
(93)dGVz\u001D - Verification code
(3103)001324 - Symbol ASCII 29 + Actual weight (in this case 1 kg. 324 grams)

Example of the marking code (templateId=83) with actual weight

Figure 183

4.4.11.1.42 List of Attributes for “Real fur” Goods Group

An example of the REST request for the “Real fur” goods group can be found in Figure 184.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "productGroup": "furslp",
  "sntins": [
    "0104650117240163215000000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
",
    "0104650117240163215100000005NgF\u001d910024\u001d92UjpfAmE6elcVxvtPJHHGl/8ULzQB8YPU/XnOERdyuQ==
"
  ],
  "attributes": {
    "productionDate": "2025-01-01"
  }
}
```

Example of the REST request for the “Real fur” goods group

Figure 184

A description of the attributes parameter of the “UtilisationReport” object for the “Real fur” goods group can be found in Table 173.

Table 173 – Description of the attributes parameter of the “UtilisationReport” object for the “Real fur” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date must be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

4.4.11.1.43 List of Attributes for “Pyrotechnic articles” Goods Group

An example of the REST request for the “Pyrotechnic articles” goods group can be found

in Figure 185.

```
POST /api/v3/utilisation?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}

{
  "productGroup": "pyrotechnics",
  "sntins": [
    "0104008638435016215aZ8B3\u001d93dGVz",
    "0104008638435016215M4Xq7\u001d93dGVz"
  ],
  "attributes": {
    "productionDate": "1/1/2026",
    "expirationDate": "12/1/2026"
  }
}
```

Example of the REST request for the “Pyrotechnic articles” goods group

Figure 185

The description of the attributes parameter of the “UtilisationReport” object for the “Pyrotechnic articles” goods group can be found in Table 174.

Table 174 – Description of the attributes parameter of the “UtilisationReport” object for the “Pyrotechnic articles” goods group

Field	Description	Type	Mandatory
productionDate	Production date. A production date must be less of or equal to the current date.	String (yyyy-MM-dd)	No (Conditionally mandatory) See the note below
expirationDate	Product expiration date. An expiration date must be greater than the current date.	String (String) (yyyy-MM-dd)	No (Conditionally mandatory) See the note below

Note: in the report on MC utilization (application), a product expiration date must be specified in the “expirationDate” attribute, and a production date must be specified in the “productionDate” attribute for units of goods. The “expirationDate” and “productionDate” attributes may be unfilled for group packages and sets. The report is processed asynchronously. The processing result will be in a result receipt.

4.4.11.2. Response to Request

An example of JSON response can be found in Figure 186.

```
HTTP/1.1 200 OK
Content-Length: 74
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"cdf12109-10d3-11e6-8b6f-0050569977a1",
  "reportId":"3179f5d2-2bf5-47d1-8df0-9452b257d851"
}
```

JSON Response Example

Figure 186

Upon successful completion of request, the server returns HTTP code -200 and a unique identifier of MC-utilization report assigned by OMS. The obtained identifier of report on MC utilization is used to obtain report processing status (see cl. 4.4.13). For the structure of response to request to send report on utilization, see Table 175. For error codes, see subsection 6.2.

Table 175 – Format of Response to Request to Send Report on MC Application

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	Unique identifier of the MC application report (the OMS). String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.12. Method “Send a Notification of Acceptance of ICs for Record-keeping Purposes”

This method is used to send a notification of acceptance of the identification codes (that were previously withdrawn from circulation with the “misdescription of identification codes” reason) for record-keeping purposes. A description on how to receive a security marker is provided in section 9.

Note: this method is currently available to participants for the following goods groups:

— “Beer, beer-based and low-alcohol beverages”.

Following the results of sending the notification of acceptance of ICs for record-keeping purposes to the OMS, it is necessary to get a report processing status (by using the Method “Obtain the Report Processing Status”). After having received a response, it becomes possible to use the “Receive receipt by unique document identifier” method (See subsection 4.4.18 to get a receipt).

4.4.12.1. Request

An example of the REST request with the “SurplusReport” object for the “Beer, beer-based and low-alcohol beverages” goods group can be found in Figure 187.

```
POST /api/v3/surplus?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
X-Signature: {подпись}


{
  "documentType": "SURPLUS_POSTING",
  "documentVersion": "1.0",
  "documentDate": "2022-03-11T05:10:00.872791Z",
  "participantInn": "7825706086",
  "primaryDocumentCustomName": "Возврат в оборот",
  "primaryDocumentDate": "2022-03-11",
  "primaryDocumentNumber": "81543b17-fdab-439a-9029-45d911729358",
  "codes": [
    "000000462095287,b4*i%93dGVz",
    "00000046200310U?:HhVK93dGVz"
  ]
}
```

An example of the REST request with the “UtilisationReport” object for the “Beer, beer-based and low-alcohol beverages” goods group

Figure 187

A structure of the JSON request to send a notification of acceptance of ICs for record-keeping purposes to the OMS.

REST request parameters can be found in Table 176.

Table 176 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/surplus?omsId={omsId}

HTTP Header Parameters can be found in Table 177.

Table 177 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes
Accept	application/json	Yes
clientToken	{clientToken} – a security marker A description on how to receive a security marker is provided in section 9.	No (conditionally mandatory)
X-Signature	Detached signature in Base64 encoding. It is specified for all goods groups except the “Medicines for Medical Use”	No (conditionally mandatory)

Request string parameters are given in Table 178.

Table 178 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	A unique OMS identifier. String value. An identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes

A description of the “SurplusReport” object structure for sending a notification of acceptance of ICs for record-keeping purposes to the OMS can be found in Table 179.

Note: marking codes sent as “codes” parameters shall be in a format of the full marking code with a verification code because this report is sent to an emission registrar where a marking code is verified. Marking codes shall not contain additional optional application identifiers. Quantity of the MCs in the notification of acceptance of ICs for record-keeping purposes shall not exceed 30,000 codes.

Table 179 – Structure of the “SurplusReport” object, message body (HTTP Body)

Field	Description	Type	Mandatory
documentType	Document type: SURPLUS_POSTING	String	Yes
documentVersion	Document version. 1.0 value shall be specified	String	Yes
documentDate	Document date. A date should be less of or equal to the current date	String (yyyy-MM-ddTHH:mm:ss.SSSZ)	Yes
participantInn	Tax Identification Number (INN)	String	Yes
participantKpp	A code of the reason for registration of the business place. It is mandatory for legal entities only. It must be ignored for a physical entity.	String	No Conditionally mandatory
participantFias	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS). It is mandatory for physical entities only. It must be ignored for a legal entity.	String (36) GUID	No Conditionally mandatory
primaryDocumentCustomName	Name of the primary document	String (1 – 255)	Yes
primaryDocumentDate	A date of the primary document. A document date should be less of or equal to the current date	String (yyyy-MM-dd)	Yes
primaryDocumentNumber	Primary document number	String (1 – 255)	Yes
codes	An array of strings (marking codes with a verification code without additional optional AI application identifiers))	String array (JSON Array of String)	Yes

4.4.12.2. Request Response

An example of JSON response is shown in Figure 188.

```
HTTP/1.1 200 OK
Content-Length: 74
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId":"cdf12109-10d3-11e6-8b6f-0050569977a1",
  "reportId":"3179f5d2-2bf5-47d1-8df0-9452b257d851"
}
```

Example of JSON Response

Figure 188

Upon successful completion of the request the server returns HTTP code -200 and a unique identifier (assigned by the OMS) of the notification of acceptance of ICs for record-keeping purposes. The received identifier of the notification of acceptance of ICs for record-keeping purposes is used to obtain a report processing status (See section 4.4.13). A structure of the response to the request for sending the notification of acceptance of ICs for record-keeping purposes is given in Table 180. For error codes, see subsection 6.2.

Table 180 – Format of Response to Request for Sending the Notification of Acceptance of ICs for Record-keeping Purposes

Field	Description	Type	Mandatory
omsId	A unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	A unique identifier of the notification of acceptance of ICs for record-keeping purposes (the OMS). String value. An identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.13. Method “Obtain the Report Processing Status”

This method is applied to obtain the report processing status by using the following parameters: security marker and OMS identifier; report identifier. Description on how to receive the security marker is provided in section 9.

Note: to find out the details of the report processing, it is necessary to obtain a receipt using the method “Receive a receipt by unique document identifier” (see Section 4.4.18).

4.4.13.1. Request

REST request example is shown in Figure 189.

```
GET /api/v3/report/info?reportId=fab1c0e4-9590-4ed7-8d58-18862d6a9aab&omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

REST Request Example

Figure 189

For REST Request Parameters, see Table 181

Table 181 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/report/info?omsId={omsId}&reportId={reportId}

HTTP Header Parameters can be found in Table 182.

Table 182 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)

Parameter	Value	Mandatory
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

For the request string parameter, see Table 183.

Table 183 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	Unique identifier of the OMS report. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.13.2. Response to Request

JSON Response example is shown in Figure 190.

```
HTTP/1.1 200 OK
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
Content-Length: 108
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "omsId": "cdf12109-10d3-11e6-8b6f-0050569977a1",
  "reportId": "fab1c0e4-9590-4ed7-8d58-
  18862d6a9aab", "reportStatus": "SUCCESS"
}
```

JSON Response Example

Figure 190

Upon successful completion of request, the server returns HTTP code -200 and a unique OMS report identifier and the report processing status. The format of response to request for the report processing status is shown in Table 184. For error codes see subsection 6.2.

Table 184 – Format of Response to Request for the Report Processing Status

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	Unique identifier of the OMS report. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportStatus	Report processing status. Allowed values are specified in the guide “Report processing status” (See subsection 5.3.1.7)	String (See subsection 5.3.1.7)	Yes

Parameter	Description	Type	Mandatory
errorReason	Reason for report rejection (detected error). it fills in only if reportStatus "REJECTED")	String	No (Conditionally mandatory)

4.4.14. Method “Getting a list of Service Providers”

This method is used to get a list of service providers serving the GCP by using the following parameters: security marker (token), OMS identifier. Description on how to receive the security marker is provided in section 9

4.4.14.1. Request

Example of request is shown in Figure 191.

```
GET /api/v3/providers?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Accept: application/json
```

Request Example

Figure 191

For REST request parameters, see Table 185.

Table 185 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/providers?omsId={omsId}

HTTP Header Parameters can be found in Table 186.

Table 186 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)

Parameter	Value	Mandatory
Accept	application/json	Yes

For request string parameters, see Table 187.

Table 187 – Request String Parameters (Query string parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.14.2. Response

Example of response is shown in Figure 192.

```
HTTP/1.1 200 OK
Content-Length: 820
Content-Type: application/json;charset=UTF-8

{
  "providers": [
    {
      "serviceProviderId": "a5ed4f3d-150b-49ae-bc1d-1582c4da634a",
      "providerName": "ООО \"Лориполь\"",
      "name": "СМ 6093 ООО \"Лориполь\"",
      "taxIdentificationNumber": "5835039864",
      "country": "RU",
      "address": "г.Москва Кашширское шоссе д.12",
      "contactPerson": "Иванов",
      "email": "ivanov@mail.ru",
      "productGroups": [
        "lp",
        "otp",
        "milk",
        "electronics",
        "tires",
        "perfumery",
        "water"
      ]
    }
  ]
}
```

Response Example

Figure 192

Upon successful completion of request, the server returns HTTP code -200 and the information on the GCP's service providers. The structure of response to request is given in the table below (Table 188). For error codes, see subsection 6.2

Table 188 – Format of Response to Request

Field	Description	Type	Mandatory
providers	Array of information on service providers (see Table 189)	Array of Providers JSON objects	Yes

Table 189 – Format of Providers Object

Field	Description	Type	Mandatory
serviceProviderId	Service provider identifier	String (string)	Yes
providerName	Service provider name	String (string)	Yes
name	Site name	String (string)	No

Field	Description	Type	Mandatory
taxIdentificationNumber	Exporter identifier	String (string)	No
country	Country of the service provider	String (string)	Yes
address	Site address	String (string)	No
contactPerson	Contact person	String (string)	No
email	Email	String (string)	No
role	Service provider role. This parameter will be removed in the 1st quarter of 2026.	String (string)	No (consider as deprecated)
productGroups	Goods group. Value of “Goods Groups” Catalog	Strings array (JSON Array of Strings)	Yes

4.4.15. Method “Obtaining the list of identifiers of the reports “Application data””

This method is used to obtain the list of identifiers of the “Application data” reports received from the service provider. Security marker (token) is sent to the server within HTTP-header with “clientToken” name (it can be transferred in the “Authorization” parameter for the “Medicines for human use” goods group).

Description on how to receive a security marker is provided in section 9.

4.4.15.1. Request

Example of request is shown in Figure 193.

```
GET/api/v3/quality?orderId=fab1c0e4-9590-4ed7-8d58-18862d6a9aab&omsId=d1bc8149-7b39-4aa2-afb1-
df1b6c8f80c5&limit=10&skip=1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 193

REST request parameters can be found in Table 190

Table 190 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of the environment>/api/v3/quality?orderId={orderId}&omsId={omsId}&limit={limit}&skip={skip}

HTTP header parameters can be found in Table 191.

Table 191 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 192.

Table 192 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
orderId	Order identifier assigned in the OMS or identifier of the order of the distribution provider.	String (36) (UUID)	No
limit	A value, which determines a number of the records in a response, but not more than 100 records. (10 records by default)	Number (limit>0)	No
skip	Page number (it is required for page-by-page output). Default value: 1.	Number (skip>0)	No

4.4.15.2. Response

Example of the response when the report identifiers are found by set parameters can be found in Figure 194.

```
HTTP/1.1 200 OK
{
  "totalCount": 2,
  "results":["f49075a7-e997-4642-89da-6b6facc15f0a","af5373b2-daff-4ba5-affd-1d27b8b69b5e"]
}
```

Example of response for cases when identifiers of the report were found for the set parameters

Figure 194

Example of the response for cases when identifiers of the report were not found for the set parameters can be found in Figure 195.

```
HTTP/1.1 200 OK
{
  "totalCount": 0,
  "results":[]
}
```

Example of response for cases when identifiers of the report were not found for the set parameters

Figure 195

Upon successful completion of the request, the server returns HTTP code 200 and the request processing result. A structure of the response to request is given in Table 193. For error codes, see subsection **6.2**.

Table 193 – Format of Response to Request

Field	Description	Type	Mandatory
totalCount	Total number of the reports that meets a search criteria	Number (skip≥0)	Yes
results	Array containing the reports identifiers	Array of strings	Yes

4.4.16. Method “Obtaining the list of ICs from the “Application data” report”

This method is used to obtain the list of ICs (MC without verification code) with the printing quality class specified in the report. The report ID obtained by means of the method “Obtaining the list of identifiers of the reports “Application data”” shall be specified as “reportId” parameter (Section 4.4.15). Security marker (token) is sent to the server within HTTP-header with the “clientToken” name (it can be transferred in the “Authorization” parameter for the “Medicines for human use” goods group).

Description on how to receive a security marker is provided in section 9.

4.4.16.1. Request

Example of request is shown in Figure 196.

```
GET/api/v3/quality/cisList?reportId=fab1c0e4-9590-4ed7-8d58-18862d6a9a67&omsId=d1bc8149-7b39-4aa2-afb1-df1b6c8f80c5 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 196

REST request parameters can be found in Table 194.

Table 194 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment> /api/v3/quality/cisList?reportId={reportId}&omsId={omsId}

HTTP Header Parameters can be found in Table 195.

Table 195 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 196.

Table 196 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
reportId	Identifier of “Application data” report	String (36) (UUID)	Yes

4.4.16.2. Response

Example of response is shown in Figure 197.

```
HTTP/1.1 200 OK
Content-Length: 820
Content-Type: application/json;charset=UTF-8

{
  "sntins": [
    {
      "code": "SNTIN1",
      "quality": "A"
    },
    {
      "code": "SNTIN2",
      "quality": "A"
  }
],
  "usageType": "PRINTED",
  "orderId": "3dc03262-ae2c-48f5-bae8-dc2f365893d1"

}
```

Response Example

Figure 197

Upon successful completion of the request, the server returns HTTP code 200 and the request processing result. A structure of the response to request is given in Table 197. For error codes, see subsection **6.2**.

Table 197 – Format of Response to Request

Field	Description	Type	Mandatory
orderId	Identifier of the request for marking codes emission.	String (36) (UUID)	No
sntins	Array of strings containing identification codes (MC without verification code) and printing quality class	Array of “IdentificationCode” objects (JSON Array of IdentificationCode) (see Table 198)	Yes
usageType	Type of utilization. Reference value: – PRINTED - MC has been printed – VERIFIED - MC application has been confirmed	String	Yes

Table 198 – Format of “IdentificationCode” Object

Field	Description	Type	Mandatory
code	Identification code (MC without verification code)	String	Yes
quality	Printing quality class. Available values are specified in the guide “Printing quality class” (see section 5.3.1.13)	String	No

4.4.17. Method “Receiving the business places”

This method is used to obtain information about business places and is available for the following goods groups:

“Beer, beer-based and low-alcohol beverages”;

“Non-alcoholic beer”;

“Specialized food products and biologically active food additives”;

“Juice products and non-alcoholic beverages”;

“Tobacco products”;

“Alternative tobacco products”;

“Nicotine products”;

“Radio-electronic products”;

“Radio-electronic products. Laptops and smartphones”;

“Building materials”.

4.4.17.1. Request

Example of REST request is shown in Figure 198.

```
GET/api/v3/mod?omsId=d1bc8149-7b39-4aa2-afb1-df1b6c8f80c5 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Host: localhost:8080
```

Example of REST Request

Figure 198

REST request parameters can be found in Table 199.

Table 199 – REST request parameters

Parameter	Description
HTTP Method	GET
URL	<url of the environment>/api/v3/mod?omsId={omsId}&productGroup={bio}&limit={limit}&skip={skip}

HTTP Header Parameters can be found in Table 200.

Table 200 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Accept	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)

Request string parameters are given in Table 201.

Table 201 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
productGroup	Goods group. Allowed values of the “Goods groups” guide (see subsection 5.3.1.16)	String	Yes
limit	A value, which determines a number of the records in a response, but not more than 1000 records. (10 records by default)	Number (limit>0)	No
skip	Mode index from which it is necessary to get quantity of the modes specified in limit	Number (skip≥0)	No

4.4.17.2. Response

Example of the response in case when there are business places in the profile can be found in Figure 199

```
HTTP/1.1 200 OK

{
  "totalCount": 2,
  "manufactureInfo": [
    {
      "id": 315,
      "name": "Test1",
      "address": "198035, г Санкт-Петербург, улица Курляндская, дом 49 ЛИТЕР А",
      "groupIds": [15,1],
      "fiasId": "255d016d-2557-4c96-a7fc-c974561a4546",
      "kpp": "783901001"
    },
    {
      "id": 376,
      "name": "Test2",
      "address": "198035, г Москва, улица Беляева, дом 4",
      "groupIds": [3,1],
      "fiasId": "345d016d-5657-41we-a3fc-c974561a4fff",
      "kpp": "983901321"
    }
  ]
}
```

Example of REST response when there are business places in the profile

Figure 199

Example of the response in case when there are no business places in the profile, see Figure 200.

```
HTTP/1.1 200 OK
{
  "totalCount": 0,
 "manufactureInfo": []
}
```

Example of REST response when there are no business places in the profile

Figure 200

Upon successful completion of the request, the server returns HTTP code -200 and the request processing result. The structure of response to request is given in Table 202.

Table 202 – Format of Response to Request

Parameter	Description	Type	Mandatory
manufactureInfo	Information on the production sites/business activity places (BAP)	Array of objects (see Table 203)	No
totalCount	Total number of the modes that meets search criteria	Number (skip≥0)	Yes

For the structure of manufactureInfo object, see Table 203.

Table 203 – Format of manufactureInfo object

Parameter	Description	Type	Mandatory
id	Entry identifier in SUA	Integer(int64)	No
name	Name of the site/BAP	String	No
lines	List of the production lines	Array of strings	No
groupIds	Array of goods group IDs (numerical identifier of the goods group)	Array of integers (int64)	Yes
fiasId	FIAS code - unique ID of FIAS within GIS and Unified State Automated Information System (EGAIS).	String (36) (GUID)	No
countryCode	Production country code	String	No
kpp	Code of reason for the registration of the business place.	String	No
address	Address of the production place	String	Yes
mod	An indicator of wether a site is a business place. Valid values: – true - Business place – false - Production site	boolean	Yes
vetisGuid	ID of VetIS production site	String	No

4.4.18. Method “Receive a receipt by unique document identifier”

This method is used to obtain receipts by unique identifier of the document (order, report or MC block) **as part of Receipting 2.0.** This method is used the following parameters: security marker (token), OMS identifier, identifier of the document (order, report or MC block).

Note: receipts formed during Receipting 1.0 cannot be received by using this method.

4.4.18.1. Request

Example of request is shown in Figure 201.

```
GET/api/v3/receipts/receipt?omsId=53ecde9e-a686-4934-a337-ae319c944242&resultDocId=05f52b01-ba4b-
4dc7-a94a-7846db44ac63 HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Accept: application/json;
```

Request Example

Figure 201

REST request parameters can be found in Table 204.

Table 204 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment>/api/v3/receipts/receipt?omsId={omsId}&resultDocId={resultDocId}

HTTP Header Parameters can be found in Table 205.

Table 205 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 206.

Table 206 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
resultDocId	Unique identifier of the document (order, report or MC block). String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.18.2. Response

Example of the response with receipt on application report which has been processed successfully, can be found in Figure 202

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "results": [
    {
      "resultDocId": "8e74959e-4323-4e9b-8882-35c953b4d666",
      "resultDocDate": 1633441943252,
      "sourceDocId": "3ec01b00-b8d9-4424-b2e4-2a23df1c7c69",
      "sourceDocDate": 1633441923090,
      "state": "SUCCESS",
      "code": 0,
      "description": "Document was successfully processed",
      "workflow": "REPORT_UTILIZE",
      "workflowVersion": 1,
      "details": {
        "participantInn": "7731376812",
        "createDocDate": 1633441923090,
        "productGroupIds": [
          3
        ],
        "txType": "REPORT_UTILIZE",
        "startDocDate": 1633441932977
      },
      "operations": [
        {
          "operationId": "da0fa16a-9328-4514-a40b-f2a75f50053f",
          "operationType": "REPORT_UTILIZE_RECEIVED",
          "operationDate": 1633441923101,
          "docId": "3ec01b00-b8d9-4424-b2e4-2a23df1c7c69",
          "docDate": 1633441923090,
          "docHash": "120e84a1183f1be0d6a2f1f9929dded068cb5ea406b6b1894455081",
          "details": {
            "state": "SUCCESS",
            "participantId": "7",
            "omsId": "53ecde9e-a686-4934-a337-ae319c944242",
```

```
            "createDocDate": 1633441923090,
            "quantity": 1
          }
        },
        {
          "operationId": "c81fa582-c055-494e-919a-88123331ab3a",
          "operationType": "REPORT_UTILIZE_EMISSION_SEND",
          "operationDate": 1633441943199,
          "details": {
            "state": "SUCCESS"
          }
        },
        {
          "operationId": "f7de41e9-000d-415a-9b75-c3a7122d2240",
          "operationType": "RNMS_GIS_ROUTED",
          "operationDate": 1633441929868,
          "details": {
            "state": "SUCCESS",
            "productGroupIds": [
              3
            ]
          }
        },
        {
          "operationId": "c592bf38-3f81-4874-ad84-d19e68c4be3a",
          "operationType": "RNMS_GIS_PROCESSED",
          "operationDate": 1633441930708,
          "details": {
            "state": "SUCCESS",
            "productGroupIds": [
              3
            ],
            "gtin": "04616033545006",
            "processed": 1,
            "total": 1
          }
        }
      ]
    }
  ]
}
```


Response Example

Figure 202

Upon successful request completion, the server returns HTTP code 200 and the array of the receipts corresponding to the document specified in the parameters. The structure of the response to request is given in Table 207.

Table 207 – Format of Response to Request

Field	Description	Type	Mandatory
results	Array of desired receipts. Description of the receipt structure can be found in Section 10	Array of JSON objects	Yes

4.4.19. Method “Obtaining receipt by set filters”

This method is used to obtain receipts by set filters **within Receipting 2.0.** This method uses the following parameters: security marker (token), OMS identifier, filters, which will be used for search.

4.4.19.1. Restrictions

Receipts, which were created during Receipting 1.0 cannot be obtained using this method. Total amount of the returned data is limited to 100 records.

A product of the values of the skip and limit parameters should not exceed 10000 (inclusive).

4.4.19.2. Request

Example of request is shown in Figure 203.

```
POST/api/v3/receipts/receipt/search?omsId=53ecde9e-a686-4934-a337-ae319c944242
HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json
Accept: application/json

{
  "filter": {
    "startCreateDocDate": 1632480396000,
    "endCreateDocDate": 1632480396000,
    "startStartDocDate": 1632480396000,
    "endStartDocDate": 1632480397000,
    "resultDocIds": ["f49075a7-e997-4642-89da-6b6facc15f0a", "f49077a7-e997-4642-89da-6b6facc15f0a"],
    "sourceDocIds": ["f49075a7-e997-4642-89da-6b6facc15f0a"],
    "orderIds": ["f49077a7-e997-4642-89da-6b6facc15f0a"],
    "serviceProviderIds": ["f49075a7-e997-4642-89da-6b6facc15f0a"],
    "resultCodes": [0, 1, 4],
    "productGroups": ["milk"],
    "workflowTypes": ["REPORT_UTILIZE"],
    "productionOrderIds": ["af5fb948-d0c5-4e52-96d6-6af442798085"]
  },
   "limit": 10,
   "skip": 1
}
```

Example of REST Request

Figure 203

REST request parameters can be found in Table 208.

Table 208 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of environment>/api/v3/receipts/receipt/search?omsId={omsId}

HTTP Header Parameters can be found in Table 209

Table 209 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Accept	application/json	Yes
Content-type	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)

Request string parameters are given in Table 210

Table 210 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

Request body parameters are given in Table 211.

Table 211 – Request Body Structure (HTTP Body)

Field	Description	Type	Mandatory
filter	Search parameters. At least one parameter shall be filled in	Object (Table 212)	Yes
limit	A value, which determines a number of the records in a response, but not more than 100 records. Default value is 10.	Integer (limit>0)	No
skip	Page number (it is required for page-by-page output). Default value: 1.	Integer (skip>0)	No

A structure of the receipt search parameters can be found in Table 212.

Table 212 – Request Body Structure (HTTP Body)

Field	Description	Type	Mandatory
startCreateDocDate	A range of the search of transactions by a primary document creation date (createDocDate). From(start)...to(end) Date and time in Unix format in milliseconds	Integer (int64)	No Conditionally mandatory (conditionally mandatory)
endCreateDocDate		Integer (int64)	No Conditionally mandatory (conditionally mandatory)
startStartDocDate	A range of the search of transactions by a transaction start date - startDocDate. From(start)...to(end) Date and time in Unix format in milliseconds	Integer (int64)	No Conditionally mandatory (conditionally mandatory)
endStartDocDate		Integer (int64)	No Conditionally mandatory (conditionally mandatory)
resultDocIds	Identifier of the result receipt, string array. Maximum number of items in the array - 100	String	No
sourceDocIds	Identifier of the primary document, string array. Maximum number of items in the array - 100	String	No
orderIds	Order identifier, string array. Maximum number of items in the array - 100	String	No
serviceProviderIds	Identifier of the service provider, string array. Maximum number of items in the array - 100	String	No
resultCodes	A status in which a receipt should be. Value array. Numerical code of the status shall be specified. A value of the guide “Receipt statuses” (see Section 5.3.1.17)	Integer ($int32)	No
productGroups	A goods group specified for the transactions, string array.	String	No
productionOrderIds	Production order ID, string array. Maximum number of items in the array - 100	String	No
workflowTypes	Document type (transaction type), string array. A list of allowed values: – CREATE_ORDER – GET_CODES	String	No

Field	Description	Type	Mandatory
	– CLOSE_ORDER – ANNULMENT_CODES – REPORT_UTILIZE – REPORT_AGGREGATION – REPORT_DROPOUT – REPORT_QUALITY		

Note: If a date range is used to search for a receipt, it is necessary to specify start and end of this range in the request (the interval between them should not be more than 7 calendar days).

4.4.19.3. Response

Example of the response in case when a receipt has been found for the parameters specified, can be found in Figure 204.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
{
  "totalCount": 1,
  "results": [
    {
      "resultDocId": "8e74959e-4323-4e9b-8882-35c953b4d666",
      "resultDocDate": 1633441943252,
      "sourceDocId": "3ec01b00-b8d9-4424-b2e4-2a23df1c7c69",
      "sourceDocDate": 1633441923090,
      "state": "SUCCESS",
      "code": 0,
      "description": "Document was successfully processed",
      "workflow": "REPORT_UTILIZE",
      "workflowVersion": 1,
      "details": {
        "participantInn": "7731376812",
        "createDocDate": 1633441923090,
        "productGroupIds": [
          3
        ],
        "txType": "REPORT_UTILIZE",
        "startDocDate": 1633441932977
      },
      "operations": [
        {
          "operationId": "da0fa16a-9328-4514-a40b-f2a75f50053f",
          "operationType": "REPORT_UTILIZE_RECEIVED",
          "operationDate": 1633441923101,
          "docId": "3ec01b00-b8d9-4424-b2e4-2a23df1c7c69",
          "docDate": 1633441923090,
          "docHash": "120e84a1183f1be0d6a2f1f9929dded068cb5ea406b6b1894455081",
          "details": {
            "state": "SUCCESS",
            "participantId": "7",
            "omsId": "53ecde9e-a686-4934-a337-ae319c944242",
            "createDocDate": 1633441923090,
            "quantity": 1
          }
        },
        {
          "operationId": "c81fa582-c055-494e-919a-88123331ab3a",
          "operationType": "REPORT_UTILIZE_EMISSION_SEND",
          "operationDate": 1633441943199,
          "details": {
            "state": "SUCCESS"
```

```
          }
        },
        {
          "operationId": "f7de41e9-000d-415a-9b75-c3a7122d2240",
          "operationType": "RNMS_GIS_ROUTED",
          "operationDate": 1633441929868,
          "details": {
            "state": "SUCCESS",
            "productGroupIds": [
              3
            ]
          }
        },
        {
          "operationId": "c592bf38-3f81-4874-ad84-d19e68c4be3a",
          "operationType": "RNMS_GIS_PROCESSED",
          "operationDate": 1633441930708,
          "details": {
            "state": "SUCCESS",
            "productGroupIds": [
              3
            ],
            "gtin": "04616033545006",
            "processed": 1,
            "total": 1
          }
        }
      ]
    }
  ]
}
```


Example of response if receipts were found

Figure 204

Example of the response in case when a receipt has not been found for the parameters specified can be found in Figure 205.


```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "totalCount":0,
  "results": []
}
```


Example of the response if receipts were not found

Figure 205

Upon successful request completion, the server returns HTTP code 200 and array of the receipts corresponding to the filters specified. A structure of the response to request is given in Table 213. If receipts have not been found, an empty array of objects will be returned.

In case of error, HTTP code 400 will be returned with indication of the error and if service is unavailable, HTTP code 500 will be returned.

Table 213 – Format of Response to Request

Field	Description	Type	Mandatory
totalCount	The approximate number of the found results, which can be greater but not less than the specified value. More accurate data requires more precise search conditions.	Integer ($int32)	Yes
results	Array of desired receipts. A description of the receipt structure can be found in Section 10.	Array of JSON objects	Yes

4.4.20. Method “Receiving a document related to receipt”

This method is used to obtain a document related to a receipt. These documents are:

1. Source document (document sent by a participant). Identifier of the document related to the receipt (docId) in this case is equal to a value of docId parameter in the first event of the receipt (event structure can be found in Table 379).
2. Document with marking codes that were processed with error when routing to processing:
    a. if a participant submits an application report;
    b. if a participant submits a rejection report (for all goods groups, except "Alternative tobacco products", "Nicotine products" and "Tobacco products”);
    c. if automatic cancellation report is formed in the OMS (it is formed when closing order with marking codes with “Active” status or if MCs in the order are expired);
    d. if automatic application report is formed when MCs are issued.

    In this case, identifier of the document (docId) related to the receipt is docId parameter of the event “Dispatch of report for processing” (event structure can be found in Table 379). If all marking codes have been sent successfully for processing during the report processing, docId parameter will be missing in this event.
3. Document with marking code processing results in the processing:
    a. when a participant submits an application report;
    b. when a participant submits a rejection report;
    c. when a participant submits an aggregation report;
    d. when automatic cancellation report is formed in the OMS (it is formed when closing order with marking codes with “Active” status or if MCs in the order are expired);
    e. when automatic application report is formed when MCs are issued.

In this case, identifier of the document (docId) related to the receipt is docId parameter of the event “Report processing result” (event structure can be found in Table 379). For the rejection report (for the “Tobacco products”, “Nicotine products”, “Alternative tobacco products” goods groups) and for the aggregation report, this document will be formed only for those marking codes, which have been processed with error (if MCs have been processed without error, docId parameter will be missing in this event). For the remaining reports, the document will be formed for all marking codes regardless of their processing result.

A security marker (token) is sent to the server in HTTP-header with the “clientToken” name (it can be transferred in the “Authorization” parameter for the “Medicines for human use” goods group).

4.4.20.1. Request

Example of request is shown in Figure 206.

```
GET /api/v3/receipts/document?resultDocId=15499583-9aa7-429a-bc33-335f0f4b0f93&docId=b024ae09-ef7c-
449e-b461-05d8eb116c79&omsId=7ce310f-5102-4057-9745-69d8d4b98ba4 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 206

REST request parameters can be found in Table 214.

Table 214 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment>/api/v3/**receipts/document**?resultDocId={resultDocId}&docId={docId}&omsId={omsId}

HTTP Header Parameters can be found in Table 215

Table 215 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 216

Table 216 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
resultDocId	Identifier of the receipt (identifier of the report, MC order or MC block). String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
docId	Identifier of the document related to the receipt. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.20.2. Response

Example of response when indicating an identifier of the document with MCs, which have been processed with error when routing to processing, in docId parameter can be found in Figure 207

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
   "content":"{\"cislist\":[{\"cis\":\"0104616052543035215KR5Ra\",\"code\":2},
{\"cis\":\"0104616052543035215Mt867\",\"code\":4}]}"
}
```

Response Example

Figure 207

Example of response (converted to * .json for convenience) when indicating an identifier of the document with MCs, which have been processed with error when routing to processing, in docId parameter can be found in Figure 208.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
{
  "content": {
    "cislist": [
      {
        "cis": "0104616052543035215KR5Ra",
        "code": 2
      },
      {
        "cis": "0104616052543035215Mt867",
        "code": 4
      }
    ]
  }
}
```

Response Example

Figure 208

Upon successful completion of the request, the server returns HTTP code 200 and a document related to the receipt. A structure of the response to request is given in Table 217.

Table 217 – Format of Response to Request

Field	Description	Type	Mandatory
content	Content of the document related to the receipt represented in the form of string	String (string)	Yes

As an example, a structure (in json format for improved readability) of the document with the MCs, which have been processed with error when routing to processing/ of the document with MC processing results in the processing is provided below (Table 218).

Table 218 – Description of document structure with errors

Field	Description	Type	Mandatory
cisList	A list of the MC information	Array of objects (see Table 219)	Yes

Table 219 - Format of cisList parameter object

Field	Description	Type	Mandatory
cis	Marking code (without verification code)	String	Yes
code	Code of MC processing. A value of the guide “Codes of marking codes processing result” (see Section 5.3.1.18)	Integer ($int32)	Yes
description	Comment	String	No

Note: marking codes specified in the documents, which are returned by the method “Receiving a document related to receipt”, do not contain verification code.

4.4.21. Method “Search of documents”

This method is used to search for the GCP’s documents (awaiting sending to the system) with the following statuses:

1. Order with CREATED status;
2. Application report with DRAFT or PENDING status;
3. Aggregation report with PENDING status;
4. Rejection report with PENDING status;
5. Notification of acceptance of ICs for record-keeping purposes with PENDING status.

Note: to view the document, it is necessary to use the method “Get document contents” (see Section 4.4.22)

4.4.21.1. Request

Example of request is shown in Figure 209.

```
GET/api/v3/documents/search?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1&documentType=order&limit=10
HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 209

Example of the request with the document index is shown in Figure 210.

```
GET/api/v3/documents/search?omsId=CDF12109-10D3-11E6-8B6F-
0050569977A1&documentType=order&limit=10&skip=10 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of request with document index

Figure 210

REST request parameters can be found in Table 220.

Table 220 – REST request parameters

Parameter	Description
HTTP method	GET
URL	<url of the environment>/api/v3/documents/search?omsId={omsId}&documentType={documentType}&limit={limit}&skip={skip}

HTTP Header Parameters can be found in Table 221.

Table 221 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 222.

Table 222 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
documentType	Type of document. Valid values: – ORDER – UTILISATION_REPORT – AGGREGATION_REPORT – DROPOUT_REPORT – SURPLUS_POSTING	String	Yes
limit	A value, which determines quantity of the records in a response, but not more than 1000 records. (10 records by default)	Number (limit>0)	No
skip	Reference number of the document from which it is necessary to get quantity of the documents specified in limit	Number (skip≥0)	No

4.4.21.2. Response

Example of response is shown in Figure 211.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 40

{
  "totalCount": 1023,
  "result": [
    {
      "docId": "04990484-55f3-4289-96f0-ca8bdd2c9e8d",
      "documentType": "ORDER",
      "productGroup": "milk",
      "status": "CREATED",
      "createdTimestamp": 1644232918197
    }
  ]
}
```

Response example

Figure 211

Upon successful completion of the request, the server returns HTTP code 200 and a list of the documents, which correspond to the request criteria. A format of the response to request is given in Table 223.

Table 223 – Response Format

Parameter	Description	Type	Mandatory
result	A list of the documents (for GCP) awaiting sending to the system / signing. If nothing is found, array will be empty.	Array of the “ResultSearch” objects (see Table 224)	Yes
totalCount	Total number of the documents that meets search criteria	Number (skip≥0)	Yes

Format of “ResultSearch” object can be found in Table 224.

Table 224 – Format of “ResultSearch” Object

Parameter	Description	Type	Mandatory
docId	Document identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
documentType	Type of document. Valid values: – ORDER – UTILISATION_REPORT – AGGREGATION_REPORT – DROPOUT_REPORT	String	Yes
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes
status	Document status. Valid values: 1. CREATED – for MC order; 2. DRAFT – for application report; 3. PENDING – for a report on application/aggregation/rejection	String	Yes
createdTimestamp	Creation date (UnixTime)	Number	Yes

4.4.22. Method “Get document contents”

This method is intended to receive a content of the GCP’s document by identifier (docId), which has been received by means of the “Search of documents” method (see Section 4.4.21).

Note: after a content of the document has been received by the GCP, the document can be deleted by means of the “Delete document” method (see Section 4.4.23) or can be signed by means of the “Sign document” method (see Section 4.4.24).

4.4.22.1. Request

Example of request is shown in Figure 212.

```
GET/api/v3/documents/content?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1&docId=04990484-55f3-4289-96f0-ca8bdd2c9e8d HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 212

REST request parameters can be found in Table 225.

Table 225 – REST request parameters

Parameter	Description
HTTP method	GET
URL	<url of environment>/api/v3/documents/content?omsId={omsId}&docId={docId}

HTTP Header Parameters can be found in Table 226.

Table 226 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 227**.**

Table 227 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
docId	Document identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.22.2. Response

Example of response is shown in Figure 213.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 40

{
  "docId": "04990484-55f3-4289-96f0-ca8bdd2c9e8d",
  "productGroup": "milk",
  "documentType": "ORDER",
  "status": "CREATED",
  "createdTimestamp": 1644232918197,
  "content": "<Документ в формате base64>"
}
```

Response Example

Figure 213

Upon successful completion of the request, the server returns HTTP code 200 and the document data. The format of response to request is given in Table 228.

Table 228 – Response Format

Parameter	Description	Type	Mandatory
docId	Document identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
productGroup	Goods group. Allowed values of the “Goods groups” guide (See subsection 5.3.1.16)	String	Yes
documentType	Type of document. Valid values: – ORDER – UTILISATION_REPORT – AGGREGATION_REPORT – DROPOUT_REPORT	String	Yes
status	Document status. Valid values: 1. CREATED – for order; 2. DRAFT – for application report; 3. PENDING – for a report on application/aggregation/rejection	String	Yes
createdTimestamp	Creation date (UnixTime)	Number	Yes
content	Document in base64 format. Attribute contains a document of JSON format, coded in base64	String	Yes

4.4.23. Method “Delete document”

This method is intended to delete a GCP’s document with the following statuses:

1. Order with CREATED status;
2. Application report with DRAFT or PENDING status;
3. Aggregation report with PENDING status;
4. Rejection report with PENDING status;
5. Notification of acceptance of ICs for record-keeping purposes with PENDING status.

4.4.23.1. Request

Example of request is shown in Figure 214.

```
DELETE /api/v3/documents/delete?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1&docId=04990484-55f3-4289-96f0-ca8bdd2c9e8d HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Request Example

Figure 214

REST request parameters can be found in Table 229.

Table 229 – REST request parameters

Parameter	Description
HTTP method	DELETE
URL	<url of environment>/api/v3/documents/delete?omsId={omsId}&docId={docId}

HTTP Header Parameters can be found in Table 230.

Table 230 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)

Parameter	Value	Mandatory
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 231.

Table 231 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
docId	Document identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.23.2. Response

Example of response is shown in Figure 215.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 40

{
  "success": true
}
```

Response Example

Figure 215

Upon successful completion of the request, the server returns HTTP code 200, boolean value, and operation result. A format of the response to request is given in Table 232.

Table 232 – Response Format

Parameter	Description	Type	Mandatory
success	Boolean value, operation result	boolean	Yes

4.4.24. Method “Sign document”

This method is intended to send a GCP’s signed document with the following statuses:

1. Order with CREATED status;
2. Application report with DRAFT or PENDING status;
3. Aggregation report with PENDING status;
4. Rejection report with PENDING status;
5. Notification of acceptance of ICs for record-keeping purposes with PENDING status.

4.4.24.1. Request

Example of request is shown in Figure 216.

```
POST /api/v3/documents/sign?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Content-Type: application/json

{
  "docId": "04990484-55f3-4289-96f0-ca8bdd2c9e8d",
  "signature": "<Данные в формате base64>"
}
```

Request Example

Figure 216

REST request parameters can be found in Table 233.

Table 233 – REST request parameters

Parameter	Description
HTTP method	POST
URL	<url of environment>/api/v3/documents/sign?omsId={omsId}

HTTP Header Parameters can be found in Table 234.

Table 234 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes
Content-type	application/json	Yes

Request string parameters are given in Table 235.

Table 235 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

A description of the request body format can be found in Table 236.

Table 236 – Request Body Parameters (HTTP Body)

Field	Description	Type	Mandatory
docId	Document identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
signature	Signed document in base64 format. A signature of the document shall be detached.	String	Yes

4.4.24.2. Response

Example of response is shown in Figure 217.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 40

{
  "success": true
}
```

Response example

Figure 217

Upon successful completion of the request, the server returns HTTP code 200, boolean value, and operation result. A format of the response to request is given in Table 237.

Table 237 – Response Format

Parameter	Description	Type	Mandatory
success	Boolean value, operation result	boolean	Yes

4.4.25. Method “Check OMS availability”

This method is used to check availability, allows to receive OMS and OMS API version and uses the following parameters: security marker (token) and OMS identifier. Description on how to receive a security marker is provided in section 9.

4.4.25.1. Request

Example of REST request is shown in Figure 218.

```
GET /api/v3/ping?omsId=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
Accept: application/json
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
```

Example of REST Request

Figure 218

REST request parameters can be found in Table 238.

Table 238 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment>/api/v3/ping?omsId={omsId}

HTTP Header Parameters can be found in Table 239.

Table 239 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameter is given in Table 240.

Table 240 – Request String Parameter

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

4.4.25.2. Response to request

Example of JSON response is shown in Figure 219.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 19

{
  "omsId":"cdf12109-10d3-11e6-8b6f-0050569977a1",
  "apiVersion": "2.0.0.54",
  "omsVersion": "3.1.8.0"
}
```

Example of JSON Response

Figure 219

Upon successful request completion, the server returns HTTP code -200, a unique OMS identifier, OMS version number and OMS API number. A format of the response to request for OMS availability can be found in Table 241. For error codes, see subsection **6.2**.

Table 241 – Format of Response to Request for OMS Availability

Field	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes
apiVersion	OMS API version	String	Yes
omsVersion	OMS version	String	Yes

4.4.26. Method “Provision of the list of installations of the integration solution (external connection)”

This method is used to receive a GCP’s list of the installations of the integration solution (external connection). In this method, <url of environment> means a basic address of the environment that hosts API to work with installations of the integration solution, for environment addresses, see Section 9.2.1

4.4.26.1. Request

Example of REST request is shown in Figure 220.

```
GET /api/v3/integration/connection?omsId=cdf12109-10d3-11e6-8b6f-
0050569977a1&limit=5&offset=5 HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Accept: application/json
```

Example of REST Request

Figure 220

REST request parameters can be found in Table 242.

Table 242 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment> /api/v3/integration/ connection?omsId={omsId}&limit={limit}&offset={offset}

HTTP Header Parameters can be found in Table 243.

Table 243 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Accept	application/json	Yes
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)

Request string parameters are given in Table 244.

Table 244 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier.	String (UUID)	Yes
limit	Number of records returned in the response. Default value: 10 Maximum value: 100	Integer	No
offset	Number of the records in the resulting issue to be skipped. Default value: 0	Integer	No

4.4.26.2. Response to request

Example of JSON response is shown in Figure 221.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "omsConnectionInfos": [
    {
      "omsConnection": "a5ed4f3d-150b-49ae-bc1d-1582c4da634a",
      "address": "Адрес установки",
      "programName": "Наименование ПО",
      "productGroups": ["milk"],
      "productVersion": "3.0",
      "vendorInn": "6312108071"
    },
    {
      "omsConnection": "a5ed4f3d-150b-49ae-bc1d-1582c4da6777",
      "address": "Адрес установки 2",
      "programName": "Наименование ПО 2",
      "productGroups": ["milk"],
      "productVersion": "3.5",
      "vendorInn": "6312108771"
    }
  ],
  "total": 2
}
```

Example of JSON Response

Figure 221

You can see an example of the response in case when installations of the integration solution (external connection) meeting the request parameters have not been found in Figure 222

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8

{
  "omsConnectionInfos": [
  ],
  "total": 0
        }
```

Example of the JSON response in case when installations of the integration solution (external connection) meeting the request parameters have not been found

Figure 222

Upon successful completion of the request, the server returns HTTP code 200 and a list with information on integration solution installations (external connection) of the GCP.

A format of response to request is given in Table 245.

Table 245 – Format of Response to Request

Field	Description	Type	Mandatory
omsConnectionInfos	Array of data on integration solution installations (external connection) of the GCP. It may be empty (if data on request were not found).	Array of Objects (see Table 246)	Yes
total	Total number of integration solution installations (external connection) of the GCP	Integer	Yes

Table 246 – Format of data on integration solution installations (external connection) of the GCP

Field	Description	Type	Mandatory
omsConnection	Unique connection identifier (external connection) assigned to the registered installation of the integration solution	String (UUID)	Yes
address	Address of installation of the integration solution instance	String	No
programName	Software name	String	No
productGroups	Software goods groups. Guide values (see section 5.3.1.16)	Array of Strings	No
productVersion	Software version	String	No
vendorInn	vendorInn	String	No

4.4.27. Method “Delete installation of the integration solution instance”

The method is intended to delete an installation of the integration solution instance (external connection) in the OMS. In this method, <url of environment> means a basic address of

the environment that hosts API to work with installations of the integration solution, for environment addresses, see Section 9.2.1

4.4.27.1. Request

Example of request is shown in Figure 223.

```
DELETE <url of the environment>/api/v3/integration/connection?omsId=cdf12109-10d3-11e6-8b6f-
0050569977a1&omsConnection=cdf12109-10d3-11e6-8b6f-0050569977a1 HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Accept: application/json
```

Request Example

Figure 223

REST request parameters can be found in Table 247.

Table 247 – REST request parameters

Parameter	Description
HTTP method	DELETE
URL	<url of environment>/api/v3/integration/connection?omsId={omsId}& omsConnection={omsConnection}

HTTP Header Parameters can be found in Table 248.

Table 248 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Authorization	token {token_id} - authorization token. It is used only for the “Medicines for Human Use” goods group. It is mandatory if clientToken parameter is not indicated. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)
clientToken	{clientToken} – security marker Description on how to receive a security marker is provided in section 9. It is mandatory if Authorization parameter is not specified.	No (conditionally mandatory)
Accept	application/json	Yes

Request string parameters are given in Table 249.

Table 249 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier.	String (UUID)	Yes
omsConnection	Unique identifier of the deleted external connection assigned to the registered installation of the integration solution. It must belong to a GCP who has sent a request (i.e., to a goods circulation participant with omsId and clientToken from the request), deletion of omsConnection of other goods circulation participants is not allowed.	String	Yes

4.4.27.2. Response

Example of response is shown in Figure 224.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8
Content-Length: 40

{
  "success": true
}
```

Response Example

Figure 224

Upon successful completion of request, the server returns HTTP code 200, a boolean value, and the operation result. A format of the response to request is given in Table 250.

Table 250 – Response Format

Parameter	Description	Type	Mandatory
success	Boolean value, operation result	boolean	Yes

4.4.28. Method “Get an ID of GCP’s profile”

This method is used to get an identifier of the OMS profile (omsID) based on the provided TT GIS security marker.

4.4.28.1. Request

Example of the request is shown in Figure 225.

```
GET <url of environment>/api/v3/integration/profile
Accept: application/json
Authorization: Bearer {JWT маркер безопасности}
```

Request Example

Figure 225

REST request parameters can be found in Table 251.

Table 251 – REST request parameters

Parameter	Description
HTTP method	GET
URL	<url of environment>/api/v3/integration/profile

HTTP Header Parameters can be found in Table 252.

Table 252 – HTTP Header Parameters (HTTP Header)

Parameter	Value	Mandatory
Accept	application/json	Yes
Authorization	Allowed value is Bearer {token}, where a token is JWT security token or a single token (unitedToken) of the TT GIS	Yes

4.4.28.2. Response

Example of response is shown in Figure 226.

```
HTTP/1.1 200 OK
Content-Type: application/json;charset=UTF-8


{
  "omsId":"b7b1abc9-f4ee-47db-8a20-f80ac83504e8",
  "profileStatus":"ACTIVE",
  "productGroups": [
    "ANTISEPTIC",
    "SHOES",
    "PETFOOD",
    "PERFUM",
    "MEAT",
    "OTP",
    "SEAFOOD",
    "MILK",
    "BIO",
    "BEER",
    "WHEELCHAIRS"
  ],
  "lockedProductGroups": ["BIO"],
  "blockedProductGroups": [
    "SHOES",
    "MILK"
  ]
}
```

Response Example

Figure 226

Upon successful completion of the request, the server returns HTTP code 200 and the operation result. A format of the response to request is given in Table 253.

Table 253 – Response Format

Parameter	Description	Type	Mandatory
omsId	Unique identifier of the GCP's profile	String	Yes
profileStatus	Participant status. Available values: • ACTIVE - activation; • LOCKED - locking; • SUSPENDED – suspended (reserved for future use)	String	Yes
productGroups	List of the goods groups	Array of strings	Yes
lockedProductGroups	List of the goods groups with restrictions. If they are missing, an empty array will be returned in the response.	Array of strings	No
blockedProductGroups	List of completely blocked goods groups of the GCP. If they are missing, an empty array will be returned in the response.	Array of strings	No

4.4.29. Method "Get information on MC orders by filters"

This method is used to get information on marking code orders by filters. The description on how to receive a security marker is provided in section 9.

4.4.29.1. Request

An example of the REST request to get information on MC orders for the "Beer, beer-based and low-alcohol beverages" goods group can be found in Figure 227.

```
POST /api/v3/orders/search HTTP/1.1
clientToken: 1cecc8fb-fb47-4c8a-af3d-d34c1ead8c4f
Accept: application/json
Content-Type: application/json


{
  "filter": {
    "startCreatedTimestamp": 1632480396000,
    "endCreatedTimestamp": 1632480396000,
    "productGroups": ["beer"],
    "orderStatuses": ["CREATED"]
  },
   "limit": 10,
   "page": 1
}
```

Example of REST request for “Beer, beer-based and low-alcohol beverages” goods group

Figure 227

A structure of the JSON request to get information on marking code orders by filters.

The REST request parameters can be found in Table 254.

Table 254 – REST request parameters

Parameter	Value
HTTP method	POST
URL	/api/v3/orders/search

HTTP Header Parameters can be found in Table 255.

Table 255 – HTTP Headers Parameters (HTTP Header)

Parameter	Value	Mandatory
Content-type	application/json	Yes
Accept	application/json	Yes
clientToken	{clientToken} – the security marker The description on how to receive a security marker is provided in section 9. It is mandatory if the Authorization parameter is not specified.	No (conditionally mandatory)
Authorization	token {token_id} – the authorization token. It is used only for the “Medicines for Medical Use” goods group. It is mandatory if the clientToken parameter is not specified. Example of indication: **Authorization:** token {token_id}	No (conditionally mandatory)

Request string parameters are given in Table 256.

Table 256 – Request String Parameters

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier. String value. ID value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (36) (UUID)	Yes

The description of the request body format can be found in Table 257.

Table 257 – Request body parameters (HTTP Body)

Field	Description	Type	Mandatory
filter	Search parameters.	“OrderFilterDtoV3” object	No
limit	A value, which determines the number of the records in a response, but no more than 100 records. Default value is 10.	Number (limit>0)	No
page	Page number (it is required for page-by-page output). Default value: 1.	Number (page>0)	No

Table 258 – Structure of the “OrderFilterDtoV3” object

Field	Description	Type	Mandatory
startCreatedTimestamp	A range of search for the order by a creation date A date and time in Unix format in milliseconds	Number	No (conditionally mandatory)
endCreatedTimestamp		Number	No (conditionally mandatory)
orderStatuses	A list of the MC order states, array of strings. Valid values: CREATED, PENDING, DECLINED, APPROVED, READY, CLOSED	String array	No
productGroups	A list of the goods groups, array of strings.	String array	No
productionOrderIds	Production order ID, string array. Maximum number of items in the array - 100	String array	No
serviceProviderIds	A list of the service provider’s IDs, array of strings. Maximum number of items in the array - 100	String array	No
orderIds	Order identifiers, array of strings. Maximum number of items in the array - 100	String array	No

4.4.29.2. Response

An example of JSON response is shown in Figure 228.

```
HTTP/1.1 200 OK
Content-Length: 512
Pragma: no-cache
X-XSS-Protection: 1; mode=block
Expires: 0
X-Frame-Options: DENY
X-Content--Options: nosniff
Content-Type: application/json;charset=UTF-8
Cache-Control: no-cache, no-store, max-age=0, must-revalidate

{
  "totalCount": 1,
  "results": [
    {
      "orderId": "0a4f21a9-19b8-11e9-8f5f-6b5f569f7171",
      "orderStatus": "READY",
      "buffers": [
        {
          "availableCodes": 1200,
          "bufferStatus": "ACTIVE",
          "gtin": "04601234567891",
          "leftInBuffer": 950,
          "poolsExhausted": false,
          "totalCodes": 1200,
          "totalPassed": 250,
          "unavailableCodes": 0,
          "expiredDate": 1737024000000,
          "productionOrderId": "987f32a1-2b9f-47d1-98f8-94b25b74a421",
          "cisType": "UNIT",
          "templateId": 101
        }
      ],
      "createdTimestamp": 1737000000000,
      "productionOrderId": "987f32a1-2b9f-47d1-98f8-94b25b74a421",
      "serviceProviderId": "SRV00112233",
      "productGroup": "TOBACCO",
      "paymentType": 1
    }
  ]
}
```

Example of JSON Response

Figure 228

Upon successful completion of the request, the server returns HTTP code -200 and the search result. A structure of the response to request to get information on marking code orders can be found in Table 259. For error codes, see subsection 6.2.

Table 259 – Format of Response to Request to Get Information on Marking Code Orders

Field	Description	Type	Mandatory
totalCount	Number of records matching the search criteria provided in the request parameters. To retrieve more accurate results, refine your search criteria.	Number	Yes
results	A list of the information about orders. If no results are found for the criteria specified, an array will be empty.	Array of objects “OrderSummaryDto”	Yes

Table 260 – Structure of “OrderSummaryDto” object

Field	Description	Type	Mandatory
orderId	Identifier of the MC emission order. Identifier value in accordance with ISO/IEC 9834-8. Template: [0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}	String (UUID)	Yes
orderStatus	Order status. Valid values: CREATED, PENDING, DECLINED, APPROVED, READY, CLOSED	String	Yes
buffers	Information on the buffer status	Array of objects BufferInfo	Yes
createdTimestamp	Order creation time	Number	Yes
declineReason	Order decline reason	String	No
productionOrderId	Production order identifier	String	No
serviceProviderId	Service provider identifier	String	No
productGroup	Goods group.	String	No
paymentType	Payment type	Number	No

Table 261 – Structure of “ BufferInfo ” object

Field	Description	Type	Mandatory
availableCodes	The total number of the MCs available for goods in buffer and registrar pools	Number	Yes
bufferStatus	Buffer status. Valid values: – PENDING - MC buffer is pending – ACTIVE - Buffer is created – EXHAUSTED - No more codes left in the buffer and ER pools – REJECTED - Buffer is non-operational – CLOSED - Buffer is closed	String	Yes
gtin	Goods code (GTIN)	String (14) [0-9]{14}	Yes
leftInBuffer	The number of unused MCs. (local buffer)	Number	Yes
poolsExhausted	MC pools in registrars are exhausted	boolean	Yes
rejectionReason	A reason for rejection of the buffer by the OMS	String	No
totalCodes	Ordered number of the MCs in the order	String	Yes
totalPassed	The total number of the MCs received from the buffer	Number	Yes
unavailableCodes	The number of unavailable codes	Number	Yes
expiredDate	MC expiration date Format: UnixTime (in milliseconds)	Number	No
productionOrderId	Production order identifier	String	No
cisType	Marking code type. Valid values: – UNIT - Goods unit – BUNDLE – Bundle – GROUP – Group consumer package – SET – Set	String	No
templateId	MC template identifier	Number	Yes

5. INPUT AND OUTPUT DATA

5.1. Nature, Arrangement and Initial Preparation of Input and Output Data

5.1.1. Information Sources

The main information sources for the system are:

1) Related information systems involved in both infocommunication and functional exchange.

2) Data entered by system users.

Operations on:

1) analog-to-digital and digital-to-analog signal conversion;

2) optical character recognition;

3) other actions to bring information to a form suitable for computer processing

are not provided for as part of the OMS-Cloud 5.0 AS functions.

5.1.2. Methods of Data Collection, Transmission, Control and Correction Arrangement

The information arrays are collected during the system operation through:

1) Receiving of structured XML-documents generated on the basis of specified XSD-schemes via collaborative services.

2) User input of information in screen forms and its subsequent storage in the database.

Data integrity control is implemented by the system application software and tools built in the used DBMS (restrictions, indices, primary and secondary keys). Data entry and correction shall be carried out only through the system software components. Direct user access to the database is not expected.

The main requirements to the processes of data collection, transmission, control and correction arrangement are to ensure the reliability, verifiability, confidentiality, accessibility, efficiency of the data collected and transmitted.

The reliability requirement implies arrangement of the information collection and transmission process, within the scope of which the transmitted and collected information will not be subject to misrepresentation.

The verifiability requirement implies arrangement of the information collection and transmission process which allows control over the reliability of the transmitted information.

The confidentiality requirement means provision of access to information in strict adherence to the established access isolation priorities and rules.

The accessibility requirement means the fundamental possibility of obtaining the collected information and its transfer.

The efficiency requirement implies such arrangement of the information collection and transmission process, during which the available information will be transmitted in a time frame acceptable for its analysis.

5.2. Format, Description and Encoding Method of the Input and Output Data when Using API

Format, description and encoding method of the input and output data when using API are provided in description of the relevant methods.

5.3. Guides Accessible via API

5.3.1. Guides to Control the Marking Codes

5.3.1.1. Guide “Method of Goods Introduction into Circulation” (releaseMethodType)

List of possible values of guide “Method of goods introduction into circulation" releaseMethodType is shown in Table 262.

Table 262 – Possible Values of Guide “Method of Goods Introduction into Circulation” releaseMethodType

Code	Description	Type
PRODUCTION	Made in the Russian Federation. It is available for all goods groups which have releaseMethodType attribute	String
IMPORT	Imported to the Russian Federation (Import). It is available for all goods groups which have releaseMethodType attribute, except for “Titanium metal products”	String
REMAINS	Remains marking. It is available for the following goods groups: 1. “Light industry”; 2. “Medical products”	String
REMARK	Remarking. It is available for the following goods groups: 1. ” Light industry”; 2. “Footwear”; 3. “New pneumatic rubber tires and tire casings”; 4. “Perfume and eau de toilette”; 5. “Photo cameras (except cine cameras), flash lights and flash bulbs”; 6. “Bicycles and bicycle frames”; 7. “Medical products”; 8. “Packaged water”; 9. “Specialized food products and biologically active food additives”; 10. “Antiseptic/antibacterial skin cleansers and hand sanitizers”; 11. “Veterinary medicines”; 12. “Non-alcoholic beer”.	String
COMMISSION	Accepted for commission from individual. It is available for the following goods groups: 1. “Light industry”; 2. “Footwear”.	String

Code	Description	Type
REAPPLY	Marking outside of production or import 1. “Beer, beer-based and low-alcohol beverages”; 2. “Cosmetics, household chemicals, and personal hygiene products”; 3. “Radio-electronic products”; 4. “Engine oils”; 5. “Specialized food products and biologically active food additives”; 6. “Bicycles and bicycle frames”; 7. “Games and toys for children”; 8. “Building materials”; 9. “Real fur” (from March 1, 2026); 10. “Radio-electronic products. Laptops and smartphones” (from May 1, 2026 to November 30, 2026); 11. “Fertilizers in consumer packaging” (from November 1, 2026).	String (string)

Notes:

1. Marking of the remaining items REMAINS for the “Light industry” goods group will be available for the third wave of payment (paymentGroup=3 in a goods card) from November 1, 2024 to March 2, 2026, for the fourth wave of payment (paymentGroup=4 in a goods card) from February 10, 2024 to December 1, 2026.

2. Marking of remaining items REMAINS for the “Medical products” goods group is available

- for the tenth payment wave (paymentGroup=10 in a goods card) from March 31, 2026 to February 28, 2027;
- for the fourth and ninth payment waves (paymentGroup=4, paymentGroup=9 in a goods card) from September 1, 2026 to September 1, 2027;
- for the eleventh and twelfth payment waves (paymentGroup=11, paymentGroup=12 in a goods card) from September 1, 2026 to March 1, 2027.

5.3.1.2. Guide “Method of Individual Serial Number Generation” (serialNumberType)

A list of possible values of guide “Method of individual serial number generation" serialNumberType is shown in Table 263.

Table 263 – Possible Values of Guide “Method of Individual Serial Number Generation” serialNumberType

Code	Description	Type
SELF_MADE	No assistance	String
OPERATOR	By TT GIS operator	String

5.3.1.3. Guide “Manufacturing Method” (createMethodType)

A list of possible values of guide “Manufacturing Method” createMethodType is shown in Table 264.

Table 264 – Possible Values of Guide “Manufacturing Method” createMethodType

Code	Description	Type
SELF_MADE	No assistance. It is available for all goods groups which have createMethodType attribute	String
CEM	Labeling and marking center. It is available for all goods groups which have createMethodType attribute	String
CM	Contract Manufacturing. It is available for all goods groups which have createMethodType attribute	String
CL	Logistic warehouse. It is available for all goods groups which have createMethodType attribute	String
CA	Consignment site. It is available for all goods groups that have the createMethodType attribute	String

Note: CEM, CM, CL, CA values of Guide “Manufacturing Method” shall be specified only in case of the work through the service provider.

5.3.1.4. Guide “MC Templates” (templateId)

A list of possible values of guide “MC templates” templateId is shown in Table 265.

Table 265 – Possible Values of Guide “MC Template” templateId

Code	Description	Goods group	Type
1	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(88 chars)	Footwear	String
3	01 GTIN + 21 SERIAL(7 chars) + 8005 (000000) + 93(4 chars)	Tobacco products - cartons	String
4	GTIN + SERIAL (7 chars) + MRP (4 chars) + VC (4 chars)	Tobacco products - packs (non-GS1)	String

Code	Description	Goods group	Type
5	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Medicines for human use	String
7	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	New pneumatic rubber tires and tire casings	String
8	01 GTIN + 21 SERIAL(20 chars) + 91(4 chars) + 92(44 chars)	Photo cameras (except cine camera), flash lights and flash bulbs	String
9	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Perfume and eau de toilette	String
10	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Light industry	String
11	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Bicycles and bicycle frames	String
12	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars) / 97 (base 64)	Medical products	String
14	01 GTIN + 21 SERIAL(7 chars) + 8005 (000000) + 93(4 chars)	Alternative tobacco products (GS1)	String
15	GTIN + SERIAL (7 chars) + MRP (AAAA) + VC (4 chars)	Alternative tobacco products (non GS1)	String
16	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Packed water	String
18	01 GTIN + 21 SERIAL(7 chars) + 93(4 chars) / 335Y (6 chars)	Beer, beer-based and low-alcohol beverages	String
20	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars) / 3103 (6 chars)	Dairy products	String
21	01 GTIN + 21 SERIAL(7 chars) + 8005 (000000) + 93(4 chars)	Nicotine products (blocks)	String
22	GTIN + SERIAL (7 chars) + MRP (AAAA) + VC (4 chars)	Nicotine products -packs)- (non-GS1)	String
23	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Specialized food products and biologically active food additives	String
25	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Antiseptic/antibacterial skin cleansers and hand sanitizers (consumer and group package)	String
26	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars) / 3103 (6 chars)	Pet foods	String
27	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars) / 3103 (6 chars)	Seafood	String
28	01 GTIN + 21 SERIAL(7 chars) + 93(4 chars) / 335Y (6 chars)	Non-alcoholic beer	String

Code	Description	Goods group	Type
29	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Juice products and non-alcoholic beverages	String
30	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Specialized food products and biologically active food additives	String
31	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Antiseptic/antibacterial skin cleansers and hand sanitizers	String
32	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars) / 3103 (6 chars)	Meat products	String (String)
34	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Games and toys for children	String
36	01 GTIN + 21 SERIAL(20 chars) + 91(4 chars) + 92(44 chars) / 30 (1-8 chars) / 310Y (6 chars) / 311Y (6 chars) / 335Y (6 chars)	Radio-electronic products	String (string)
37	01 GTIN + 21 SERIAL(20 chars) + 93(4 chars) / 30 (1-8 chars) / 310Y (6 chars) / 311Y (6 chars) / 335Y (6 chars)	Radio-electronic products	String (string)
38	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars) / 3103 (6 chars)	Seafood	String
39	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Titanium metal products	String
40	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Vegetable oils	String (string)
41	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars) / 3103 (6 chars)	Pet foods	String (string)
42	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Groceries	String (string)
43	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Groceries	String (string)
44	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars) / 311Y (6 chars)	Optical fiber and fiber optic products	String (string)
45	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars) / 311Y (6 chars)	Optical fiber and fiber optic products	String (string)
46	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars)	Cosmetics, household chemicals, and personal hygiene products	String (string)

Code	Description	Goods group	Type
47	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Cosmetics, household chemicals, and personal hygiene products	String (string)
48	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars)	Canned foods	String (string)
49	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Canned foods	String (string)
50	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Veterinary medicines	String (string)
51	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Vegetable oils	String (string)
52	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Printed goods	String (string)
53	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Building materials	String (string)
54	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Building materials	String (string)
55	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Fire safety and firefighting equipment	String (string)
56	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Fire safety and firefighting equipment	String (string)
57	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Heaters	String (string)
58	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars)	Heaters	String (string)
59	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Games and toys for children	String (string)
60	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Engine oils	String (string)
61	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Engine oils	String (string)
62	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars) / 311Y (6 chars)	Cabling and wiring products	String (string)
63	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars) / 311Y (6 chars)	Cabling and wiring products	String (string)
64	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Polymer pipes	String (string)

Code	Description	Goods group	Type
65	01 GTIN + 21 SERIAL(6 chars) + 91(4 chars) + 92(44 chars)	Polymer pipes	String (string)
66	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Confectionery products	String (string)
67	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Confectionery products	String (string)
68	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Auto parts and components for vehicles	String (string)
69	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Auto parts and components for vehicles	String (string)
70	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Radio-electronic products. Electronic nicotine delivery systems	String (string)
71	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Radio-electronic products. Electronic nicotine delivery systems	String (string)
72	01 GTIN + 21 SERIAL(20 chars) + 93(4 chars)	Radio-electronic products. Laptops and smartphones	String (string)
73	01 GTIN + 21 SERIAL(20 chars) + 91(4 chars) + 92(44 chars)	Radio-electronic products. Laptops and smartphones	String (string)
74	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars) / 3103 (6 chars)	Meat products	String (String)
75	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Feed additives	String (String)
76	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Feed additives	String (String)
77	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Home and kitchen goods	String (String)
78	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Home and kitchen goods	String (String)
79	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Industrial equipment	String (String)
80	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Industrial equipment	String (String)
81	01 GTIN + 21 SERIAL(13 chars) + 93(4 chars)	Fertilizers in consumer packaging	String (String)
82	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Fertilizers in consumer packaging	String (String)

Code	Description	Goods group	Type
83	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars) / 3103 (6 chars)	Semi-finished and frozen food products	String (String)
84	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars) / 3103 (6 chars)	Semi-finished and frozen food products	String (String)
85	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Real fur	String (String)
86	01 GTIN + 21 SERIAL(6 chars) + 93(4 chars)	Pyrotechnic articles	String (String)
87	01 GTIN + 21 SERIAL(13 chars) + 91(4 chars) + 92(44 chars)	Pyrotechnic articles	String (String)

Notes:

1. Pack-template lacks AI in template and MC.
2. templateId=2 is removed for “Medicines for human use” goods group, this template is no longer applicable for marking codes emission, as well as the MCs emitted by templateId=2 cannot be specified in the reports on utilization (application). The template with code “5” shall be used instead.
3. templateId=6 is removed for goods group “Dairy products”, this template is not used anymore for marking codes emission, but marking codes, which have been emitted by this template, are supported in the reports.
4. templateId=18 with 13-symbol serial number is no longer applicable for emission of the marking codes for the “Beer, beer-based and low-alcohol beverages” goods group. Emission is only available for templateId=18 with 7-symbol serial number. MCs, which have been emitted in line with this template with 13-symbol serial number, are not supported in the reports.
5. templateId=34 with 6-symbol serial number is no longer applicable for emission of the marking codes for the “Games and toys for children” goods group. Emission is only available for templateId=34 with 13-symbol serial number. MCs, which have been emitted in line with this template with 6-symbol serial number, are not supported in the reports.
6. templateId=56 with 6-symbol serial number is no longer applicable for emission of the marking codes for the “Fire safety and firefighting equipment” goods group. Emission is only available for templateId=56 with 13-symbol serial number. MCs, which have been emitted in line with this template with 6-symbol serial number, are not supported in the reports.

7. From October 1, 2025, templateId=70 with 6-character serial number will no longer be valid for issuance of marking codes for the “Radio electronic products. Electronic nicotine delivery systems” goods group. From October 1, 2025, issuance will be available only for templateId=70 with 13-character serial number, issuance with the use of templateId=71 will remain unchanged. From October 1, 2025, MCs issued using templateId=70 with 6-character serial number, will no longer be supported in the reports.
8. For the “Radio-electronic products” goods group, templateId=36 and templateId=37 with a 13-character serial number will not be applicable for marking code issue as of January 1, 2026. Starting on this date, issue for templateId=36 and templateId=37 will be available only with a 20-character serial number. MCs issued under templates of templateId=36 and templateId=37 with a 13-character serial number, will no longer be supported in reports as of January 1, 2026.
9. Starting September 29, 2026, templateId=81 with a 6-character serial number will no longer be available for marking code emission for the “Fertilizers in consumer packaging” goods group. Starting September 29, 2026, emission will be available only for templateId=81 with a 13-character serial number. Emission using templateId=82 will remain unchanged. Marking codes issued using templateId=81 with a 6-character serial number will no longer be supported in the reports starting September 29, 2026.


5.3.1.5. Guide “MC Array Status” (status)

List of possible values of guide “MC Array Status” (status) is shown in Table 266.

Table 266 – Possible Values of Guide “MC Array Status” (status)

Code	Description	Type
REQUEST_ERROR	Incorrect request format	String
REQUESTED	MC array (pool) was requested in ER	String
IN_PROCESS	Processing in progress	String
READY	MC array (pool) ready for use	String
CLOSED	All MCs in array were fully utilized	String
DELETED	MC array exhausted and closed	String
REJECTED	Order not completed (incorrect order parameters—e.g., the order contains non-unique serial numbers)	String

State diagram is shown in Figure 229.

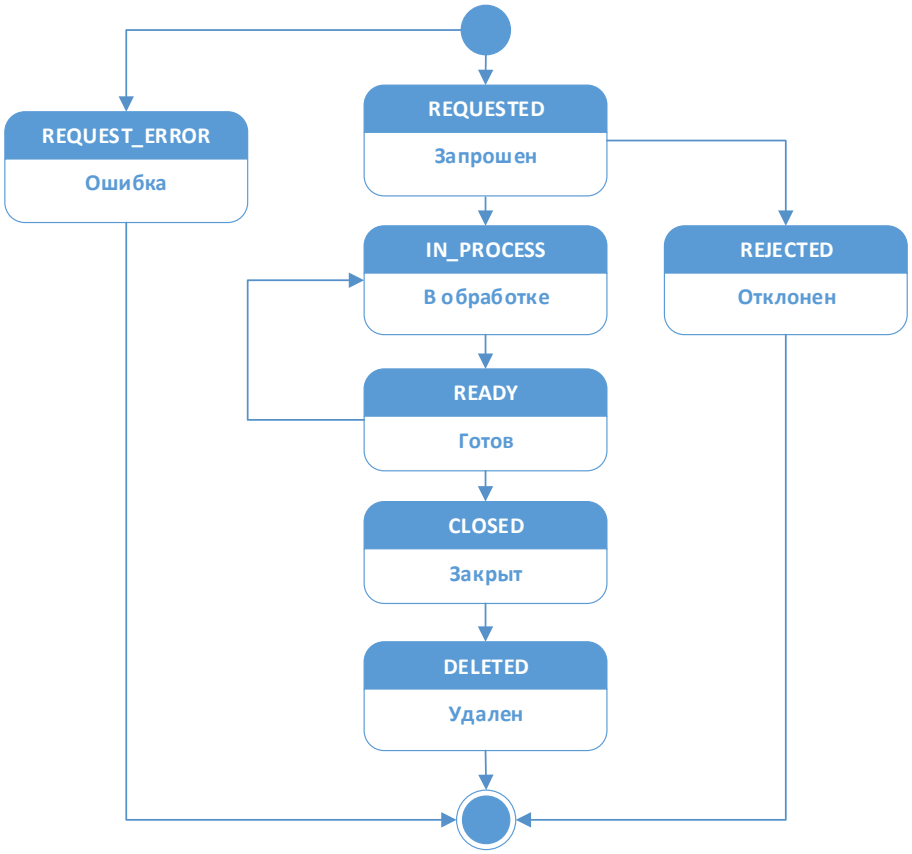

MC Array Status

Figure 229


5.3.1.6. Guide “MC Buffer Status” (bufferStatus)

List of possible values of guide “MC buffer status” bufferStatus is shown in Table 267.

Table 267 – Possible Values of Guide “MC Buffer Status” bufferStatus

Code	Description	Type
PENDING	MC buffer pending	String
ACTIVE	Buffer is created	String
EXHAUSTED	No more codes left in the buffer and pools of ER	String
REJECTED	Buffer is non-operational	String
CLOSED	Buffer is closed	String

State diagram is shown in Figure 230.

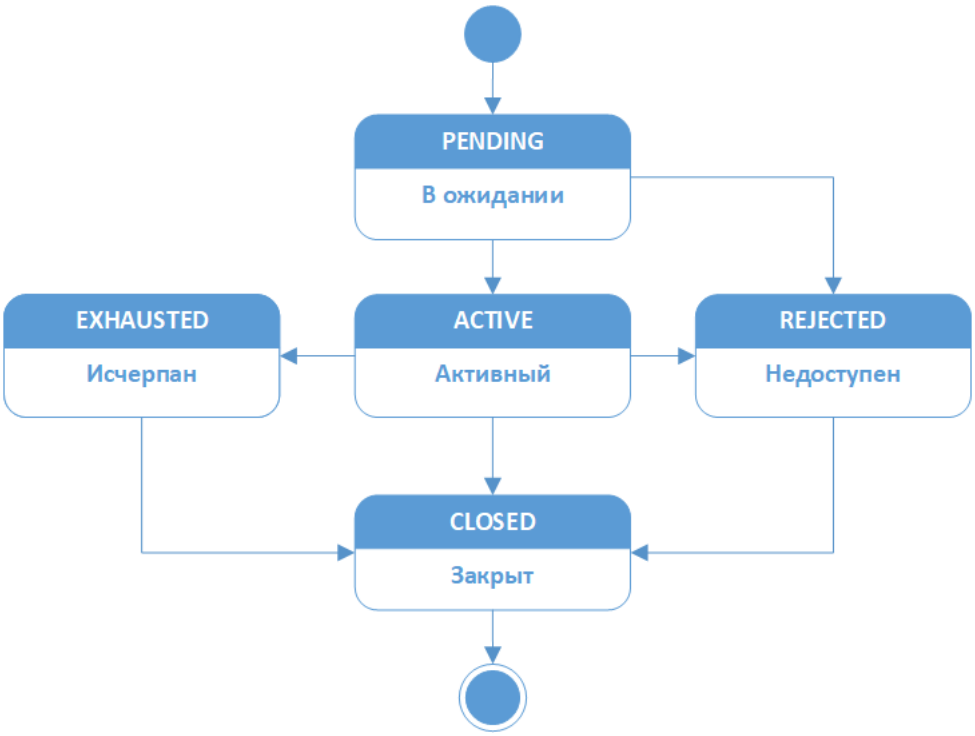

MC Buffer Status

Figure 230


5.3.1.7. Guide “Report Processing Status” (reportStatus)

List of possible values of guide “Report processing status” reportStatus is shown in Table 268.

Table 268 – Possible Values of Guide “Report Processing Status” reportStatus

Code	Description	Type
DRAFT	Report received by the OMS (Draft)	String
PENDING	Report pending	String
READY_TO_SEND	Report ready to be sent to ER	String
REJECTED	Report rejected	String
SENT	Report sent	String
CHECK	The report’s metadata get checked (this applies to the Pharmaceuticals for medical use product group)	String
SUCCESS	Report processed successfully	String
FAILED	Report processed with error	String
PARTIALLY	Report processed partially	String

State diagram is shown in Figure 231.

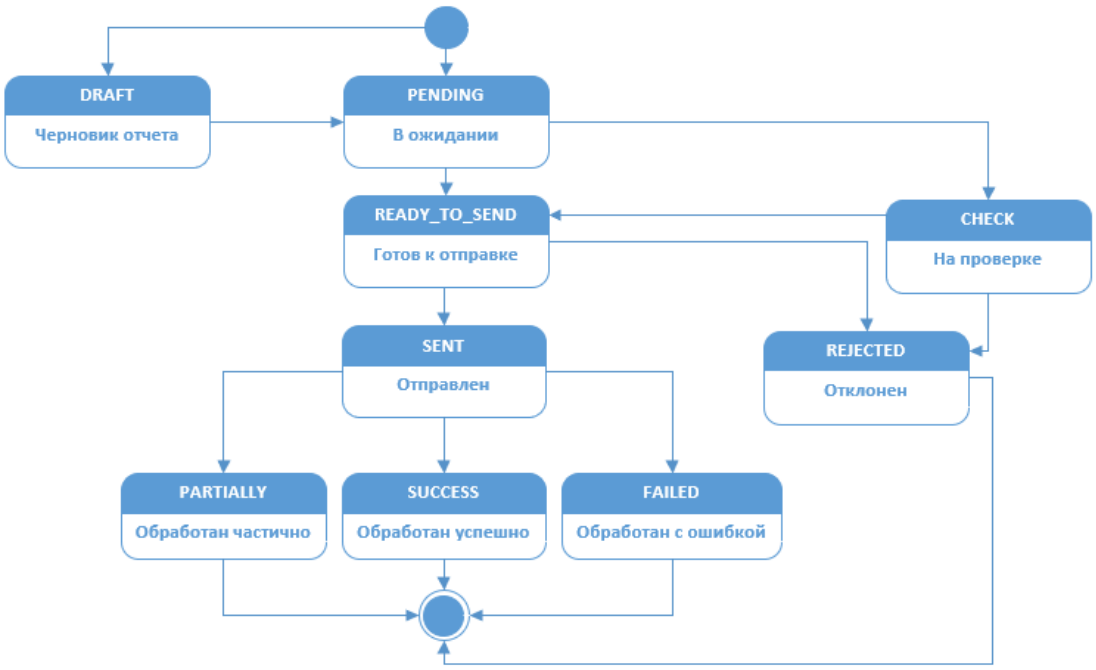

Report processing status

Figure 231


5.3.1.8. Guide “Order Status” (orderStatus)

List of possible values of guide “Order status” orderStatus is shown in Table 269

Table 269 – Possible Values of Guide “Order Status” orderStatus

Code	Description	Type
CREATED	Order created	String
PENDING	Order awaiting confirmation by TT GIS	String
DECLINED	Order is not confirmed in TT GIS	String
APPROVED	Order is confirmed in TT GIS	String
READY	Order ready	String
CLOSED	Order closed	String

State diagram is shown in Figure 232.

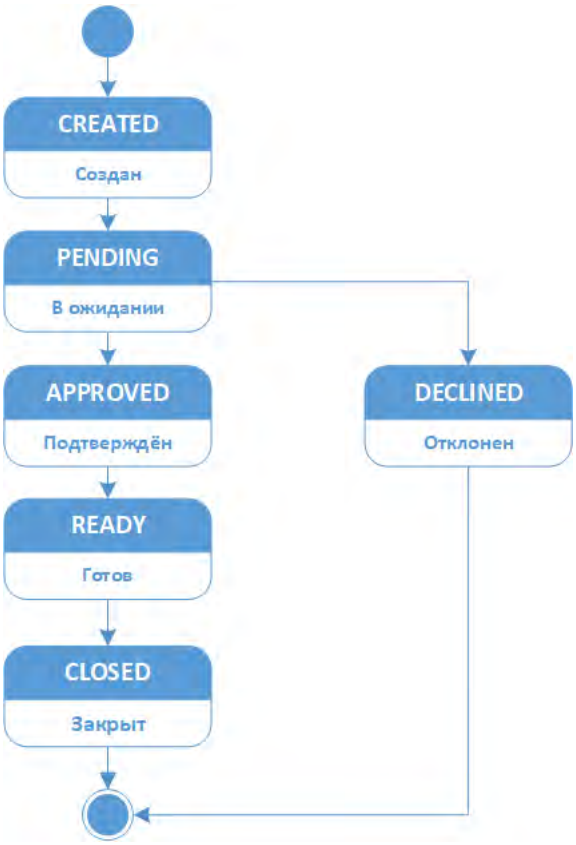

Order status

Figure 232

5.3.1.9. Guide “Dropout Reason” (dropoutReason)

List of possible values of guide “Dropout Reason” dropoutReason is shown in Table 270.

Table 270 – Possible Values of Guide “Dropout Reason” dropoutReason

Code	Description	Type
DEFECT	Defect	String
EXPIRY	Shelf life is expired	String
QA_SAMPLES	Laboratory test samples	String
PRODUCT_RECALL	Recalled from market	String
COMPLAINTS	Complaints	String
PRODUCT_TESTING	Product testing	String
DEMO_SAMPLES	Demo samples	String
OTHER	Other reasons	String
DAMAGE_LOSS	Goods loss	String
DESTRUCTION	Goods destruction	String
LIQUIDATION	Enterprise liquidation	String
CONFISCATION	Goods confiscation	String

Code	Description	Type
OWN_USE_EXCISE	Use for own purposes with payment of excise duties	String

Notes:

1) only DEFECT and QA_SAMPLES values are available for milk manufacturers of “Dairy Products” goods group category.

2) OWN_USE_EXCISE value is available only for the “Alternative tobacco products”, “Tobacco products” and “Nicotine products” goods groups.

5.3.1.10. Guide “Marking Code Type” (cisType)

Table 271 shows a list of possible values for guide “Marking code type” cisType.

Table 271 – Possible Values of Guide “Marking Code Type” cisType

Code	Description	Available for goods groups	templateId	Type
UNIT	Goods item	“Light industry”	10	String (string)
		“Perfume and eau de toilette”	9	
		“Photo cameras (except cine cameras), flash lights and flash bulbs”	8	
		“Dairy products”	20	
		“Alternative tobacco products”	14, 15	
		“Packaged water”	16	
		“Beer, beer-based and low-alcohol beverages”	18	
		“Nicotine products”	22	
		“Specialized food products and biologically active food additives”	23, 30	
		“Antiseptic/antibacterial skin cleansers and hand sanitizers”	25, 31	
		“Non-alcoholic beer”	28	
		“Medical products”	12	
		“Seafood”	27, 38	
		“Games and toys for children”	34, 59	
		“Titanium metal products”	39	
		“Pet foods”	26, 41	
		“Juice products and non-alcoholic beverages”	29	
		“Optical fiber and fiber optic products”	44, 45	
		“Radio-electronic products”	36, 37	

Code	Description	Available for goods groups	templateId	Type
		“Vegetable oils”	40, 51	
		“Cosmetics, household chemicals, and personal hygiene products”	46, 47	
		“Canned foods”	48, 49	
		“Veterinary medicines”	50	
		“Tobacco products”	4	
		“Footwear”	1	
		“New pneumatic rubber tires and tire casings”	7	
		“Bicycles and bicycle frames”	11	
		“Medicines for medical use”	5	
		“Building materials”	53, 54	
		“Fire safety and firefighting equipment”	55, 56	
		“Printed goods”	52	
		“Heaters”	57, 58	
		“Groceries”	42,43	
		“Engine oils”	60,61	
		“Cabling and wiring products”	62,63	
		“Polymer pipes”	64, 65	
		“Confectionery products”	66,67	
		“Auto parts and components for vehicles”	68, 69	
		“Radio-electronic products. Electronic nicotine delivery systems”	70, 71	
		“Radio-electronic products. Laptops and smartphones”	72,73	
		“Meat products”	32, 74	
		“Feed additives”	75, 76	
		“Home and kitchen goods”	77, 78	
		“Industrial equipment”	79, 80	
		“Fertilizers in consumer packaging”	81, 82	
		“Semi-finished and frozen food products”	83, 84	
		“Real fur”	85	
		“Pyrotechnic articles”	86, 87	
BUNDLE	Bundle	“Light industry”	10	String (string)
GROUP	Group consumer packing	“Dairy products”	20	String (string)
		“Packaged water”	16	
		“Alternative tobacco products”	14	

Code	Description	Available for goods groups	templateId	Type
		“Beer, beer-based and low-alcohol beverages”	18	
		“Nicotine products”	21	
		“Medical products”	12	
		“Seafood”	27, 38	
		“Juice products and non-alcoholic beverages”	29	
		“Antiseptic/antibacterial skin cleansers and hand sanitizers”	25, 31	
		“Specialized food products and biologically active food additives”	23, 30	
		“Optical fiber and fiber optic products”	44, 45	
		“Radio-electronic products”	36, 37	
		“Pet foods”	26, 41	
		“Veterinary medicines”	50	
		“Tobacco products”	3	
		“Building materials”	53, 54	
		“Fire safety and firefighting equipment”	55, 56	
		“Canned foods”	48,49	
		“Groceries”	42, 43	
		“Cosmetics, household chemicals, and personal hygiene products”	46, 47	
		“Vegetable oils”	40, 51	
		“Engine oils”	60,61	
		“Cabling and wiring products”	62,63	
		“Non-alcoholic beer”	28	
		“Games and toys for children”	34, 59	
		“Polymer pipes”	64, 65	
		“Confectionery products”	66, 67	
		“Auto parts and components for vehicles”	68, 69	
		“Heaters”	57, 58	
		“Bicycles and bicycle frames”	11	
		“Radio-electronic products. Laptops and smartphones”	72,73	
		“Meat products”	32, 74	
		“Feed additives”	75, 76	
		“Home and kitchen goods”	77, 78	
		“Industrial equipment”	79, 80	
		“Fertilizers in consumer packaging”	81, 82	
		“Semi-finished and frozen food products”	83, 84	

Code	Description	Available for goods groups	templateId	Type
		“Pyrotechnic articles”	86, 87	
		“Printed goods”	52	
SET	Set.	“Light industry”	10	String (string)
		“Perfume and eau de toilette”	9	
		“Photo cameras (except cine cameras), flash lights and flash bulbs”	8	
		“Dairy products”	20	
		“Nicotine products”	21	
		“Medical products”	12	
		“Juice products and non-alcoholic beverages”	29	
		“Specialized food products and biologically active food additives”	23, 30	
		“Antiseptic/antibacterial skin cleansers and hand sanitizers”	25, 31	
		“Seafood”	27, 38	
		“Games and toys for children”	34, 59	
		“Polymer pipes”	64, 65	
		“Fire safety and firefighting equipment”	55, 56	
		“Canned foods”	48, 49	
		“Pet foods”	26, 41	
		“Vegetable oils”	40, 51	
		“Non-alcoholic beer”	28	
		“Groceries”	42, 43	
		“Cosmetics, household chemicals, and personal hygiene products”	46, 47	
		“Engine oils”	60, 61	
		“Confectionery products”	66, 67	
		“Auto parts and components for vehicles”	68, 69	
		“Printed goods”	52	
		“Radio-electronic products”	36, 37	
		“Radio-electronic products. Laptops and smartphones”	72,73	
		“Meat products”	32, 74	
		“Home and kitchen goods”	77, 78	
		“Industrial equipment”	79, 80	
		“Fertilizers in consumer packaging”	81, 82	
		“Semi-finished and frozen food products”	83, 84	
		“Real fur”	85	

Code	Description	Available for goods groups	templateId	Type
		“Pyrotechnic articles”	86, 87	

.

.

5.3.1.11. Guide “Country code of MC emission”

A list of possible values for guide “Country code of MC emission” can be found in Table 272.

Table 272 – Possible Values of Guide “Country code”

Country code of MC emission	Description	Type
1	Republic of Armenia	String
2	Republic of Belarus	String
3	Republic of Kazakhstan	String
4	Kyrgyz Republic	String
5	Russian Federation	String

5.3.1.12. Guide “Cancellation of unused MCs”

List of goods groups for which the MCs are canceled after their expiration date can be found in Table 273.

Table 273 – Possible Values of Guide “Cancellation of unused MCs”

Code	Name of goods group	Number of days	Calendar/Business days	Distribution (role of service provider is CEM)
shoes	Footwear	90	calendar days	false
lp	Light industry	90	calendar days	false
electronics	Photo cameras (except cine cameras), flash lights and flash bulbs	90	calendar days	false
tires	New pneumatic rubber tires and tire casings	90	calendar days	false
perfumery	Perfume and eau de toilette	90	calendar days	false
milk	Dairy products	30	calendar days	false
milk	Dairy products”	365	calendar days	true
tobacco otp ncp	“Tobacco products”, “Alternative tobacco products” “Nicotine products”	30	calendar days	false

Code	Name of goods group	Number of days	Calendar/Business days	Distribution (role of service provider is CEM)
antiseptic	Antiseptic/antibacterial skin cleansers and hand sanitizers	30	calendar days	false
antiseptic	Antiseptic/antibacterial skin cleansers and hand sanitizers	365	calendar days	true
water	Packaged water	30	calendar days	false
water	Packaged water	365	calendar days	true
bio	Specialized food products and biologically active food additives	30	calendar days	false
bio	Specialized food products and biologically active food additives	365	calendar days	true
beer	Beer, beer-based and low-alcohol beverages	60	calendar days	false
beer	Beer, beer-based and low-alcohol beverages	365	calendar days	true
wheelchairs	Medical products	30	calendar days	false
wheelchairs	Medical products	365	calendar days	true
seafood	Seafood	30	calendar days	false
seafood	Seafood	365	calendar days	true
softdrinks	Juice products and non-alcoholic beverages	30	calendar days	false
softdrinks	Juice products and non-alcoholic beverages	365	calendar days	true
bicycle	Bicycles and bicycle frames	30	calendar days	false
bicycle	Bicycles and bicycle frames	365	calendar days	true
petfood	Pet foods	30	calendar days	false
petfood	Pet foods	365	calendar days	true
conserve	Canned foods	30	calendar days	false
conserve	Canned foods	365	calendar days	true
vegetableoil	Vegetable oils	30	calendar days	false
vegetableoil	Vegetable oils	365	calendar days	true
vetpharma	Veterinary medicines	30	calendar days	false
vetpharma	Veterinary medicines	365	calendar days	true
nabeer	Non-alcoholic beer	60	calendar days	false
nabeer	Non-alcoholic beer	365	calendar days	true

Code	Name of goods group	Number of days	Calendar/Business days	Distribution (role of service provider is CEM)
softdrinks	Juice products and non-alcoholic beverages	30	calendar days	false
softdrinks	Juice products and non-alcoholic beverages	365	calendar days	true
chemistry	Cosmetics, household chemicals, and personal hygiene products	60	calendar days	false
chemistry	Cosmetics, household chemicals, and personal hygiene products	545	calendar days	true
radio	Radio-electronic products	30	calendar days	false
radio	Radio-electronic products	365	calendar days	true
grocery	Groceries	30	calendar days	false
grocery	Groceries	365	calendar days	true
autofluids	Engine oils	30	calendar days	false
autofluids	Engine oils	365	calendar days	true
construction	Building material	30	calendar days	false
construction	Building material	365	calendar days	true
toys	Games and toys for children	30	calendar days	false
toys	Games and toys for children	365	calendar days	true
furslp	Real fur	30	calendar days	false
furslp	Real fur	365	calendar days	true
nicotindev	Radio-electronic products. Electronic nicotine delivery systems	30	calendar days	false
nicotindev	Radio-electronic products. Electronic nicotine delivery systems	365	calendar days	true
gadgets	Radio-electronic products. Laptops and smartphones	30	calendar days	false
gadgets	Radio-electronic products. Laptops and smartphones	365	calendar days	true
sweets	Confectionery products	30	calendar days	false
sweets	Confectionery products	365	calendar days	true
meat	Meat products	30	calendar days	false
meat	Meat products	365	calendar days	true

Code	Name of goods group	Number of days	Calendar/Business days	Distribution (role of service provider is CEM)
fertilizers	Fertilizers in consumer packaging	30	calendar days	false
fertilizers	Fertilizers in consumer packaging	365	calendar days	true

Notes:

1. The cancellation takes place the day after the expiration date at 00:00h (in case of the “Footwear” goods group, the cancellation will be at 00:00h on the 61st business day).
2. When payment type is “Payment upon emission” for the "Antiseptic/antibacterial skin cleansers and hand sanitizers", "Specialized food products and biologically active food additives", “Medical products”, “Dairy products", "Beer, beer-based and low-alcohol beverages", "Packaged water", “Pet foods”, “Canned foods”, “Vegetable oils”, “Veterinary medicines”, “Non-alcoholic beer”, “Seafood” and “Juice products and non-alcoholic beverages” goods groups, MC lifetime is not calculated, the codes have no expiration date.
3. For the "Antiseptic/antibacterial skin cleansers and hand sanitizers", "Specialized food products and biologically active food additives”, "Packaged water", “Pet foods”, “Canned foods”, “Vegetable oils”, “Veterinary medicines”, “Non-alcoholic beer”, “Seafood” and “Juice products and non-alcoholic beverages” goods groups, MC expiration date is calculated for all roles of the service provider which are available for the goods group.
4. For “Footwear”, “Light industry”, “Perfume and eau de toilette”, “New pneumatic rubber tires and tire casings”, “Photo cameras (except cine cameras), flash lights and flash bulbs” goods groups, MC lifetime is 90 days both in case of MC application w/o assistance and in case of application of the MCs by a service provider.
5. Marking code cancellation will be launched for the “Fertilizers in consumer packaging” goods group starting November 1, 2026.

5.3.1.13. Guide “Printing Quality Class”

For the list of possible values of Guide “Printing Quality Class”, see Table 274.

Table 274 – Possible Values of Guide “Printing Quality Class”

Code	Description	Type
A	Highest quality class, complies with numerical designation of class 4 as per GOST R ISO / IEC 15415-2012	String
B	Complies with numerical designation of class 3 as per GOST R ISO / IEC 15415-2012	String
C	Complies with numerical designation of class 2 as per GOST R ISO / IEC 15415-2012	String
D	Complies with numerical designation of class 1 as per GOST R ISO / IEC 15415-2012	String
F	Quality class of rejects. Complies with numerical designation of class 0 as per GOST R ISO / IEC 15415-2012.	String

5.3.1.14. Guide “Types of receipts”

Values of the “Types of receipts” guide can be found in Table 275.

Table 275 – Types of receipts

Value	Description
CREATE_ORDER	MC Order
REPORT_UTILIZE	Report on MC usage
REPORT_AGGREGATION	Aggregation of marking codes
REPORT_DROPOUT	Dropout of rejected products
ANNULMENT_CODES	Marking codes cancellation
GET_CODES	Issue of MCs
REPORT_QUALITY	Report “Application information”
CLOSE_ORDER	Closing of order
REPORT_SURPLUS	Notification of acceptance of ICs for record-keeping purposes

5.3.1.15. Guide “Types of events”

Values of the “Types of events” guide can be found in Table 276.

Table 276 – Types of events

Value	Description
Receipt “MC order”	
CREATE_ORDER_RECEIVED	Order receipt
CREATE_ORDER_VALIDATION	Dispatch of order for verification

CREATE_ORDER_VALIDATION_RESULT	Order verification result
CREATE_ORDER_EMISSION_TASK_SEND	Dispatch of task to ER/MER
CREATE_ORDER_GIS_CREATED	Saving suborder received
CREATE_ORDER_GIS_GENERATED	Generation of report Generated/10300 by suborder
CREATE_ORDER_GIS_SEND_TO_PROCESSING	Result of sending of suborder for processing
CREATE_ORDER_SUBORDER_RESULT	Suborder result
Receipt "Report on MC usage"	
REPORT_UTILIZE_RECEIVED	Receipt of report on MC application
REPORT_UTILIZE_VALIDATION	Dispatch of report metadata for verification to MDLP
REPORT_UTILIZE_VALIDATION_RESULT	Result of report metadata verification in MDLP
REPORT_UTILIZE_EMISSION_SEND	Dispatch of report to ER/MER
RNMS_GIS_ROUTED	Dispatch of report for processing
RNMS_GIS_PROCESSED	Report processing result
Receipt "Marking code aggregation"	
REPORT_AGGREGATION_RECEIVED	Receipt of aggregation report
REPORT_AGGREGATION_GIS_SEND	Dispatch of report to marking system
REPORT_AGGREGATION_GIS_ROUTED	Dispatch of report for processing
REPORT_AGGREGATION_GIS_PROCESSED	Report processing result
Receipt "Dropout of rejected products"	
REPORT_DROPOUT_RECEIVED	Receipt of rejection report
REPORT_DROPOUT_EMISSION_SEND	Dispatch of report to ER/MER/marking system
REPORT_DROPOUT_GIS_ROUTED/ RNMS_GIS_ROUTED	Dispatch of report for processing
REPORT_DROPOUT_GIS_PROCESSED / RNMS_GIS_PROCESSED	Report processing result
Receipt "Marking code cancellation"	
ANNULMENT_CODES	MC cancellation
ANNULMENT_CODES_EMISSION_SEND	Dispatch of report to ER/MER
RNMS_GIS_ROUTED	Dispatch of report for processing
RNMS_GIS_PROCESSED	Report processing result
Receipt "MC issue"	
GET_CODES_RESULT	Result of MC issue
GET_CODES_GENERATED_REPORT	Dispatch of automatically generated report on MC application
RNMS_GIS_ROUTED	Dispatch of report for processing
RNMS_GIS_PROCESSED	Report processing result
Receipt "Report "Application information""	
REPORT_QUALITY_RECEIVED	Receipt of report "Application information""
Receipt "Closing of order"	
CLOSE_ORDER	Closing of order
Receipt "Notification of acceptance of ICs for record-keeping purposes"	
REPORT_SURPLUS_RECEIVED	Receipt of the notification of acceptance of the ICs on account

REPORT_SURPLUS_EMISSION_SEND	Transmission of the notification to ER/MER
REPORT_SURPLUS_GIS_ROUTED	Sending the notification for processing
DOCUMENT_PROCESSED	Notification processing result

5.3.1.16. Guide “Goods Groups”

Values of the “Goods Groups” guide can be found in Table 277.

Table 277 – Goods Groups

Code	Alias	Name
1	lp	Light industry
2	shoes	Footwear
3	tobacco	Tobacco products
4	perfumery	Perfume and eau de toilette
5	tires	New pneumatic rubber tires and tire casings
6	electronics	Photo cameras (except cine cameras), flash lights and flash bulbs
7	pharma	Medicines for human use
8	milk	Dairy products
9	bicycle	Bicycles and bicycle frames
10	wheelchairs	Medical products
12	otp	Alternative tobacco products
13	water	Drinking water
15	beer	Beer, beer-based and low-alcohol beverages
16	ncp	Nicotine products
17	bio	Specialized food products and biologically active food additives
19	antiseptic	Antiseptic/antibacterial skin cleansers and hand sanitizers
20	petfood	Pet foods
21	seafood	Seafood
22	nabeer	Non-alcoholic beer
23	softdrinks	Juice products and non-alcoholic beverages
25	meat	Meat products
26	vetpharma	Veterinary medicines
27	toys	Games and toys for children
28	radio	Radio-electronic products
31	titan	Titanium metal products
32	conserve	Canned foods
33	vegetableoil	Vegetable oils
34	opticfiber	Optical fiber and fiber optic products
35	chemistry	Cosmetics, household chemicals, and personal hygiene products
36	books	Printed goods
37	grocery	Groceries
39	construction	Building materials
40	fire	Fire safety and firefighting equipment
41	heater	Heaters
42	cableraw	Cabling and wiring products
43	autofluids	Engine oils
44	polymer	Polymer pipes
45	sweets	Confectionery products

48	carparts	Auto parts and components for vehicles
49	furslp	Real fur
50	nicotindev	Radio-electronic products. Electronic nicotine delivery systems
51	gadgets	Radio-electronic products. Laptops and smartphones
52	frozen	Semi-finished and frozen food products
53	fertilizers	Fertilizers in consumer packaging
54	homeware	Home and kitchen goods
55	vetbio	Feed additives
57	industrial	Industrial equipment
59	pyrotechnics	Pyrotechnic articles

5.3.1.17. Guide “Receipt statuses”

Values of the “Receipt statuses” guide can be found in Table 278

Table 278 – Receipt statuses

Status code	Receipt status	Description
0	SUCCESS	Receipt succeeded
1	FAILED	Receipt failed
2	IN_PROGRESS	Receipt is being processed (not completed)
3	PARTIALLY	Receipt partially succeeded

5.3.1.18. Guide “Codes of marking codes processing result”

Values of the “Codes of marking codes processing result” guide can be found in Table 279 and Table 280.

Table 279 – Codes of the result of processing of the marking codes on the application report and rejection report (for all goods groups, except "Alternative tobacco products", "Nicotine products" and "Tobacco products”)

Value	Descirption	Explanation
0	Ok	Code processing has been successfully completed
1	Duplicate	The code specified is a duplicate. Possible situations: 1. Emission of the same code has been requested. 2. One code has been specified several times in the application report.

		3. Several identical reports have been received.
	Code has already been utilised	Code has already been applied.
	CIS has already been dropped_out	Code has already been written off.
2	Not exists KM	The code specified is missing in the system. Possible situations: 1. GG, which does not correspond to the goods group of the marking code is specified 2. Emission for the code is missing 3. Incorrect code format is specified
	There is no emission for code	Code emission is missing (only for the report on withdrawal of the MC without application of the MC if report processing failed).
3	Report not valid tags	Incorrect (invalid) data were specified for the report
4	Written off KM	Incorrect code status (code has already been written off - it is used in case of application report)
6	Insufficient funds on account	Insufficient funds
7	Billing contract not found	Personal account was not found
8	Payment type can't be resolved	Incorrect tariff type was specified
9	Owner is not correct	GCP is not the MC owner
11		A weight (AI3103) of the product (milk) is not specified
12		There is no a goods card (GTIN) in the NC
13		A weight (AI3103) of the product (milk) was specified
14		A volume (AI335Y) of the product (beer) was not specified
31	Report not valid tag EXDA	Incorrect (invalid) expiration date was specified in the report
34	Report not valid tag PRDT	Incorrect (invalid) production date was specified in the report
39	Report not valid tag CIST	Incorrect (invalid) MC type was specified in the report

40	Report not valid tag ORTY	Incorrect (invalid) method of introduction into circulation was specified in the report
41	Report not valid tag PATY	Incorrect (invalid) type of charging for billing was specified in the report
	Payment type [${pack.paymentType}] is not supported by product group [${pack.productGroup}]	Tariff type not supported for the GG was specified in the application report
101		Invalid code structure was indicated
102		Code was not found in the database - the code specified is missing in the TT GIS database
103		Error in cryptographic verification of code
132	Report not valid tag EXCN	Incorrect (invalid) description of the storage conditions of goods is specified in the report
300		Invalid SPRT tag (missing “alcoholVolume” parameter)
301		Invalid PPDD tag (missing “documentDate” parameter)
302		Invalid PPDN tag (missing “documentNumber” parameter)

Table 280 – Codes of errors in processing of the marking codes for rejection report (for the “Tobacco products”, “Nicotine products”, “Alternative tobacco products” goods groups) and for aggregation report

Code	Text
13	Participant $participant is not identified (is not registered)
21	Marking code $cis with parent $currentParent cannot be aggregated into $newParent
22	Marking codes $cis are not found
24	Status $status of the marking code $cis does not correspond to performed operation
26	Participant $participant is not registered in EGRIP/USRLE as an active participant
31	Participant $participant has no authority to perform operations with group package $pack and marking code $cis
44	Error in validation of document $docId on the XSD scheme

Code	Text
46	Content or name of the document is incorrect
56	Type of package for aggregate $cis is pack
62	The package type $cis cannot be put into package $parent
66	Aggregate $cis is not empty
67	Date of emission/application of new group package $newParent is less than date of emission/application of old package $previousParent or dates of emission/application are missing
68	Marking code $cis is unpaid
69	Content or name of the document is incorrect. Parsing could not be performed
70	Document content is incorrect. $reason is missing
71	Document content is incorrect. Incorrect data: $reason
72	Incorrect type of document: $docType
73	Incorrect type of emission
74	Identification code statuses specified in the “Aggregation” document do not match
79	Marking code $cis is incorrect
84	Boxes and pallets failed the aggregation: $ciss
86	Marking code $cis specified in document $documentName contains itself in parent
87	Incorrect format of parameter $field for MC $cis
88	Incorrect value of parameter $field for MC $cis
101	Document processing was interrupted
102	Document contains multiple products marking codes
103	Document does not contain marking codes
106	Document validation error
107	Signature validation error
108	Service error occurred.
111	Error occurred in the document routing.
116	Participant $participant cannot move the Marking Code $cis not introduced into circulation

Code	Text
117	Marking code $cis has been emitted
191	Aggregate <required MC> corresponds to a regular expression for volume and grade accounting

6. MESSAGES

6.1. Messages to the Operator transmitted via GUI

6.1.1. Information windows

If any error occurs during the program execution, a red pop-up window opens in the Web-browser with two types of messages:


1) Program entry error message (Figure 233).



Program entry error message

Figure 233

2) System error message (Figure 234).

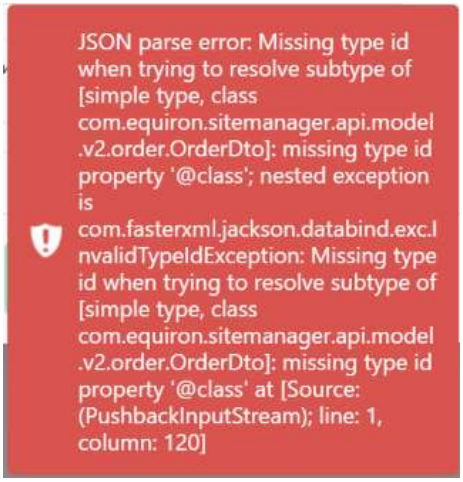

System error message

Figure 234

6.2. Error Format and Codes

6.2.1. Error format

The format of response with error is shown in Table 281.

Table 281 – Format of Response with Error

Field	Description	Type
fieldErrors	Error	Array of objects (JSON Array Of ProtobeansError Object)
globalErrors	Description of global errors	Array of objects (JSON Array Of OmsApiGlobalError Object)
success	Request execution result	Boolean

For the description of object “ProtobeansError” format, see Table 282.

Table 282 – Object “ProtobeansError” Format

Field	Description	Type
fieldError	Error description	String
fieldName	Field name	String
errorCode	Error code	String

For the description of object “OmsApiGlobalError” format, see Table 283.

Table 283 – Object “OmsApiGlobalError” Format

Field	Description	Type
error	Error description	String
errorCode	Error code	String

Example of JSON response with error is shown in Figure 235.

```
{
  "fieldErrors": [
    {
      "fieldError": "string",
      "fieldName": "string",
      "errorCode": 1010
    }
  ],
  "globalErrors": [
    {
      "error": "string",
      "errorCode": 1010
    }
  ],
  "success": false
}
```


Example of JSON response with error

Figure 235

6.2.2. Description of Errors

Error codes in response to request are shown in Table 284.

Table 284 – Data Send Error Codes

Error code	Description
400	Operation not completed. Wrong input parameters
404	Operation not completed. Object not found
413	Operation not completed. Attached signature, which is not supported by the system, has been specified
500	Operation not completed. Internal server error.

Notes:

if you get error 500, please repeat your request in 30 seconds.

7. OMS API 3.0 USE EXAMPLES

This section contains OMS API 3.0 use examples.


7.1. Signing Requests with the Electronic Digital Signature

This subsection describes the method of signing an HTTP request using the example of CryptoPro JCP library from CRYPTO-PRO Limited Liability Company. When using a library of other crypto provider, follow the guidelines for the selected library.

Before using other libraries, make sure that the library supports the required standards which can be found in subsection 2.3.

7.1.1. Library “CryptoPro JCP”


To get the CryptoPro JCP library, go through the registration procedure on the official website of CRYPTO-PRO Limited Liability Company (https://www.cryptopro.ru/). After registration, go to the "Download Center" section and select the required library from the list, in our case it is "CryptoPro JCP" (Figure 236).

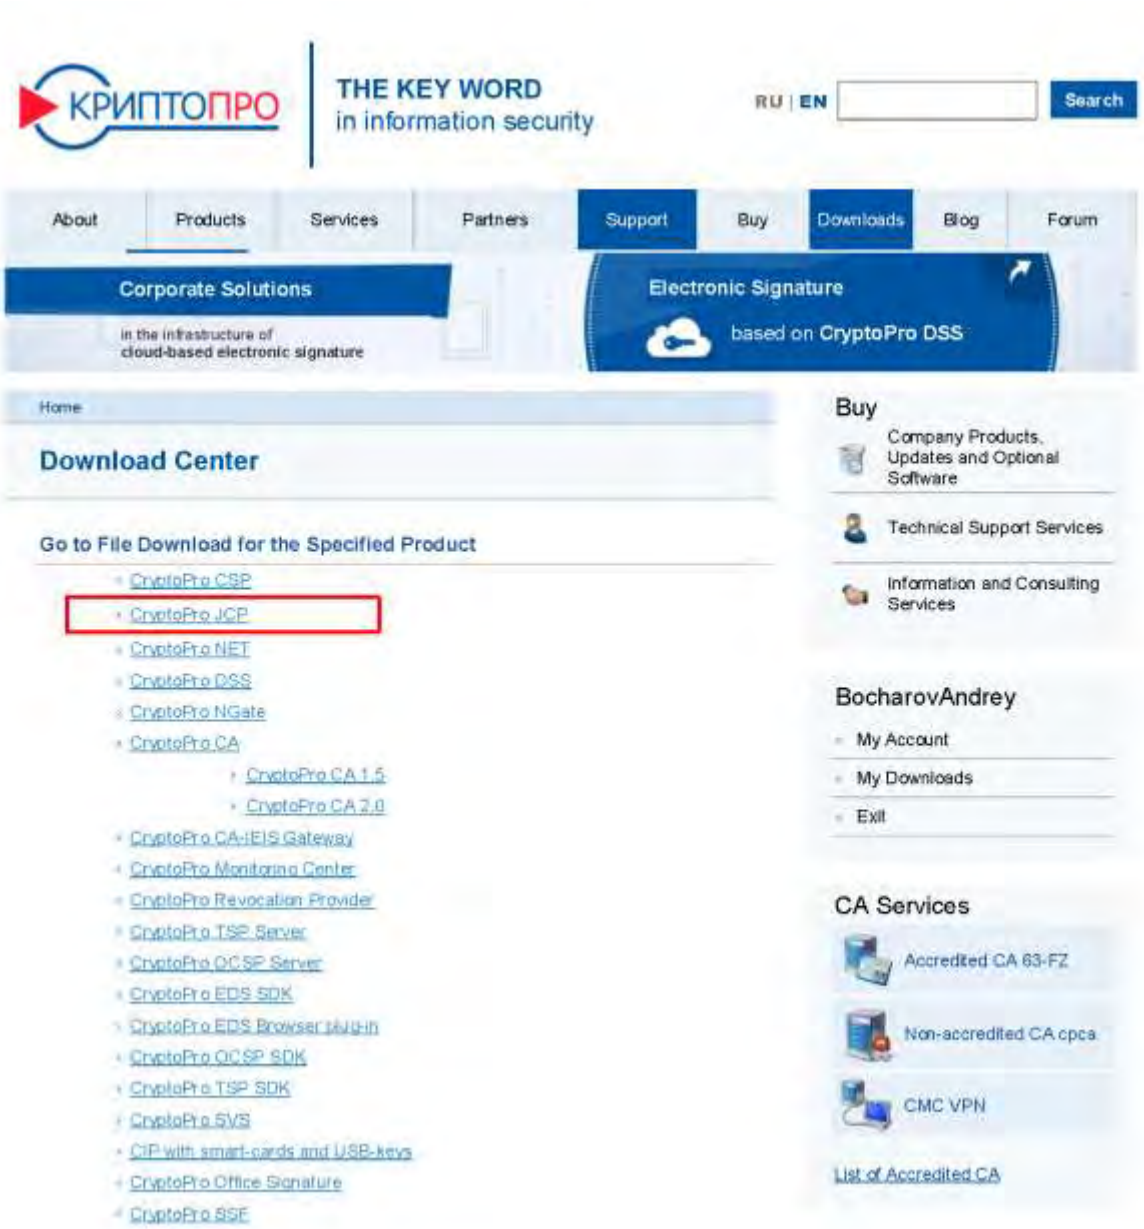

List of CryptoPro Software Products

Figure 236


After clicking on the "CryptoPro JCP" link, the user gets the list of library versions available for downloading (Figure 237).

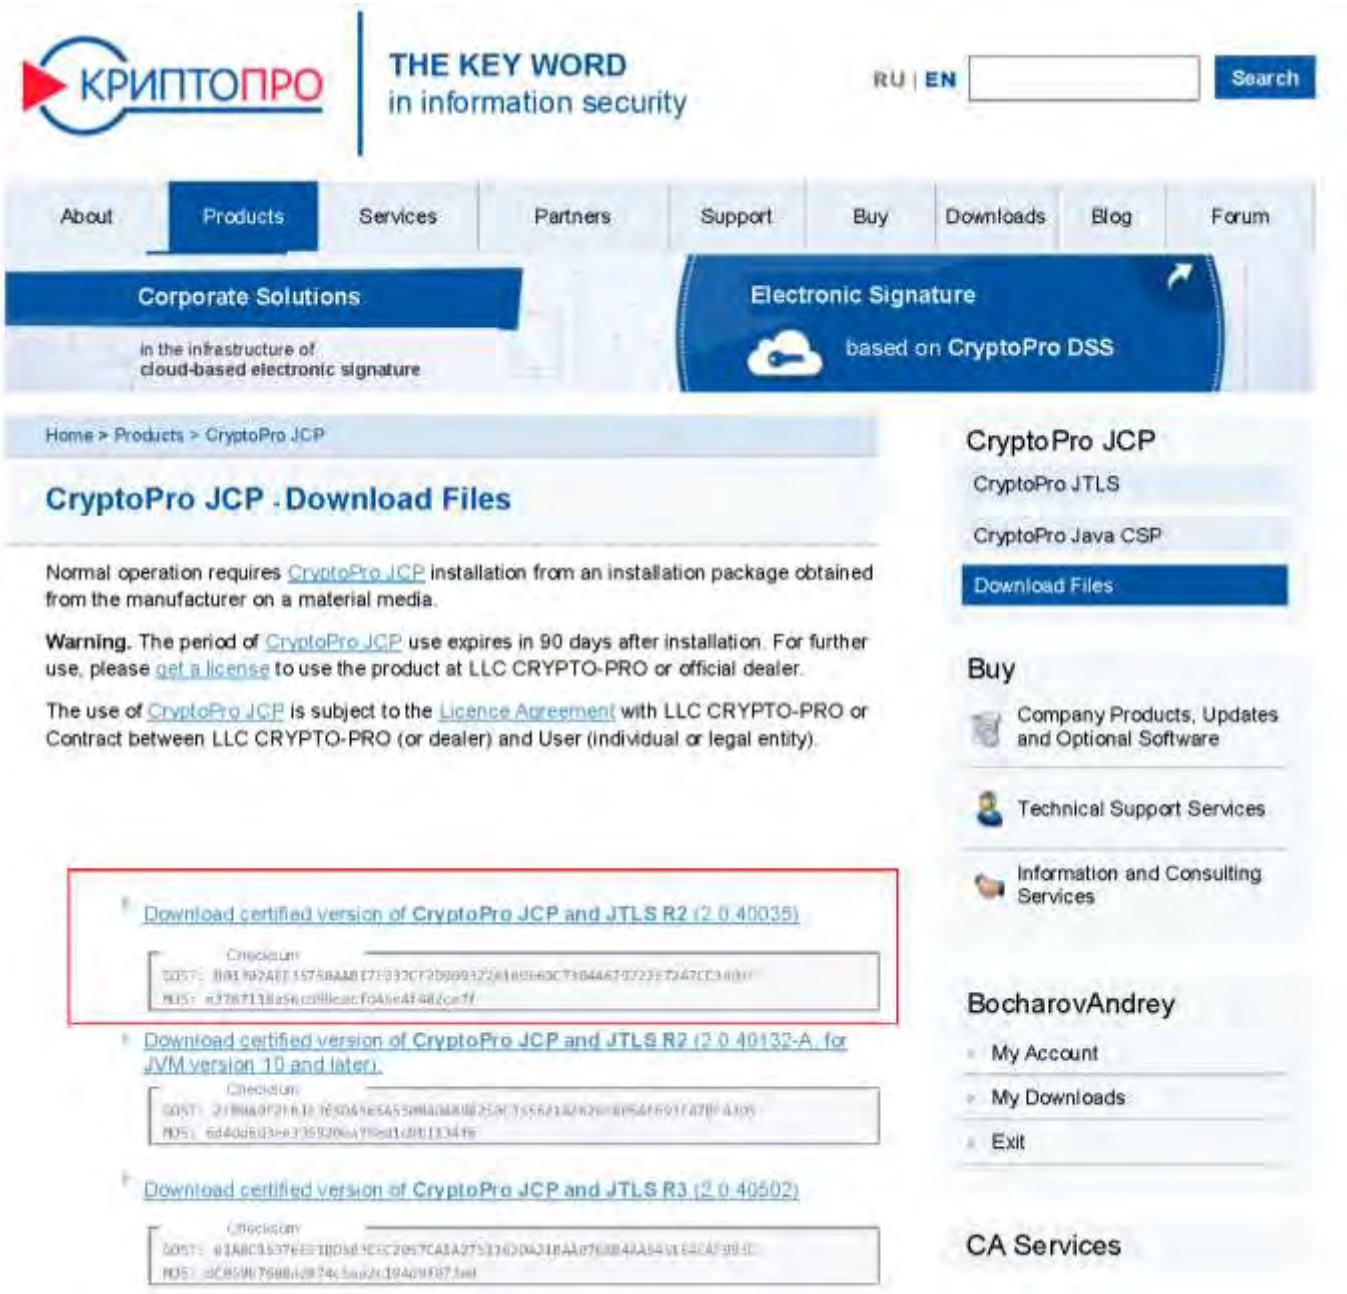

List of "CryptoPro JCP" Versions

Figure 237


After downloading the selected version, get access on your computer to archive "jcp-2.0.40035.zip" with the library and examples of use (see Figure 238).

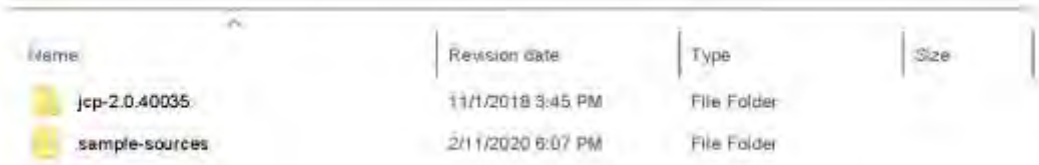

Content of “CryptoPro JCP” Library

Figure 238

The “sample-sources” directory contains a subdirectory “CMS_samples”, which provides an example of classes and functions to generate a detached signature of CMS format [IETF RFC 5652] (Figure 239).

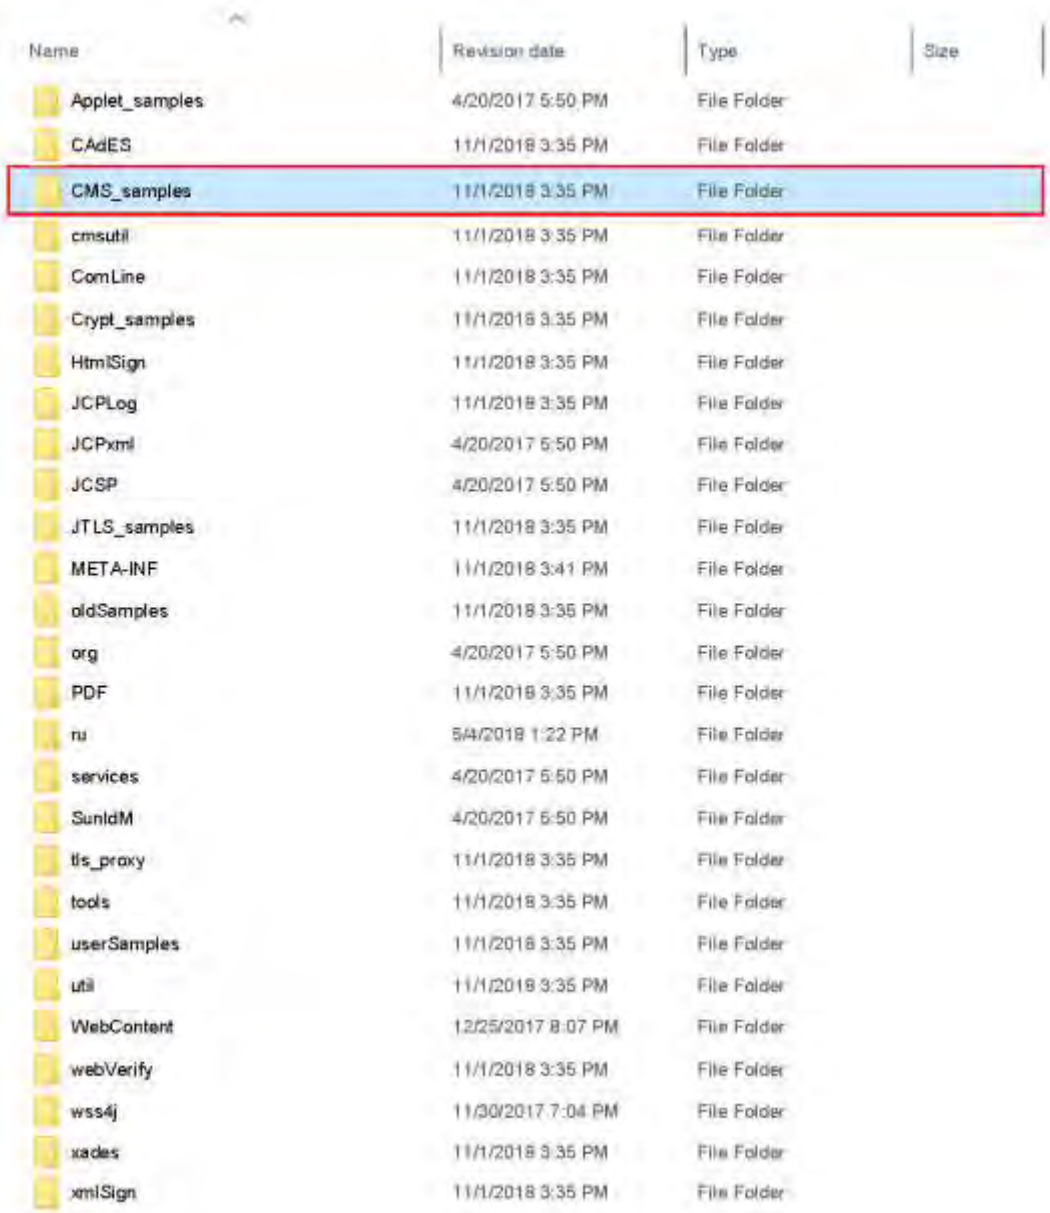

Name	Revision date	Type	Size
Applet_samples	4/20/2017 5:50 PM	File Folder	
CAdES	11/1/2018 3:35 PM	File Folder	
CMS_samples	11/1/2018 3:35 PM	File Folder	
cmsutil	11/1/2018 3:35 PM	File Folder	
ComLine	11/1/2018 3:35 PM	File Folder	
Crypt_samples	11/1/2018 3:35 PM	File Folder	
HtmlSign	11/1/2018 3:35 PM	File Folder	
JCPLog	11/1/2018 3:35 PM	File Folder	
JCPxml	4/20/2017 5:50 PM	File Folder	
JCSP	4/20/2017 5:50 PM	File Folder	
JTLS_samples	11/1/2018 3:35 PM	File Folder	
META-INF	11/1/2018 3:41 PM	File Folder	
oldSamples	11/1/2018 3:35 PM	File Folder	
org	4/20/2017 5:50 PM	File Folder	
PDF	11/1/2018 3:35 PM	File Folder	
ru	5/4/2018 1:22 PM	File Folder	
services	4/20/2017 5:50 PM	File Folder	
SunIdM	4/20/2017 5:50 PM	File Folder	
tls_proxy	11/1/2018 3:35 PM	File Folder	
tools	11/1/2018 3:35 PM	File Folder	
userSamples	11/1/2018 3:35 PM	File Folder	
util	11/1/2018 3:35 PM	File Folder	
WebContent	12/25/2017 8:07 PM	File Folder	
webVerify	11/1/2018 3:35 PM	File Folder	
wss4j	11/30/2017 7:04 PM	File Folder	
xades	11/1/2018 3:35 PM	File Folder	
xmlSign	11/1/2018 3:35 PM	File Folder	

Examples of “CryptoPro JCP” Use

Figure 239

The next section provides an example of calling a function to sign a request using detached signature in CMS format [IETF RFC 5652]; the requirements for request signing are given in section 2.3.1.

7.1.2. Example with the Use of Library to Sign the Request

Below is an example of using “CryptoPro JCP” library using classes from the examples distributed with the library.

Note: *The program code in the examples distributed with the library is intended for training purposes. This code cannot be directly used to protect information. Crypto-Pro company does not bear any responsibility for the operation of this code. (C) Crypto-Pro, LLC 2004-2007.*

To sign the request, the data must be converted into a byte array and sent to CMS.CMSSignEx signature method of the library, see the method parameters below (Table 285). To generate a detached signature, parameter “detached” shall contain value “true”.

Table 285 - Parameters of CMS Format Signature Generation Function

Description

/**
* sign CMS
*
* @param data - ***Signed data array***
* @param key - ***Private key***
* @param cert cert - ***Certificate***
* @param detached - ***Detached signature use attribute***
* @param digestOid - ***OID of hashing algorithm***
* @param signOid - ***OID of signature algorithm***
* @param signAlg – ***Signature algorithm name***
* @param providerName – ***Provider name***;
* @throws Exception e
*/
public static byte[] **CMSSignEx**(byte[] data, PrivateKey key,
Certificate cert, boolean detached, String digestOid,
String signOid, String signAlg, String providerName)
throws Exception {
 	
// sign
final Signature signature = Signature.getInstance(signAlg, providerName);
signature.initSign(key);
signature.update(data);
 	
final byte[] sign = signature.sign();
 	
// create cms format
return createCMSEx(data, sign, cert, detached, digestOid, signOid);
}

The function execution result is the signature of CMS format [IETF RFC 5652], the generated signature of the message request in CMS format fit in the HTTP header in “X-Signature” parameter in Base64 encoding.

Verification of the generated request signature fit in HTTP in “X-Signature” parameter can be performed with the support program use of cURL command-line designed to transfer data using cURL syntax.

An example of command used to verify the request signature is shown below (Table 186).

Example of Command to Verify the Request Signature:

```
curl -X POST "https://intuot.crpt.ru:12011/api/v3/orders?omsId=" -H
"@headers.txt" -H "@XSignature.txt" --data "@order.json"
PAUSE >nul
```

Where:

1) URL: address of the resource where the request is sent;
2) "@headers.txt" – file containing the HTTP header of the request (excluding “X-Signature” parameter);
3) "@XSignature.txt" – file containing parameter “X-Signature” from the request HTTP header;
4) "@order.json" – file containing the request data.

8. STRUCTURES AND FORMATS OF MARKING CODES, IDENTIFICATION CODES, AND VERIFICATION CODES

8.1. “Tobacco products”

8.1.1. Consumer package (non GS1)

The identification means for consumer package of tobacco products contains a marking code that includes 4 groups of data, where the first 3 groups form an identification code for consumer package of tobacco products, the fourth group comprises a verification code, while:

the first group consists of 14 digits and contains the goods code;

the second group consists of 7 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the identification code for the package of tobacco products;

the third group consists of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains maximum retail price of the consumer package (in recoded format) with a precision of one kopeck;

the fourth group consists of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 286 – Marking Code Structure

Code	Length	Format	Type
1	14	Figures	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	Tobacco products package identification code
3	4	Symbol string	Maximum retail price of consumer package with an accuracy of one kopeck in recoded form
4	4	Symbol string	Verification code

8.1.2. Group package (GS1)

The identification means for the group packing of tobacco products contains a marking code that includes 4 mandatory data groups, where the first 3 groups form the group packing identification code, the fourth group comprises a verification code, while:

1. **the first** group of mandatory data is identified by the application code AI = '01' and contains the product code (14 digits) of the group packing;

2. **the second** group of mandatory data is identified by the application code AI = '21' and contains the individual serial number (7 characters) of the group package. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.
3. **the third** group of mandatory data is identified by the application code AI = '8005' and contains the sum of the maximum retail prices of the enclosed consumer packages, expressed in kopecks, with an accuracy of one kopeck (6 characters). The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.
4. **the fourth** group of mandatory data is identified by the application code AI = '93' and contains a verification code (4 characters).

Table 287 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Goods individual serial number
3	6	Symbol string	8005	Sum of the maximum retail prices of consumer packages with a precision of one kopeck
4	4	Symbol string	93	Imitation insertion (verification code)

8.2. “Light industry”

The identification means for consumer goods (consumer package, consumer goods packages and sets) contains a marking code that includes 4 groups of data, where the first and second groups form an identification code of the consumer package or a package identification code, or a set identification code, the third and fourth groups form a verification code, while:

the first group consists of 14 digits and contains a goods code preceded by an application identifier (01), generated by the operator based on the information submitted by a consumer goods circulation participant;

the second group consists of 13 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of a goods unit preceded by an application identifier (21) and which is generated by an operator or a consumer goods circulation participant. The terminating character for this data group must be a separator that has code 29 in the ASCII character table. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial

number.**the third** group is 4 characters long and contains a verification key, preceded by an application identifier (91) and generated by the operator. The terminating character for this data group must be a special delimiter character with code 29 in the ASCII character table;

the fourth group consists of 44 characters (numbers, uppercase and lowercase letters of the Latin alphabet and special characters) and contains a verification code, preceded by an application identifier (92) and generated by the operator.

Table 288 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification key

8.3. “Footwear”

The identification means for footwear contains a marking code that includes 4 data groups, where the first and second groups form an identification code, the third and fourth groups form a verification code, while:

the first group consists of 14 digits and contains a goods code preceded by an application identifier (01), generated by the operator based on the information submitted by a footwear goods circulation participant;

the second group consists of 13 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of a goods unit, which is preceded by an application identifier (21) and which is generated by an operator or footwear goods circulation participant. The terminating character for this data group is the delimiter character code 29 in the ASCII character table. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

the third group consists of 4 characters and contains an identifier (individual sequence number) of the verification key, preceded by an application identifier (91) and generated by the operator. The terminating character for this data group is a special delimiter character code 29 in the ASCII character table;

the fourth group consists of 88 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the value of the verification code, preceded by an application identifier (92) and generated by the operator.

Table 289 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	88	Symbol string	92	Verification key

8.4. “New pneumatic rubber tires and tire casings”

The “Tires” goods identification means contains a marking code that includes 4 data groups, where the first and second groups form an identification code, the third and fourth groups form a verification code, while:

the first group consists of 14 digits and contains a product code, preceded by an application identifier (01), and which is generated by the operator or a “Tires” goods circulation participant based on the information submitted by the a “Tires” goods circulation participant;

the second group consists of 13 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of a goods unit, preceded by an application identifier (21) and which is generated by an operator or a “Tires” goods circulation participant. The terminating character for this data group must be a separator that has code 29 in the ASCII character table. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

the third group is 4 characters long and contains a verification key, preceded by an application identifier (91) and generated by the operator. The terminating character for this data group must be a special delimiter character with code 29 in the ASCII character table;

the fourth group consists of 44 characters (numbers, uppercase and lowercase letters of the Latin alphabet and special characters) and contains a verification code, preceded by an application identifier (92) and generated by the operator.

Table 290 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification kode

8.5. “Perfume and Eau de Toilette”

Identification means of the perfumery consumer package and perfumery set contain a marking code, which includes 4 data groups of which the first two groups comprise an identification code of the consumer goods or identification code of the goods set, and the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the operator based on information submitted by a perfumery products circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or the perfumery products circulation participant. The end symbol for this data group should be a divider that has a code 29 in ASCII symbol table.

When generating serial numbers independently, the Participant shall add a serial number consisting of 19 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is 4 characters long and contains a verification key, preceded by an application identifier (91) and generated by the operator. The terminating character for this data group must be a special delimiter character with code 29 in the ASCII character table;

4) **The fourth** group consists of 44 characters (numbers, uppercase and lowercase letters of the Latin alphabet and special characters) and contains a verification code, preceded by an application identifier (92) and generated by the operator.

Table 291 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.6. “Photo cameras (except cine cameras), flash lights and flash bulbs”

Identification means of photo products (of consumer package and sets) contain a marking code, which includes 4 data groups of which the first and the second groups comprise an identification code of the consumer package or identification code of the set, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the operator based on information submitted by a photo products circulation participant.

2) **The second** group consists of 20 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a photo products circulation participant. The end symbol for this data group should be a divider that has a code 29 in ASCII symbol table.

When generating serial numbers independently, the Participant shall add a serial number consisting of 19 characters. The country code is indicated by the Emission Server and shall be indicated before the received serial number.

3) The third group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group should be a special divider that has a code 29 in ASCII symbol table.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator.

Table 292 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	20	Symbol string	21	Good individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.7. “Medicines for human use”

The identification means for medicines contains a marking code that includes 4 groups of data, where the first and second groups form an identification code, the third and fourth groups form a verification code, while:

the first data group is the global trade unit number, consisting of 14 numeric characters, preceded by an application identifier (01);

the second group of data is an individual serial number of a trade unit, consisting of 13 characters of a numeric or alphanumeric sequence (Latin alphabet), preceded by an application identifier (21). The terminating character for this data group is a special delimiter character with code 29 in the ASCII character table or FUNCTION 1 (FNC1);

the third group of data is the identifier (individual serial number) of the verification key provided to the issuers of identification means by the operator of the monitoring system as part of the verification code, consisting of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet), preceded by the application identifier (91). The terminating character for this data group is a special delimiter character with code 29 in the ASCII character table or FUNCTION 1 (FNC1);

the fourth data group — the value of the verification code provided to the issuers of identification means by the operator of the monitoring system as part of the verification code, which is preceded by the application identifier (92), and consisting of 44 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters).

Table 293 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

Note: Currently, 88 characters for the fourth data group are not used (considered deprecated).

8.8. “Dairy products”

Identification means of the dairy products (of consumer package, group package and sets) contain a marking code, which includes 4 data groups of which the first two groups comprise an identification code of the consumer package or identification code of the group package, or identification code of the sets, the third group comprises a verification code, the fourth group comprises an actual weight of the product, while:

the first group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code;

the second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of dairy products packing and ends with the delimiter character FNC1 (ASCII 29);

When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

the third group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

the fourth group is identified by the application identifier AI=’3103’, it consists of 6 digits and contains an actual weight of products in kilograms. This group is optional and can be used only if reports on MC application are sent.

Table 294 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight of products in kilograms, optional group

8.9. “Bicycles and bicycle frames”

The identification means for cycling goods contain a marking code (of the consumer package or group package) that includes 4 groups of data, where the first and second groups form an identification code of the consumer package or group package, the third and fourth groups form a verification code, while:

the first group consists of 14 digits and contains a goods code preceded by an application identifier (01), generated by the operator of the information system based on the information submitted by the goods circulation participant;

the second group consists of 13 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of a

unit of goods, which is preceded by an application identifier (21) and which is generated by an operator or a cycling gear circulation participant. The terminating character for this data group is the delimiter character with code 29 in the ASCII character table.

When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

The third group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

The fourth group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 295 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.10. "Medical products"

Identification means of medical products contain a marking code (of the consumer package, group package or sets) including 4 data groups, the first and the second groups comprise an identification code of the consumer package, group package or sets, the third and the fourth groups comprise a verification code, while:

The first group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the operator of the information system based on information submitted by a goods circulation participant.

The second group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a goods circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

the third group is 4 characters long and contains a verification key, preceded by an application identifier (91) and generated by the operator. The terminating character for this data group is a special delimiter character code 29 in the ASCI character table. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

the fourth group, the fourth group consists of 44 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code preceded by an application identifier (92) and generated by the operator of the information system.

Table 296 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.11. “Alternative tobacco products”

8.11.1. Consumer package (non GS1)

The consumer package identification means contains a marking code that includes 4 data groups, where the first 3 groups form the consumer package identification code, the fourth group comprises a verification code, while:

the first group consists of 14 digits and contains the goods code;

the second group consists of 7 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of a package of tobacco products;

the third group consists of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains, in recoded form, the maximum retail price of consumer package with an accuracy of one kopeck, while the price is indicated equal to zero rubles and zero kopecks;

the fourth group consists of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 297 – Marking Code Structure

Code	Length	Format	Type
1	14	Figures	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	Tobacco product package identification code
3	4	Symbol string	Maximum retail price of consumer package with an accuracy of one kopeck in recoded form
4	4	Symbol string	Verification code

8.11.2. Consumer package (GS1)

The consumer package identification means contains a marking code that includes 3 mandatory data groups, where the first 2 groups form the consumer package identification code, the third group comprises a verification code, while:

the first group of mandatory data is identified by the application code AI = '01' and contains the product code (14 digits) of the consumer packing;

the second group of mandatory data is identified by the application code AI = '21' and contains an individual serial number (7 characters) of the consumer packaging;

the third group of mandatory data is identified by the application code AI = '8005' and contains maximum retail price of the consumer package with a precision of one kopeck. At the same time the maximum retail price equal to 000000 (six zeros) is specified in the third group of data;

the fourth group of mandatory data is identified by the application code AI = '93' and contains a verification code (4 characters).

Table 298 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Goods individual serial number
3	6	Symbol string	8005	Maximum retail price of consumer package with a precision of one kopeck
4	4	Symbol string	93	Verification code

8.11.3. Group package (GS1)

The group packing identification means contains a marking code that includes 3 mandatory data groups, where the first 2 groups form the group packing identification code, the third group comprises a verification code, while:

the first group of mandatory data is identified by the application code AI = '01' and contains the goods code (14 digits) of the group packing;

the second group of mandatory data is identified by the application code AI = '21' and contains an individual serial number (7 characters) of the group packaging;

the third group of mandatory data is identified by the application code AI = '8005' and contains a sum of the maximum retail prices of the nested consumer packages expressed in kopecks, with a precision of one kopeck (6 digits). At the same time the sum of the maximum retail prices of consumer packages equal to 000000 (six zeros) is specified in the third group of data;

the fourth group of mandatory data is identified by the application code AI = '93' and contains a verification code (4 characters).

Table 299 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Goods individual serial number
3	6	Symbol string	8005	Sum of maximum retail prices of consumer packings with a precision of one kopeck
4	4	Symbol string	93	Verification code

8.12. “Packed water”

The identification means for packed water, including natural mineral water, contains a marking code (of consumer package and group package) that includes 3 data groups, where the first 2 groups form consumer and group package identification code while:

the first group is identified by the application identifier AI = '01', consists of 14 digits and contains the goods code;

the second group is identified by the application identifier AI = '21', consists of 13 characters (numbers, uppercase and lowercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the drinking water package, including natural mineral water and ends with the separator character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12

characters. The country code is indicated by the Emission Server and shall be entered before the received serial number;

the third group is identified by the application identifier AI = '93', consists of 4 characters (numbers, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 300 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code

8.13. “Beer, beer-based and low-alcohol beverages”

The identification means of beer-based beverages contain a marking code (of consumer package and group package) including four data groups, the first two of which generate the identification code of consumer and group package, the third group comprises a verification code, the fourth group comprises a volume of the products, while:

the first group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code;

the second group is identified by the application identifier AI=’21’, it consists of 7 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of beer-based beverages packing and ends with the delimiter character FNC1 (ASCII 29).

When generating serial numbers independently, the Participant shall add a serial number consisting of 6 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

The third group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

The fourth group is identified by the application identifier AI=’335Y’ (allowed values are AI='3350', '3351', '3352', '3353', '3354', '3355'), it consists of 6 digits and contains a volume of the products in liters. This group is optional and can be used only if reports on MC application are sent.

Table 301 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Good individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	335Y, where Y can have values from 0 to 5	Volume (contains volume in liters), optional attribute. Note: decimal point is assumed (but not specified) after Y digits for fractional values.

8.14. “Nicotine products”

8.14.1. Group package (GS1)

Identification means of nicotine products group package contain a marking code including four mandatory data groups, the first three of which comprise a group package identification code, the fourth group comprises a verification code, while:

1) **The first** group of mandatory data is identified by the application code AI = ’01’ and contains a goods code (14 digits) of the group packing.

2) **The second** group of mandatory data is identified by the application code AI = ’21’, it contains an individual serial number (7 characters) of the group packing.

3) **The third** group of mandatory data is identified by the application code AI = '8005' and contains the sum of the maximum retail prices of the nested consumer packages expressed in kopecks, with a precision of one kopeck (6 digits). At the same time the sum of the maximum retail prices of the consumer packages equals to 000000 (six zeros) is specified in the third group of data.

4) **The fourth** group of mandatory data is identified by the application code AI = ’93’ and contains a verification code (4 characters).

Table 302 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	21	Goods individual serial number
3	6	Symbol string	8005	Sum of maximum retail prices of consumer packages with a precision of one kopeck
4	4	Symbol string	93	Verification code

8.14.2. Consumer package (non GS1)

The identification means of nicotine products consumer package contain a marking code including four data groups, the first three of which generate the identification code of the consumer package of the nicotine products, the fourth group comprises a verification code, while:

the first group consists of 14 digits and contains a goods code;

the second group consists of 7 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of nicotine products package;

the third group consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, and special characters) and contains the maximum retail price (in the recoded format) of the consumer package expressed with a precision of one kopeck. At the same time a price equal to zero rubles and zero kopecks is specified;

the fourth group consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 303 – Marking Code Structure

Code	Length	Format	Type
1	14	Figures	Goods code according to the corresponding goods nomenclature (GTIN)
2	7	Symbol string	Good individual serial number
3	4	Symbol string	Maximum retail price of consumer package with a precision of one kopeck in recoded format
4	4	Symbol string	Verification code

8.15. “Specialized food products and biologically active food additives”

Identification means of the specialized food products and biologically active food additives contain a marking code (of consumer and group packages, and sets), which includes 3 data groups of which the first two groups comprise an identification code of the consumer package or identification code of the group package, or identification code of the sets, the third group comprises a verification code, while:

1) The first group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code;

2) The second group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of specialized food products and biologically active food additives packing and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number;

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 304 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of specialized food products and biologically active food additives contain a marking code (consumer and group packages, and sets), which includes 4 data groups of which the first and the second groups comprise an identification code of the consumer package or identification code of the group package, or identification code of the sets, the third and the fourth groups comprise a verification code while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant;

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 305 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Numbers	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.16. “Antiseptic/antibacterial skin cleansers and hand sanitizers”

Identification means of the antiseptic/antibacterial skin cleansers and hand sanitizers contain a marking code (of consumer package, group package and sets), which includes 3 data groups of which the first two groups comprise an identification code of the consumer package or identification code of the group package, or identification code of the sets, the third group comprises a verification code, while:

1) **the first group** is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code;

2) **the second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package of antiseptic/antibacterial skin cleansers and hand sanitizers and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.
3) **the third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 306 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Digits	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of antiseptic/antibacterial skin cleansers and hand sanitizers contain a marking code (of consumer and group packages, and sets), which includes 4 data groups of which the first and the second groups comprise an identification code of the consumer package or identification code of the group package, or identification code of the sets, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number;

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 307 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.17. “Non-alcoholic beer”

Identification means of non-alcoholic beer products contain a marking code (of the consumer or group package or sets) including 3 mandatory data groups, the first 2 of which generate an identification code of the consumer or group package or sets, the third group comprises a verification code, the fourth group comprises a volume of the products while:

1) **The first** group of mandatory data is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code;

2) **The second** group of mandatory data is identified by the application identifier AI=’21’, it consists of 7 characters and contains an individual serial number of beer beverages packing. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 6 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group of mandatory data is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

4) **The fourth** group is identified by the application identifier AI=’335Y’ (allowed values are AI='3350', '3351', '3352', '3353', '3354', '3355'), it consists of 6 digits and contains a volume of the products in liters. This group is optional and can be used only if reports on MC application are sent.

Table 308 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature GS1
2	7	Symbol string	21	Goods individual serial number
3	4	Symbol string	93	Verification code
4	6	Figures	335Y, where Y can have values from 0 to 5	Volume (in liters), optional attribute. Y value indicates the number of decimal places in a value of the volume

8.18. “Juice products and non-alcoholic beverages”

Identification means of juice products and non-alcoholic beverages contain a consumer package marking code including 3 mandatory data groups, the first 2 of which generate an identification code of the consumer package, the third group comprises a verification code, while:

1) **the first** group of mandatory data is identified by the application code AI = ’01’ and contains a goods code (14 digits) of the consumer and group package;

2) **the second** group of mandatory data is identified by the application code AI = ’21’ and contains an individual serial number (13 characters) of the consumer package. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number;

3) **the third** group of mandatory data is identified by the application code AI = ’93’ and contains a verification code (4 characters).

Table 309 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature GS1
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	93	Verification key

8.19. “Seafood”

Identification means of seafood contain a marking code (of consumer, group packages and sets), which includes 3 data groups of which the first two groups comprise an identification code of the consumer package, identification code of the group package or a set, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the seafood package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Note: actual weight of the unit of products can be indicated in the marking code structure after the third data group (after a verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the third data group is only available to transfer weight to the system as part of information of the application report for the

goods that have an attribute of variable weight. However, adding weight information into a structure of the MC for its further conversion into identification means is not allowed

Table 310 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight of products in kilograms is optionally specified in the MC structure when submitting an application report

Identification means of seafood contain a marking code (of consumer, group packages and sets), which includes 4 data groups of which the first and the second groups comprise an identification code of the consumer package, group package or a set, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Note: actual weight of the unit of products can be indicated in the marking code structure after the fourth data group (after a verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the fourth data group is only

available to transfer weight to the system as part of information of the application report for the goods that have an attribute of variable weight. However, adding weight information into a structure of the MC for its further conversion into identification means is not allowed.

Table 311 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight of products in kilograms is optionally specified in the MC structure when submitting an application report

8.20. “Pet foods”

Identification means of pet food products contain a marking code (of the consumer, group packages and sets) including 4 data groups, the first and the second groups generate an identification code of the consumer, group packages and sets, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key that is preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and that is generated by the operator of the information system.

Note: the actual weight of the unit of products can be indicated in the marking code structure after the fourth data group (after a verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the fourth data group is applicable only to transfer weight to the system as part of information of the application report for the goods that have an attribute of variable weight. However, adding weight information into a structure of the MC for its further conversion into identification means is not allowed.

Table 312 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight of products in kilograms is indicated optionally in the MC structure when submitting an application report

Identification means of pet food products contain a marking code (of the consumer, group packages and sets) including 3 data groups, the first two groups generate an identification code of the consumer, group packages and sets, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Note: the actual weight of the unit of products can be indicated in the marking code structure after the third data group (after a verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the third data group is applicable only to transfer weight to the system as part of information of the application report for the goods that have an attribute of variable weight. However, adding weight information into a structure of the MC for its further conversion into identification means is not allowed.

Table 313 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight of products in kilograms is indicated optionally in the MC structure when submitting an application report

8.21. “Games and toys for children”

Identification means of games and toys for children contain a marking code (of the consumer or group package or a set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package or a set, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) The second group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item that is preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

When generating serial numbers independently, the Participant shall add a serial number consisting of 12 symbols. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) The third group consists of 4 symbols and contains a verification key that is preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols.

4) The fourth group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 314 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

Identification means of games and toys for children contains a marking code (of the consumer or group package or a set) including 3 data groups, the first two groups generate an identification code of the consumer or group package or a set, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 315 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

8.22. “Titanium metal products”

The identification means of titanium metal products contain a marking code (of the consumer package) including 3 data groups, the first 2 of which generate an identification code of the consumer package, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 316 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

8.23. “Radio-electronic products”

Identification means of radio-electronic products contain a marking code (of the consumer package, group package or set) including 3 data groups, the first 2 of which generate an identification code of the consumer, group package or set, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 20 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 19 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

4) **The fourth** group is identified by one of following application identifiers:

– AI=’30’ (it consists of 1 to 8 digits);

– AI=’310Y’ (allowed values are AI='3100', '3101', '3102', '3103', '3104', '3105', it consists of 6 digits);

– AI=’311Y’ (allowed values are AI='3110', '3111', '3112', '3113', '3114', '3115', it consists of 6 digits);

– AI=’335Y’ (allowed values are AI='3350', '3351', '3352', '3353', '3354', '3355', it consists of 6 digits);

This group is optional and can be used only when reports on MC application are sent. Only one variable characteristic can be specified for one marking code.

However, adding weight information to the structure of the MC for its subsequent conversion into identification means is not allowed.

Table 317 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	20	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4.1	1-8	Figures	30	Quantity of goods in products (optional)
4.2	6	Figures	310Y, where Y can assume values from 0 to 5	Weight (optional) Note: decimal point is assumed (but not specified) after Y digits for fractional values.
4.3	6	Figures	311Y, where Y can assume values from 0	Length of goods (optional attribute) Note: decimal point is assumed (but not specified) after Y digits for fractional values.
4.4	6	Figures	335Y, where Y can assume values from 0 to 5	Volume of goods (optional attribute). Note: decimal point is assumed (but not specified) after Y digits for fractional values.

Identification means of radio-electronic products contain a marking code (of the consumer package, group package or set) including 4 data groups, the first and the second groups generate an identification code of the consumer, group package or set, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 20 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 19 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

5) **The fifth** group is identified by one of following application identifiers:

– AI=’30’ (it consists of 1 to 8 digits);

– AI=’310Y’ (allowed values are AI='3100', '3101', '3102', '3103', '3104', '3105', it consists of 6 digits);

– AI=’311Y’ (allowed values are AI='3110', '3111', '3112', '3113', '3114', '3115', it consists of 6 digits);

– AI=’335Y’ (allowed values are AI='3350', '3351', '3352', '3353', '3354', '3355', it consists of 6 digits);

This group is optional and can be used only if reports on MC application are sent. Only one variable characteristic can be specified for one marking code.

However, adding weight information to the structure of the MC for its subsequent conversion into identification means is not allowed.

Table 318 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	20	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5.1	1-8	Figures	30	Quantity of goods in products (optional)
5.2	6	Figures	310Y, where Y can assume values from 0 to 5	Weight (optional) Note: decimal point is assumed (but not specified) after Y digits for fractional values.
5.3	6	Figures	311Y, where Y can assume values from 0	Length of goods (optional attribute) Note: decimal point is assumed (but not specified) after Y digits for fractional values.
5.4	6	Figures	335Y, where Y can assume values from 0 to 5	Volume of goods (optional attribute). Note: decimal point is assumed (but not specified) after Y digits for fractional values.

8.24. “Optical fiber and fiber optic products”

Identification means of fiber optic products contain a marking code (of the consumer and group package) including 3 data groups, the first 2 of which generate an identification code of the consumer and group package, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Note: the length of goods can be specified in the MC structure after the third data group (after the verification code with indication of the ASCII 29 character) using the application identifier AI=’311Y’ (allowed values: AI='3110', '3111', '3112', '3113', '3114', '3115'); it consists of 6 digits and contains the length of goods in meters. This group is optional and can be used only when submitting the MC application reports.

Table 319 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	311Y, where Y can have values from 0	Length of goods (optional attribute) Note: For fractional values, the decimal point is assumed (but not specified) before the last Y digits.

Identification means of fiber optic products contain a marking code (of the consumer and group package) including 4 data groups, the first and the second groups generate an identification code of the consumer and group package, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Note: the length of goods can be specified in the MC structure after the fourth data group (after the verification code with indication of the ASCII 29 character) using application identifier AI=’311Y’ (allowed values: AI='3110', '3111', '3112', '3113', '3114', '3115'); it consists of 6 digits and contains the length of goods in meters. This group is optional and can be used only when submitting MC application reports.

Table 320 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	311Y, where Y can have values from 0	Length of goods (optional attribute) Note: For fractional values, the decimal point is assumed (but not specified) before the last Y digits.

8.25. “Vegetable oils”

Identification means of vegetable oils contain a marking code (of the consumer, group packages and sets) including 3 data groups, the first 2 of which generate an identification code of the consumer, group packages and sets, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 321 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of vegetable oils contain a marking code (of the consumer, group packages and sets) including 4 data groups, the first and the second groups generate an identification code of the consumer, group packages and sets, the third and the fourth groups comprise a verification code, wherein:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 322 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.26. “Cosmetics, household chemicals, and personal hygiene products”

Identification means of household chemical products contain a marking code (of the consumer or group package or a set) including 3 data groups, the first 2 of which generate an identification code of the consumer or group package or a set, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 323 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of household chemical products contain a marking code (of the consumer or group package or a set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package or a set, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 324 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.27. “Canned foods”

The identification means of canned foods contain a marking code (of the consumer, group packages and sets) including 3 data groups, the first 2 of which generate an identification code of the consumer, group packages and sets, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) The second group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 325 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of canned foods contain a marking code (of the consumer, group packages and sets) including 4 data groups, the first and the second groups generate an identification code of the consumer, group packages and sets, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 326 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.28. “Veterinary medicines”

Identification means of veterinary products contain a marking code (of the consumer and group packages) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package, the third and the fourth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 327 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.29. “Building materials”

Identification means of the building materials contains a marking code (of consumer or group package), which includes 3 data groups of which the first two groups generate an identification code of the consumer or group package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 328 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means of building materials contains a marking code (of consumer or group package), which includes 4 data groups of which the first and the second groups generate an identification code of the consumer or group package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 329 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.30. “Fire safety and firefighting equipment”

Identification means contains a marking code (of consumer package, group package or set) which includes 3 data groups of which the first two groups generate an identification code of the consumer package, group package or set, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 symbols (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 symbols (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 330 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contains a marking code (of consumer package, group package or set), which includes 4 data groups of which the first and the second groups generate an identification code of the consumer package, group package or set, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 331 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.31. **“Printed goods”**

Identification means contains a marking code (of the consumer package, group package, and set) including 4 data groups, the first and the second groups generate an identification code of the consumer package, group package, and set, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 332 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.32. **“Heaters”**

Identification means contains a marking code (of the consumer package or group package), which includes 3 data groups of which the first two groups generate an identification code of the consumer package or group package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 symbols (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 symbols. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 symbols (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 333 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contains a marking code (of the consumer package or group package) including 4 data groups, the first and the second groups generate an identification code of the consumer package or group package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 5 symbols. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 334 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.33. “Groceries”

Identification means contain a marking code (of the consumer package or a set), which includes 3 data groups of which the first two groups generate an identification code of the consumer, group packages or a set, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 335 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer package or a set) including 4 data groups, the first and the second groups generate an identification code of the consumer, group packages or a set, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 336 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.34. “Cabling and wiring products”

Identification means contain a marking code (of the consumer and group packages), which includes 3 data groups of which the first two groups generate an identification code of the consumer and group packages, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Note: the length of goods can be specified in the MC structure after the third data group (after the verification code with indication of the ASCII 29 character) using the application identifier AI=’311Y’ (allowed values: AI='3110', '3111', '3112', '3113', '3114', '3115'); it consists of 6 digits and contains the length of goods in meters. This group is optional and can be used only when submitting MC application reports.

Table 337 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	311Y, where Y can have values from 0	Length of goods (optional attribute) Note: For fractional values, the decimal point is assumed (but not specified) before the last Y digits

Identification means contain a marking code (of the consumer and group packages) including 4 data groups, the first and the second groups generate an identification code of the consumer and group packages, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Note: the length of goods can be specified in the MC structure after the fourth data group (after the verification code with indication of the ASCII 29 character) using application identifier AI=’311Y’ (allowed values: AI='3110', '3111', '3112', '3113', '3114', '3115'); it consists of 6 digits and contains the length of goods in meters. This group is optional and can be used only when

submitting MC application reports.

Table 338 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	311Y, where Y can have values from 0	Length of goods (optional attribute) Note: For fractional values, the decimal point is assumed (but not specified) before the last Y digits

8.35. “Engine oils”

Identification means contain a marking code (of the consumer or group package or a set), which includes 3 data groups of which the first two groups generate an identification code of the consumer or group package or a set, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 339 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer or group package or a set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package or a set, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 340 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.36. “Polymer pipes”

Identification means contain a marking code (of the consumer or group package, or set), which includes 3 data groups of which the first two groups generate an identification code of the consumer or group package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 341 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer or group package, or set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 6 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 342 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.37. “Confectionery products”

Identification means contain a marking code (of the consumer package, group package or set) which includes 3 data groups of which the first two groups generate an identification code of the consumer package, group package or set, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 343 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package or set) including 4 data groups, the first and the second groups generate an identification code of the consumer package, group package or set, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 344 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.38. “Auto parts and components for vehicles”

Identification means contain a marking code (of the consumer package, group package or set) which includes 3 data groups of which the first two groups generate an identification code of the consumer or group package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 345 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package or set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 346 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.39. “Radio-electronic products. Electronic nicotine delivery systems”

Identification means contain a marking code (of a consumer package) that includes 3 data groups of which the first two groups generate an identification code of the consumer package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is placed before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 347 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer package) including 4 data groups, the first and the second groups generate an identification code of the consumer package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII characters. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is placed before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end character for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Table 348 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.40. “Radio-electronic products. Laptops and smartphones”

Identification means contain a marking code (of the consumer package, group package or set), which includes 3 data groups of which the first two groups generate an identification code of the consumer or group package, the third group generates a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 20 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 19 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 349 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	20	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package or set) including 4 data groups, the first and the second groups generate an identification code of the consumer or group package, the third and the fourth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 20 symbols (digits, lowercase and uppercase Latin letters, and special characters) and contains individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 19 characters. The country code is indicated by the Emission Server and shall be entered before the received serial number.

3) **The third** group consists of 4 symbols and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Table 350 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	20	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.41. “Meat products”

Identification means contain a marking code (of the consumer, group package, or set), which includes 3 data groups of which the first two groups constitute an identification code of the consumer or group package, the third group constitutes a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, a Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Note: the actual weight of the product unit may be indicated in the marking code structure after the third data group (after the verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the third data group is permitted only for transmitting weight information to the system as part of the application report for the goods that have an attribute of variable weight. However, adding weight data into the MC structure for its subsequent conversion into identification means is not permitted.

Table 351 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight of products in kilograms is optionally specified in the MC structure when submitting an application report

Identification means contain a marking code (of the consumer, group package, or set) including 4 data groups, the first and the second groups constitute an identification code of the consumer or group package, the third and the forth groups constitute a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Note: the actual weight of the product unit may be indicated in the marking code structure after the fourth data group (after the verification code with indication of symbol ASCII 29) by using application identifier AI = '3103'. Indication of the actual weight after the fourth data group is permitted only for transmitting weight information to the system as part of the application report for the goods that have an attribute of variable weight. However, adding weight data into the MC structure for its subsequent conversion into identification means is not permitted.

Table 352 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight of products in kilograms is optionally specified in the MC structure when submitting an application report

8.42. “Feed additives”

Identification means contain a marking code (of the consumer, group package), which includes 3 data groups of which the first two groups constitute an identification code of the consumer or group package, the third group constitute a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 353 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package) including 4 data groups, the first and the second groups constitute an identification code of the consumer or group package, the third and the forth groups constitute a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item preceded by the application identifier (21) and that is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, a Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key preceded by the application identifier (91) and that is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 354 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.43. “Home and kitchen goods”

Identification means contain a marking code (of the consumer package, group package and set) which includes 3 data groups of which the first two groups comprise an identification code, the third group comprises a verification code, while:

1) **The first** group is identified by application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains the verification code.

Table 355 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	A goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	An individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package and set) including 4 data groups, the first and the second groups comprise an identification code, the third and the forth groups generate a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end character for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end character for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 356 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.44. “Industrial equipment”

Identification means contain a marking code (of the consumer package, group package and set) which includes 3 data groups of which the first two groups comprise an identification code, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 357 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package and set) including 4 data groups, the first and the second groups comprise an identification code, the third and the forth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code preceded by the application identifier (92) and that is generated by the operator of the information system.

Table 358 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.45. “Fertilizers in consumer packaging”

Identification means contain a marking code (of the consumer package, group package and set) which includes 3 data groups of which the first two groups comprise an identification code, the third group comprise a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 13 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 359 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package and set) including 4 data groups, the first and the second groups comprise an identification code, the third and the forth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Table 360 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.46. “Semi-finished and frozen food products”

Identification means contain a marking code (of the consumer package, group package and set) which includes 3 data groups of which the first two groups comprise an identification code, the third group comprise a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Note: the actual weight of a product unit may be indicated in the marking code structure after the third data group (after the verification code with indication of symbol ASCII 29) using application identifier AI = '3103'. Indication of the actual weight after the third data group is permitted solely to transfer weight data to the system within the application report for the goods that have an attribute of variable weight. Adding weight information to the structure of the MC for its subsequent conversion into identification means is not allowed.

Table 361 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code
4	6	Figures	3103	Actual weight of the products (in kilograms). It is optionally specified in the MC structure when submitting an application report

Identification means contain a marking code (of the consumer, group package and set) including 4 data groups, the first and the second groups comprise an identification code, the third and the forth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Note: the actual weight of a product unit may be indicated in the marking code structure after the fourth data group (after the verification code with indication of symbol ASCII 29) using application identifier AI = '3103'. Indication of the actual weight after the fourth data group is permitted solely to transfer weight data to the system within the application report for the goods

that have an attribute of variable weight. Adding weight information to the structure of the MC for its further conversion into identification means is not allowed.

Table 362 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code
5	6	Figures	3103	Actual weight of the products (in kilograms). It is optionally specified in the MC structure when submitting an application report

8.47. “Real fur”

Identification means contain a marking code (of consumer package and set), which includes 4 data groups of which the first and the second groups comprise an identification code, the third and the forth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Table 363 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

8.48. “Pyrotechnic articles”

Identification means contain a marking code (of the consumer package, group package, and set) which includes 3 data groups of which the first two groups comprise an identification code, the third group comprises a verification code, while:

1) **The first** group is identified by the application identifier AI=’01’, it consists of 14 digits and contains a goods code.

2) **The second** group is identified by the application identifier AI=’21’, it consists of 6 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains an individual serial number of the package and ends with the delimiter character FNC1 (ASCII 29). When generating serial numbers independently, the Participant shall add a serial number consisting of 5 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group is identified by the application identifier AI=’93’, it consists of 4 characters (digits, lowercase and uppercase letters of the Latin alphabet, as well as special characters) and contains a verification code.

Table 364 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	6	Symbol string	21	Individual serial number of the package
3	4	Symbol string	93	Verification code

Identification means contain a marking code (of the consumer, group package, and set) including 4 data groups, the first and the second groups comprise an identification code, the third and the forth groups comprise a verification code, while:

1) **The first** group consists of 14 digits and contains a goods code preceded by an application identifier (01), is generated by the Operator of the information system based on the information submitted by a circulation participant.

2) **The second** group consists of 13 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains an individual serial number of the goods item that is preceded by the application identifier (21) and is generated by the operator or a circulation participant. The end symbol for this data group is a special divider with code 29 in the table of ASCII symbols. When generating serial numbers independently, the Participant shall add a serial number consisting of 12 characters. A country code is indicated by the Emission Server and is indicated before the received serial number.

3) **The third** group consists of 4 characters and contains a verification key that is preceded by the application identifier (91) and is generated by the operator. The end symbol for this data group is a special divider with code 29 in the table of ASCI symbols.

4) **The fourth** group consists of 44 characters (digits, lowercase and uppercase Latin letters, and special characters) and contains a verification code that is preceded by the application identifier (92) and is generated by the operator of the information system.

Table 365 – Marking Code Structure

Code	Length	Format	AI	Type
1	14	Figures	01	Goods code according to the corresponding goods nomenclature (GTIN)
2	13	Symbol string	21	Individual serial number of the unit of goods
3	4	Symbol string	91	Verification key
4	44	Symbol string	92	Verification code

9. AUTHORIZATION AND AUTHENTICATION

9.1. Getting a client token

To increase the security of information interaction, a mechanism for getting a client token by applying to single authentication methods has been implemented:

1) Obtaining a unique connection identifier (registration of external connection – omsConnection).

1. A connection identifier is required to install integration solution. A process of integration solution installation registration is described in section 9.1.1.
2. In the transitional period, a connection identifier can be obtained in two ways:
   (1) By registering the installation of the integration solution via API (see subsection 9.2).
   (2) Via the OMS user interface.

2) Getting a client token.


1. For each installation of the integration solution, only one client token is available (getting a client token by applying to single authentication methods of the TT GIS (TT GIS API / True API) is described in section 9.1.2 and getting a client token of the MDLP IS (for a GCP with the “Medicines for medical use” goods group) is described in section 9.1.3)
2. If a client token is requested repeatedly for the same installation, the previous token terminates and a new token is generated.
3. Operation time of the client token:
   (1) 10 hours for tokens received via TT GIS API / True API.
   (2) is specified in a response when the token is provided (for tokens received via API of the MDLP IS).

3) Request of data in the OMS API using a client token.

1. It is necessary to use a received client token to make requests to the OMS API.
2. After the expiration of the client token, it is repeatedly obtained according to the procedure described in item 2.

9.1.1. Process “01.00.00.00 Registration of installation of integration decision in the OMS”

Diagram of the registration process for installation of the integration decision in the OMS by means of OMS API can be found in Figure 240.

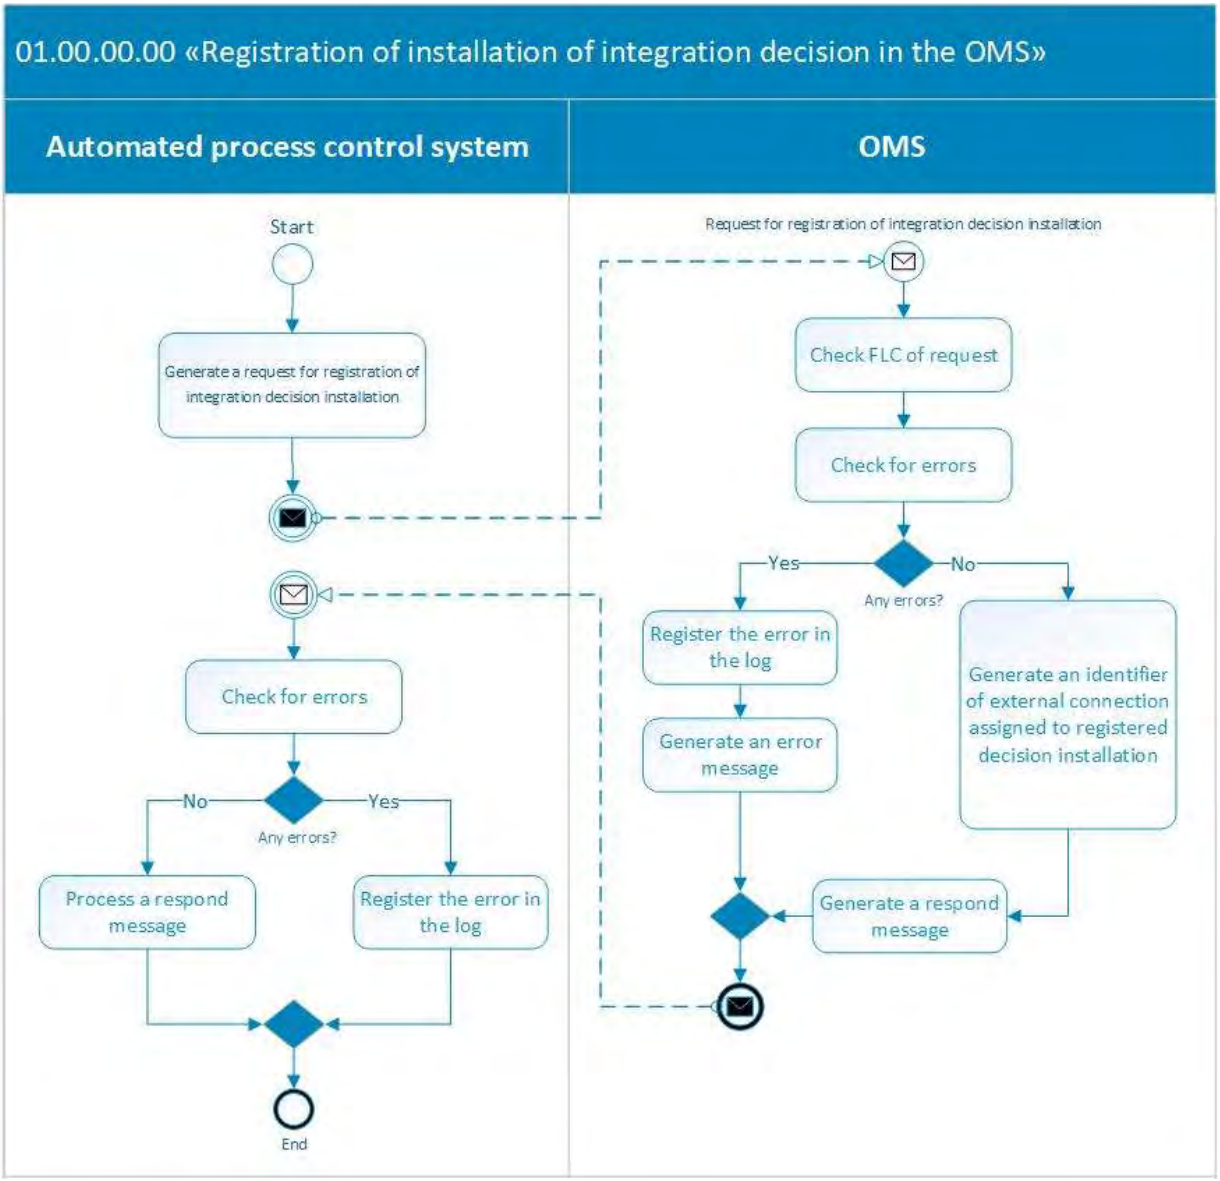

Process “Registration of installation of integration decision in the OMS”

Figure 240

Description:

1) APCS forms a request to register the installation of integration decision and sends it to the OMS.
2) The OMS verifies the request.

– If request contains errors, the OMS will register the error in the log;

– The OMS generates an error message and sends it to APCS;

– Then you will be taken to step 5) of the main scenario.

3) If there are no errors, the OMS will register the installation of the integration decision and will assign to it the identifier of the external connection.


4) The OMS generates a response message and sends it to APCS.

5) APCS receives the request processing result.

6) The process ends.

9.1.2. Process “01.00.00.01 Getting a client token by means of the TT GIS”

A diagram of the process for getting a client token for applying to OMS API by means of the TT GIS can be found in Figure 241.

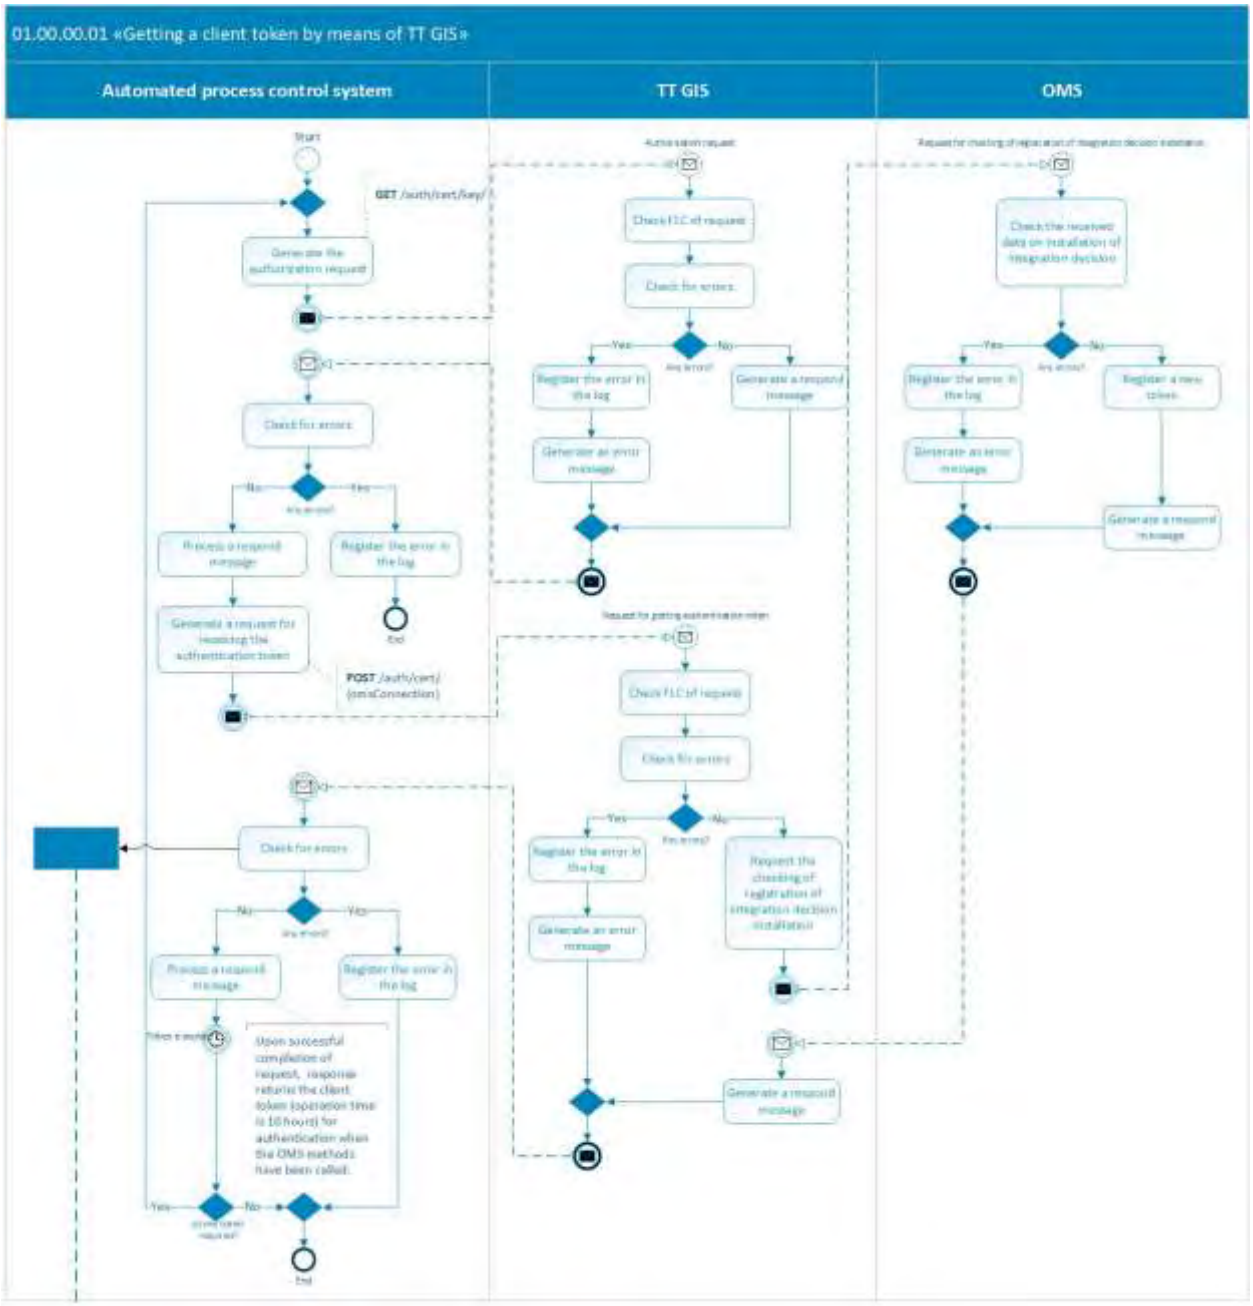

Process “Getting a client token by means of the TT GIS”

Figure 241

Description:

1) APCS forms an authorization request (see section 9.3.2.1) and sends it to TT GIS.
2) TT GIS verifies the request.

- If the request contains errors, the TT GIS will register the error in the log;
- TT GIS generates an error message and sends it to APCS;
- Then you will be taken to step 5) of the main scenario.

3) If there are no errors, the TT GIS generates a random data string for signing and token receiving.


4) TT GIS generates a response message and sends it to APCS.
5) APCS receives the request processing result.

- In case if the authorization request response contains information on the errors occurred, the process will end.

6) If the authorization request is successfully completed, APCS generates an authentication token request (see. section 9.3.2.2) and sends it to TT GIS.
7) TT GIS verifies the request.
    - If the request contains errors, TT GIS will register the error in the log;
    - TT GIS generates an error message and sends it to APCS;
    - Then you will be taken to step 13) of the main scenario.
8) If there are no errors, TT GIS sends a request for verification of the integration decision installation registration in OMS.
9) OMS verifies the received information on integration decision installation.
    - If installation of the integration decision is not registered in OMS, OMS will register an error in the log;
    - OMS generates an error message and sends it to TT GIS;
    - Then you will be taken to step 11) of the main scenario.
10) If verification of data on the installation of the integration decision has been successful, OMS will register a new token for the installation of the integration decision and will form a response message and send it to the TT GIS.
11) TT GIS receives the request processing result.
12) TT GIS generates a response message and sends it to APCS.
13) APCS receives the request processing result. If the request has been successfully completed, APCS will transmit the received token in HTTP header in the “clientToken” parameter when applying to OMS API. Once the client token has expired, the procedure for receiving the token shall be repeated.
14) The process ends.

9.1.3. Process “01.00.00.02 Getting a client token by means of MDLP IS”

Diagram of process of the client token receiving by means of MDLP IS can be found in Figure 242.

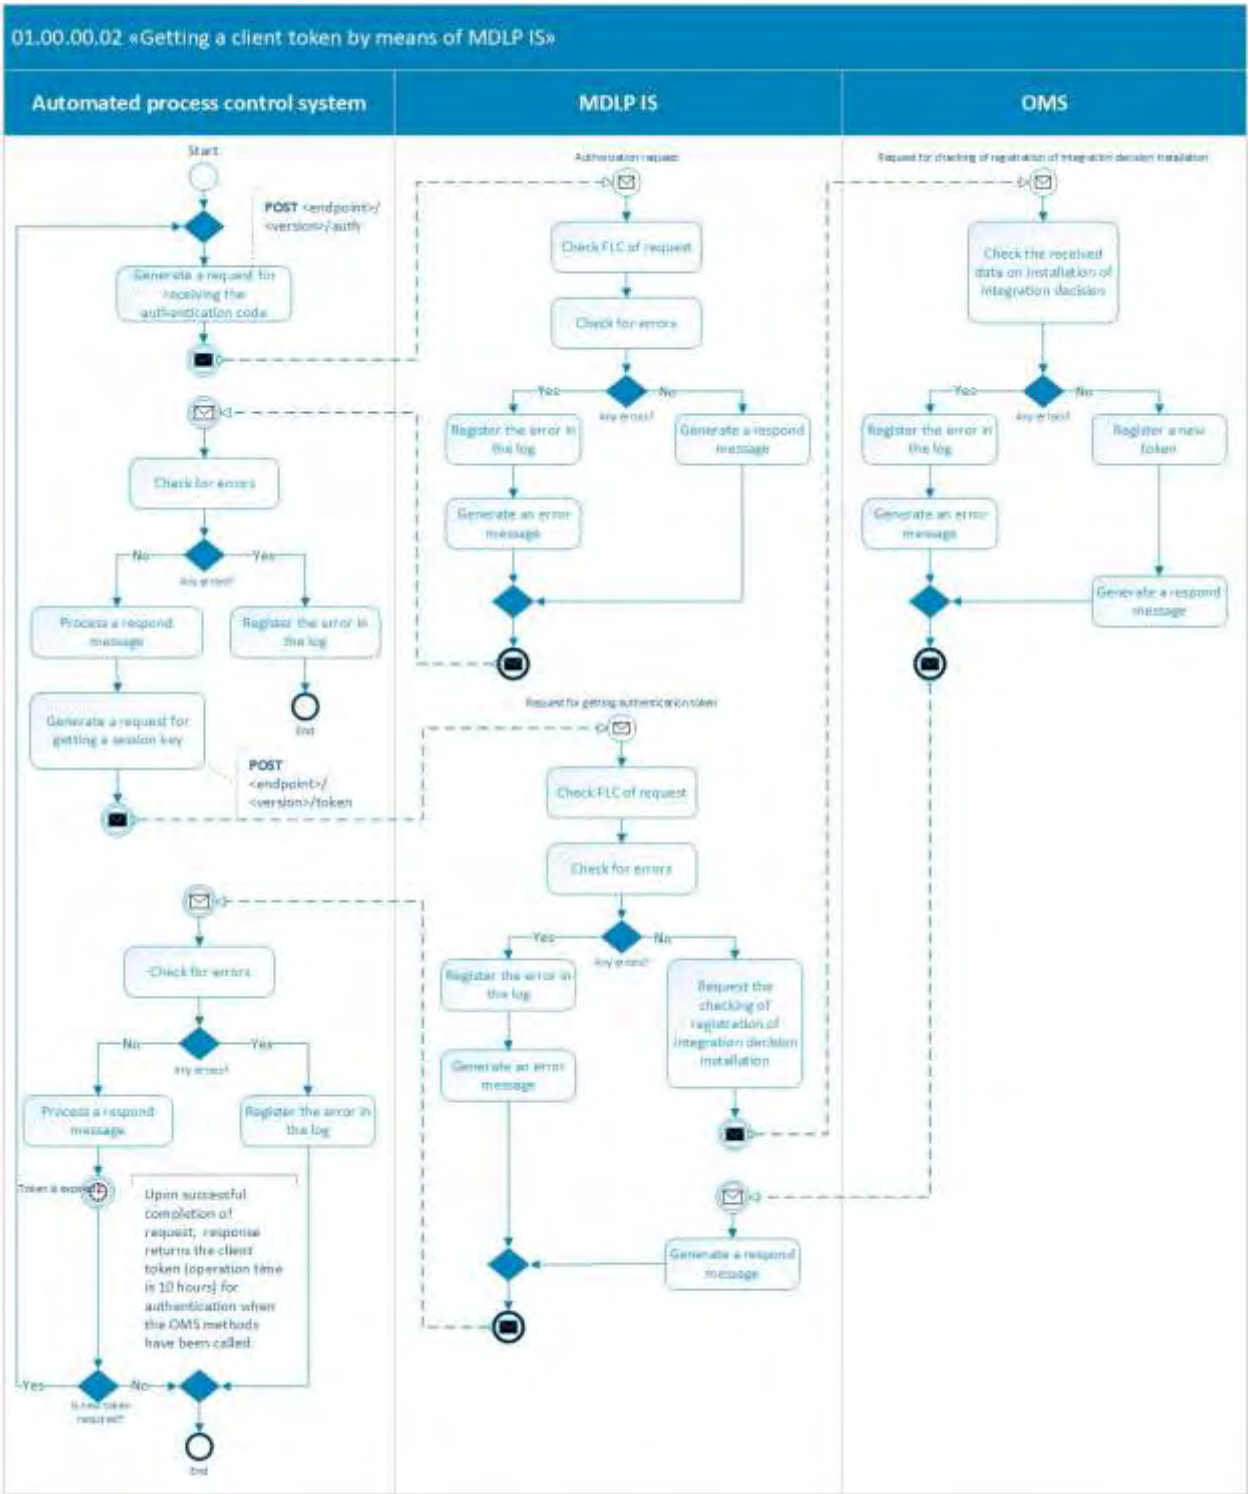

Process “Getting a client token by means of the MDLP IS”

Figure 242

Description:

1) APCS forms a request for getting the authentication code (see section 9.3.1.1) and sends it to IS MDLP.
2) MDLP IS verifies the request.
   - If request contains errors, MDLP IS will register the error in the log;
   - MDLP IS generates an error message and sends it to APCS;

- Then you will be taken to step 5) of the main scenario.

3) MDLP IS will generate the authentication code for token receiving if there are no errors.
4) MDLP IS generates a response message and sends it to APCS.
5) APCS receives the request processing result.
   - In case if the authorization request response contains information on the errors occurred, the process will end.
6) If the authorization request is successfully completed, APCS generates the authentication token request (see. section 9.3.1.2) and sends it to MDLP IS.
7) The MDLP IS verifies the request.
   - If request contains errors, MDLP IS will register the error in the log;
   - MDLP IS generates an error message and sends it to APCS;
   - Then you will be taken to step 13) of the main scenario.
8) If there are no errors, MDLP IS sends a request for verification of the integration decision installation registration in the OMS.
9) OMS verifies the received information on integration decision installation.
   - If the installation of integration decision is not registered in OMS, OMS will register an error in the log;
   - OMS generates an error message and sends it to MDLP IS;
   - Then you will be taken to step 11) of the main scenario.
10) If verification of the data on the installation of the integration decision has been successful, OMS will register a new token for the installation of the integration decision and will form a response message and send it to MDLP IS.
11) MDLP IS receives the request processing result.
12) MDLP IS generates a response message and sends it to APCS.
13) APCS receives the request processing result. If request has been successfully completed, APCS will transmit the received token in HTTP header in the “clientToken” parameter when applying to OMS API. Once the client token has expired, the procedure for receiving the token shall be repeated.
14) The process ends.

9.2. Registering the installation of the integration decision instance

9.2.1. Method “Requesting registration of installation of the integration decision instance”

This method is used to send the request for registering the installation of the integration decision instance to the OMS.

Request on registration of installation of the integration decision instance shall be signed with GCP certificate.

The circulation participant generates a request, signs it and generates a detached signature using GCP certificate. The GCP's detached signature is included into HTTP header within X-Signature parameter, in Base64 encoding. For signature, the data from the message body is used.

Note: the system does not support attached signature, therefore error and HTTP code 413 are returned when specifying this signature in “X-Signature” parameter.

In this section the <url of API environment to register the installation> is the base address of the environment where the API is located to register the installation of the integration solution instance.

The following environment addresses are available to send a request to register the installation of the integration solution instance:

1. https://suz-integrator.sandbox.crptech.ru – new base address of demo environment. The following code of integration solution registration is available to all participants on the demo environment for testing: 4344d884-7f21-456c-981e-cd68e92391e8;
2. https://suzgrid.crpt.ru:16443 – base address of production environment.

9.2.1.1. Request

Example of request can be found in Figure 243.

```
POST /api/v3/integration/connection?omsId=CDF12109-10D3-11E6-8B6F-0050569977A1 HTTP/1.1
Accept: application/json
Content-Type: application/json
X-Signature: <Откреплennая подпись запроса>
X-RegistrationKey: cdf12109-10d3-11e6-8b6f-0050569977a1


{
  "address": "г.Москва, ул. Ленинские горы, 1",
  "name": "Наименование"
}
```

Request Example

Figure 243

REST request parameters can be found in Table 366

Table 366 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/api/v3/integration/connection?omsId={omsId}

HTTP header parameters can be found in Table 367.

Table 367 – HTTP Header Parameters (HTTP Header)

Parameter	Description	Type	Mandatory
X-Signature	Detached request signature	String	Yes
X-RegistrationKey	Unique code of integration solution registration	String	Yes
Content-type	application/json	String	Yes
Accept	application/json	String	Yes

Note: signing of request with GCP's EQES is not required for GCP with "Medicines for medical use" goods group.

Request string parameters can be found in Table 368.

Table 368 – Request String Parameters (Query string parameters)

Parameter	Description	Type	Mandatory
omsId	Unique OMS identifier.	String (UUID)	Yes

Request body parameters are given in Table 369.

Table 369 – Request Body Structure (HTTP Body)

Field	Description	Type	Mandatory
address	Address of installation of the integration decision instance	String	Yes
name	Name of the integration solution instance (external connection). It should not duplicate names of the integration solution instances (external connection) registered with a GCP. If it is not specified, a random name in UUID format will be generated	String (1-256)	No

Notes:

1) registrationKey obtaining is described in the Instruction for Partners and Integrators available at https://честныйзнак.рф/business/doc/?id=Инструкция_по_работе_с_РИ.html, the received code of integration solution registration (registrationKey) is used in registration of installation of the integration solution instance on the production environment.
2) The following code of integration solution registration can be used for testing on the demo environment: 4344d884-7f21-456c-981e-cd68e92391e8.

9.2.1.2. Response

Example of response is shown in Figure 244.

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "status" : "SUCCESS",
  "omsConnection" : "CDF12109-10D3-11E6-8B6F-0050569977A1",
  "name": "Наименование"
}
```

Response Example

Figure 244

Upon successful completion of request, the server returns HTTP code 200 and the status of registration of installation of the integration decision instance.

The format of response to request is given in Table 370.

For error codes, see subsection 6.2.

Table 370 – Format of Response to Request

Field	Description	Type	Mandatory
status	Registration status of installation of the integration decision instance. It may assume the following values: – SUCCESS – processing has completed successfully; – REJECTED - request is rejected	String	Yes
omsConnection	Unique identifier of connection (external connection) assigned to the registered installation of the integration decision. Contains in the response if status= SUCCESS	String (UUID)	No
name	Name of the integration solution instance (external connection). It contains in the response if status= SUCCESS	String	No

Field	Description	Type	Mandatory
rejectionReason	Reason for rejection of the request for registration of installation of the integration decision instance. Contains in the response if status=REJECTED	String	No

Note: only one token can be obtained for each installation of integration decision (omsConnection), and when the client token is requested again to install the integration decision (omsConnection), the validity of the token obtained earlier will expire and new token will be generated.

9.3. Getting a client token by means of single authentication methods

9.3.1. Getting a client token by applying to single authentication methods of MDLP IS

This section describes the methods of MDLP IS API for a GCP with GG “Medicines for medical use” to receive a token used in applying to OMS API methods (see section 4.4)

In this section, <version> refers to the MDLP IS API version number, <endpoint> refers to the environment address (endpoint) where MDLP IS API is located.

The following environment addresses are available:

- For resident participants:
  - https://api.mdlp.crpt.ru – production environment;
  - https://api.sb.mdlp.crpt.ru – Sandbox test environment;
- For non-resident participants:
  - https://nrz.api.mdlp.crpt.ru – production environment;
  - http://api.mdlp.crpt.ru – production environment;
  - https://nrz.api.sb.mdlp.crpt.ru – “Sandbox” test environment.

9.3.1.1. Method for getting the authentication code

This method is used to get the authentication code.

9.3.1.1.1 Request

Example of request with use of “PASSWORD” authentication type can be found in Figure 245.

```
POST api/v1/auth HTTP/1.1
Host: api.sb.mdlp.crpt.ru
Content-Type: application/json
Accept: application/json

{
  "client_id": "7df0d06f-6510-44fe-a378-76cb53e2605f",
  "client_secret": "49781b3a-19d5-4ad7-b1b6-abb57e598d41",
  "user_id" : "user@example.org",
  "auth_type" : "PASSWORD"
}
```

Example of REST Request (for “PASSWORD” authentication type)

Figure 245

Example of request with the use of “SIGNED_CODE” authentication type can be found in Figure 246.

```
POST api/v1/auth HTTP/1.1
Host: api.sb.mdlp.crpt.ru
Content-Type: application/json
Accept: application/json

{
  "client_id": "7df0d06f-6510-44fe-a378-76cb53e2605f",
  "client_secret": "49781b3a-19d5-4ad7-b1b6-abb57e598d41",
  "user_id" : "1865725612 ",
  "auth_type" : "SIGNED_CODE"
}
```

Example of REST Request (for “SIGNED_CODE” authentication type)

Figure 246

REST request parameters can be found in Table 371.

Table 371 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/<version>/auth

HTTP header parameters can be found in Table 372.

Table 372 – HTTP header parameters (HTTP Header)

Parameter	Description	Type	Mandatory
Content-type	application/json	String	Yes
Accept	application/json	String	Yes

Request body parameters are given in Table 373.

Table 373 – Request Body Parameters (HTTP Body)

Field	Description	Type	Mandatory
client_id	Client identifier	String (GUID)	Yes
client_secret	Secret key	String	Yes
user_id	Unique ID of user If identification is for a resident, this field is filled in with the certificate identifier*, if for a non-resident, this field is filled in by email.	String	Yes
auth_type	Type of authentication. It may assume the following values: - SIGNED_CODE - EDS (residents) - PASSWORD - password (non-residents)	String	Yes

Note: Certificate ID is the serial number of the certificate in decimal form or the certificate thumbprint (required hashing algorithm - SHA1). It is also allowed to use the user identifier - user_id, which is returned in the output data while registering the user in MDLP IS (Method for registering the users of the accounting system (for residents of the country)).

9.3.1.1.2 Response

Example of JSON response is shown in Figure 247.

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "code":"b7b1abc9-f4ee-47db-8a20-f80ac83504e8"
}
```

Example of JSON Response

Figure 247

Upon successful completion of request, the server returns HTTP code 200 and the authentication code.

A structure of the response to request is given in Table 374.

Table 374 – Format of Response to Request

Field	Description	Type	Mandatory
code	Code for authentication	String (GUID)	Yes

9.3.1.2. Method for getting the session key

This method is used for getting the security marker (authentication token) for the OMS. For OMS token, the parameter “omsConnection” - unique external connection identifier assigned to the registered installation of the integration decision - is added to the method.

9.3.1.2.1 Request

Example of JSON request (for “PASSWORD” authentication type) can be found in Figure 248.

```
POST api/v1/token/1a7ef78e-597a-424e-8e81-1994109b90be HTTP/1.1
Host: api.sb.mdlp.crpt.ru
Accept: application/json
Content-Type: application/json

{
  "code":"b7b1abc9-f4ee-47db-8a20-f80ac83504e8",
  "password":"password123"
}
```

Example of JSON Request (for “PASSWORD” authentication type)

Figure 248

Example of JSON request (for “SIGNED_CODE” authentication type) can be found in Figure 249.

```
POST api/v1/token/1a7ef78e-597a-424e-8e81-1994109b90be HTTP/1.1
Host: api.sb.mdlp.crpt.ru
Accept: application/json
Content-Type: application/json

{
  "code":"b7b1abc9-f4ee-47db-8a20-f80ac83504e8",
  "signature":"<Подпись в base64>"
}
```

Example of JSON request (for “SIGNED_CODE” authentication type)

Figure 249

REST request parameters can be found in Table 375.

Table 375 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of the environment>/<version>/token/{omsConnection}

HTTP header parameters can be found in Table 376.

Table 376 – HTTP header parameters (HTTP Header)

Parameter	Description	Type	Mandatory
Content-type	application/json	String	Yes
Accept	application/json	String	Yes

Request string parameters are given in Table 377.

Table 377 – Request String Parameters (Query string parameters)

Field	Description	Type	Mandatory
omsConnection	Unique external connection identifier assigned to the registered installation of the integration decision. It is issued while registering the installation of the integration decision (see subsection 9.2).	String	It shall be indicated for getting a token for access to OMS API

– Note: in a transitional period, the obtainment of unique external connection identifier (omsConnection) will also be available by registering the client device (system), which will be interact via OMS API in the OMS user interface.

Request body parameters are given in Table 378.

Table 378 – Request Body Parameters (HTTP Body)

Field	Description	Type	Mandatory
code	Code for authentication	String (GUID)	Yes
signature	Detach signature of the code for authentication in base64	String	No (It is obligatory for authentication type - SIGNED_CODE)
password	User password	String	No (It is obligatory for authentication type - PASSWORD)

9.3.1.2.2 Response

Example of JSON response is shown in Figure 250.

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "token":"58f908f1-832a-4ad0-93f4-bdafbf8eb55a",
  "life_time": 30
}
```

Example of JSON Response

Figure 250

Upon successful completion of request, the server returns HTTP code 200, a token and its operative time in minutes.

The structure of response to request is given in Table 379.

Table 379 – Format of Response to Request

Field	Description	Type	Mandatory
token	Authentication token. Parameter is mandatory in case of successful response	String	Yes
life_time	Token operative time in minutes	Number	Yes

9.3.2. Getting a client token by applying to single authentication methods of True API

This section describes the methods of True API for getting the client token that is used in applying to the OMS API methods.

In this section <url of environment> is used to denote the base address of the environment where True API can be found.

The following environment addresses are available:

1) https://markirovka.sandbox.crptech.ru/api/v3/true-api - base address of demo environment
2) https://markirovka.crpt.ru/api/v3/true-api – base address of the production environment.

9.3.2.1. Request of authorization in single authentication

This method is used to get the identifier of authentication and data for goods circulation participant’s EQES.

9.3.2.1.1 Request

Example of JSON request is shown in Figure 251.

```
GET /auth/key
```

Example of REST Request

Figure 251

REST request parameters can be found in Table 380.

Table 380 – REST request parameters

Parameter	Value
HTTP method	GET
URL	<url of environment>/auth/key

9.3.2.1.2 Response

Example of JSON response is shown in Figure 252.

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "uuid":"a63ff582-b723-4da7-958b-453da27a6c62",
  "data":"GNUFBAZBMPIUUMLXNMIOGSHTGFXZM"
}
```

Example of JSON Response

Figure 252

When the request is successfully completed, the server returns HTTP code 200, the generated random data identifier and the signature data.

A structure of response to request is given in Table 381.

Table 381 – Format of Response to Request

Field	Description	Type	Mandatory
uuid	Unique identifier of generated random data	String	Yes
data	Random data string	String	Yes

9.3.2.2. Receiving an Authentication Token

This method is used for getting the security marker (authentication token) for the OMS. For receiving the OMS token, the “omsConnection” parameter - unique connection identifier (external connection) assigned to the registered installation of the integration solution - is added to the method.

9.3.2.2.1 Request

Example of JSON request is shown in Figure 253.

```
POST auth/simpleSignIn/11b1abc9-f4ee-47db-8a20-f80ac83504e8
Content-Type: application/json

{
  "uuid":"b7b1abc9-f4ee-47db-8a20-f80ac83504e8",
  "data":"<Подписанные данные в base64>"
}
```

Example of JSON Request

Figure 253

REST request parameters can be found in Table 382.

Table 382 – REST request parameters

Parameter	Value
HTTP method	POST
URL	<url of environment V3>/auth/simpleSignIn/{omsConnection}

HTTP header parameters can be found in Table 383.

Table 383 – HTTP header parameters (HTTP Header)

Parameter	Description	Type	Mandatory
Content-type	Content-type: application/json	String	Yes

Request string parameters are given in Table 384.

Table 384 – Request String Parameters (Query string parameters)

Field	Description	Type	Mandatory
omsConnection	Unique connection identifier (external connection) assigned to the registered installation of the integration solution. It is issued while registering the installation of the integration solution (see section 9.2).	String	It shall be indicated for getting a token for access to OMS API

Note: in the transitional period, obtaining a unique connection identifier (external connection - omsConnection) will also be available by registering the client device (system) in the OMS user interface where it will interact through the OMS API.

Request body parameters are given in Table 385.

Table 385 – Request Body Parameters (HTTP Body)

Field	Description	Type	Mandatory
uuid	Unique identifier of signed random data	String	Yes
data	Random data signed with EQES of registered GCP in base64 (attached electronic signature)	String	Yes
inn	INN of the goods circulation participant for which authorization is required for an individual under a machine-readable power of attorney	String	No

9.3.2.2.2 Response

An example of JSON response is shown in Figure 254.

```
HTTP/1.1 200 OK
Content-Type: application/json

{
  "token":"58f908f1-832a-4ad0-93f4-bdafbf8eb55a"
}
```

Example of JSON response for a single token request

Figure 254

Upon successful completion of request, the server returns HTTP code 200 and a token, or an error message.

A structure of response to request is given in Table 386.

Table 386 – Format of Response to Request

Field	Description	Type	Mandatory
token	Authentication token. Token is valid for 10 hours. Parameter to be specified in case of successful response	String	No
code	Error code	String	No
error_message	Error message	String	No
description	Error description	String	No

10. RECEIPTING 2.0

This section describes the data structures within Receipting 2.0. When receiving a document from the OMS participant, to ensure integrity and stability of the data, a transaction start document with information on document receipt depending on its type and destination, is formed. Then, during processing of the participant's document in the information system, events, which contain information on the processing, are formed. Thus, a receipt in Receipting 2.0 is a document that contains the data of the transaction start document and all events occurring as part of the transaction.

The receipt structure can be found in Table 387.

Table 387 – Receipt Structure

Attribute	Description	Type	Mandatory
resultDocId	Receipt identifier	String	Yes
resultDocDate	Date and time of receipt update. Date and time in UNIX format, in milliseconds	Integer	Yes
sourceDocId	Identifier of the source document - the document for which the receipt was formed.	String	Yes
sourceDocDate	Date and time of the source document - the document for which the receipt was formed. Date and time in UNIX format in milliseconds	Integer	Yes
state	Receipt processing status. The value of the guide "Receipt statuses" (see Section 5.3.1.17).	String	Yes
code	Numerical code of receipt processing. The value of the guide "Receipt statuses" (see Section 5.3.1.17).	Integer	Yes
description	Text description of the receipt processing result.	String	Yes
workflow	Receipt type. The value of the guide "Types of receipts" (see Section 5.3.1.14)	String	No
workflowVersion	Version of the receipt type. Valid value: 1	Integer	No
details	User data of the receipt	Object (see Table 388)	No
operations	List of the events on the document within transaction.	Object (see Table 389)	No

User data of the receipt can be found in Table 388

Table 388 – User data of the receipt

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
participantInn	INN of the participant.	String	Yes
serviceProviderId	Service provider identifier.	String (UUID)	No
txType	Receipt type. The value of the guide “Types of receipts” (see Section 5.3.1.14)	String	Yes
startDocDate	Date and time of the source document processing start (start of transaction) in UNIX format in milliseconds.	Integer	Yes
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer	Yes
orderId	Order identifier assigned in the OMS or MCDN.	String	No
productionOrderId	Production order identifier.	String	No
distributionProviderInn	INN of the integrator of the service provider.	String	No

Structure of the events on document can be found in Table 389.

Table 389 – Event Structure

Parameter	Description	Type	Mandatory
operationId	Event identifier	String	Yes
operationType	Event type. The value of the guide “Types of events” (see Section 5.3.1.15)	String	Yes
operationDate	Date and time of the event. Date and time in UNIX format in milliseconds.	Integer	Yes
docId	Identifier of the document related to the receipt (the document formed for event)	String	No
docDate	Date of the document formed for the event. Date and time in UNIX format.	Integer	No
docHash	Hash sum of the document formed for event (sha-256).	String	No
details	User data of the event. Content depends on the receipt type and event itself (for structure of each event, see Section 10.1)	Object	No

Note: A docId parameter is not transferred in the receipts for operations with REJECTED status for the “Medicines for human use” goods group. Errors can be viewed in the MDLP FGIS user account (in the section "Registry of documents" -> "Outgoing") by operationId number of the event completed with error.

10.1. Description of the user data of the event

10.1.1. Receipt “Marking code order” (CREATE_ORDER)

You can see an example of the receipt on MC order (for the “Dairy products” goods group) that has been processed successfully in Figure 255


```
{
        "resultDocId": "b4032928-da0a-4bba-8f5e-e6ffc483dd1b",
        "resultDocDate": 1636633167982,
        "sourceDocId": "71a95d4c-3e9a-41a7-a991-5923d8f5384e",
        "sourceDocDate": 1636633158032,
        "state": "SUCCESS",
        "code": 0,
        "description": "Document was successfully processed",
        "workflow": "CREATE_ORDER",
        "workflowVersion": 1,
        "details": {
            "participantInn": "7736673512",
            "createDocDate": 1636633134116,
            "productGroupIds": [
                8
            ],
            "txType": "CREATE_ORDER",
            "startDocDate": 1636633158191
        },
        "operations": [
            {
                "operationId": "c4207157-19bb-4ea4-b341-eba4d8bf34d7",
                "operationType": "CREATE_ORDER_RECEIVED",
                "operationDate": 1636633147492,
```

```
                            "docId": "71a95d4c-3e9a-41a7-a991-5923d8f5384e",
                            "docDate": 1636633158032,
                            "docHash": "096bdb5c413c3e115b1e31b5d944ea987e3189af7d033214f519af82f972
da7f",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "paymentType": 2,
                                "createDocDate": 1636633134116
                            }
                        },
                        {
                            "operationId": "ee795cf7-8c61-471c-bfab-e5b177b3a062",
                            "operationType": "CREATE_ORDER_VALIDATION",
                            "operationDate": 1636633151730,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "f7f03353-427d-4b4a-a10a-8f3b6bd0f9d9",
                            "operationType": "CREATE_ORDER_VALIDATION_RESULT",
                            "operationDate": 1636633151738,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "5e66959c-2b49-4bb0-a0d8-4a59a02e5465",
                            "operationType": "CREATE_ORDER_EMISSION_TASK_SEND",
                            "operationDate": 1636633153739,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "85afd3ae-38ff-4eae-b1c0-a71259b24c8a",
                            "operationType": "CREATE_ORDER_GIS_CREATED",
                            "operationDate": 1636633153571,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "585077e4-6fec-4ef6-ab2a-2d7c0cad001b",
                            "operationType": "CREATE_ORDER_GIS_GENERATED",
```

```
                    "operationDate": 1636633153859,
                    "details": {
                        "state": "SUCCESS",
                        "productGroupIds": [
                            8
                        ]
                    }
                },
                {
                    "operationId": "2086d8b7-ac89-4491-85c8-cb28ccea82b3",
                    "operationType": "CREATE_ORDER_GIS_SEND_TO_PROCESSING",
                    "operationDate": 1636633154104,
                    "details": {
                        "state": "SUCCESS",
                        "productGroupIds": [
                            8
                        ]
                    }
                },
                {
                    "operationId": "9b9e4d56-59c8-4e31-8e1b-4214af13f069",
                    "operationType": "CREATE_ORDER_SUBORDER_RESULT",
                    "operationDate": 1636633160199,
                    "details": {
                        "products": [
                            {
                                "gtin": "04640002480019",
                                "quantity": 12
                            }
                        ],
                        "state": "SUCCESS"
                    }}]}
```


Example of the receipt on MC order (for the “Dairy products” goods group), that has been processed successfully

Figure 255

You can see an example of the receipt on MC order (for the “Dairy products” goods group), that has been rejected after checking with the OMS, in Figure 256


```
{
            "resultDocId": "a059fc4c-18a6-4728-b18f-50a10e2cb62e",
            "resultDocDate": 1636633680375,
            "sourceDocId": "04211f0b-4a5f-4290-9be3-49617a500d93",
            "sourceDocDate": 1636633679056,
            "state": "FAILED",
            "code": 1,
            "description": "Document processing was failed",
            "workflow": "CREATE_ORDER",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1636633671860,
                "productGroupIds": [
                    8
                ],
                "txType": "CREATE_ORDER",
                "startDocDate": 1636633679547
            },
            "operations": [
                {
                    "operationId": "48012d43-e01a-4879-8d52-7ebf8550cd6e",
                    "operationType": "CREATE_ORDER_RECEIVED",
                    "operationDate": 1636633675932,
```

```
                            "docId": "04211f0b-4a5f-4290-9be3-49617a500d93",
                            "docDate": 1636633679056,
                            "docHash": "7154d488ecaf46a9cefa5e50cdfe76a0352e1fd589507b8f873fac5f174c
254a",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 15
                                    }
                                ],
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "paymentType": 2,
                                "createDocDate": 1636633671860
                            }
                        },
                        {
                            "operationId": "c43b7992-6218-4012-9786-d25cee326afb",
                            "operationType": "CREATE_ORDER_VALIDATION",
                            "operationDate": 1636633678398,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "9b6c8be6-1345-4472-8945-6162d42d8e4e",
                            "operationType": "CREATE_ORDER_VALIDATION_RESULT",
                            "operationDate": 1636633678404,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 15
                                    }
                                ],
                                "state": "REJECTED",
                                "description": "Значение параметра \"Код товара\" 04640002480019 не
соответствует типу кода маркировки \"Набор\""
                            }}]}
```


Example of receipt on MC order (for the “Dairy products” goods group), that has been rejected after checking with the OMS

Figure 256

Example of receipt on MC order (for the “Dairy products” goods group), that was processed unsuccessfully due to indication of the serial numbers that had already been sent, can be found in Figure 257


```
        {
                    "resultDocId": "bc95c263-c9b9-4381-ab30-ccfc6fe4a053",
                    "resultDocDate": 1636634999584,
                    "sourceDocId": "6ba7eef2-2e4f-402b-b518-cddf518e5eac",
                    "sourceDocDate": 1636634961915,
                    "state": "FAILED",
                    "code": 1,
                    "description": "Document processing was failed",
                    "workflow": "CREATE_ORDER",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1636634949454,
                        "productGroupIds": [
                            8
```

```
                    ],
                    "txType": "CREATE_ORDER",
                    "startDocDate": 1636634962017
                },
                "operations": [
                    {
                        "operationId": "973489a7-7bca-40bf-b4f8-4caab26cec30",
                        "operationType": "CREATE_ORDER_RECEIVED",
                        "operationDate": 1636634954995,
                        "docId": "6ba7eef2-2e4f-402b-b518-cddf518e5eac",
                        "docDate": 1636634961915,
                        "docHash": "f5aab6d72655fab254d3a738c083d1e369f55948870314cbde758c6755a1
e385",
                        "details": {
                            "products": [
                                {
                                    "gtin": "04640002480019",
                                    "quantity": 10
                                }
                            ],
                            "state": "SUCCESS",
                            "participantId": "600000114",
                            "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                            "paymentType": 2,
                            "createDocDate": 1636634949454
                        }
                    },
                    {
                        "operationId": "44496485-8fda-4d3c-8e77-17417802e953",
                        "operationType": "CREATE_ORDER_VALIDATION",
                        "operationDate": 1636634957913,
                        "details": {
                            "state": "SUCCESS"
                        }
                    },
                    {
                        "operationId": "2ca4a878-3974-40a1-8e8f-96ad96432659",
                        "operationType": "CREATE_ORDER_VALIDATION_RESULT",
                        "operationDate": 1636634957916,
                        "details": {
                            "products": [
                                {
                                    "gtin": "04640002480019",
                                    "quantity": 10
                                }
                            ],
                            "state": "SUCCESS"
                        }
                    },
                    {
                        "operationId": "00621683-41a6-45f6-8d74-386522ef914f",
                        "operationType": "CREATE_ORDER_EMISSION_TASK_SEND",
                        "operationDate": 1636634959050,
                        "details": {
                            "products": [
                                {
                                    "gtin": "04640002480019",
                                    "quantity": 10
                                }
                            ],
                            "state": "SUCCESS"
                        }
                    },
                    {
                        "operationId": "3c403932-f3a7-4e47-8e52-189599b1af63",
                        "operationType": "CREATE_ORDER_GIS_CREATED",
                        "operationDate": 1636634958909,
                        "details": {
```

```
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "51f2d495-7644-4a5f-b6c7-665d69452289",
                            "operationType": "CREATE_ORDER_GIS_GENERATED",
                            "operationDate": 1636634959163,
                            "details": {
                                "state": "REJECTED",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "263d3978-4d68-4f50-877e-032e69143147",
                            "operationType": "CREATE_ORDER_SUBORDER_RESULT",
                            "operationDate": 1636634967471,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 10
                                    }
                                ],
                                "state": "REJECTED",
                                "description": "All pools in statuses: REJECTED or REQUEST_ERROR. Fo
llowing sGTINs were marked as duplicates [046400024800195E1z2t, 046400024800195HEEi5, 04640002480019
5Hvc1i, 046400024800195NGYt0, 04640002480195OKOvd...]."
                            }
                        }
                    ]
                }
```


Example of the receipt on MC order (for the “Dairy products” goods group), that was processed unsuccessfully due to indication of the serial numbers that had already been sent

Figure 257

Example of receipt on MC order (for the “Dairy products” goods group), that was processed partially (the order was processed successfully for one “gtin” and was not processed for another), can be found in Figure 258.


```
                {
                    "resultDocId": "cc81242b-73f8-4237-ac8c-6c2d9f520f29",
                    "resultDocDate": 1636635239957,
                    "sourceDocId": "8fe83257-ba65-4370-a27b-32753d77f5bf",
                    "sourceDocDate": 1636635192431,
                    "state": "PARTIALLY",
                    "code": 3,
                    "description": "The document was partially processed",
                    "workflow": "CREATE_ORDER",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1636635176262,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "CREATE_ORDER",
```

```
                        "startDocDate": 1636635192572
                    },
                    "operations": [
                        {
                            "operationId": "d32c702a-6d09-4704-9a98-bdaf9c630744",
                            "operationType": "CREATE_ORDER_RECEIVED",
                            "operationDate": 1636635180189,
                            "docId": "8fe83257-ba65-4370-a27b-32753d77f5bf",
                            "docDate": 1636635192431,
                            "docHash": "d113104ac40dfd19171c7237a0900983f5361ab93327d4405cefc87e4e56
e443",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 10
                                    },
                                    {
                                        "gtin": "04640002480095",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "paymentType": 2,
                                "createDocDate": 1636635176262
                            }
                        },
                        {
                            "operationId": "c1adda67-8ae7-4be2-828e-73fb2de7d955",
                            "operationType": "CREATE_ORDER_VALIDATION",
                            "operationDate": 1636635183544,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "b363ced5-7202-432c-a329-298d33527877",
                            "operationType": "CREATE_ORDER_VALIDATION_RESULT",
                            "operationDate": 1636635183547,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 10
                                    },
                                    {
                                        "gtin": "04640002480095",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "1d440a03-5c8a-4ee6-8671-67588d1fe60a",
                            "operationType": "CREATE_ORDER_EMISSION_TASK_SEND",
                            "operationDate": 1636635185231,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480095",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS"
                            }
```

```
        },
        {
            "operationId": "264feb71-76c9-466c-b31c-a5a002343b61",
            "operationType": "CREATE_ORDER_EMISSION_TASK_SEND",
            "operationDate": 1636635184572,
            "details": {
                "products": [
                    {
                        "gtin": "04640002480019",
                        "quantity": 10
                    }
                ],
                "state": "SUCCESS"
            }
        },
        {
            "operationId": "89bd0e10-59f3-4739-bdd7-66c15c6f244a",
            "operationType": "CREATE_ORDER_GIS_CREATED",
            "operationDate": 1636635184631,
            "details": {
                "state": "SUCCESS",
                "productGroupIds": [
                    8
                ]
            }
        },
        {
            "operationId": "c65e1b79-c313-4463-94b2-8ef646821f34",
            "operationType": "CREATE_ORDER_GIS_CREATED",
            "operationDate": 1636635184414,
            "details": {
                "state": "SUCCESS",
                "productGroupIds": [
                    8
                ]
            }
        },
        {
            "operationId": "5c3a68b9-f37d-4d7f-bfa8-a25869a59c58",
            "operationType": "CREATE_ORDER_GIS_GENERATED",
            "operationDate": 1636635184887,
            "details": {
                "state": "SUCCESS",
                "productGroupIds": [
                    8
                ]
            }
        },
        {
            "operationId": "f29e9692-97b7-4011-94f0-b86a56235fc6",
            "operationType": "CREATE_ORDER_GIS_GENERATED",
            "operationDate": 1636635184679,
            "details": {
                "state": "REJECTED",
                "productGroupIds": [
                    8
                ]
            }
        },
        {
            "operationId": "d888ae47-0502-43fd-b6e7-5129742a4dc3",
            "operationType": "CREATE_ORDER_GIS_SEND_TO_PROCESSING",
            "operationDate": 1636635185167,
            "details": {
                "state": "SUCCESS",
                "productGroupIds": [
                    8
                ]
```

```
                            }
                        },
                        {
                            "operationId": "587e7ef2-5ee1-4808-8022-47ac9246d0b5",
                            "operationType": "CREATE_ORDER_SUBORDER_RESULT",
                            "operationDate": 1636635185935,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480095",
                                        "quantity": 12
                                    }
                                ],
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "cf1e74d2-726b-49a0-bb7c-84dce9791bc7",
                            "operationType": "CREATE_ORDER_SUBORDER_RESULT",
                            "operationDate": 1636635207500,
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 10
                                    }
                                ],
                                "state": "REJECTED",
                                "description": "All pools in statuses: REJECTED or REQUEST_ERROR. Fo
llowing sGTINs were marked as duplicates [046400024800195E1z2t, 046400024800195HEEi5, 04640002480019
5Hvc1i, 046400024800195NGYt0, 046400024800195OKOvd...]."
                            }}]}
```


Example of receipt on MC order (for the “Dairy products” goods group), that was processed partially (the order was processed successfully for one “gtin” and was not processed for another)

Figure 258

10.1.1.1. Event “Order receipt” (CREATE_ORDER_RECEIVED)

The event is formed only after successful signing of the order for all goods groups, except “Tobacco products”, “Medicines for human use”, and “Nicotine products”. For the goods groups specified, the event is formed after the order has been received successfully.

For a structure of the user data of the event, see Table 390

Table 390 – Structure of the user data of the event CREATE_ORDER_RECEIVED

Parameter	Description	Type	Mandatory
products	Goods description.	Object (see Table 391)	Yes
state	Operation processing status. Valid values: SUCCESS – order has been received.	String	Yes
description	Text description of the operation processing result.	String	No
participantId	Identifier of the goods circulation participant.	String	No
serviceProviderName	Service provider name.	String	No
serviceProviderInn	INN of the Service provider.	String	No
omsId	OMS profile identifier.	String (UUID)	Yes
paymentType	Payment type Valid values: 1 - Payment upon emission; 2 - Payment upon application.	Integer (Int32)	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer (int64)	Yes
productionOrderId	Production order identifier	String	No

Description of the structure of “products” parameter is given in Table 391.

Table 391 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs for this gtin	Integer	Yes

10.1.1.2. Event “Dispatch of order for verification” (CREATE_ORDER_VALIDATION)

The event is formed only after the order is sent successfully for verification. At the same time:

- If there had been an accident in the MDLP IS at the time of creation of the transaction start document, the event would also have not been formed for the “Medicines for human use”
- If the settings of the order check had been turned off for the “Tobacco products”, “Nicotine products”, “Alternative tobacco products”, “Beer, beer-based and low-alcohol beverages” goods groups at the time of creation of the transaction start document, the event would also have not been formed for these goods groups.

For a structure of the user data of the event, see Table 392.

Table 392 – Structure of the user data of the event CREATE_ORDER_VALIDATION

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – order has been sent for verification.	String	Yes
description	Text description of the operation processing result.	String	No

10.1.1.3. Event “Order verification result” (CREATE_ORDER_VALIDATION_RESULT)

The event is formed after verification of the order. At the same time:

- If there had been an accident in the MDLP IS at the time of creation of the transaction start document, the event would also have not been formed for the “Medicines for human use” goods group;
- If the settings of the order check had been turned off for the “Tobacco products”, “Nicotine products”, “Alternative tobacco products”, “Beer, beer-based and low-alcohol beverages” goods groups at the time of creation of the transaction start document, the event would also have not been formed for these goods groups.

For a structure of the user data of the event, see Table 393.

Table 393 – Structure of the user data of the event CREATE_ORDER_VALIDATION_RESULT

Parameter	Description	Type	Mandatory
products	Goods description	Object (see Table 394)	Yes
state	Operation processing status. Valid values: • SUCCESS – verification was successful • REJECTED – verification failed	String	Yes
description	Text description of the operation processing result.	String	No

Description of the structure of the “products” parameter is given in Table 394.

Table 394 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs for this gtin	Integer	Yes

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.1.4. Event “Dispatch of task to ER/MER” (CREATE_ORDER_EMISSION_TASK_SEND)

The event is formed only after the task is sent successfully to ER/MER. The number of events of this type should be equal to the number of tasks sent to ER/MER. There may be situations in which the final receipt does not display these events because the event is optional (in the future it will become mandatory).

For a structure of the user data of the event, see Table 395.

Table 395 – Structure of the user data of the event CREATE_ORDER_EMISSION_TASK_SEND

Parameter	Description	Type	Mandatory
products	Goods description.	Object (see Table 396)	Yes
state	Operation processing status. Valid values: SUCCESS – task has been sent	String	Yes
description	Text description of the operation processing result.	String	No

Description of the structure of “products” parameter is given in Table 396.

Table 396 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs for this gtin	Integer	Yes

10.1.1.5. Event “Saving a suborder received” (CREATE_ORDER_GIS_CREATED)

The event is formed after saving the received suborder in the ES. The number of events of this type should be equal to the number of tasks sent to ER/MER.

For a structure of the user data of the event, see Table 397.

Table 397 – Structure of the user data of the event CREATE_ORDER_GIS_CREATED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
state	Operation processing status. Available values: • SUCCESS – order has been saved successfully • REJECTED – an error occurred during saving the order.	String	Yes
description	Text description of the operation processing result.	String	No

10.1.1.6. Event “Generation of report Generated/10300 by suborder” (CREATE_ORDER_GIS_GENERATED)

The events are formed after generation of the automatic report “Generated” or “10300” (for the “Medicines for human use” goods group). The number of events of this type should be equal to the number of tasks sent to ER/MER, except for those that were processed with error (event CREATE_ORDER_GIS_CREATED has REJECTED status) at the suborder saving stage.

For a structure of the user data of the event, see Table 398.

Table 398 – Structure of the user data of the event CREATE_ORDER_GIS_GENERATED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
state	Operation processing status. Available values: • REJECTED – Errors occurred while generating MCs • SUCCESS – MCs generation by order successfully completed.	String	Yes
description	Text description of the operation processing result.	String	No

10.1.1.7. Event “Result of sending of suborder for processing” (CREATE_ORDER_GIS_SEND_TO_PROCESSING)

The event is formed after sending an order for processing. The number of events of this type should be equal to the number of tasks sent to ER/MER, except for those that were processed with an error at the stage of saving of suborder and generation of report Generated/10300 (events CREATE_ORDER_GIS_CREATED and CREATE_ORDER_GIS_GENERATED with REJECTED status).

For a structure of the user data of the event, see Table 399.

Table 399 – Structure of the user data of the event CREATE_ORDER_GIS_SEND_TO_PROCESSING

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
state	Operation processing status. Valid values: SUCCESS – sending has been completed successfully.	String	Yes
description	Text description of the operation processing result.	String	No

10.1.1.8. Event “Suborder result” (CREATE_ORDER_SUBORDER_RESULT)

The event is formed after receiving a result of suborder execution. The number of events of this type should be equal to the number of gtin in the order.

For a structure of the user data of the event, see Table 400.

Table 400 – Structure of the user data of the event CREATE_ORDER_SUBORDER_RESULT

Parameter	Description	Type	Mandatory
products	Goods description.	Object (see Table 401)	Yes
state	Operation processing status. Valid values: • SUCCESS – all the pools of the suborder were successfully processed in the ES • REJECTED - 1 and/or more pools of suborder were rejected in the ES OR pool was not created for suborder for the “Dairy products”/ “Packaged water” goods group (in this case the event of sending the task to the ER/MER and subsequent events will not be formed by the ES)	String	Yes
description	Text description of the operation processing result.	String	No

Description of the structure of “products” parameter is given in Table 401.

Table 401 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs for this gtin	Integer	Yes
reserveId	Pool identifier	String (UUID)	No
reason	Reason description	String	No

Note: status of the receipt depends on the status of these events:

- If all events of this type are completed with “SUCCESS” status, the receipt will have “SUCCESS” status.
- If all events of this type are completed with “REJECTED” status, the receipt will have “FAILED” status.
- If events of this type are both with “REJECTED” and “SUCCESS” statuses, receipt will have “PARTIALLY” status.

10.1.2. Receipt “Report on MC usage” (REPORT_UTILIZE)

Example of receipt on application report (for the “Dairy products” goods group), that has been processed successfully, can be found in Figure 259


```
        {
            "results": [
                {
                    "resultDocId": "aa85c311-81fa-4323-bab0-f6cf89c2f09b",
                    "resultDocDate": 1640077144403,
                    "sourceDocId": "4c0a6425-105b-487c-a244-efbbba8b313c",
                    "sourceDocDate": 1640077131776,
                    "state": "SUCCESS",
                    "code": 0,
                    "description": "Document was successfully processed",
                    "workflow": "REPORT_UTILIZE",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640077039497,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "REPORT_UTILIZE",
                        "utilisationType": "UTILISATION",
                        "startDocDate": 1640077131847
                    },
                    "operations": [
                        {
                            "operationId": "4808dbd6-6204-44a1-9107-32a4eaa68c36",
                            "operationType": "REPORT_UTILIZE_RECEIVED",
                            "operationDate": 1640077121688,
                            "docId": "4c0a6425-105b-487c-a244-efbbba8b313c",
                            "docDate": 1640077131776,
                            "docHash": "a6d7d9041c8138ccfc50edc6934a725e37bff068be1ba8ef4c506b4d4670
864b",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
```

```
                            "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                            "createDocDate": 1640077039497,
                            "quantity": 2
                        }
                    },
                    {
                        "operationId": "7f99427b-8642-4ccf-aa02-4b0174c4e59c",
                        "operationType": "REPORT_UTILIZE_EMISSION_SEND",
                        "operationDate": 1640077141967,
                        "details": {
                            "state": "SUCCESS"
                        }
                    },
                    {
                        "operationId": "fe5d02b3-7416-43c9-b3e1-de05a339f113",
                        "operationType": "RNMS_GIS_ROUTED",
                        "operationDate": 1640077126524,
                        "details": {
                            "state": "SUCCESS",
                            "productGroupIds": [
                                8
                            ]
                        }
                    },
                    {
                        "operationId": "cf12c18a-47f5-4d34-9195-c660f36f303a",
                        "operationType": "RNMS_GIS_PROCESSED",
                        "operationDate": 1640077127299,
                        "details": {
                            "state": "SUCCESS",
                            "productGroupIds": [
                                8
                            ],
                            "gtin": "04640002480019",
                            "processed": 2,
                            "total": 2
                        }
                    }
                ]
            }
        ]
    }
```


Example of receipt on application report (for the “Dairy products” goods group), that has been processed successfully

Figure 259

Example of the receipt on application report (for the “Dairy products” goods group), that has not been processed successfully (all MCs in the report were processed with error) can be found in Figure 260


```
    {
        "results": [
            {
                "resultDocId": "0c49bb2f-bcb6-4c06-a159-b6e1e9694be9",
                "resultDocDate": 1640077394834,
                "sourceDocId": "77d63818-8797-42b7-8a9d-283e05fbc94c",
                "sourceDocDate": 1640077382172,
                "state": "FAILED",
                "code": 1,
                "description": "Document processing was failed",
                "workflow": "REPORT_UTILIZE",
                "workflowVersion": 1,
```

```
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640077358218,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "REPORT_UTILIZE",
                        "utilisationType": "UTILISATION",
                        "startDocDate": 1640077382227
                    },
                    "operations": [
                        {
                            "operationId": "64481b19-6fd8-4bd0-95b5-d9506d67018a",
                            "operationType": "REPORT_UTILIZE_RECEIVED",
                            "operationDate": 1640077369302,
                            "docId": "77d63818-8797-42b7-8a9d-283e05fbc94c",
                            "docDate": 1640077382172,
                            "docHash": "c928c200da9a39d3aeb33a0aa754068337816db9961b9c9f1f94e7bbddb9
311b",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640077358218,
                                "quantity": 2
                            }
                        },
                        {
                            "operationId": "1225bb92-3bb5-4d14-8766-56af0a627a55",
                            "operationType": "REPORT_UTILIZE_EMISSION_SEND",
                            "operationDate": 1640077392396,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "6d9309c3-7f6e-45a4-afdc-26246e924a62",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640077376633,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "431c2b4a-d073-4c86-8338-f9b13a1de8d5",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640077376954,
                            "docId": "6d9309c3-7f6e-45a4-afdc-26246e924a62",
                            "docDate": 1640077376633,
                            "docHash": "gost3411-2012-
256:2cfcfdecb3cdca889ac0b6b17db6c775adf3c418fcb4628f3a11787f71248c2b",
                            "details": {
                                "state": "REJECTED",
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480019",
                                "processed": 0,
                                "total": 2
                            }
                        }
                    ]
                }
            ]
        }
```

Example of the receipt on application report (for the “Dairy products” goods group), that has not been processed successfully (all MCs in the report were processed with error)

Figure 260

Example of the receipt on application report (for the “Dairy products” goods group), that has been processed partially successfully (there are MCs, which have been processed successfully and unsuccessfully), can be found in Figure 261


```
{
    "results": [
        {
            "resultDocId": "6642b8f1-67e0-4384-8ee1-801b7c060b05",
            "resultDocDate": 1640077685383,
            "sourceDocId": "ba827b68-83d8-4d86-b6f4-1d7ffc43a816",
            "sourceDocDate": 1640077672794,
            "state": "PARTIALLY",
            "code": 3,
            "description": "The document was partially processed",
            "workflow": "REPORT_UTILIZE",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640077646623,
                "productGroupIds": [
                    8
                ],
                "txType": "REPORT_UTILIZE",
                "utilisationType": "UTILISATION",
                "startDocDate": 1640077672841
            },
            "operations": [
                {
                    "operationId": "fe14f9b5-13a2-43e6-ace5-277eb5f3cfce",
                    "operationType": "REPORT_UTILIZE_RECEIVED",
                    "operationDate": 1640077661217,
                    "docId": "ba827b68-83d8-4d86-b6f4-1d7ffc43a816",
                    "docDate": 1640077672794,
                    "docHash": "0715055560ea45c0909dc4ecaa6931a0994d2a36bfcacff57d3ab319923d
d163",
                    "details": {
                        "state": "SUCCESS",
                        "participantId": "600000114",
                        "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                        "createDocDate": 1640077646623,
                        "quantity": 3
                    }
                },
                {
                    "operationId": "8eddc251-1ccf-48ac-878f-0496dda28b2e",
                    "operationType": "REPORT_UTILIZE_EMISSION_SEND",
                    "operationDate": 1640077682945,
                    "details": {
                        "state": "SUCCESS"
                    }
                },
                {
                    "operationId": "475442da-c414-44b0-b58e-4a344c8d31ff",
                    "operationType": "RNMS_GIS_ROUTED",
                    "operationDate": 1640077666889,
                    "details": {
```

```
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "c85035dd-724b-465f-9f96-766419ea6043",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640077667438,
                            "docId": "475442da-c414-44b0-b58e-4a344c8d31ff",
                            "docDate": 1640077666889,
                            "docHash": "gost3411-2012-
256:cb4dc12b8461f8b5522e58b794924018363ab3d92f45c7e5cf4510d65c733e72",
                            "details": {
                                "state": "PARTIALLY",
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480019",
                                "processed": 1,
                                "total": 3
                            }
                        }
                    ]
                }
            ]
        }
```


Example of the receipt on application report (for the “Dairy products” goods group), that has been processed partially successfully (there are MCs, which have been processed successfully and unsuccessfully)

Figure 261

10.1.2.1. Event “Receipt of report on MC application” (REPORT_UTILIZE_RECEIVED)

The event is formed after the report has been received successfully.

For a structure of the user data of the event, see Table 402

Table 402 – Structure of the user data of the event REPORT_UTILIZE_RECEIVED

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – report is received.	string	Yes
description	Text description of the operation processing result.	string	No
quantity	Total number of the MCs in the report.	int	Yes
omsId	OMS profile identifier.	string (UUID)	Yes
participantId	Identifier of the goods circulation participant	string	No
serviceProviderName	Service provider name.	string	No
serviceProviderInn	INN of the Service provider.	string	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	long	Yes

10.1.2.2. Event “Dispatch of report metadata for verification in MDLP” (REPORT_UTILIZE_VALIDATION)

The event is formed only after successful sending of the report metadata to be verified in the MDLP IS for the “Medicines for Medical Use” goods group. If there had been an accident in the MDLP IS at the time of creation of the transaction start document, the event would have not been formed.

For a structure of the user data of the event, see Table 403.

Table 403 – Structure of the user data of the event REPORT_UTILIZE_VALIDATION

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – report has been sent for verification	String	Yes
description	Text description of the operation processing result.	String	No

10.1.2.3. Event “Results of report metadata verification in MDLP” (REPORT_UTILIZE_VALIDATION_RESULT)

The event will be formed after the report metadata are verified in the MDLP IS for the “Medicines for Medical Use” goods group. If there had been an accident in the MDLP IS at the time of creation of the transaction start document, the event would have not been formed.

For a structure of the user data of the event, see Table 404.

Table 404 – Structure of the user data of the event REPORT_UTILIZE_VALIDATION_RESULT

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: • SUCCESS – report metadata validation was successful • REJECTED - report metadata validation failed	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.2.4. Event “Dispatch of report to ER/MER” (REPORT_UTILIZE_EMISSION_SEND)

The event is formed taking into account the results of sending of the report to ER/MER.

For a structure of the user data of the event, see Table 405.

Table 405 – Structure of the user data of the event REPORT_UTILIZE_EMISSION_SEND

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: • SUCCESS – report has been sent • REJECTED – report has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.2.5. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED)

The event is formed taking into account the results of sending of the report for processing.

For a structure of the user data of the event, see Table 406.

Table 406 – Structure of the user data of the event RNMS_GIS_ROUTED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	No
gtins	List of the goods codes in the report	String	No
state	Operation processing status. Available values: • SUCCESS – report has been sent for processing • REJECTED – report has not been sent for processing	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.2.6. Event “Report processing result” (RNMS_GIS_PROCESSED)

The event is formed taking into account the results of the report processing. The number of events of this type should be equal to the number of unique gtin in the report.

For a structure of the user data of the event, see Table 407.

Table 407 – Structure of the user data of the event RNMS_GIS_PROCESSED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	No
state	Operation processing status. Available values: • SUCCESS – processing of the report on gtin succeeded; • REJECTED - processing of the report on gtin failed; • PARTIALLY - received report on gtin has been partially processed (the status is not applied for the rejection report).	String	Yes
description	Text description of the operation processing result.	String	No
processed	Total number of the codes processed successfully in the report on gtin.	Integer	Yes
total	Total number of the MCs in the report on gtin.	Integer	Yes
gtin	Goods code	String	Yes

Note: status of the receipt depends on the status of these events:

– If all events of this type are completed with “SUCCESS” status, the receipt will have “SUCCESS” status.

– If all events of this type are completed with “REJECTED” status, the receipt will have “FAILED” status.

– If among the events of this type there are events with “REJECTED” and “SUCCESS” status or among the events of this type there is at least one with “PARTIALLY” status, the receipt will have “PARTIALLY” status.

10.1.3. Receipt “Marking code aggregation” (REPORT_AGGREGATION)

Example of the receipt on aggregation report (for the “Dairy products” goods group), that has been processed successfully, can be found in Figure 262


```
{
    "results": [
        {
            "resultDocId": "cbcf33cf-4077-435e-a649-0756bcf97ebc",
            "resultDocDate": 1640078347794,
            "sourceDocId": "1c1019be-8853-4d92-ac5d-c39600fa0b51",
            "sourceDocDate": 1640078263751,
            "state": "SUCCESS",
            "code": 0,
            "description": "Document was successfully processed",
            "workflow": "REPORT_AGGREGATION",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640078247043,
                "productGroupIds": [
                    8
```

```
                        ],
                        "txType": "REPORT_AGGREGATION",
                        "startDocDate": 1640078263899
                    },
                    "operations": [
                        {
                            "operationId": "d7c43ee8-c01e-4cd0-8b8d-4b48e8fe4df9",
                            "operationType": "REPORT_AGGREGATION_RECEIVED",
                            "operationDate": 1640078257416,
                            "docId": "1c1019be-8853-4d92-ac5d-c39600fa0b51",
                            "docDate": 1640078263751,
                            "docHash": "4c1b95beae0db9e3aacb1d10767e446e0de467ac4b0ebe1567bdae16d7bb
0e45",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640078247043,
                                "quantity": 2
                            }
                        },
                        {
                            "operationId": "0d0ca70f-f580-46f0-ad24-f5fb32509d1d",
                            "operationType": "REPORT_AGGREGATION_GIS_SEND",
                            "operationDate": 1640078274084,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "dde185d3-4692-4d63-9d03-2b943ba4782f",
                            "operationType": "REPORT_AGGREGATION_GIS_ROUTED",
                            "operationDate": 1640078267311,
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "productGroupIds": [
                                    8
                                ],
                                "signINN": "7736673512"
                            }
                        },
                        {
                            "operationId": "47880251-cd54-47f8-afc1-d805bcde2793",
                            "operationType": "REPORT_AGGREGATION_GIS_PROCESSED",
                            "operationDate": 1640078347585,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        }
                    ]
                }
            ]
        }
```


Example of receipt on aggregation report (for the “Dairy products” goods group), that has been processed successfully

Figure 262

Example of receipt on aggregation report (for the “Dairy products” goods group), that has not been processed successfully, can be found in Figure 263


```
{
    "results": [
        {
            "resultDocId": "07f539d3-0e5b-45fe-998d-4ba5711c3459",
            "resultDocDate": 1640079068961,
            "sourceDocId": "7819c99a-fdcc-44ba-ba93-d667da6214d6",
            "sourceDocDate": 1640079025314,
            "state": "FAILED",
            "code": 1,
            "description": "Document processing was failed",
            "workflow": "REPORT_AGGREGATION",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640079011356,
                "productGroupIds": [
                    8
                ],
                "txType": "REPORT_AGGREGATION",
                "startDocDate": 1640079025360
            },
            "operations": [
                {
                    "operationId": "222eaf69-04ba-46f2-9d10-e51e8b077c7a",
                    "operationType": "REPORT_AGGREGATION_RECEIVED",
                    "operationDate": 1640079020567,
                    "docId": "7819c99a-fdcc-44ba-ba93-d667da6214d6",
                    "docDate": 1640079025314,
                    "docHash": "8b2af1754e5b3ec430cd7e665342f0b9d84df561e845bddb7e396e33043f
af9d",
                    "details": {
                        "state": "SUCCESS",
                        "participantId": "600000114",
                        "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                        "createDocDate": 1640079011356,
                        "quantity": 1
                    }
                },
                {
                    "operationId": "85c6d43f-69ba-4cc1-9bff-b95824e0fa97",
                    "operationType": "REPORT_AGGREGATION_GIS_SEND",
                    "operationDate": 1640079035456,
                    "details": {
                        "state": "SUCCESS"
                    }
                },
                {
                    "operationId": "7d517a44-098e-44bd-9040-b4ddcfa2fb14",
                    "operationType": "REPORT_AGGREGATION_GIS_ROUTED",
                    "operationDate": 1640079027813,
                    "details": {
                        "state": "SUCCESS",
                        "participantId": "600000114",
                        "productGroupIds": [
                            8
                        ],
                        "signINN": "7736673512"
                    }
                },
                {
                    "operationId": "ceef3535-2cc0-4ebc-afe0-09b9a4d40191",
                    "operationType": "REPORT_AGGREGATION_GIS_PROCESSED",
                    "operationDate": 1640079068688,
                    "details": {
```

```
                        "state": "REJECTED"
                    }
                }
            ]
        }
    ]
}
```


Example of receipt on aggregation report (for the “Dairy products” goods group), that has not been processed successfully

Figure 263

10.1.3.1. Event “Receipt of aggregation report” (REPORT_AGGREGATION_RECEIVED)

The event is formed after the report has been received successfully.

For a structure of the user data of the event, see Table 408.

Table 408 – Structure of the user data of the event REPORT_AGGREGATION_RECEIVED

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – report has been received	String	Yes
quantity	MC Quantity	Integer	Yes
description	Text description of the operation processing result.	String	No
participantId	Identifier of the goods circulation participant	String	No
omsId	OMS profile identifier	String (UUID)	Yes
serviceProviderName	Service provider name.	String	No
serviceProviderInn	INN of the Service Provider (in the profile	String	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer	Yes

10.1.3.2. Event “Dispatch of report to marking system” (REPORT_AGGREGATION_GIS_SEND)

The event is formed taking into account the results of sending of the report to marking system.

For a structure of the user data of the event, see Table 409.

Table 409 – Structure of the user data of the event REPORT_AGGREGATION_GIS_SEND

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: • SUCCESS – report has been sent • REJECTED – report has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.3.3. Event “Dispatch of report for processing” (REPORT_AGGREGATION_GIS_ROUTED)

The event is formed taking into account the results of validation and sending of the report for processing.

For a structure of the user data of the event, see Table 410.

Table 410 – Structure of the user data of the event REPORT_AGGREGATION_GIS_ROUTED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
signINN	Sender’s INN	String	No
participantId	Identifier of the goods circulation participant	Integer	No
state	Operation processing status. Available values: • SUCCESS – report has passed validation and has been sent • REJECTED – report has not passed validation and/or has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.3.4. Event “Report processing result” (REPORT_AGGREGATION_GIS_PROCESSED)

The event is formed taking into account the results of the report processing.

For a structure of the user data of the event, see Table 411.

Table 411 – Structure of the user data of the event REPORT_AGGREGATION_GIS_PROCESSED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer	Yes
state	Operation processing status. Available values: • SUCCESS – report processing succeeded; • REJECTED – reports processing failed;	String	Yes
description	Text description of the operation processing result.	String	No

Note: status of the receipt depends on the status of this event:

– If event is completed with “SUCCESS” status, the receipt will have “SUCCESS” status.

– If event is completed with “REJECTED” status, the receipt will have “FAILED” status.

10.1.4. Receipt “Marking code cancellation” (ANNULMENT_CODES)

Example of the receipt on cancellation report due to close of the order for the “Dairy products” goods group, can be found in Figure 264


```
{
    "results": [
        {
            "resultDocId": "49dafd04-f200-420e-0000-00006fd204a8",
            "resultDocDate": 1640085937114,
            "sourceDocId": "b357c707-1e10-4458-a69a-b3f5b02d5951",
            "sourceDocDate": 1640085924455,
            "state": "SUCCESS",
            "code": 0,
            "description": "Document was successfully processed",
            "workflow": "ANNULMENT_CODES",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640085913564,
                "orderId": "49dafd04-f200-420e-8888-adf8673803f4",
                "productGroupIds": [
                    8
                ],
                "txType": "ANNULMENT_CODES",
                "startDocDate": 1640085924556
            },
            "operations": [
                {
                    "operationId": "e84e6ee1-8930-4547-a848-9643ebf7f7fd",
                    "operationType": "ANNULMENT_CODES",
                    "operationDate": 1640085913583,
                    "docId": "b357c707-1e10-4458-a69a-b3f5b02d5951",
                    "docDate": 1640085924455,
                    "docHash": "4f159711c874322e22753274969d12e103cbdd6580411310b83d9cf42e3b
8961",
                    "details": {
                        "products": [
                            {
                                "gtin": "04640002480033",
                                "quantity": 9
                            }
                        ],
```

```
                            "state": "SUCCESS",
                            "participantId": "600000114",
                            "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                            "createDocDate": 1640085913564,
                            "quantity": 9,
                            "reason": 1,
                            "orderId": "49dafd04-f200-420e-8888-adf8673803f4"
                        }
                    },
                    {
                        "operationId": "7240dddb-4a60-4490-97a0-21cae0133db3",
                        "operationType": "ANNULMENT_CODES_EMISSION_SEND",
                        "operationDate": 1640085918995,
                        "details": {
                            "state": "SUCCESS"
                        }
                    },
                    {
                        "operationId": "ae5df8c9-d172-4d56-a465-174301a97083",
                        "operationType": "RNMS_GIS_ROUTED",
                        "operationDate": 1640085921441,
                        "details": {
                            "state": "SUCCESS",
                            "productGroupIds": [
                                8
                            ]
                        }
                    },
                    {
                        "operationId": "d7e01105-57b5-4c51-b575-473ddf0f75a9",
                        "operationType": "RNMS_GIS_PROCESSED",
                        "operationDate": 1640085921803,
                        "details": {
                            "state": "SUCCESS",
                            "productGroupIds": [
                                8
                            ],
                            "gtin": "04640002480033",
                            "processed": 9,
                            "total": 9
                        }
                    }
                ]
            }
        ]
    }
```


Example of the receipt on cancellation report due to close of the order for the “Dairy products” goods group

Figure 264

10.1.4.1. Event “MC cancellation” (ANNULMENT_CODES)

The event is formed after the report has been generated by the information system in case of closing of the order with marking codes with “ACTIVE” status or if MCs in the order are expired.

For a structure of the user data of the event, see Table 412.

Table 412 – Structure of the user data of the event ANNULMENT_CODES

Parameter	Description	Type	Mandatory
products	Goods description	Object (see Table 413)	Yes
reason	Code of the reason for marking code cancellation 1- MC cancellation due to closing of the MC order; 2 - MC cancellation due to expired MC	Integer	Yes
state	Operation processing status. Valid values: SUCCESS – MC cancellation succeeded	String	Yes
quantity	Total number of the MCs to be canceled	Integer	Yes
description	Text description of the operation processing result.	String	No
omsId	OMS profile identifier.	String (UUID)	Yes
participantId	Identifier of the goods circulation participant.	String	No
orderId	Order identifier.	String (UUID)	Yes
serviceProviderName	Service provider name.	String	No
serviceProviderInn	INN of the Service provider.	String	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer	Yes

Description of the structure of “products” parameter is given in Table 413.

Table 413 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the canceled MCs for this gtin	Integer	Yes

10.1.4.2. Event “Dispatch of report to ER/MER” (ANNULMENT_CODES_EMISSION_SEND)

The event is formed taking into account the results of sending of the report to ER/MER.

For a structure of the user data of the event, see Table 414.

Table 414 – Structure of the user data of the event ANNULMENT_CODES_EMISSION_SEND

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: • SUCCESS – report has been sent • REJECTED – report has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: If it is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.4.3. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED)

The event is formed taking into account the results of sending of the report for processing.

For a structure of the user data of the event, see Table 407.

10.1.4.4. Event “Report processing result” (RNMS_GIS_PROCESSED)

The event is formed taking into account the results of the report processing. The number of events of this type should be equal to the number of unique gtin in the report. The event may not be formed if the reason for cancellation was expiration of the MCs.

For a structure of the user data of the event, see Table 408.

10.1.5. Receipt “Dropout of rejected products” (REPORT_DROPOUT)

Example of receipt on rejection report (for the “Dairy products” goods group), that has been processed successfully, can be found in Figure 265


```
{
    "results": [
        {
            "resultDocId": "89a2cecc-71c1-4592-8b2c-26f24f68495d",
            "resultDocDate": 1640080539819,
            "sourceDocId": "be221e30-2056-46ff-bd67-ce4329cecbe5",
            "sourceDocDate": 1640080527161,
            "state": "SUCCESS",
            "code": 0,
            "description": "Document was successfully processed",
            "workflow": "REPORT_DROPOUT",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640080506389,
                "productGroupIds": [
                    8
                ],
                "txType": "REPORT_DROPOUT",
                "startDocDate": 1640080527237
            },
            "operations": [
                {
                    "operationId": "97e0aef3-6f87-413c-ba05-ef24567b8e0d",
```

```
                            "operationType": "REPORT_DROPOUT_RECEIVED",
                            "operationDate": 1640080517523,
                            "docId": "be221e30-2056-46ff-bd67-ce4329cecbe5",
                            "docDate": 1640080527161,
                            "docHash": "171d23694bf2b554f90a7fbb46e7109216632dcba47e6dab4e484c8dcf29
4639",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640080506389,
                                "quantity": 1,
                                "dropoutReason": "DEFECT"
                            }
                        },
                        {
                            "operationId": "d8f71bc4-af77-4ddf-bcb9-3d51f0209c38",
                            "operationType": "REPORT_DROPOUT_EMISSION_SEND",
                            "operationDate": 1640080537387,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "c2e7dfcf-90ba-4587-899e-b95b069c2bda",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640080528651,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "c426b64b-eede-4c3c-b392-32ec5e5577bd",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640080528942,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480033",
                                "processed": 1,
                                "total": 1
                            }
                        }
                    ]
                }
            ]
        }
```


Example of receipt on rejection report (for the “Dairy products” goods group), that has been processed successfully

Figure 265

Example of receipt on rejection report (for the “Dairy products” goods group), that has not been processed successfully (all MCs in the report were processed with error for one gtin), can be found in Figure 266

```
        {
            "results": [
                {
                    "resultDocId": "08acb9b0-997c-4f8b-8ea8-f26113bec6d9",
                    "resultDocDate": 1640082152736,
                    "sourceDocId": "e9cd9c92-34de-40d7-8010-c8d8691a9a88",
                    "sourceDocDate": 1640082140171,
                    "state": "FAILED",
                    "code": 1,
                    "description": "Document processing was failed",
                    "workflow": "REPORT_DROPOUT",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640082058882,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "REPORT_DROPOUT",
                        "startDocDate": 1640082140216
                    },
                    "operations": [
                        {
                            "operationId": "9bb7ee65-7586-44af-87c7-b1940f5d2d47",
                            "operationType": "REPORT_DROPOUT_RECEIVED",
                            "operationDate": 1640082127905,
                            "docId": "e9cd9c92-34de-40d7-8010-c8d8691a9a88",
                            "docDate": 1640082140171,
                            "docHash": "51f5439f804eb62789ee5dcda63a9356a4c276daf0a4268404bfaee0f4e3
4cd9",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640082058882,
                                "quantity": 2,
                                "dropoutReason": "DEFECT"
                            }
                        },
                        {
                            "operationId": "7f990da6-e69b-491d-81f9-1d9aab8f9cbc",
                            "operationType": "REPORT_DROPOUT_EMISSION_SEND",
                            "operationDate": 1640082150309,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "c60a1582-d716-454e-ad0b-448ea9be4cdb",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640082139632,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "3611c31c-713f-4c99-adaf-8f1b93b04ab0",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640082139916,
                            "docId": "c60a1582-d716-454e-ad0b-448ea9be4cdb",
                            "docDate": 1640082139631,
                            "docHash": "gost3411-2012-
256:042bd6a8af52cba1bbe495156766ab1dec19aecc2841ef9d0aec4deaf4c96eb8",
                            "details": {
                                "state": "REJECTED",
```

```
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480019",
                                "processed": 0,
                                "total": 2
                            }
                        }
                    ]
                }
            ]
        }
```


Example of receipt on rejection report (for the “Dairy products” goods group), that has not been processed successfully (all MCs of one “gtin” in report were processed with error)

Figure 266

Example of receipt on rejection report (for the “Dairy products” goods group), that has not been processed successfully (for one gtin, one part of the MCs was processed successfully, and another was not), can be found in Figure 267


```
        {
            "results": [
                {
                    "resultDocId": "8de6a4da-0de4-4c25-99b3-a724e95e144a",
                    "resultDocDate": 1640081461248,
                    "sourceDocId": "40f73558-8527-4f38-9a6c-b6c379177317",
                    "sourceDocDate": 1640081448668,
                    "state": "FAILED",
                    "code": 1,
                    "description": "Document processing was failed",
                    "workflow": "REPORT_DROPOUT",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640081421402,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "REPORT_DROPOUT",
                        "startDocDate": 1640081448719
                    },
                    "operations": [
                        {
                            "operationId": "70d291b3-9c39-4169-a45f-20affbca038c",
                            "operationType": "REPORT_DROPOUT_RECEIVED",
                            "operationDate": 1640081443690,
                            "docId": "40f73558-8527-4f38-9a6c-b6c379177317",
                            "docDate": 1640081448668,
                            "docHash": "a09f212be80c461cdc1652dc12fe44b044deb963bebbfbce4b42dd7f1772
d12b",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640081421402,
                                "quantity": 2,
                                "dropoutReason": "DEFECT"
                            }
                        },
                        {
```

```
                            "operationId": "0fef6dac-51ad-4a20-85db-662e0d7e1dc2",
                            "operationType": "REPORT_DROPOUT_EMISSION_SEND",
                            "operationDate": 1640081458812,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "38218f1d-8ba9-476c-b1d3-7241408ea5ed",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640081449151,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "f7cff059-4c58-48e6-acc5-4b78f676900a",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640081449416,
                            "docId": "38218f1d-8ba9-476c-b1d3-7241408ea5ed",
                            "docDate": 1640081449151,
                            "docHash": "gost3411-2012-
256:133897ef501490661855624f1c5a5927f954a5f9ebcfdf7e1c4137d411d2fa7b",
                            "details": {
                                "state": "REJECTED",
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480019",
                                "processed": 0,
                                "total": 2
                            }
                        }
                    ]
                }
            ]
        }
```


Example of receipt on rejection report (for the “Dairy products” goods group), that has not been processed successfully (for one gtin, one part of the MCs was processed successfully, and another was not)

Figure 267

Example of receipt on rejection report (for the “Dairy products” goods group), that was processed partially (MCs of one gtin were processed successfully, but for another gtin, MC processing failed), can be found in Figure 268


```
        {
            "results": [
                {
                    "resultDocId": "2f21b538-5d61-4c43-8a9e-ffe9dbb466f1",
                    "resultDocDate": 1640081070578,
                    "sourceDocId": "13a202ce-ff09-4e42-9402-6b758c089f91",
                    "sourceDocDate": 1640081057955,
                    "state": "PARTIALLY",
                    "code": 3,
                    "description": "The document was partially processed",
                    "workflow": "REPORT_DROPOUT",
                    "workflowVersion": 1,
```

```
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640080796191,
                        "productGroupIds": [
                            8
                        ],
                        "txType": "REPORT_DROPOUT",
                        "startDocDate": 1640081058022
                    },
                    "operations": [
                        {
                            "operationId": "450d378a-40e0-4362-bd08-43dd11c76d01",
                            "operationType": "REPORT_DROPOUT_RECEIVED",
                            "operationDate": 1640081047576,
                            "docId": "13a202ce-ff09-4e42-9402-6b758c089f91",
                            "docDate": 1640081057955,
                            "docHash": "270e4aff794e996ae5e0e4820c91fb4fe07cf5869b7c8d7e0f9e0833b742
ec4a",
                            "details": {
                                "state": "SUCCESS",
                                "participantId": "600000114",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640080796191,
                                "quantity": 2,
                                "dropoutReason": "DEFECT"
                            }
                        },
                        {
                            "operationId": "a3ff7ab6-ed4d-4ccb-ac73-f03881b2f00f",
                            "operationType": "REPORT_DROPOUT_EMISSION_SEND",
                            "operationDate": 1640081068144,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "0d432451-2a2f-4c65-bc12-8df1550b8f76",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640081058927,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    8
                                ]
                            }
                        },
                        {
                            "operationId": "ad466522-28c7-450a-b082-4d60ce0a0522",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640081059304,
                            "docId": "0d432451-2a2f-4c65-bc12-8df1550b8f76",
                            "docDate": 1640081058927,
                            "docHash": "gost3411-2012-
256:8287827b59acee4e11d22c656dd813057e5513b4df6dd3eec7413296e372e5bc",
                            "details": {
                                "state": "REJECTED",
                                "productGroupIds": [
                                    8
                                ],
                                "gtin": "04640002480033",
                                "processed": 0,
                                "total": 1
                            }
                        },
                        {
                            "operationId": "f2d8fa00-dd40-420c-851f-21664d8dd04c",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640081059460,
```

```
                        "details": {
                            "state": "SUCCESS",
                            "productGroupIds": [
                                8
                            ],
                            "gtin": "04640002480019",
                            "processed": 1,
                            "total": 1
                        }
                    }
                ]
            }
        ]
    }
```


Example of receipt on rejection report (for the “Dairy products” goods group), that was processed partially (MCs of one gtin were processed successfully, but for another gtin, MC processing failed)

Figure 268

10.1.5.1. Event “Receipt of rejection report” (REPORT_DROPOUT_RECEIVED)

The event is formed after the report has been received successfully.

For a structure of the user data of the event, see Table 415.

Table 415 – Structure of the user data of the event REPORT_DROPOUT_RECEIVED

Parameter	Description	Type	Mandatory
quantity	Number of dropped out MCs in the rejection report	Integer (int32)	Yes
dropoutReason	Reason for MCs dropout. Guide value of the guide “Disposal Reasons”.	String	Yes
state	Operation processing status. Valid values: SUCCESS – report has been received	String	Yes
description	Text description of the operation processing result.	String	No
omsId	OMS profile identifier	String (UUID)	Yes
participantId	Identifier of the goods circulation participant	String	No
serviceProviderName	Service provider name.	String	No
serviceProviderInn	INN of the Service Provider	String	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer (int64)	Yes

10.1.5.2. Event “Dispatch of report to ER/MER/marking system” (REPORT_DROPOUT_EMISSION_SEND)

The event is formed taking into account the results of sending of the report to ER/MER/marking system.

For a structure of the user data of the event, see Table 416.

Table 416 – Structure of the user data of the event REPORT_DROPOUT_EMISSION_SEND

Parameter	Description	Type	Mandatory
state	Document processing status. Valid values: • SUCCESS - report has been sent • REJECTED – report has not been sent.	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.5.3. Event “Dispatch of report for processing” (REPORT_DROPOUT_GIS_ROUTED)

The event is formed taking into account the results of validation and sending of the report for processing only for the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups.

For a structure of the user data of the event, see Table 417.

Table 417 – Structure of the user data of the event REPORT_DROPOUT_GIS_ROUTED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer (int32)	Yes
signINN	Sender’s INN	String	No
participantId	Identifier of the goods circulation participant	Integer (int64)	No
state	Operation processing status. Available values: • SUCCESS – report has passed validation and has been sent • REJECTED – report has not passed validation and/or has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with “REJECTED” status, the transaction will have “FAILED” status and further events will not be formed.

10.1.5.4. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED)

The event is formed taking into account the results of validation and sending of the report for processing (for all goods groups except the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups).

For a structure of the user data of the event, see Table 408.

10.1.5.5. Event “Report processing result” (REPORT_DROPOUT_GIS_PROCCESSED)

The event is formed taking into account the results of the report processing for the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups.

For a structure of the user data of the event, see Table 418.

Table 418 – Structure of the user data of the event REPORT_DROPOUT_GIS_PROCESSED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. The value of the guide “Goods groups” (see Section 5.3.1.16)	Integer (int32)	Yes
state	Operation processing status. Available values: • SUCCESS – processing of the report on gtin succeeded; • REJECTED – processing of the report on gtin failed;	String	Yes
description	Text description of the operation processing result.	String	No

Note: status of the receipt depends on the status of these events:

– If all events of this type are completed with “SUCCESS” status, the receipt will have “SUCCESS” status.

– If all events of this type are completed with “REJECTED” status, the receipt will have “FAILED” status.

– If events of this type are both with “REJECTED” and “SUCCESS” statuses, receipt will have “PARTIALLY” status.

10.1.5.6. Event “Report processing result” (RNMS_GIS_PROCESSED)

The event is formed taking into account the results of the report processing (for all goods groups except the “Tobacco products”, “Nicotine products” and “Alternative tobacco products” goods groups). The number of events of this type should be equal to the number of unique gtin in the report.

For a structure of the user data of the event, see Table 408.

10.1.6. Receipt “MC issue” (GET_CODES)

Example of receipt on MC issue for the “Dairy products” goods group (automatic application report is not formed), can be found in Figure 269


```
{
    "results": [
        {
            "resultDocId": "2b91773b-3d20-4b13-b5a5-dec2d6b9615c",
            "resultDocDate": 1640086185722,
            "sourceDocId": "4be7a037-c47c-4e2d-81d0-0eb8a98f9965",
            "sourceDocDate": 1640086183014,
            "state": "SUCCESS",
            "code": 0,
            "description": "Document was successfully processed",
            "workflow": "GET_CODES",
            "workflowVersion": 1,
            "details": {
```

```
                        "participantInn": "7736673512",
                        "createDocDate": 1640086174241,
                        "orderId": "49c2d2b9-75ac-4eb1-8fc0-661feaa0e432",
                        "productGroupIds": [
                            8
                        ],
                        "txType": "GET_CODES",
                        "startDocDate": 1640086183102
                    },
                    "operations": [
                        {
                            "operationId": "899de7ef-5b58-4a25-972d-a22b56551c96",
                            "operationType": "GET_CODES_RESULT",
                            "operationDate": 1640086174241,
                            "docId": "4be7a037-c47c-4e2d-81d0-0eb8a98f9965",
                            "docDate": 1640086183014,
                            "docHash": "554cd0b75af0d47359cb50872fec97b534502181afa093d0574866d50fc9
eaa7",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640002480019",
                                        "quantity": 1
                                    }
                                ],
                                "state": "SUCCESS",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640086174241,
                                "sourceRequest": "UI"
                            }
                        }
                    ]
                }
            ]
        }
```


Example of receipt on MC issue for the “Dairy products” goods group (automatic application report is not formed)

Figure 269

Example of receipt on MC issue for the “Perfume and eau de toilette” goods group (automatic application report is formed), can be found in Figure 270


```
        {
            "results": [
                {
                    "resultDocId": "6023e124-eb66-4c53-9d6b-77ca99a14bfd",
                    "resultDocDate": 1640086507708,
                    "sourceDocId": "960f0e52-e946-4eab-8580-377713cb7f48",
                    "sourceDocDate": 1640086483726,
                    "state": "SUCCESS",
                    "code": 0,
                    "description": "Document was successfully processed",
                    "workflow": "GET_CODES",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1640086458592,
                        "orderId": "252567fb-94d9-434e-8280-de3e5bdefbb2",
                        "productGroupIds": [
                            4
                        ],
                        "txType": "GET_CODES",
```

```
                        "startDocDate": 1640086483780
                    },
                    "operations": [
                        {
                            "operationId": "ce4cd270-f786-4211-a720-70f5a15e7220",
                            "operationType": "GET_CODES_RESULT",
                            "operationDate": 1640086458592,
                            "docId": "960f0e52-e946-4eab-8580-377713cb7f48",
                            "docDate": 1640086483726,
                            "docHash": "f65e8b472c1481dc7d62ec38b9781435fb4036c69d603cab4975c6ad9213
e701",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "04640007230084",
                                        "quantity": 1
                                    }
                                ],
                                "state": "SUCCESS",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1640086458592,
                                "sourceRequest": "UI",
                                "reserveId": "6023e124-eb66-4c53-9d6b-77ca99a14bfd"
                            }
                        },
                        {
                            "operationId": "89922f48-ebf3-48f9-9667-8c3c97e96a4a",
                            "operationType": "GET_CODES_GENERATED_REPORT",
                            "operationDate": 1640086505257,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "757d52fc-2bd5-4400-ac35-acba6ebea95e",
                            "operationType": "RNMS_GIS_ROUTED",
                            "operationDate": 1640086491775,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    4
                                ]
                            }
                        },
                        {
                            "operationId": "e2b3e66c-1215-4e0a-b80e-bf9d10168d1f",
                            "operationType": "RNMS_GIS_PROCESSED",
                            "operationDate": 1640086492104,
                            "details": {
                                "state": "SUCCESS",
                                "productGroupIds": [
                                    4
                                ],
                                "gtin": "04640007230084",
                                "processed": 1,
                                "total": 1
                            }
                        }
                    ]
                }
            ]
        }
```

Example of receipt on MC issue for the “Perfume and eau de toilette” goods group (automatic application report is formed)

Figure 270

10.1.6.1. Event “Result of MC issue” (GET_CODES_RESULT)

The event is formed after MCs have been successfully issued.

For a structure of the user data of the event, see Table 419.

Table 419 – Structure of the user data of the event GET_CODES_RESULT

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – MCs are issued.	String	Yes
description	Text description of the operation processing result.	String	No
products	Goods description	Object (see Table 420)	Yes
reserveId	Pool identifier	String (UUID)	No
participantId	Identifier of the goods circulation participant	String	No
serviceProviderName	Service provider name	String	No
serviceProviderInn	INN of the Service Provider	String	No
omsId	OMS profile identifier	String (UUID)	Yes
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer (int64)	Yes
sourceRequest	Source of the request for MC issue. Valid values: UI or API	String	Yes

Description of the structure of “products” parameter is given in Table 420.

Table 420 – Structure of “products” parameter

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs issued for this gtin	Integer (int32)	Yes

Note: If MCs are issued for a goods group, which does not provide for creation of the automatically generated report on the MC application or MCs are received by a service provider

(the order has been created for the service provider), then the transaction will have “SUCCESS” status and further events will not be formed.

10.1.6.2. Event “Dispatch of automatically generated report on the MC application” (GET_CODES_GENERATED_REPORT)

The event is formed taking into account the results of sending of the automatically generated report to ES.

For a structure of the user data of the event, see Table 421.

Table 421 – Structure of the user data of the event GET_CODES_GENERATED_REPORT

Parameter	Description	Type	Mandatory
state	Document processing status. Valid values: • SUCCESS – report has been sent • REJECTED – report has not been sent	String	Yes
description	Description	String	No
reserveId	Pool identifier	string (UUID)	No

Note: if the event is completed with “REJECTED” status, the receipt will have “FAILED” status and further events will not be formed.

10.1.6.3. Event “Dispatch of report for processing” (RNMS_GIS_ROUTED)

The event is formed taking into account the results of sending of the report for processing.

For a structure of the user data of the event, see Table 407.

10.1.6.4. Event “Report processing result” (RNMS_GIS_PROCESSED)

The event is formed taking into account the results of the processing of the automatically generated report. The number of events of this type should be equal to the number of unique gtin in the report.

For a structure of the user data of the event, see Table 408.

10.1.7. Receipt “Report “Application data”” (REPORT_QUALITY)

Example of the receipt on the report “Application information” for the “Dairy products” goods group, can be found in Figure 271

```
{
    "results": [
        {
            "resultDocId": "1s91773b-3d20-4b13-b5a5-dec2d6b91123",
            "resultDocDate": 1640086185722,
            "sourceDocId": "3237a037-c47c-4e2d-81d0-0eb8a98f9111",
            "sourceDocDate": 1640086183014,
            "state": "SUCCESS",
            "code": 0,
            "description": "Document was successfully processed",
            "workflow": "REPORT_QUALITY",
            "workflowVersion": 1,
            "details": {
                "participantInn": "7736673512",
                "createDocDate": 1640086174241,
                "orderId": "98c2d2b9-75ac-4eb1-8fc0-661feaa0e765",
                "productGroupIds": [
                    8
                ],
                "txType": "REPORT_QUALITY",
                "startDocDate": 1640086183102
            },
            "operations": [
                {
                    "operationId": "545de7ef-8b58-4a25-972d-a22b56551c00",
                    "operationType": "REPORT_QUALITY_RECEIVED",
                    "operationDate": 1640086174241,
                    "docId": "3237a037-c47c-4e2d-81d0-0eb8a98f9111",
                    "docDate": 1640086183014,
                    "docHash": "554cd0b75af0d47359cb50872fec97b534502181afa093d0574866d50fc9
eaa7",
                    "details": {
                        "quantity": 1
                        "state": "SUCCESS",
                        "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                        "createDocDate": 1640086174241,
                        "orderId": "98c2d2b9-75ac-4eb1-8fc0-661feaa0e765"
                    }
                }
            ]
        }
    ]
}
```


Example of receipt on the report “Application information” for the “Dairy products” goods group

Figure 271

10.1.7.1. Event “Receipt of report “Application information”” (REPORT_QUALITY_RECEIVED)

The event is formed after the report has been received successfully.

For user data structure of the event “Receipt of report “Application information””, see Table 422.

Table 422 – Structure of the user data of the event REPORT_QUALITY_RECEIVED

Parameter	Description	Type	Mandatory
state	Document processing status. Valid values: SUCCESS – report has been received	String	Yes
description	Text description of the operation processing result.	String	No
quantity	Total number of MCs in the report	Integer (int32)	Yes
omsId	OMS profile identifier	String (UUID)	Yes
participantId	Identifier of the goods circulation participant	String	No
serviceProviderName	Service provider name	String	No
serviceProviderInn	INN of the Service Provider	String	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Integer (int64)	Yes
orderId	Order identifier assigned in the OMS or MCDN	String	No
productionOrderId	Production order identifier	String	No

Note: after this event is formed, the receipt will have “SUCCESS” status

10.1.8. Receipt “Closing of order” (CLOSE_ORDER)

Example of the receipt on the “Closing of order” for the “Dairy products” goods group, can be found in Figure 272


```
{
  "results": [
    {
      "resultDocId": "94873e2a-e625-4038-bf21-3615a5a487af",
      "resultDocDate": 1650544931132,
      "sourceDocId": "07601211-89fe-49c1-8647-e013fa1f11c5",
      "sourceDocDate": 1650544925704,
      "state": "SUCCESS",
      "code": 0,
      "description": "Document was successfully processed",
      "workflow": "CLOSE_ORDER",
      "workflowVersion": 1,
      "details": {
        "participantInn": "7736673512",
        "createDocDate": 1650037514122,
        "orderId": "f7f65d84-a07a-41c6-8d1f-fc0239ee85c4",
        "productGroupIds": [
          8
        ],
        "txType": "CLOSE_ORDER",
        "startDocDate": 1650544925740
      },
      "operations": [
        {
          "operationId": "61aeddb1-290c-4798-b9a1-1d945eb9239d",
          "operationType": "CLOSE_ORDER",
          "operationDate": 1650544925703,
          "docId": "07601211-89fe-49c1-8647-e013fa1f11c5",
          "docDate": 1650544925704,
          "docHash": "77b968fd52323bfa3a30354e72b7f97c7a43022b21c7ebd442759bcb033d10a5",
```

```
                "details": {
                  "state": "SUCCESS",
                  "participantId": "600000114",
                  "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                  "createDocDate": 1650037514122,
                  "reason": "UI",
                  "orderId": "f7f65d84-a07a-41c6-8d1f-fc0239ee85c4"
                }
              }
            ]
          }
        ]
      }
```


Example of the receipt on “Closing of order” for the “Dairy products” goods group

Figure 272

10.1.8.1. Event “Closing of order” (CLOSE_ORDER)

The event is formed after the order has been closed successfully.

User data structure of the event “Closing of order” can be found in Table 423.

Table 423 – Structure of the user data of the event CLOSE_ORDER

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS	String	Yes
description	Text description of the operation processing result	String	No
omsId	OMS profile identifier	String (UUID)	Yes
participantId	Identifier of the goods circulation participant	String	No
orderId	Order identifier	String (UUID)	Yes
serviceProviderName	Service provider name	String	No
serviceProviderInn	INN of the Service Provider	String	No
createDocDate	Date and time of creation of the request for closing in UNIX format in milliseconds	Integer (int64)	Yes
reason	Reason for closing the order. Valid values: – EXHAUSTED – all MCs from the order were received – API – order was closed by a participant via API – UI – order was closed by a participant via UI – EXPIRED – MC in the order expired – OTHER – other reason	String	Yes
reasonMessage	Text description of the reason for closing the order. It fills in if reason=OTHER	String	No

Note: after this event is formed, the receipt will have “SUCCESS” status

10.1.9. Receipt “Notification of acceptance of ICs for record-keeping purposes” (REPORT_SURPLUS)

An example of the receipt of “Notification of acceptance of ICs for record-keeping purposes” for the “Beer, beer-based and low-alcohol beverages” goods group that has been successfully processed can be found in Figure 273.


```
{
            "results": [
                {
                    "resultDocId": "1f9fc7e9-0e41-4b2f-a133-e5d9e1aa5c08",
                    "resultDocDate": 1755762489721,
                    "sourceDocId": "9d363732-f690-4979-9edd-e6e950df4379",
                    "sourceDocDate": 1755762429500,
```

```
                    "state": "SUCCESS",
                    "code": 0,
                    "description": "Document was successfully processed",
                    "workflow": "REPORT_SURPLUS",
                    "workflowVersion": 1,
                    "details": {
                        "participantInn": "7736673512",
                        "createDocDate": 1755762409972,
                        "productGroupIds": [
                            15
                        ],
                        "txType": "REPORT_SURPLUS",
                        "startDocDate": 1755762429553
                    },
                    "operations": [
                        {
                            "operationId": "65ec1302-1253-4b00-a2c7-e99944559839",
                            "operationType": "REPORT_SURPLUS_RECEIVED",
                            "operationDate": 1755762409984,
                            "docId": "9d363732-f690-4979-9edd-e6e950df4379",
                            "docDate": 1755762429500,
                            "docHash":
"30c4bc1e3d6bd9f1d3cc0c3431fb166623308df0220c03c69d7e0e00de9d5ab1",
                            "details": {
                                "products": [
                                    {
                                        "gtin": "07685014123025",
                                        "quantity": 1
                                    }
                                ],
                                "state": "SUCCESS",
                                "participantId": "600000028",
                                "omsId": "15ecde9e-a686-4934-a337-ae319c944242",
                                "createDocDate": 1755762409972,
                                "quantity": 1,
                                "documentDate": "250110"
                            }
                        },
                        {
                            "operationId": "5d459e93-d6b4-4eaa-b45c-fde43191217d",
                            "operationType": "REPORT_SURPLUS_EMISSION_SEND",
                            "operationDate": 1755762489676,
                            "details": {
                                "state": "SUCCESS"
                            }
                        },
                        {
                            "operationId": "9728aaa7-144e-4f00-b915-b4f0c558158b",
                            "operationType": "REPORT_SURPLUS_GIS_ROUTED",
                            "operationDate": 1755762467001,
                            "details": {
                                "state": "SUCCESS",
                                "description": "routing success",
                                "productGroupIds": [
                                    15
                                ]
                            }
                        },
                        {
                            "operationId": "101232e1-1b92-4b10-9d23-90f5873c66a1",
                            "operationType": "DOCUMENT_PROCESSED",
                            "operationDate": 1755762471625,
                            "docId": "1b2a25f3-15f4-450e-b3d5-942938ae86a9",
                            "docDate": 1755762471549,
                            "docHash":                                                    "gost3411-2012-
256:1fbf625ad0a62d5be3e379a9352ba404cc69257dfc34ccfbe30d67a797826131",
                            "details": {
                                "state": "SUCCESS",
```

```
                            "productGroupIds": [
                                15
                            ],
                            "processed": 1,
                            "total": 1
                        }
                    }
                ]
            }
        ]
    }
```


Example of the receipt of “Notification of acceptance of ICs for record-keeping purposes” for the “Beer, beer-based and low-alcohol beverages” goods group

Figure 273

10.1.9.1. Event “Receiving a notification of acceptance of ICs for record-keeping purposes” (REPORT_SURPLUS_RECEIVED)

The event is formed after the notification of acceptance of ICs for record-keeping purposes has been successfully received.

For a structure of the user data of the event can be found in Table 424.

Table 424 – Structure of the user data of the event REPORT_SURPLUS_RECEIVED

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: SUCCESS – notification has been received.	String	Yes
description	Text description of the operation processing result.	String	No
quantity	Total number of the MCs in the notification.	Number	Yes
omsId	OMS profile identifier.	String (UUID)	Yes
participantId	Identifier of the goods circulation participant	String	No
createDocDate	Date and time of the source document creation in UNIX format in milliseconds.	Number	Yes
products	Goods description	Array of the “Products” objects	Yes

A structure of the “Products” object can be found in Table 425.

Table 425 – “Products” Object Structure

Parameter	Description	Type	Mandatory
gtin	Goods code	String	Yes
quantity	Number of the MCs for this gtin	Number	No

10.1.9.2. Event “Transmission of Notification to ER/MER” (REPORT_SURPLUS_EMISSION_SEND)

The event is formed taking into account the results of sending the notification to ER/MER.
For a structure of the user data of the event, see Table 426.

Table 426 – Structure of the user data of the event REPORT_SURPLUS_EMISSION_SEND

Parameter	Description	Type	Mandatory
state	Operation processing status. Valid values: • SUCCESS – notification has been sent • REJECTED – notification has not been sent	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with the “REJECTED” status, the receipt will have the “FAILED” status and further events will not be formed.

10.1.9.3. Event “Sending the notification for processing” (REPORT_SURPLUS_GIS_ROUTED)

The event is formed taking into account the results of sending of the notification for processing.

For a structure of the user data of the event, see Table 427.

Table 427 – Structure of the user data of the event REPORT_SURPLUS _GIS_ROUTED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. A value of the guide “Goods groups” (see Section 5.3.1.16)	Number	No
state	Operation processing status. Available values: • SUCCESS – report has been sent for processing • REJECTED – report has not been sent for processing	String	Yes
processed	Quantity of processed codes	Number	Yes
total	Total number of codes	Number	Yes

10.1.9.4. Event “Notification processing result” (DOCUMENT_PROCESSED)

The event is formed taking into account the results of the processing of the notification of acceptance of ICs for record-keeping purposes.

For a structure of the user data of the event, see Table 428.

Table 428 – Structure of the user data of the event DOCUMENT_PROCESSED

Parameter	Description	Type	Mandatory
productGroupIds	Identifier of the goods group. A value of the guide “Goods groups” (see Section 5.3.1.16)	Number	No
gtins	List of the goods codes in the report	String	No
state	Operation processing status. Available values: • SUCCESS – report has been sent for processing • REJECTED – report has not been sent for processing	String	Yes
description	Text description of the operation processing result.	String	No

Note: if the event is completed with the “REJECTED” status, the receipt will have the “FAILED” status and further events will not be formed.

LIST OF APPLICATION PROGRAMMING INTERFACE CHANGES

Version/ Edition	*Date*	*OMS version*	*List of Modifications*
67	24.09.2026	5.03	The following modifications were introduced: — For the “Fertilizers in consumer packaging” goods group, a new paymentType parameter has been added to the Order object extension as part of the introduction of payment. Notes on the introduction of payment have been added to the extension description (see section 4.4.1.1.45). — Information on the availability of the “Marking of remaining items” method of introduction into circulation has been removed from the marking code emission notes for the “Specialized food products and biologically active food additives” goods group (see section 4.4.1.1.15). — Information on the availability of the REMAINS value for the “Specialized food products and biologically active food additives” goods group has been removed from the description of the “Method of goods introduction into circulation” guide (see section 5.3.1.1). — The note on specifying the batchNumber parameter in the UtilisationReport object extension for the “Dairy products” goods group has been expanded (see section 4.4.11.1.3). — An optional batchNumber attribute has been added to the UtilisationReport object extension description for the “Confectionery products” goods group (see section 4.4.11.1.32). — Information on specifying the actual weight of a product unit has been removed from the marking code application report extension description for the “Confectionery products” goods group (see section 4.4.11.1.32). — Information on the actual weight has been removed from the marking code structure description for the “Confectionery products” goods group (see section 8.37). — A note on the mandatory specification of business place information in the marking code application report has been added for the “Radio-electronic products. Electronic nicotine delivery systems” goods group (see section 4.4.11.1.34). — For the “Meat products” goods group, a new optional expDate72 attribute for specifying the expiration date of products with a shelf life of less than 72 hours, has been added to the marking code application report structure description; a note on the filling conditions has also been added (see section 4.4.11.1.36). — Information on the ability to specify the length of goods using the AI311Y variable characteristic has been added to the marking code application report for the “Optical fiber and fiber optic products” goods group (see section 4.4.11.1.16).

			— Information on the length of goods has been added to the marking code structure description for the “Optical fiber and fiber optic products” goods group (see section 8.24). — Information on the length of goods has been added to the marking code structure description for the “Cabling and wiring products” goods group (see section 8.34). — Support for group packaging has been added for the “Printed goods” goods group in the “Marking code type” guide (see section 5.3.1.10) and in the marking code structure and format description (see section 8.31). — The marking code structure and format description for the “Radio-electronic products. Electronic nicotine delivery systems” goods group has been corrected (see section 8.39). — Information in the “Cancellation of unused MCs” guide has been updated (see section 5.3.1.12). — Information on support for product length data for the “Cabling and wiring products” and “Optical fiber and fiber optic products” goods groups has been updated in the “MC Templates” guide (see section 5.3.1.4). — The serial number length for the templateId=81 template of the “Fertilizers in consumer packaging” goods group has been changed in the “MC Templates” guide (see section 5.3.1.4). — Information on serial number lengths and the request example for the “Fertilizers in consumer packaging” goods group have been updated in the “Create Marking Code Emission Order” method (see sections 4.4.1.1 and 4.4.1.1.45). — The request example for the “Fertilizers in consumer packaging” goods group has been updated for the “Send Report on MC Utilization (Application)” method (see section 4.4.11.1.40). — The serial number length has been changed in the marking code structure and format description for the “Fertilizers in consumer packaging” goods group (see section 8.45).
66	25.08.2026	5.02	The following modifications were introduced: — For the “Medical products” goods group, the following information has been added to the marking code order notes: the launch of the twelfth payment wave, the updated payment start date and experiment period for the seventh wave, and the experiment period for the thirteenth payment wave (see section 4.4.1.1.10); — For the “Medical products” goods group, information has been added to the notes on MC emission using the method of release of goods into circulation, “Marking of remaining items” (see section 5.3.1.1); — For the “Radio-electronic products. Laptops and smartphones” goods group, the experiment end date has been changed (see section 4.4.1.1.39);

			— For the “Cosmetics, household chemicals, and personal hygiene products” goods group, the start date of the fifth payment group has been changed (see section 4.4.1.1.26); — For the “Radio-electronic products. Electronic nicotine delivery systems” goods group, attributes parameters of the report on MC application have been expanded with business place search attributes (kpp and fiasId) (see section 4.4.11.1.34); — For the “Cabling and wiring products” goods group, information about specifying goods length in the variable characteristic AI311Y has been added to the application report (see section 4.4.11.1.29); — For the “Fertilizers in consumer packaging” goods group, the “producer” attribute (INN of the goods card owner) and notes on MC emission using the method of release of goods into circulation, “Marking outside production or import”, have been added (see section 4.4.1.1.45); — For the “Fertilizers in consumer packaging” goods group, the “REAPPLY” value has been added to the description of the guide “Method of Goods Introduction into Circulation” (see section 5.3.1.1); — For the “Semi-finished and frozen food products” goods group, a note to the MC application report has been corrected regarding how to fill in the “expirationDate” and “productionDate” parameters (see section 4.4.11.1.41); — For the “Medical products” goods group, the description of the note on filling in parameters for group packages and sets has been expanded (see section 4.4.11.1.10).
65	05.08.2026	5.01	The following modifications were introduced: — In the description of the “UtilisationReport” object extension for the “Fire safety and firefighting equipment” goods group, the note on specifying information in the optional “productionDate” attribute has been updated (see section 4.4.11.1.25).
64	22.07.2026	5.01	The following modifications were introduced: — For the “Medical products” goods group, information on the launch of the 4th, 9th, and 11th payment waves has been added to the note on ordering MCs (see section 4.4.1.1.10); — For the “Engine oils” goods group, the note on creating an MC order (regarding issuance for remaining stock marking) has been updated in the description of the “Order” object extension (see section 4.4.1.1.35); — The name of the goods group has been changed from “Pyrotechnic articles and fire safety and firefighting equipment” to “Fire safety and firefighting equipment”; — In the description of the “UtilisationReport” object extension for the “Dairy products” goods group, the note on the requirement to specify the product expiration date and production date parameters has been updated, and a note on specifying the lot number for different MC types has been added (see section 4.4.11.1.3);

			— In the description of the “UtilisationReport” object extension for the “Medical products” goods group, the note on specifying the lot number for different MC types has been updated (see section 4.4.11.1.10); — In the description of the “UtilisationReport” object extension for the “Fire safety and firefighting equipment” goods group, the note on specifying information in the optional “productionDate” and “expirationDate” attributes has been updated (see section 4.4.11.1.25); — Information on support of group packages and sets of the “Radio-electronic products. Electronic nicotine delivery systems” goods group has been removed from the note on the MC application report (see section 4.4.11.1.34), from the “Marking code type” guide (see section 5.3.1.10), and from the description of the marking code structure and format (see section 8.39); — A new allowed value, REMARK, has been added for the “utilisationType” parameter (see section 4.4.11.1); — A description of the remarking operation has been added to the list of attributes for the “Cosmetics, household chemicals, and personal hygiene products” goods group (see section 4.4.11.1.19); — The description of the “kpp” and “fiasId” parameters has been updated in the “UtilisationReport” object extension for the following goods groups: “Juice products and non-alcoholic beverages” (see section 4.4.11.1.11), “Non-alcoholic beer” (see section 4.4.11.1.9), “Building materials” (see section 4.4.11.1.24), “Radio-electronic products” (see section 4.4.11.1.15) and “Radio-electronic products. Laptops and smartphones” (see section 4.4.11.1.35); — The description of the marking code structure has been corrected for the “Radio-electronic products” goods group (see section 8.23); — The unitedToken request parameter, as well as the unitedToken and expireDate response parameters, have been removed from the description of the “Getting an authentication token” method (see section 9.3.2.2); — Information on the length of the MC serial number for the “Radio-electronic products. Electronic nicotine delivery systems” goods group has been corrected in the note to the MC order creation request (see section 4.4.1);

			— The note on specifying the “producer” parameter in the “Order” object extension for original GTINs of the global range has been updated for the following goods groups: “Light industry” (see section 4.4.1.1.2), “Footwear” (see section 4.4.1.1.3), “Perfume and Eau de Toilette” (see section 4.4.1.1.5), “Bicycles and bicycle frames” (see section 4.4.1.1.9), “Medical products” (see section 4.4.1.1.10), “Beer, beer-based and low-alcohol beverages” (see section 4.4.1.1.13), “Specialized food products and biologically active food additives” (see section 4.4.1.1.15), “Antiseptic/antibacterial skin cleansers and hand sanitizers” (see section 4.4.1.1.16), “Non-alcoholic beer” (see section 4.4.1.1.19), “Games and toys for children” (see section 4.4.1.1.21), “Radio-electronic products” (see section 4.4.1.1.23), “Cosmetics, household chemicals, and personal hygiene products” (see section 4.4.1.1.26), “Veterinary medicines” (see section 4.4.1.1.28), “Building materials” (see section 4.4.1.1.29), “Engine oils” (see section 4.4.1.1.35), “Radio-electronic products. Laptops and smartphones” (see section 4.4.1.1.40), “Real fur” (see section 4.4.1.1.47).
63	22.06.2026	5.0	The following modifications were introduced: — The MC structure description has been updated to include information on the actual weight for the “Confectionery products” goods group (see section 8.37); — In the “UtilisationReport” object extension for the “Dairy products” goods group, the description of the “batchNumber” parameter format has been updated; and a note on how to specify this parameter has been added (see section 4.4.11.1.3); — In the “UtilisationReport” object extension for the “Medical products” goods group, the note on indication of the information in the optional “seriesNumber” and “batchNumber” attributes or in the fifth group of the marking code structure has been updated (see section 4.4.11.1.10); — Information on indication of the actual weight of a product unit has been added to the description of the application report extension for the “Confectionery products” goods group (see section 4.4.11.1.32); — The “MC template” guide has been updated (see section 5.3.1.4). The values in the guide have been aligned with the requirements of section 8.
62	26.05.2026	4.64	The following modifications were introduced: — Information about the planned transition from UUID v4 to v8 has been removed (see section 4.4); — The “productionLineId” parameter has been removed from the REST request example for the MC aggregation report and marked as deprecated for the following goods groups: “Tobacco products” (see section 4.4.10.1.1), “Alternative tobacco products” (see section 4.4.10.1.3), “Nicotine products” (see section 4.4.10.1.6);

			— The “Pyrotechnic articles” goods group has been added to the list of goods groups specifying the serial number length (see section 4.4.1.1); — A list of attributes for creating and submitting a marking code emission order has been added for the “Pyrotechnic articles” goods group (see section 4.4.1.1.48); — The “Pyrotechnic articles” goods group has been added to the list of goods groups for sending an MC utilization report to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions has been added for the “Pyrotechnic articles” goods group (see section 4.4.11.1.43); — Information on the “Pyrotechnic articles” goods group has been added to the “MC templates” guide (see section 5.3.1.4); — Information on the “Pyrotechnic articles” goods group has been added to the “Marking code type” guide (see section 5.3.1.10); — Information on the “Pyrotechnic articles” goods group has been added to the “Goods Groups” guide (see section 5.3.1.16); — A description of the marking code structure and format has been added for the “Pyrotechnic articles” goods group (see section 8.48); — Information on availability of the “REMAINS” value for the “Engine oils” goods group has been removed from the description of the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — The experiment completion date for the first payment wave of the “Radio-electronic products. Electronic nicotine delivery systems” goods group has been extended. The new completion date is August 31, 2026 (previously May 31, 2026) (see section 4.4.1.1.39).
61	30.04.2026	4.63	The following modifications were introduced: — For the “Tobacco products”, “Alternative tobacco products”, and “Nicotine products” goods groups, the requirement for the “productionDate” parameter in the MC application report has been changed from optional to conditionally mandatory (see section 4.4.11.1.1, 4.4.11.1.4, 4.4.11.1.6); — For the “Beer, beer-based and low-alcohol beverages” goods group, the requirement for the “alcoholVolume”, “documentNumber”, “documentDate” parameters in the MC application report has been changed from optional to conditionally mandatory (see section 4.4.11.1.7); — For the “Beer, beer-based and low-alcohol beverages” goods group, the note on filling requirements for the “alcoholVolume”, “documentNumber”, and “documentDate” parameters in the MC application report has been updated (see section 4.4.11.1.7);

			— Error codes 300, 301, and 302 have been added to the list of marking code processing result codes for the application and rejection reports (see section 5.3.1.18).
60	24.04.2026	4.63	The following modifications were introduced: — The URL of the demo environment with GOST TLS support has been added to the OMS API methods (see section 4.4); — The code structure description has been updated for the “Radio-electronic products” goods group (see section 8.23); — Details on the pilot program for the eighth payment group have been added for the “Medical products” goods group (see section 4.4.1.1.10); — The fifth payment group has been added for the “Dairy products” goods group (see section 4.4.1.1.8); — The “Clothing items, bed, table, bath and kitchen linens” goods group has been renamed “Light industry” within the document; — For the “Beer, beer-based and low-alcohol beverages” goods group, a note on specifying the actual ethyl alcohol content in the MC application report has been added (see section 4.4.11.1.7); — For the “Tobacco products”, “Alternative tobacco products”, “Nicotine products” goods groups, a note on specifying the production date in the MC application report has been added (see section 4.4.11.1.1, 4.4.11.1.4, 4.4.11.1.6); — The “expireDate” parameter has been added to the response of the “Receiving an Authentication Token” method, a response example for the UUID token format has been updated (see section 9.3.2.2.2); — The new optional “expDateConditions” attribute (with expiration dates and storage condition indexes) has been added to the description of the application report structure for the “Confectionery products” goods group, along with usage notes and a REST request example (see section 4.4.11.1.32); — A typo has been fixed in the note for the MC order for the "Radio-electronic products" goods group, regarding the period of use of the method for releasing goods into circulation "REAPPLY" (see section 4.4.1.1.23).
59	08.04.2026	4.62	The following modifications were introduced: — URLs with GOST TLS support have been added to section “Methods of OMS API”.
58	26.03.2026	4.62	The following modifications were introduced: — Information about the planned transition from UUID v4 to v8 has been added (see section 4.4); — Request rate limits to the OMS-Cloud API have been updated (see section 4.4);

			— For all goods groups, the mandatory status of the “createMethodType” parameter has been changed; the parameter has been marked as deprecated in the request description of the “Create marking code emission order” method (see sections 4.4.1.1.2 – 4.4.1.1.47); — For the “Radio-electronic products” goods group, emission using the method of introduction into circulation, “Manufacture in the Russian Federation”, has been discontinued for goods codes of technical range (029) in the "Create marking code emission order" method (see section 4.4.1.1.23); — For the “Specialized food products and biologically active food additives” goods group, information about the launch of the fourth payment wave has been added to the MC order note (see section 4.4.1.1.15); — For the “Semi-finished and frozen food products” goods group, the application report structure description has been updated with: a new optional attribute “expDateConditions” (specifying shelf lives and storage condition indexes), filling instructions, and a REST request example (see section 4.4.11.1.41); — For the “Medical products” goods group, information on how to fill in the parameter when releaseMethodType = “REMAINS” has been added to the description of the “producer” attribute (INN of the goods card owner). Information has also been added to the notes on MC emission using the method of release of goods into circulation “Marking of remaining items” (see section 4.4.10.1.9); — For the “Medical products” goods group, the “REMAINS” value has been added to the description of the “Method of Goods Introduction into Circulation” guide, along with a note on the availability of the method of release of goods into circulation, “Marking of remaining items”, for the 10th payment wave (see section 5.3.1.1); — For the “Radio-electronic products. Laptops and smartphones” goods group, the “REAPPLY” value has been added to the description of the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — For the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group, information about availability of the “REMAINS” value has been removed from the description of the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — A note to the “Cancellation of unused MCs” guide has been updated (see section 5.3.1.12); — For the "Groceries" goods group, payment implementation start dates for payment waves 6, 7, 8, and 9 have been updated in the "Create marking code emission order" method (see section 4.4.1.1.33);

			— For the “Radio-electronic products. Laptops and smartphones” goods group, a new parameter “paymentType” has been added to the extension of the “Order” object as part of the payment implementation. Notes on payment implementation have been added to the extension description (see section 4.4.1.1.40); — For the “Radio-electronic products. Laptops and smartphones” goods group, information on how to fill in the parameter when releaseMethodType = “REAPPLY” has been added to the description of the “producer” attribute (INN of the goods card owner). Notes on MC emission using the method of release of goods into circulation “Marking outside production or import” have also been added (see section 4.4.1.1.40); — For the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group, information on how to fill in the parameter when releaseMethodType = “REMAINS” has been removed from the description of the “producer” attribute (INN of the goods card owner). Information on a method of release of goods into circulation “Marking of remaining items” has been removed from the MC emission note (see section 4.4.1.1.16).
57	04.03.2026	4.61	The following modifications were introduced: — The description of the "Re-obtain marking codes from marking code order" method has been corrected and the method restriction has been supplemented (see section 4.4.6); — The mandatory status of the "productionDate" parameter has been changed and a note on how to fill in the parameter has been added to the "Send Report on MC Utilization (Application)" method for the "Radio-electronic products" goods group (see section 4.4.11.1.15);
56	24.02.2026	4.61	The following modifications were introduced: — For the “Radio-electronic products” goods group, the payment start dates have been updated for the first and third waves in the “Create marking code emission order” method (see sections 4.4.1.1.23, 5.3.1.12); — For the “Clothing items, bed, table, bath and kitchen linens” goods group, the deadline for completion of marking of remaining items has been changed for the third payment group (see section 5.3.1.1); — For the “Clothing items, bed, table, bath and kitchen linens” goods group, a marking period for remaining items has been added for the fourth payment group (see section 5.3.1.1), a clarification on the use of the cards of short set of attributes has been added (see section 4.4.1.1.2); — Within the document the goods group name has been changed from “Products made of real fur” to “Real fur”; — The “Meat products” and “Polymer pipes” goods groups have been added to the “SET” value in the description of the “Marking code type” guide (see section 5.3.1.10, 8.36, 8.41);

			— For the “Medical products” goods group, the end date of the experiment has been changed for the fourth payment wave from March 1, 2026 to August 31, 2026 (see section 4.4.1.1.10); — For the “Semi-finished and frozen food products” goods group, the MC structure description has been supplemented with information on actual weight (see sections 4.4.11.1.41, 8.46); — Two parameters, “kpp” and “fiasId”, have been added to the “UtilisationReport” object extension for the “Radio-electronic products. Laptops and smartphones” goods group; the REST request example has been updated; and a note on how to receive information about production sites has been added (see sections 4.4.11.1.35, 4.4.17); — Information on extended requirements for the Authorization parameter has been added to the “Get an ID of GCP’s profile” method (see section 4.4.28); — The “Appendix” has been removed from the “LIST OF APPLICATION PROGRAMMING INTERFACE CHANGES” section to update the section name in the table of contents; — Call frequency limit has been clarified for the OMS Cloud API (see section 4.4); — The Single minimum price (the SMP) for 2026 has been updated (see section 4.4.1.1.1); — The list of goods groups has been updated in the description of the “Receiving the business places” method (see section 4.4.17); — A new parameter, unitedToken (Indicator that a single token is requested as uuid), has been added to the description of the “Receiving an Authentication Token” method (see section 9.3.2.2); — A clarification has been added to the notes for the “Games and toys for children” and “Building materials” goods groups: emission of marking codes using the REAPPLY method of introduction into circulation is permitted only when the payment type is “Payment upon emission” (see section 4.4.1.1.21, 4.4.11.1.29).
55	02.02.2026	4.60	The following modifications were introduced: — For the “Radio-electronic products” goods group, the description of the application report has been corrected for the goods separation operation in the “Send Report on MC Utilization (Application)” method (see section 4.4.11.1.15);
54	27.01.2026	4.60	The following modifications were introduced: — Information about the launch of the tenth payment wave has been added to the note of the MC order for the “Medical products” goods group (see section 4.4.1.1.10); — A new parameter “paymentType” has been added to the extension of the “Order” object for the “Confectionery products” goods group as part of the payment launch. Notes on the payment launch have been added to the extension description (see section 4.4.1.1.37);

			— A new parameter “paymentType” has been added to the extension of the “Order” object for the “Meat products” goods group as part of the payment launch. Notes on the payment launch have been added to the extension description (see section 4.4.1.1.41); — A new allowed value has been added for the “utilisationType” parameter: DIVISIONMARK (see section 4.4.11.1); — Two parameters, “kpp” and “fiasId”, have been added to the “UtilisationReport” object extension for radio-electronic products; REST request examples and notes have been corrected (see section 4.4.11.1.15); — A description of the goods separation operation has been added to the list of the attributes for the “Radio-electronic products” goods group (see section 4.4.11.1.15); — Information about a new fee implementation group has been added for the “Dairy products” goods group (see section 4.4.1.1.8); — Information about a new fee implementation group has been added for the “Canned foods” goods group (see section 4.4.1.1.27); — Information on shelf life has been added for the “Confectionery products”, “Meat products” goods groups to the guide “Cancellation of unused MCs” (see section 5.3.1.12); — The launch dates for the “REAPPLY” value have been updated for the goods groups in the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — The list of goods code prefixes (prefix 004 has been added to 046) that determine the local range has been expanded in the notes of the goods groups in the “Create marking code emission order” method (see section 4.4.1); — The note on verification of the MC order for the “Nicotine products” goods group regarding compliance with the license for sets has been updated (see section 4.4.1.1.14).
53	19.01.2026	4.59	The following modifications were introduced: — Information on shelf life has been added to the “Cancellation of unused MCs” guide for the “Juice products and non-alcoholic beverages”, “Building materials”, “Games and toys for children”, “Radio-electronic products. Electronic nicotine delivery systems”, “Radio-electronic products. Laptops and smartphones” goods groups (see section 5.3.1.12).
52	29.12.2025	4.59	The following modifications were introduced:

			— Information on how to fill in the parameter when releaseMethodType = “REMAINS” has been added for the “Engine oils” goods group to the description of the “producer” attribute (INN of the goods card owner). Information has been added to the MC emission notes on the method of release of goods into circulation “Marking of remaining items” (see section 4.4.1.1.35); — The “REMAINS” value for the “Engine oils” goods group has been added to the description of the guide “Method of Goods Introduction into Circulation” (see section 5.3.1.1).
51	17.12.2025	4.59	The following modifications were introduced: — A name of the goods group has been changed from “Biologically active food additives” to “Specialized food products and biologically active food additives”; — A description of the operation of marking of goods from the composition of disaggregated set has been added to the list of attributes for the “Radio-electronic products” goods group (see section 4.4.11.1.15); — A description of the operation of marking of goods from the composition of disaggregated set has been added to the list of attributes for the “Games and toys for children” goods group (see section 4.4.11.1.22); — For the “Meat products” goods group, a new optional attribute “expDateConditions” with indication of shelf lives and storage condition indexes has been added to the description of the application report structure, filling instructions and the REST request example have been added as well (see section 4.4.11.1.36); — A serial number length for templateId=36 and templateId=37 templates of the “Radio-electronic products” goods group has been changed in the “MC templates” guide (see section 5.3.1.4); — The information on serial number length has been updated, a request example has been updated as well for the “Radio-electronic products” goods group in the “Create marking code emission order” method (see section 4.4.1.1, 4.4.1.1.23); — The request example for the “Radio-electronic products” goods group has been updated for the “Send Report on MC Aggregation” method (see section 4.4.10.1.11); — The request example for the “Radio-electronic products” goods group has been updated for the “Send Report on MC Utilization (Application)” method (see section 4.4.11.1.15); — The serial number length has been changed in the description of marking codes structure and format for the “Radio-electronic products” goods group (see section 8.23); — The “omsId” and “orderId” optional parameters have been added to the response of the “Get a status of MC array from the order” method (see section 4.4.2);

			— The “Products made of real fur” goods group has been added to the list of goods groups with indication of the serial number length (see section 4.4.1.1); — A list of attributes for creating and submitting a marking code emission order has been added for the “Products made of real fur” goods group (see section 4.4.1.1.47); — The “Products made of real fur” goods group has been added to the list of goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of extensions of the “UtilisationReport” object has been added for the “Products made of real fur” goods group (see section 4.4.11.1.42); — Information on the “Products made of real fur” goods group has been added to the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — Information on the “Products made of real fur” goods group has been added to the “MC templates” guide (see section 5.3.1.4); — Information on the “Products made of real fur” goods group has been added to the “Marking code type” guide (see section 5.3.1.10); — Information on the “Products made of real fur” goods group has been added to the guide “Cancellation of unused MCs” (see section 5.3.1.12); — Information on the “Products made of real fur” goods group has been added to the “Goods Groups” guide (see section 5.3.1.16); — A description of the marking code structure and format has been added for the “Products made of real fur” goods group (see section 8.47); — The note on how to fill in the “UtilisationReport” parameter has been updated for the “Building materials” goods group (see section 4.4.11.1.24); — Information on the seventh fee implementation group has been updated for the “Medical products” goods group (see section 4.4.1.1.10).
50	02.12.2025	4.58	The following modifications were introduced: — Information about a new payment group for the “Dairy products” goods group has been removed (see section 4.4.1.1.8); — Information about a new payment group for the “Canned foods” goods group has been removed (see section 4.4.1.1.27); — The “role” parameter has been removed from the REST request example in the method “Getting a list of Service Providers”; the mandatory status of the “role” parameter has been changed, and the parameter has been marked as deprecated (see section 4.4.14).

49	01.12.2025	4.58	The following modifications were introduced: — Information on how to fill in the parameter when releaseMethodType = “REMARK” has been added to the description of the “producer” attribute (INN of the goods card owner) for the “Perfume and Eau de Toilette” goods group. Notes on MC emission for the “Remarking” method of release of goods into circulation have been added (see section 4.4.1.1.5). — Information about a new payment group has been added for the “Dairy products” goods group (see section 4.4.1.1.8); — Information about a new payment group has been added for the “Medical products” goods group (see section 4.4.1.1.10); — Information about a new payment group has been added for the “Canned foods” goods group (see section 4.4.1.1.27); — Information about a new payment group has been added for the “Veterinary medicines” goods group (see section 4.4.1.1.28); — The “Semi-finished and frozen food products” goods group has been added to the list of goods groups with indication of the serial number length (see section 4.4.1.1); — The list of attributes for requesting the creation and submission of an order for MC emission has been added for the “Semi-finished and frozen food products” goods group (see section 4.4.1.1.46); — The “Semi-finished and frozen food products” goods group has been added to the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — The list of the “UtilisationReport” object extensions has been added for the “Semi-finished and frozen food products” goods group (see section 4.4.11.1.41); — Information on the “Semi-finished and frozen food products” goods group has been added to the “MC templates” guide (see section 5.3.1.4); — Information on the “Semi-finished and frozen food products” goods group has been added to the “Marking code type” guide (see section 5.3.1.10); — Information on the “Semi-finished and frozen food products” goods group has been added to the “Goods Groups” guide (see section 5.3.1.16); — The description of the marking code structure and format has been added for the “Semi-finished and frozen food products” goods group (see section 8.46); — The note on filling in the “expirationDate” parameter has been expanded for the “Cosmetics, household chemicals, and personal hygiene products” goods group (see section 4.4.11.1.19);

			— Information on how to fill in the parameter when releaseMethodType = “REMAINS” has been removed from the description of the “producer” attribute (INN of the goods card owner) for the “Engine oils” goods group. Information on a method of release of goods into circulation “Marking of remaining items” has been removed from the MC emission note (see section 4.4.1.1.35). — Information on availability of the “REMAINS” value for the “Engine oils” goods group has been removed from the description of the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — The description on how to submit an application report for the operation of marking of goods from the composition of disaggregated set has been corrected for the “Cosmetics, household chemicals, and personal hygiene products” goods group (see section 4.4.11.1.19); — The note to the “Cancellation of unused MCs” guide has been updated (see section 5.3.1.12); — Information on how to fill in the parameter when releaseMethodType = “REMAINS” has been added to the description of the “producer” attribute (INN of the goods card owner) for the “Biologically active food additives” goods group. Information on a method of release of goods into circulation “Marking of remaining items” has been added to the MC emission notes (see section 4.4.1.1.15). — Information on availability of the “REMAINS” value for the “Biologically active food additives” goods group has been added to the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — The description of the structure of the application report has been updated for the “Cosmetics, household chemicals, and personal hygiene products” goods group (see section 4.4.11.1.19).
48	24.10.2025	4.57	The following modifications were introduced: — A new allowed value, SPLITMARK, has been added for the “utilisationType” parameter (see section 4.4.11.1); — The list of attributes for the “Cosmetics, household chemicals, and personal hygiene products” goods group now includes a description of the operation of marking of goods from the composition of disaggregated set (see section 4.4.11.1.19); — The note to the request of the “Send Report on MC Utilization (Application)” method has been updated to include information about transfer of the actual weight in the MC structure for the “Meat products” goods group (see section 4.4.11.1); — The description of the application report extension for the “Meat products” goods group now includes information on how to indicate the actual weight of the product unit (see section 4.4.11.1.36);

			— In the “MC templates” guide the description of the MC structure has been supplemented for the “Meat products” goods group with the information about indication of the application identifier with actual weight (see section 5.3.1.4); — The description of the MC structure has been supplemented for the “Meat products” goods group with the information about the actual weight (see section 8.41); — For the “Radio-electronic products” goods group, the fee note has been updated: information regarding Payment Group 2 for GTINs has been removed and the fee implementation start date for Payment Groups 1 and 3 have been revised (see section 4.4.1.1.23); — The description of the batchNumber parameter format has been updated (see section 4.4.11.1.3); — The “Home and kitchen goods”, “Industrial equipment” and “Fertilizers in consumer packaging” goods groups have been added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the attributes to request creation and sending of the order for MC emission has been added for the “Home and kitchen goods” (see section 4.4.1.1.43), “Industrial equipment” (see section 4.4.1.1.44) and “Fertilizers in consumer packaging” (see section 4.4.1.1.45); — The “Home and kitchen goods”, “Industrial equipment” and “Fertilizers in consumer packaging” goods groups have been added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of extensions of the “UtilisationReport” object has been added for the “Home and kitchen goods” (see section 4.4.11.1.38), “Industrial equipment” (see section 4.4.11.1.39) and “Fertilizers in consumer packaging” goods groups (see section 4.4.11.1.40); — The information on the “Home and kitchen goods”, “Industrial equipment” and “Fertilizers in consumer packaging” goods groups has been added into the “MC templates” guide (see section 5.3.1.4); — The information on the “Home and kitchen goods”, “Industrial equipment” and “Fertilizers in consumer packaging” goods groups has been added into the “Marking code type” guide (see section 5.3.1.10); — The information on the “Home and kitchen goods”, “Industrial equipment” and “Fertilizers in consumer packaging” goods groups has been added into the “Goods Groups” guide (see section 5.3.1.16); — The description of the marking code structure and format has been added for the “Home and kitchen goods” goods group (see section 8.43); — The description of the marking code structure and format has been added for the “Industrial equipment” goods group (see section 8.44);

			— The description of the marking code structure and format has been added for the “Fertilizers in consumer packaging” goods group (see section 8.45); — A new method “Get information on MC orders by filters” has been added (see section 4.4.29); — A date from which marking of the remaining items will be unavailable for the 3rd wave of payment for the “Clothing items, bed, table, bath and kitchen linen” goods group, has been changed (see section 5.3.1.1);
47	22.09.2025	4.56	The following modifications were introduced: — The following goods groups have been added to the REAPPLY value (“Marking outside production or import”) in the guide “Method of Goods Introduction into Circulation” (releaseMethodType)”: “Building materials”, “Games and toys for children”, “Bicycles and bicycle frames” and “Biologically active food additives” goods groups (see section 5.3.1.1); — For the “Bicycles and bicycle frames” goods group, information on how to fill in the parameter (when releaseMethodType = “REAPPLY”) has been added into the description of the “producer” attribute (INN of the goods card owner). MC emission notes of a method of release of goods into circulation “Marking outside production or import” have been added. Information about marking of remaining items has been removed due to feature deactivation (see section 4.4.1.1.9). — For the “Biologically active food additives” goods group, information on how to fill in the parameter (when releaseMethodType = “REAPPLY”) has been added into the description of the “producer” attribute (INN of the goods card owner). MC emission notes of a method of release of goods into circulation “Marking outside of production or import” have been added (see section 4.4.1.1.15). — The “producer” attribute (INN of the goods card owner) and MC emission notes of a method of release of goods into circulation “Marking outside production or import” have been added for the “Building materials” (see section 4.4.1.1.29) and “Games and toys for children” (see section 4.4.1.1.21) goods groups. — Information about a new fee implementation group has been added for the “Medical products” goods group (see section 4.4.1.1.10); — Information about a new fee implementation group and about an experiment on the “Cosmetics, household chemicals, and personal hygiene products” goods group has been added (see section 4.4.1.1.26); — Information about new fee implementation groups and an experiment on the “Groceries” goods group has been added (see section 4.4.1.1.33);

			— For the “Games and toys for children” goods group, a new parameter “paymentType” has been added into an extension of the “Order” object as part of the fee implementation. Notes regarding fee implementation have been added to the extensions description (see section 4.4.1.1.21); — For the “Building materials” goods group, a new parameter “paymentType” has been added into an extension of the “Order” object as part of the fee implementation. Notes regarding fee implementation have been added to the extension description (see section 4.4.1.1.29); — The serial number length has been updated for template templateId=70 of the “Radio electronic products. Electronic nicotine delivery systems” goods group in the “MC templates” guide (see section 5.3.1.4); — An example of the request has been updated for the “Radio electronic products. Electronic nicotine delivery systems” goods group in the “Create marking code emission order” method (see section 4.4.1.1.39); — An example of the request has been updated for the “Radio electronic products. Electronic nicotine delivery systems” goods group in the “Send Report on MC Utilization (Application)” method (see section 4.4.1.1.34); — The serial number length has been updated in the description of the marking code structure and format for the “Radio electronic products. Electronic nicotine delivery systems” goods group (see section 8.39); — A note for the “Medical products” goods group has been removed from the “Method of Goods Introduction into Circulation” guide (releaseMethodType), and a value of the goods group has been removed as well for REMAINS in in view of remaining items marking discontinuation (see section 5.3.1.1); — For the “Medical products” goods group, the releaseMethodType= REMAINS value has been removed from the MC issuance request description (see section 4.4.1.1.10); — The list of available values has been updated for the utilisationType parameter in the “UtilisationReport” object structure; and a note on how to fill the parameter has been updated as well (see section 4.4.11.1); — For the “Cosmetics, household chemicals, and personal hygiene products” goods group, the “participantId” parameter has been added into a list of the attributes; information about conditions of submission of the application report for the remarking operation has been added as well (see section 4.4.11.1.19); — The condition on how to fill in the “expirationDate” parameter has been added into the note for the “Cosmetics, household chemicals, and personal hygiene products” goods group (see section 4.4.11.1.19).
46	03.09.2025	4.55	The following modifications were introduced:

			— Information about launch of payment was changed in the note of the MC order for the “Groceries” goods group (4.4.1.1.33);
45	25.08.2025	4.55	The following modifications were introduced: — A name of the goods group was changed from “Perfumes and toilet preparations and household chemicals” to “Cosmetics, household chemicals, and personal hygiene products”; — A note on automatic annulling of unused MCs upon expiration of validity periods has been updated (see section 5.3.1.12); — A note about the ability to mark remaining items for goods cards with a short set of attributes for a marking code type — “UNIT” has been added for the “Clothing items, bed, table, bath and kitchen linens” goods group (see section 4.4.1.1.2); — The “Meat products” and “Feed additives” goods groups were added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the attributes to request creation and sending of the order for MC emission has been added for the “Meat products” (see section 4.4.1.1.41) and “Feed additives” (see section 4.4.1.1.42) goods groups; — The “Meat products” and “Feed additives” goods groups have been added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of extensions of the “UtilisationReport” object has been added for the “Meat products” (see section 4.4.11.1.36) and “Feed additives” (see section 4.4.11.1.37) goods groups; — Information on the “Meat products” and “Feed additives” goods groups has been added into the “MC Templates” guide (see section 5.3.1.4); — Information on the “Meat products” and “Feed additives” goods groups has been added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Meat products” and “Feed additives” goods groups has been added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format has been added for the “Meat products” goods group (see section 8.41); — A description of the marking code structure and format has been added for the “Feed additives” goods group (see section 8.42); — The “utilisationType” optional parameter has been added into examples for the “REPORT_UTILIZE” receipt (see section 10.1.2) — The “REPORT_SURPLUS” value has been added into the “Types of receipts” guide (see 5.3.1.14) — Events have been added for the receipt of the “REPORT_SURPLUS” type into the “Types of events” guide (see 5.3.1.15)

			— A description of the receipt with events of “REPORT_SURPLUS” type has been added (see 10.1.9)
44	01.08.2025	4.54	The following modifications were introduced: — The “Engine oils” goods group was added to the REAPPLY value (“Marking outside production or import”) in the guide “Method of Goods Introduction into Circulation” (releaseMethodType) (see section 5.3.1.1); — Information on how to fill in the parameter when releaseMethodType = “REAPPLY” was added into the description of the “producer” attribute (INN of the goods card owner). Notes of MC emission on a method of release of goods into circulation “Marking outside production or import” were added (see section 4.4.1.1.35).
43	14.07.2025	4.53	The following modifications were introduced: — Information about an experiment on the “Biologically active food additives” goods group was added (see section 4.4.1.1.15); — Information about an experiment on the “Perfumes and toilet preparations and household chemicals” goods group was added (see section 4.4.1.1.26); — Information about an experiment on the “Groceries” goods group was added (see section 4.4.1.1.33); — A name of the document was changed from “Notification of acceptance of the MCs on account” to “Notification of acceptance of ICs for record-keeping purposes” (see sections 4.4.12, 4.4.21, 4.4.23, 4.4.24); — Information about the ability to specify a variable characteristic (quantity, length, weigh and volume) of products in the marking code structure (templateId=36, templateId=37) for the “Radio-electronic products” goods group was added into the “Send Report on MC Utilization (Application)” method (see section 4.4.11.1.15); — The information about allowed application identifiers (30, 310Y, 311Y, 335Y) for the “Radio-electronic products” goods group was added into the “MC templates” guide (see section 5.3.1.4); — A description of allowed application identifiers (30, 310Y, 311Y, 335Y) for the “Radio-electronic products” goods group was added into the description of the MC template (see section 8.23);
42	24.06.2025	4.52	The following modifications were introduced: — A length of the shipping package of the SSCC format was corrected to 20 numeric symbols (including GS1 AI 00 application identifier) for all goods groups in the aggregation report (see section 4.4.10.1); — Information about launch of the third wave of payment was added to a note of the MC order for the “Biologically active food additives” goods group (4.4.1.1.15);

			— Information about launch of the fourth wave of payment was added to a note of the MC order for the “Perfumes and toilet preparations and household chemicals” goods group (4.4.1.1.26); — Information about launch of the third, fourth and fifth waves of payment was added to a note of the MC order for the “Groceries” goods group (4.4.1.1.33); — The “Radio-electronic products. Laptops and smartphones” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Radio-electronic products. Laptops and smartphones” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.40); — The “Radio-electronic products. Laptops and smartphones” goods group was added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Radio-electronic products. Laptops and smartphones” goods group (see section 4.4.11.1.35); — Information on the “Radio-electronic products. Laptops and smartphones” goods group was added into the “MC templates” guide (see section 5.3.1.4); — Information on the “Radio-electronic products. Laptops and smartphones” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Radio-electronic products. Laptops and smartphones” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Radio-electronic products. Laptops and smartphones” goods group (see section 8.40).
41	28.05.2025	4.51	The following modifications were introduced: — A description of unavailability of MC emission for the sets for the “Marking of remaining items” method of introduction into circulation was deleted from the note for the “Engine oils” goods group (see section 4.4.1.1.35); — A single minimum price for the “Tobacco products” goods group for the period of 2024 was deleted (see section 4.4.1.1.1); — The “Radio-electronic products. Electronic nicotine delivery systems” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Radio-electronic products. Electronic nicotine delivery systems” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.39);

			— The “Radio-electronic products. Electronic nicotine delivery systems” goods group was added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Radio-electronic products. Electronic nicotine delivery systems” goods group (see section 4.4.11.1.34); — Information on the “Radio-electronic products. Electronic nicotine delivery systems” goods group was added into the “MC templates” guide (see section 5.3.1.4); — Information on the “Radio-electronic products. Electronic nicotine delivery systems” goods group was added into the “Marking code type” guide (see section 5.3.1.10); — Information on the “Radio-electronic products. Electronic nicotine delivery systems” goods group was added into the “Goods Groups” guide (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Radio-electronic products. Electronic nicotine delivery systems” goods group (see section 8.39); — Information on the possibility of signing in a user interface (if there is no signature in the API request) was deleted (see section 2.3.1); — Information about the “Meat” goods group was deleted from the document.
40	28.04.2025	4.50	The following modifications were introduced: — The “Heaters” and “Bicycles and bicycle frames” goods groups were added for the “GROUP” value into description of the “Marking code type” guide (see section 5.3.1.10); — A description of the group packages was added for the MC template for the “Heaters” goods group into description of the marking codes structure and format (see section 8.32); — A description of the group packages was added for the MC template for the “Bicycles and bicycle frames” goods group into description of the marking codes structure and format (see section 8.9); — Length and format of the “batchNumber” parameter (Lot number) was changed for the “Dairy products” goods group (see section 4.4.11.1.3); — The “Radio-electronic products” goods group was added to the REAPPLY value (“Marking outside production or import”) in the guide “Method of Goods Introduction into Circulation” (releaseMethodType) (see section 5.3.1.1); — A new attribute - “producer” (“INN of the goods card owner”) was added into the “OrderProduct” object for the “Radio-electronic products” goods group. The attribute is available for the releaseMethodType = “REAPPLY”. Notes of MC emission on a method of relase of goods into circulation “Marking outside of production or import” were added (see section 4.4.1.1.23);

			— Information about launch of the fourth fee implementation group of the GTIN was added into a note for the “Radio-electronic products” goods group (see section 4.4.1.1.23); — A note about a possibility to mark remaining items for the goods cards with a short set of attributes for range 029 was added for the “Clothing items, bed, table, bath and kitchen linens” goods group (see section 4.4.1.1.2); — The EXHAUSTED status was removed from a requirement of 100 active orders from a description of the “Create marking code emission order” method (see section 4.4.1); — Information about the number of the aggregated identification codes or shipping packages was added into a marking codes aggregation report (see section 3.1); — Information about marking of the remaining items of the “Bicycles and bicycle frames” goods group was deleted from the “Method of Goods Introduction into Circulation” guide (releaseMethodType) (see section 5.3.1.1); — Information about marking of the remaining items of the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group for the first wave of payment was removed from a note to the “Method of Goods Introduction into Circulation” guide (releaseMethodType) (see section 5.3.1.1); — The “Engine oils” goods group was added for the “REMAINS” value into description of the guide “Method of Goods Introduction into Circulation”, and a note on a period of availability was added as well (see section 5.3.1.1); — A new parameter - “producer” was added into an extension of the “OrderProduct” object for “Engine oils” goods group; also, notes were added as part of launch of marking of the remaining items (see section 4.4.1.1.35).
39	27.03.2025	4.49	The following modifications were introduced: — “Printed goods” and “Radio-electronic products” goods groups were added for the “SET” value, “Groceries” goods group was added for the “GROUP” value into the description of the “Marking code type” guide (see section 5.3.1.10); — A description of the sets was added for the MC template into description of the marking codes structure and format for the “Printed goods” goods group (see section 8.31); — A description of the sets was added for the MC template into description of the marking codes structure and format for the “Radio-electronic products” goods group (see section 8.23); — A description of the sets was added for the MC template into description of the marking codes structure and format for the “Confectionery products” goods group (see section 8.37);

			— Information on restriction of the order on methods of introduction into circulation for participants that have “Wholesale trading” and “Retail and other” roles was added into a note to a description of the order structure for the “Beer, beer-based and low-alcohol beverages” goods group (4.4.1.1.13); — The “Perfumes and toilet preparations and household chemicals” goods group was added to a value of REAPPLY - “Marking outside of production or import” in the “Method of Goods Introduction into Circulation” guide (releaseMethodType) (see section 5.3.1.1); — A new attribute - “producer” (“INN of the goods card owner”) was added into the “OrderProduct” object for the “Perfumes and toilet preparations and household chemicals” goods group. The attribute is available for the releaseMethodType = “REAPPLY”. Notes of MC emission on a method of introduction of goods into circulation “Marking outside of production or import” were added (see section 4.4.1.1.26); — A new method - “Send a notification of acceptance of the MCs on account” was added. The method is available for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.12); — Schemes of getting a client token of the OMS API by means of TT GIS and MDLP IS single authentication methods were deleted; and a sequence of receiving a client token was corrected (see section 9).
38	27.02.2025	4.48	The following modifications were introduced: — The “Auto parts and components for vehicles” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Auto parts and components for vehicles” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.38); — The “Auto parts and components for vehicles” goods group was added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Auto parts and components for vehicles” goods group (see section 4.4.11.1.33); — Information about the “Auto parts and components for vehicles” goods group was added into the guide “MC templates” (see section 5.3.1.4); — Information about the “Auto parts and components for vehicles” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information about the “Auto parts and components for vehicles” goods group was added into the guide “Goods Groups” (see section 5.3.1.16);

			— A description of the marking code structure and format was added for the “Auto parts and components for vehicles” goods group (see section 8.38); — A date of closing the remaining items for the third wave of payment (paymentGroup=3 in a goods card) was changed, and information about marking of remaining items for the fifth wave of payment (paymentGroup=5 in a goods card) was added for the “Medical products” goods group (see section 5.3.1.1); — A description of the date of the start of remarking was deleted from a note for the “Non-alcoholic beer” goods group (see section 5.3.1.1); — A date of closing the remaining items for the first wave of payment (paymentGroup=1 in a goods card) was indicated for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group (see section 5.3.1.1); — Information was deleted from a note on marking of remaining items for the “Biologically active food additives” goods group (see section 4.4.1.1.15); — A description was changed to “Made in the Russian Federation” for the PRODUCTION value of the guide “Method of Goods Introduction into Circulation” releaseMethodType (see section 5.3.1.1); — A new optional attribute “expDateConditions” with indication of shelf life and storage condition indexes was added into a description of the application report structure for the “Groceries” goods group, notes on conditions of filling and the REST request example were added as well (see section 4.4.11.1.28); — Information about discontinuation of support of the MCs that have been emitted by using templateId=18 and have 13-character serial number, was added into a note for the “Beer, beer-based and low-alcohol beverages” goods group (see section 5.3.1.4); — A start date for payment for the “Radio-electronic products” goods group was changed for GTIN of the first fee implementation group (see section 4.4.1.1.23); — A new parameter “paymentType” was added into an extension of the “Order” object for the “Groceries” goods group as part of launch of payment. Notes on payment launch were added to a description of the extension (see section 4.4.1.1.33); — A new parameter “paymentType” was added into an extension of the “Order” object for the “Engine oils” goods group as part of launch of payment. Notes on payment launch were added to a description of the extension (see section 4.4.1.1.35); — In the guide “Cancellation of unused MCs” information about MC expiration dates was added for the “Groceries” and “Engine oils” goods groups; and a date of the start of payment was corrected for the “Radio-electronic products” goods group (see section 5.3.1.12);

			— Length of the application identifier 335Y was corrected for the “Beer, beer-based and low-alcohol beverages” and “Non-alcoholic beer” goods groups (see sections 4.4.11.1.7, 4.4.11.1.9, 8.13, 8.17).
37	29.01.2025	4.47	The following modifications were introduced: — A new parameter “paymentType” was added into an extension of the “Order” object for the “Radio-electronic products” goods group as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.23); — A new parameter “paymentType” was added into an extension of the “Order” object for the “Perfumes and toilet preparations and household chemicals” goods group as part of launch of payment. Notes on payment launch were added to a description of extensions (see section 4.4.1.1.26); — Information about the MC validity period was added for the “Radio-electronic products” and “Perfumes and toilet preparations and household chemicals” goods groups into the guide “Cancellation of unused MCs” (see section 5.3.1.12); — A new attribute - “alcoholVolume” (Actual ethyl alcohol content) and a note on its filling were added into the description of the attributes parameter of the “UtilisationReport” object for manufacturers of household chemicals (see section 4.4.11.1.19); — Information about limitations of length of the attributes (“batchNumber” and “seriesNumber”) was added into the description of the attributes parameter of the “UtilisationReport” object for manufacturers of medical products (see section 4.4.11.1.10); — A new value REAPPLY (“Marking outside of production or import”) was added into the guide “Method of Goods Introduction into Circulation” (releaseMethodType) (see section 5.3.1.1); — A new attribute - “producer” (“INN of the goods card owner”) was added into the “OrderProduct” object for the “Beer, beer-based and low-alcohol beverages” goods group. The attribute is available for the releaseMethodType = “REAPPLY”. Notes of MC emission on a method of relase of goods into circulation “Marking outside of production or import” were added (see section 4.4.1.1.13); — A new conditionally mandatory parameter - utilisationType and a note on its filling were added into the “UtilisationReport” object structure (see section 4.4.11.1); — Information about conditions of submission of the application report for a misgrading operation was added into a list of the attributes for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.11.1.7);

			— A description on allowed characters of application identifier 335Y was changed for the “Beer, beer-based and low-alcohol beverages” and “Non-alcoholic beer” goods groups in the description of the MC template (see section 8.13, 8.17); — A length of the serial number was changed for the templates of the “Cabling and wiring products” goods group in the “MC templates” guide (templateId) (see section 5.3.1.4); — The third group of data was changed to the fourth one for a consumer and group package for the “Alternative tobacco products” goods group in the description of the MC structure (see section 8.11.2, 8.11.3).
36	23.12.2024	4.46	The following modifications were introduced: — A length of the serial number was changed for the Pyrotechnic articles and fire safety and firefighting equipment goods group (see sections 4.4.1.1, 5.3.1.4, 8.30); — The “Confectionery products” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Confectionery products” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.37); — The “Confectionery products” goods group was added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Confectionery products” goods group (see section 4.4.11.1.32); — Information about the “Confectionery products” goods group was added into the guide “MC templates” (see section 5.3.1.4); — Information about the “Confectionery products” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information about the “Confectionery products” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Confectionery products” goods group (see section 8.37); — Information about the SMP for 2025 was added into the tobacco products order structure for the “mrp” attribute (see section 4.4.1.1.1); — Use of application identifier AI 3356 was deleted for the “Non-alcoholic beer” and “Beer, beer-based and low-alcohol beverages” goods groups; — A misprint in a line of filling of parameters of the “UtilisationReport” object was corrected for the manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.11.1.7).

35	28.11.2024	4.45	The following modifications were introduced: — A note on availability of the goods card of the technical range was added for the “Polymer pipes” goods group for a method of introduction into circulation - “Manufacture in the Russian Federation” (see section 4.4.1.1.36); — A note on availability of the goods card of the technical range was added for the “Cabling and wiring products” goods group for a method of introduction into circulation - “Manufacture in the Russian Federation” (see section 4.4.1.1.34); — A length of the serial number was changed for templates 60 and 61 for the “Engine oils” goods group (see sections 4.4.1.1.35, 4.4.11.1.30, 4.4.1.1, 8.35, 5.3.1.4) — A note on discontinuation of support of the MCs that have been emitted by using template 34 with 6-character serial number was corrected for the “Games and toys for children” goods group in an application report (see section 5.3.1.4); — Two parameters - “kpp” and “fiasId” were added for building materials into the “UtilisationReport” object extension; REST request examples and notes were corrected (see section 4.4.11.1.24); — The “Building materials” goods group was added into the description of the method (see section 4.4.17); — A description of the “productionDate” parameter was changed for manufacturers of pharmaceutical industry (see section 4.4.11.1.2).
34	15.11.2024	4.44	The following modifications were introduced: — A description of the third data group was corrected for the “Tobacco products” and “Nicotine products” goods groups (see section 8.1.1, 8.14.1, 8.14.2); — A description of the third data group was added for the “Alternative tobacco products” goods group (see section 8.11.2, 8.11.3); — A note was corrected in the application report for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.11.1.7).
33	12.11.2024	4.44	The following modifications were introduced: — The “exporterTaxpayerId” attribute was deleted from a REST request example in the MC order for the “Footwear” goods group (see section 4.4.1.1.3) and for the “Packaged water” goods group (see section 4.4.1.1.12); — Information about the beginning of availability of the method of introduction into circulation REMAINS was deleted for the “Medical products” and “Bicycles and bicycle frames” goods groups (see section 5.3.1.1);

			— Notes to the “Method of Goods Introduction into Circulation” guide were amended as follows: corrected information about marking of remaining items for the “Clothing items, bed, table, bath and kitchen linens” goods group, added information about availability of marking of remaining items for the “Bicycles and bicycle frames”, “Antiseptic/antibacterial skin cleansers and hand sanitizers” and “Medical products” goods groups (see section 5.3.1.1); — A link to a period of availability of marking of the remaining items was added for the “Clothing items, bed, table, bath and kitchen linens” goods group into the “producer” parameter of the “attributes” attribute of the “OrderProduct” object (see section 4.4.1.1.2); — A name of the goods group was corrected for the “Dairy products” goods group; and information about fee implementation groups was added into the note of the “Order” object (see section 4.4.1.1.8); — A link to a period of availability of marking of the remaining items was added into the “producer” parameter for the “Bicycles and bicycle frames” goods group; and a note on fee implementation groups of the “Order” object was corrected (see section 4.4.1.1.9); — A link to a period of availability of marking of the remaining items was added into the “producer” parameter of the “attributes” attribute of the “OrderProduct” object for the “Medical products” goods group; and a note on fee implementation groups of the “Order” object was corrected (see section 4.4.1.1.10); — Information about fee implementation groups was added into the note of the “Order” object for the “Packaged water” goods group (see section 4.4.1.1.12); — A note on fee implementation groups of the “Order” object was corrected for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.1.1.13); — REMAINS value was deleted for the “Biologically active food additives” goods group from the “producer” parameter of the “attributes” attribute of the “OrderProduct” object; and a note on fee implementation groups of the “Order” object was corrected (see section 4.4.1.1.15); — A name of the goods group was corrected for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group; and information about fee implementation groups was corrected in a note of the “Order” object (see section 4.4.1.1.16); — A note on groups of payment of the “Order” object was corrected for the “Pet foods” goods group (see section 4.4.1.1.17); — A note on fee implementation groups of the “Order” object was corrected for the “Seafood” goods group (see section 4.4.1.1.18);

			— A note on fee implementation groups of the “Order” object was corrected for the “Non-alcoholic beer” goods group (see section 4.4.1.1.19); — A note on fee implementation groups of the “Order” object was corrected for the “Juice products and non-alcoholic beverages” goods group (see section 4.4.1.1.20); — A note on fee implementation groups of the “Order” object was corrected for the “Vegetable oils” goods group (see section 4.4.1.1.25); — A note on fee implementation groups of the “Order” object was corrected for the “Canned foods” goods group (see section 4.4.1.1.27); — A note on fee implementation groups of the “Order” object was corrected for the “Veterinary medicines” goods group (see section 4.4.1.1.28); — A note on filling of actual volume was corrected in an application report for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.11.1.7); — A note on filling of actual volume was added in an application report for the “Non-alcoholic beer” goods group (see section 4.4.11.1.9); — Information about transfer of the actual volume in the MC structure was added for the “Non-alcoholic beer” goods group, and information about transfer of actual weight was added for the “Seafood” and “Pet foods” goods groups in a note to a request of the method “Send Report on MC Utilization (Application)” (see section 4.4.11.1); — Information about availability of the application report for the EEU Operator was deleted (see section 4.4.11); — Optional attributes were added into the UtilisationReport object for the “Beer, beer-based and low-alcohol beverages” goods group, and a note on mandatory status of filling of these attributes was added as well (see section 4.4.11.1.7); — The REMARK value was added into the “Method of Goods Introduction into Circulation” guide for the “Non-alcoholic beer” goods group; and a note on a date of launch of marking was added for this goods group as well (see section 5.3.1.1); — A description of the “producer” parameter transfered in the “attributes” attribute of the “OrderProduct” object was added; and a note on remarking of goods was added for the “Non-alcoholic beer” goods group (see section 4.4.1.1.19).
32	29.10.2024	4.44	The following modifications were introduced: — The “Non-alcoholic beer” and “Games and toys for children” goods groups were added for the “GROUP” value into description of the “Marking code type” guide (see section 5.3.1.10); — A note on filling in the expirationDate and productionDate parameters for the group packages was corrected for the “Games and toys for children” goods group (see section 4.4.11.1.22);

			— A description of the group packages was added for the MC template for the “Non-alcoholic beer” goods group into description of the marking codes structure and format (see section 8.17); — A description of the group packages was added for the MC template for the “Games and toys for children” goods group into description of the marking codes structure and format (see section 8.21); — The “Groceries”, “Perfumes and toilet preparations and household chemicals” and “Engine oils” goods groups were added for the “SET” value into description of the “Marking code type” guide (see section 5.3.1.10); — A note on filling in the expirationDate and productionDate parameters for sets was corrected for the “Groceries” goods group (see section 4.4.11.1.28); — A note on filling in the expirationDate and productionDate parameters for the group packages and sets was corrected for the “Perfumes and toilet preparations and household chemicals” goods group (see section 4.4.11.1.19); — A note on filling in the expirationDate and productionDate parameters for sets was corrected for the “Pyrotechnic articles and fire safety and firefighting equipment” goods group (see section 4.4.11.1.25); — A note on filling in the expirationDate and productionDate parameters for group packages and sets was corrected for the “Engine oils” goods group (see section 4.4.11.1.30); — A description of the sets was added for the MC template for the “Groceries” goods group into description of the marking codes structure and format (see section 8.33); — A description of the sets was added for the MC template for the “Perfumes and toilet preparations and household chemicals” goods group into description of the marking codes structure and format (see section 8.26); — A description of the sets was added for the MC template for the “Engine oils” goods group into description of the marking codes structure and format (see section 8.35); — The “Polymer pipes” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Polymer pipes” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.36); — The “Polymer pipes” goods group was added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Polymer pipes” goods group (see section 4.4.11.1.31); — Information about the “Polymer pipes” goods group was added into the guide “MC template” (see section 5.3.1.4);

			— Information about the “Polymer pipes” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information about the “Polymer pipes” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Polymer pipes” goods group (see section 8.36); — Information about availability of the values of the “Payment type” parameter was added for the “Canned foods” goods group for participants of the “Farmer” category (see section 4.4.1.1.27).
31	09.10.2024	4.43	The following modifications were introduced: — Information about start of remarking for the “Non-alcoholic beer” goods group was deleted from the guide “Method of Goods Introduction into Circulation” (see section 5.3.1.1); — Description of the “producer” parameter transferred in the “attributes” attribute of the “OrderProduct” object and notes on remarking of goods for the “Non-alcoholic beer” goods group were deleted (see section 4.4.1.1.19)
30	26.09.2024	4.43	The following modifications were introduced: — A list of auxiliary methods with a note on the need to close an order or suborder was added (see section 4.2); — A note on availability of payment upon emission for a farmer category was corrected for the “Dairy products” goods group for the attributes parameters of the “Order” object (see section 4.4.1.1.8); — Information about availability of GTINs of the fifth fee implementation group was added into a note of the attributes parameters of the “OrderProduct” object for the “Medical products” goods group (see section 4.4.1.1.10); — Information about start of marking of the remaining items for GTIN of the third fee implementation group was added into a note of the attributes parameters of the “OrderProduct” object for the “Medical products” goods group (see section 4.4.1.1.10); — A note on availability of payment upon emission from September 1, 2024 to the attributes parameters of the “Order” object was deleted for the “Packaged water” goods group (see section 4.4.1.1.12); — A note on support of the farmer attribute was added to the attributes parameters of the “Order” object for the “Canned foods” goods group (see section 4.4.1.1.27); — In the description of the values of the “Method of Goods Introduction into Circulation” guide for the “Clothing items, bed, table, bath and kitchen linens” goods group a note on marking of remaining items was added; and information about start of remarking for the “Non-alcoholic beer” goods group was added (see section 5.3.1.1);

			— The “Cabling and wiring products” and “Engine oils” goods groups were added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Cabling and wiring products” goods group attributes for a request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.34); — A list of the “Engine oils” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.35); — The “Cabling and wiring products” and “Engine oils” goods groups were added into a list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Cabling and wiring products” goods group (see section 4.4.11.1.29); — A list of the “UtilisationReport” object extensions was added for the “Engine oils” goods group (see section 4.4.11.1.30); — Information about the “Cabling and wiring products” and “Engine oils” goods groups was added into the “MC templates” guide (see section 5.3.1.4); — Information on the “Cabling and wiring products” and “Engine oils” goods groups was added into the “Marking code type” guide (see section 5.3.1.10); — Information on the “Cabling and wiring products” and “Engine oils” goods groups was added into the “Goods Groups” guide (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Cabling and wiring products” goods group (see section 8.34); — A description of the marking code structure and format was added for the “Engine oils” goods group (see section 8.35).
29	29.08.2024	4.42	The following modifications were introduced: — A note was corrected for a GCP of the “Farmer” category in terms of availability of the order with the “Payment upon emission” payment type (see section 4.4.1.1.8); — Information about indication of the actual weight of the unit of products was added into a description of the extension of the application report for the “Pet foods” goods group (see section 4.4.11.1.17); — A description of the MC structure was supplemented with information about the actual weight for the “Pet foods” goods group (see section 8.20). — A possibility to mark remaining items is being closed for the “Medical products” and “Clothing items, bed, table, bath and kitchen linens” goods groups (see section 5.3.1.1); — Information about a date of availability of payment upon emission for GTINs of the third fee implementation group was added for the “Medical products” goods group (see section 4.4.1.1.10);

			— A new parameter “paymentType” was added into an extension of the “Order” object for pet food manufacturers as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.17); — A new parameter - “paymentType” was added into an extension of the “Order” object for manufacturers of canned foods as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.27); — A new parameter - “paymentType” was added into an extension of the “Order” object for manufacturers of vegetable oils as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.25); — A new parameter - “paymentType” was added into an extension of the “Order” object for manufacturers of veterinary medicines as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.28); — A new parameter - “paymentType” was added into an extension of the “Order” object for manufacturers of non-alcoholic beer as part of launch of payment. Notes on payment launch were added to a description of extension (see section 4.4.1.1.19); — The “Pet foods”, “Canned foods”, “Vegetable oils”, “Veterinary medicines”, “Non-alcoholic beer” and “Seafood” and “Juice products and non-alcoholic beverages” goods groups (for which MCs are canceled after an expiration date) were added into the guide “Cancellation of unused MCs”, notes to this guide were corrected as well (see section 5.3.1.12); — A new parameter - “producer” (INN of the goods card owner) was added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object for the “Veterinary medicines” goods group, and notes on remarking of goods were added as well (see section 4.4.1.1.28); — The REMARK value was added into the guide “Method of Goods Introduction into Circulation” for the “Veterinary medicines” goods group (see section 5.3.1.1); — Two parameters - “kpp” and “fiasId” were added for non-alcoholic beer into the “UtilisationReport” object extension; REST request examples and notes were corrected (see section 4.4.11.1.9); — A new note to an application report was added for the “Beer, beer-based and low-alcohol beverages” goods group, as well as a note added previously was corrected (see section 4.4.11.1.7); — A description of the mrp parameter was corrected in the order for the “Tobacco products” goods group (see section 4.4.1.1.1);

			— An optional parameter – inn was added into a request of the method to get an authentication token (see section 9.3.2.2.1).
28	25.07.2024	4.41	The following modifications were introduced: — The “Canned foods”, “Pet foods”, “Seafood”, “Vegetable oils”, “Non-alcoholic beer” goods groups were added for the “SET” value into description of the “Marking code type” guide (see section 5.3.1.10); — A note on filling in the expirationDate and productionDate parameters was corrected for sets for the “Canned foods” goods group (see section 4.4.11.1.20); — A note on filling in the expirationDate and productionDate parameters was corrected for sets for the “Pet foods” goods group (see section 4.4.11.1.17); — A note on filling in the expirationDate and productionDate parameters was corrected for sets for the “Vegetable oils” goods group (see section 4.4.11.1.18); — A note on filling in the expirationDate and productionDate parameters was corrected for sets for the “Medical products” goods group (see section 4.4.11.1.10); — A note on filling in the expirationDate and productionDate parameters was corrected for sets for the “Non-alcoholic beer” goods group (see section 4.4.11.1.9); — A description of the sets was added for the MC template for the “Pet foods” goods group into description of the marking codes structure and format (see section 8.20); — A description of the sets was added for the MC template for the “Non-alcoholic beer” goods group into description of the marking codes structure and format (see section 8.17); — A description of the sets was added for the MC template for the “Canned foods” goods group into description of the marking codes structure and format (see section 8.27); — A description of the sets was added for the MC template for the “Vegetable oils” goods group into description of the marking codes structure and format (see section 8.25); — A description of the sets was added for the MC template for the “Medical products” goods group into description of the marking codes structure and format (see section 8.10); — A method of introduction into circulation - “REMARK” was added for manufacturers of the bicycles and bicycle frames into description of the “producer” parameter of the “OrderProduct” object; a note about remarking of goods was corrected as well (see section 4.4.1.1.9); — A note on the experiment timeframes was added for the “Medical products” goods group (see section 4.4.1.1.10); — The “productionLineId” parameter was deleted from the REST request example, mandatory status of the “productionLineId” parameter was changed in a description of the structure of the “Order” object extension, and this parameter was marked as deprecated for tobacco industry (see section 4.4.1.1.1);

			— The “productionLineId” parameter was deleted from the REST request example, mandatory status of the “productionLineId” parameter was changed in a description of the structure of the “Order” object extension, and this parameter was marked as deprecated for the alternative tobacco products (see section 4.4.1.1.11); — The “productionLineId” parameter was deleted from example of the REST request, mandatory status of the “productionLineId” parameter was changed in a description of the structure of extension of the “Order” object, and this parameter was marked as deprecated for the nicotine products (see section 4.4.1.1.14); — The “productionLineId” parameter was deleted from the REST request example of the report on MC utilization (application); this parameter was marked as deprecated for tobacco industry (see section 4.4.11.1.1), for alternative tobacco products (see section 4.4.11.1.11), for nicotine products (see section 4.4.11.1.6); — “See the note below” phrase was added into mandatory status of attributes (for which there is a note on filling in) of the report on MC utilization (application) (see section 4.4.11); — A note on filling in the “expirationDate” and “productionDate” parameters was corrected for manufacturers of household chemicals (see section 4.4.11.1.19); — A misprint in a description of the marking code structure was corrected for the “Photo cameras (except cine cameras), flash lights and flash bulbs” goods group (see section 8.6).
27	10.07.2024	4.40.5	The following modifications were introduced: — Mandatory status of the expDate, expDate72 and expDateConditions parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for dairy manufacturers (see section 4.4.11.1.3); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of packaged water (see section 4.4.11.1.5); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.11.1.7); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of biologically active food additives (see section 4.4.11.1.8);

			— Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of non-alcoholic beer (see section 4.4.11.1.9); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of medical products (see section 4.4.11.1.10); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of juice products and non-alcoholic beverages (see section 4.4.11.1.11); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers; and a note on a condition of filling was added (see section 4.4.11.1.12); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of seafood (see section 4.4.11.1.13); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for pet food manufacturers; and a note on a condition of filling was added (see section 4.4.11.1.17); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of vegetable oils (see section 4.4.11.1.18); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of household chemicals (see section 4.4.11.1.19); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of canned foods (see section 4.4.11.1.20); — Mandatory status of the expirationDate, seriesNumber and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of veterinary products (see section 4.4.11.1.21);

			— Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of games and toys for children (see section 4.4.11.1.22); — Mandatory status of the productionDate parameter was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of household chemicals (see section 4.4.11.1.23); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for building materials manufacturers (see section 4.4.11.1.24); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of pyrotechnic articles (see section 4.4.11.1.25); — Mandatory status of the productionDate parameter was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of the printed goods (see section 4.4.11.1.26); — Mandatory status of the productionDate parameter was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of the heaters (see section 4.4.11.1.27); — Mandatory status of the expirationDate and productionDate parameters was changed to conditionally mandatory in a description of the “UtilisationReport” object extension for manufacturers of groceries (see section 4.4.11.1.28).
26	27.06.2024	4.40.5	The following modifications were introduced: — Information about generation of marking codes with the MRP was added into a note of description of the “OrderProduct” object extension for the alternative tobacco products (see section 4.4.1.1.11); — A note about an array of disposed MCs was corrected for the “Tobacco products”, “Alternative tobacco products” and “Nicotine products” goods groups in a note of description of the “DropoutReport” object structure (see section 4.4.9.1); — A structure of the MC template was changed for the “Alternative tobacco products” goods group (see section 5.3.1.4)
25	27.06.2024	4.40	The following modifications were introduced:

			— An optional parameter “productionDate” was added into description of the “UtilisationReport” object extension for the “Alternative tobacco products” goods group (see section 4.4.11.1.4); — A new value of “GROUP” of the “cisType” parameter was added for the “Canned foods” goods group (see sections 5.3.1.10, 8.27); — A new value of “GROUP” of the “cisType” parameter was added for the “Perfumes and toilet preparations and household chemicals” goods group (see sections 5.3.1.10, 8.26); — A new value of “GROUP” of the “cisType” parameter was added for the “Vegetable oils” goods group (see sections 5.3.1.10, 8.25); — A note was added to the application report for the “Canned foods” goods group (see section 4.4.11.1.20); — A note was added to the application report for the “Perfumes and toilet preparations and household chemicals” goods group (see section 4.4.11.1.19); — A note was added to the application report for the “Vegetable oils” goods group (see section 4.4.11.1.18); — A misprint in a note on MC application report for the “Games and toys for children” goods group was corrected (see section 4.4.11.1.22) — The “Groceries” goods group was added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Groceries” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.33); — The “Groceries” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Groceries” goods group (see section 4.4.11.1.28); — Information on the “Groceries” goods group was added into the guide “MC templates” (see section 5.3.1.4); — Information on the “Groceries” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Groceries” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Groceries” goods group (see section 8.33).
24	10.06.2024	4.39.1	The following modifications were introduced: — A length of the serial number was changed for template 34 for the “Games and toys for children” goods group (see sections 4.4.1.1.21, 4.4.11.1.22, 4.4.1, 5.3.1.4, 8.21); — A new template was added for the “Games and toys for children” goods group (see sections 4.4.1, 5.3.1.4, 8.21, 5.3.1.10);

			— A misprint in a length of the serial number was corrected for the “Pet foods” goods group (see section 8.20); — A misprint in a length of the serial number was corrected for the “Canned foods” goods group (see section 8.27); — The “Building materials” goods group was added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Building materials” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.29); — The “Building materials” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Building materials” goods group (see section 4.4.11.1.24); — Information on the “Building materials” goods group was added into the guide “MC template” (see section 5.3.1.4); — Information on the “Building materials” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Building materials” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Building materials” goods group (see section 8.29). — The “Pyrotechnic articles and fire safety and firefighting equipment” goods group was added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Pyrotechnic articles and fire safety and firefighting equipment” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.30); — The “Pyrotechnic articles and fire safety and firefighting equipment” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Pyrotechnic articles and fire safety and firefighting equipment” goods group (see section 4.4.11.1.25); — Information on the “Pyrotechnic articles and fire safety and firefighting equipment” goods group was added into the guide “MC templates” (see section 5.3.1.4); — Information on the “Pyrotechnic articles and fire safety and firefighting equipment” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Pyrotechnic articles and fire safety and firefighting equipment” goods group was added into the guide “Goods Groups” (see section 5.3.1.16);

			— A description of the marking code structure and format was added for the “Pyrotechnic articles and fire safety and firefighting equipment” goods group (see section 8.30); — The “Printed goods” goods group was added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Printed goods” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.31); — The “Printed goods” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Printed goods” goods group (see section 4.4.11.1.26); — Information on the “Printed goods” goods group was added into the guide “MC template” (see section 5.3.1.4); — Information on the “Printed goods” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Printed goods” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Printed goods” goods group (see section 8.31); — The “Heaters” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Heaters” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.32); — The “Heaters” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Heaters” goods group (see section 4.4.11.1.27); — Information on the “Heaters” goods group was added into the guide “MC template” (see section 5.3.1.4); — Information on the “Heaters” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Heaters” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Heaters” goods group (see section 8.32).
23	30.05.2024	4.39	The following modifications were introduced: — An optional attribute “batchNumber” was added into description of the “UtilisationReport” object extension for milk producers (see section 4.4.11.1.3); — A date of launch of payment was changed for manufacturers of bicycles, payment will be launched from June 1, 2024 (see section 4.4.1.1.9, 5.3.1.12)

			— The “Bicycles and bicycle frames” goods group was added for the “REMAINS” value into description of the guide “Method of Goods Introduction into Circulation”, and the "Biologically active food additives” goods group was deleted (see section 5.3.1.1); — A new parameter - “producer” was added into an extension of the “OrderProduct” object for manufacturers of bicycles; also, notes were added as part of launch of marking of remaining items. (see section 4.4.1.1.9); — Tables of HTTP header parameters were corrected for several methods in terms of adding/deleting Accept and Content-Type headers; — Examples of the requests were corrected for several methods in terms of adding/deleting Accept and Content-Type headers.
22	15.05.2024	4.38	The following modifications were introduced: — A note on launch of payment for GTIN of the second group was added for the "Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group (see section 4.4.1.1.16); — A note on launch of payment for GTIN of the second group was added for the “Biologically active food additives” goods group (see section 4.4.1.1.15); — An extension of the “UtilisationReport” object was added for the “Bicycles and bicycle frames” goods group (see sections 4.4.11, 4.4.11.1.23); — A text in a description and a table name were corrected (see section 4.4.11.1.22).
21	26.04.2024	4.38	The following modifications were introduced: — A note to an application report for the “Biologically active food additives” goods group has been updated in a part concerning filling the “vetisGuid” parameter when a method of introduction into circulation is “Remarking” (see section 4.4.11.1.8); — The length has been changed in the template structure for the “Games and toys for children” goods group (see section 5.3.1.4), length of the serial number was corrected in the REST request example of the order for MC emission (see section 4.4.1.1.21); — The length was changed for the “Games and toys for children” goods group in a description of the MC structure and format (see section 8.21); — The “Bicycles and bicycle frames” goods group was added into description of the “Send Report on MC Utilization (Application)” method as a group, the report for which is sent manually, and was deleted from a list of the goods groups for which the report is formed automatically (see section 4.4.11);

			— The “paymentType” (Payment type) optional parameter was added, an example of the REST request was corrected, and a note with a date of launch of payment was added into description of the “Order” object extension for the “Bicycles and bicycle frames” goods group (see section 4.4.1.1.9); — The “Seafood” and “Bicycles and bicycle frames” goods groups (for which MCs are canceled after the expiration date) were added into the Guide “Cancellation of unused MCs” (see section 5.3.1.12); — A new optional attribute with indication of shelf life and storage condition indexes “expDateConditions” was added into a description of the application report structure for the “Vegetable oils” goods group, notes on conditions of filling and REST request example were added as well (see section 4.4.11.1.18); — A name of the goods group was changed from “Vegetable oil” to “Vegetable oils” within the document.
20	28.03.2024	4.37	The following modifications were introduced: — A new parameter “paymentType” was added into an extension of the “Order” object for manufacturers of seafood as part of launch of payment. Notes on payment launch were added to a description of the extension (see section 4.4.1.1.18); — An extension of the “UtilisationReport” object was added for the “Games and toys for children” goods group (see sections 4.4.11.1.22, 4.4.11); — Information on a new MC template was added for the “Vegetable oil” goods group (see sections 5.3.1.4, 8.25, 5.3.1.10). — Mandatory status of the “productionLineId” parameter was changed in an extension of the “UtilisationReport” object for the “Tobacco products” and “Nicotine products” goods groups (see sections 4.4.11.1.1, 4.4.11.1.6); — Mandatory status of the “seriesNumber” parameter in the extension of the “UtilisationReport” object was changed for the “Veterinary medicines” goods group, and a note was added as well (see section 4.4.11.1.21); — Information on indication of actual weight in the MC structure in the application report was corrected for the “Seafood” goods group (see sections 8.19, 4.4.11.1.13).
19	21.02.2024	4.36	The following modifications were introduced: — Information about limiting the number of requested codes in the “Obtain MC from the order” method was added (see section 4.4.4).
18	21.02.2024	4.36	The following modifications were introduced: — A new method to get an identifier of the GCP’s profile was added (see section 4.4.28);

			— A description of the kpp and fiasId parameters was corrected in the application report (see section 4.4.11.1.1, 4.4.11.1.4, 4.4.11.1.6, 4.4.11.1.7, 4.4.11.1.11); — A new value of the “SET” of the “cisType” parameter was added for the “Seafood” goods group (see sections 5.3.1.10, 8.19); — A name of the goods group was changed from “Pet foods (excluding livestock feeds) packaged in consumer packaging” to “Pet foods”; — A new value of the “GROUP” of the “cisType” parameter was added for the “Pet foods” goods group (see sections 5.3.1.10, 8.20); — A date from which marking of the remaining items will be unavailable for the “Biologically active food additives” goods group, has been added (see section 5.3.1.1); — A new value of the “SET” of the “cisType” parameter was added for the “Games and toys for children” goods group (see sections 5.3.1.10, 8.21); — Information on check of a license for MC order was added for the “Tobacco products” goods group (see section 4.4.1.1.1); — Information on check of a license for MC order was added for the “Alternative tobacco products” goods group (see section 4.4.1.1.11); — Information on check of a license for MC order was added for the “Nicotine products” goods group (see section 4.4.1.1.14); — A length of the serial number was changed for the “Perfumes and toilet preparations and household chemicals” goods group (see sections 4.4.1.1.26, 4.4.11.1.19, 4.4.1, 5.3.1.4, 8.26); — A new value of the “GROUP” of the “cisType” parameter was added for the “Veterinary medicines” goods group (see sections 5.3.1.10, 8.28); — An aggregation report was added for the “Veterinary medicines” goods group (see section 4.4.10, 4.4.10.1.13) — New parameters were added into a response of the “Get a status of MC array from the order” method (see section 4.4.2.2); — New parameters were added into a response of the method “Obtain a list of marking code orders” (see section 4.4.3.2); — A note on filling the “expirationDate” and “productionDate” attributes in the report on MC utilization (application) was added for the “Packaged water” goods group (see section 4.4.11.1.5).
17	01.02.2024	4.35	The following modifications were introduced: — A misprint in a length of the serial number in the MC template was corrected for the “Footwear” and “Clothing items, bed, table, bath and kitchen linens” goods groups (see section 5.3.1.4);

			— An optional parameter - “approvalNumber” (Approval No.) was added for the "Tobacco products", "Alternative tobacco products" and "Nicotine products” goods groups and examples of the REST requests were corrected as well (see section 4.4.1.1.1, 4.4.1.1.11, 4.4.1.1.14); — “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups were added into a description of the “Send Report on MC aggregation” method (see section 4.4.10); — A list of the AggregationReport attributes was added for manufacturers of the radio-electronic products (see section 4.4.10.1.11); — A list of the AggregationReport attributes was added for manufacturers of the fiber optic products (see section 4.4.10.1.12); — “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups were added for the GROUP (Group consumer packing) value into the “Marking code type” guide (see section 5.3.1.10); — Information on a group package was added into a description of the marking code structure and format for the “Radio-electronic products” goods group (see section 8.23); — Information on a group package was added into a description of the marking code structure and format for the “Optical fiber and fiber optic products” goods group (see section 8.24).
16	24.01.2024	4.34	The following modifications were introduced: — A note on filling an expiration date and production date was corrected for manufacturers of dairy products in the “UtilisationReport” object extension (see section 4.4.11.1.3); — A note on filling an expiration date and production date was corrected in a description of the “UtilisationReport” object extension for manufacturers of juice products and non-alcoholic beverages (see section 4.4.11.1.11); — The “Veterinary medicines” goods group was added into a list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Veterinary medicines” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.28); — The “Veterinary medicines” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Veterinary medicines” goods group (see section 4.4.11.1.21); — Information on the “Veterinary medicines” goods group was added into the guide “MC templates” (see section 5.3.1.4);

			— Information on the “Veterinary medicines” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Veterinary medicines” goods group was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Veterinary medicines” goods group (see section 8.28).
15	16.01.2024	4.34	The following modifications were introduced: — A description of the “producer” parameter was changed; notes were deleted from the “OrderProduct” object extension for the nicotine products as a result of the completion of marking of the remaining products (see section 4.4.1.1.14); — Two parameters - “kpp” and “fiasId” were added for the tobacco industry into the “UtilisationReport” object extension; a REST request example was corrected; a note on how to receive information about production sites was added (see section 4.4.11.1.1); — Two parameters - “kpp” and “fiasId” were added for the alternative tobacco industry into the “UtilisationReport” object extension; a REST request example was corrected; a note on how to receive information about production sites was added (see section 4.4.11.1.4); — Two parameters - “kpp” and “fiasId” were added for the nicotine industry into the “UtilisationReport” object extension; a REST request example was corrected; a note on how to receive information about production sites was added (see section 4.4.11.1.6); — The “Nicotine products” goods group was deleted from the REMAINS value of the “Method of Goods Introduction into Circulation” guide (see section 5.3.1.1); — The “Canned foods” goods group was added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Canned foods” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.27); — The “Canned foods” goods group was added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Canned foods” goods group (see section 4.4.11.1.20); — Information on the “Canned foods” goods group was added into the “MC Template” guide (see section 5.3.1.4); — Information on the “Canned foods” goods group was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Canned foods” goods group was added into the guide “Goods Groups” (see section 5.3.1.16);

			— A description of the marking code structure and format was added for the “Canned foods” goods group (see section 8.27).
14	21.12.2023	4.33	The following modifications were introduced: – A description of the productionDate parameter of the application report for manufacturers of medical products was corrected (see section 4.4.11.1.10); – Information on indication of the actual weight of the unit of products was added into a description of the extension of the application report for manufacturers of seafood (see section 4.4.11.1.13); – New parameters of the passport of conformity - “documentNumber”, “documentDate” and “documentSource” were added into extensions of the application report for manufacturers of titanium metal products (see section 4.4.11.1.14); – A description of the MC structure was supplemented with information on the actual weight for the “Seafood” goods group (see section 8.19).
13	01.12.2023	4.32	The following modifications were introduced: — The “Vegetable oil” and “Perfumes and toilet preparations and household chemicals” goods groups were added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Vegetable oil” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.25); — A list of the “Perfumes and toilet preparations and household chemicals” goods group attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.26); — The “Vegetable oil” and “Perfumes and toilet preparations and household chemicals” goods groups were added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11); — A list of the “UtilisationReport” object extensions was added for the “Pet foods (excluding livestock feeds) packaged in consumer packaging” goods group (see section 4.4.11.1.17); — A list of the “UtilisationReport” object extensions was added for the “Vegetable oil” goods group (see section 4.4.11.1.18); — A list of the “UtilisationReport” object extensions was added for the “Vegetable oil” and “Perfumes and toilet preparations and household chemicals” goods groups (see section 4.4.11.1.19);

			— Information on “Vegetable oil”, “Pet foods (excluding livestock feeds) packaged in consumer packaging” and “Perfumes and toilet preparations and household chemicals” goods groups was added into the guide “MC templates” (see section 5.3.1.4); — Information on the “Vegetable oil”, “Pet foods (excluding livestock feeds) packaged in consumer packaging” and “Perfumes and toilet preparations and household chemicals” goods groups was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Vegetable oil” and “Perfumes and toilet preparations and household chemicals” goods groups was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Pet foods (excluding livestock feeds) packaged in consumer packaging” goods group (see section 8.20); — A description of the marking code structure and format was added for the “Vegetable oil” goods group (see section 8.25); — A description of the marking code structure and format for the “Perfumes and toilet preparations and household chemicals” goods group was added (see section 8.26).
12	01.12.2023	4.32	The following modifications were introduced: — A new parameter “paymentType” was added into extension of the “Order” object as part of launch of payment for manufacturers of juice products and non-alcoholic beverages. Notes on launch of payment for manufacturers of juice products and non-alcoholic beverages were added to a description of the extension (see section 4.4.1.1.20); — The “Process “01.00.00.01 Getting a client token by means of the TT GIS”” subsection was added into the “Getting a client token” section (see section 9.1); — The “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups were added into the list of the goods groups with indication of the serial number length (see section 4.4.1.1); — A list of the “Radio-electronic products” goods group attributes of the request for creation and sending the order for the MC emission was added (see section 4.4.1.1.23); — A list of the “Optical fiber and fiber optic products” goods group attributes of the request for creation and sending the order for the MC emission was added (see section 4.4.1.1.24); — The “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups were added into the list of the goods groups for sending a report on MC utilization to the OMS (see section 4.4.11);

			— A list of the “UtilisationReport” object extensions was added for the “Radio-electronic products” goods group (see section 4.4.11.1.15); — A list of the “UtilisationReport” object extensions was added for the “Optical fiber and fiber optic products” goods group (see section 0); — Information on the “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups was added into the guide “MC templates” (see section 5.3.1.4); — Information on the “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups was added into the guide “Marking code type” (see section 5.3.1.10); — Information on the “Radio-electronic products” and “Optical fiber and fiber optic products” goods groups was added into the guide “Goods Groups” (see section 5.3.1.16); — A description of the marking code structure and format was added for the “Radio-electronic products” goods group (see section 8.23); — A description of the marking code structure and format for the “Optical fiber and fiber optic products” goods group was added (see section 8.24).
11	28.11.2023	4.31	The following modifications were introduced: — An optional parameter “productionDate” was added into attributes parameters of the “UtilisationReport” object for manufacturers of dairy products and a note on filling an expiration date and production date was corrected (see section 4.4.11.1.3); — An optional parameter “productionDate” was added into attributes parameters of the “UtilisationReport” object for manufacturers of packaged water (see section 4.4.11.1.5); — A note on filling an expiration date and production date was corrected in a description of the attributes parameters of the “UtilisationReport” object for manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.11.1.7); — A note on filling an expiration date and production date was corrected in a description of the attributes parameters of the “UtilisationReport” object for manufacturers of biologically active food additives (see section 4.4.11.1.8); — A note on filling an expiration date and production date was added for manufacturers of non-alcoholic beer in a description of the attributes parameters of the “UtilisationReport” object (see section 4.4.1.1.19); — A description to the “expirationDate” parameter was corrected in a description of the attributes parameters of the “UtilisationReport” object for manufacturers of medical products and a note on filling an expiration date and production date was supplemented (see section 4.4.11.1.10);

			— A note on filling an expiration date and production date was corrected in a description of the attributes parameters of the “UtilisationReport” object for manufacturers of juice products and non-alcoholic beverages (see section 4.4.11.1.11); — A description to the “productionDate” and “expirationDate” parameter was corrected in a description of the attributes parameters of the “UtilisationReport” object for manufacturers of seafood and a note on filling an expiration date and production date was added (see section 4.4.11.1.13).
10	24.11.2023	4.31	The following modifications were introduced: — A note was corrected for the manufacturers of biologically active food additives in terms of description of requirements for remarking of goods (see section 4.4.1.1.15); — A note was corrected for the manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers in terms of description of requirements for remarking of goods (see section 4.4.1.1.16); — A note was corrected for the manufacturers of medical products in terms of description of requirements for remarking of goods (see section 4.4.1.1.10); — Information on the "Antiseptic/antibacterial skin cleansers and hand sanitizers” and "Biologically active food additives” goods groups was added into the guide into the REMARK value (see section 5.3.1.1); — expDate, expDate72, expDateConditions parameters became optional for the manufacturers of dairy products and a note on canceling the necessity to fill in fields depending on the cisType parameter was corrected (see section 4.4.11.1.3); — productionDate and expirationDate parameters became optional for manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.11.1.7); — productionDate and expirationDate parameters became optional for manufacturers of biologically active food additives (see section 4.4.11.1.8); — productionDate and expirationDate parameters became optional for manufacturers of non-alcoholic beer (see section 4.4.11.1.9); — productionDate and expirationDate parameters became optional for manufacturers of juice products and non-alcoholic beverages (see section 4.4.11.1.11); — productionDate and expirationDate parameters became optional for manufacturers of seafood (see section 4.4.11.1.13); — cisType parameter was deleted for manufacturers of seafood and dairy products (see section 4.4.11.1.3 and 4.4.11.1.13);

			— The “Process “01.00.00.01 Getting a client token by means of the TT GIS”” subsection was deleted from the “Getting a client token” section (see section 9.1); — A section with a description of the methods for getting a client token by applying to single authentication methods of TT GIS was deleted from the section “Getting a client token by means of single authentication methods” (see section 9.3); — A misprint in a description of the “serialNumbers” parameter of the “OrderProduct” object structure was corrected (see section 4.4.1); — workflowTypes optional parameter was added into a structure of the request of the method “Obtaining receipt by set filters” (see section 4.4.19).
9	24.10.2023	4.30	The following modifications were introduced: — A description of the templates was corrected for all goods groups in the “MC Templates” guide (see section 5.3.1.4); — Mandatory status of the “productionDate”, “batchNumber” and “seriesNumber” (now the attributes are optional) attributes was changed for the manufacturers of the medical products. Information on filling in data in the “seriesNumber”, “batchNumber” attributes and information on factory serial number in a marking code structure were added (see section 4.4.11.1.10); — Mandatory status of the “fiasId” attribute was changed (the attribute is conditionally mandatory) for the manufacturers of juice products and non-alcoholic beverages (see section 4.4.11.1.11); — A description of the “producer” parameter was corrected in a structure of the “OrderProduct” object for manufacturers of light industry of the “Clothing items, bed, table, bath and kitchen linen” goods group category and notes on marking of remaining items were supplemented (see section 4.4.1.1.2); — “ Clothing items, bed, table, bath and kitchen linen” goods group was added into a description of the guide “Method of Goods Release into Circulation” for the REMAINS value (see section 5.3.1.1).
8	25.09.2023	4.29	The following modifications were introduced: — A description of the nesting logic was corrected in a note of description of the “AggregationReport” object attributes for manufacturers of dairy products (see section 4.4.10.1.2); — A description of the nesting logic was corrected in a note of description of the “AggregationReport” object attributes for the manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.10.1.5); — A description of the nesting logic was corrected in a note of description of the “AggregationReport” object attributes for the manufacturers of nicotine products (see section 4.4.10.1.6);

			— A description of the nesting logic was corrected in a note of description of the “AggregationReport” object attributes for the manufacturers of biologically active food additives (see section 4.4.10.1.7); — A description of the nesting logic was corrected in a note of description of the “AggregationReport” object attributes for the manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers (see section 4.4.10.1.8); — Information about MC expiration date for the “Medical products” goods group was added into the guide “Cancellation of unused MCs” (see section 5.3.1.12); — The “Juice products and non-alcoholic beverages” goods group was added into the guide “Marking code type” for the “GROUP” and “SET” codes (see section 5.3.1.10); — A list of the “AggregationReport” attributes was added for the “Medical products” goods group (see section 4.4.10.1.9); — A list of the “AggregationReport” attributes was added for the “Juice products and non-alcoholic beverages” goods group (see section 4.4.10.1.10); — A list of the goods groups was corrected in a description of the “Send Report on MC Utilization (Application)” method (see section 4.4.11); — A new parameter - "expirationDate” was added into a description of the attributes parameter of the “UtilisationReport” object and into an example of the REST request for manufacturers of the packed water (see section 4.4.11.1.5); — A new parameter - "expirationDate” was added into a description of the attributes parameter of the “UtilisationReport” object and into an example of the REST request for manufacturers of beer, beer-based and low-alcohol beverages (see section 4.4.11.1.7); — A new parameter - "vetisGuid” was added into a description of the attributes parameter of the “UtilisationReport” object and into an example of the REST request for manufacturers of biologically active food additives (see section 4.4.11.1.8); — New parameters - "productionDate" and "expirationDate” were added into a description of the attributes parameter of the “UtilisationReport” object and into an example of the REST request for manufacturers of non-alcoholic beer (see section 4.4.11.1.9); — A list of the attributes was added for the “Medical products” goods group (see section 4.4.11.1.10); — A list of the attributes was added for the “Juice products and non-alcoholic beverages” goods group (see section 4.4.11.1.11); — A list of the attributes was added for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group (see section 4.4.11.1.12); — A list of the attributes was added for the “Seafood” goods group (see section 4.4.11.1.13);

			— The following goods groups were added into the list of the goods groups with indication of the serial number length: “Seafood”, “Pet foods (excluding livestock feeds) packaged in consumer packaging”, “Meat”, “Games and toys for children”, “Titanium metal products” (see section 4.4.1); — The “exporterTaxpayerId” (INN/TIN (or analog) of the exporter) was deleted from the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object, for the following goods groups: “Clothing items, bed, table, bath and kitchen linen”, “Footwear”, “New pneumatic rubber tires and tire casings”, “Perfume and Eau de Toilette”, “Photo cameras (except for cine cameras), flash lights and flash bulbs”, “Dairy products”; — A new parameter - “producer” (INN of the goods card owner) and notes on remarking of goods were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object, for the “Clothing items, bed, table, bath and kitchen linens” goods group (see section 4.4.1.1.2); — A new parameter - “producer” (INN of the goods card owner) and notes on remarking of goods were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object, for the “Footwear” goods group (see section 4.4.1.1.3); — A new parameter - “paymentType” (Payment type) was added for the “Medical products” goods group into the parameters which are transferred in the “attributes” attribute of the “Order” object; a new parameter - “producer” and notes on marking of remaining items and payment of goods were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object (see section 4.4.1.1.10); — A new parameter - “paymentType” (Payment type) was added into the parameters which are transferred in the “attributes” attribute of the “Order” object for the “Beer, beer-based and low-alcohol beverages” goods group (see section 4.4.1.1.13); — A new parameter - “producer” (INN of the goods card owner) and notes on marking of the remaining items were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object, for the “Nicotine products” goods group (4.4.1.1.14); — A new parameter - “paymentType” (Payment type) was added for the "Biologically active food additives” goods group into the parameters which are transferred in the “attributes” attribute of the “Order” object; a new parameter - “producer” and notes on marking of remaining items and payment of goods were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object (see section 4.4.1.1.15);

			— A new parameter - “paymentType” (Payment type) was added for the “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group into the parameters which are transferred in the “attributes” attribute of the “Order” object; a new parameter - “producer” and notes on marking of remaining items and payment of goods were added into the parameters which are transferred in the “attributes” attribute of the “OrderProduct” object (see section 4.4.1.1.16); — A list of the “Games and toys for children” attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.21); — A list of the “Titanium metal products” attributes of the request for creation and sending of the order for the MC emission was added (see section 4.4.1.1.22).
7	06.02.2023	4.14	The following modifications were introduced: — Request examples of the “Create marking code emission order” method were corrected for all goods groups (see 4.4.1)
6	21.11.2022	4.14	The following modifications were introduced: — A response message of the “Check OMS availability” method with support of OMS and OMS API versions was expanded (see section 4.4.25); — “Obtain OMS and API version” method was deleted in connection with expansion of the “Check OMS availability” method; — “orderId” parameter was deleted from a string of the request of the “Re-obtain marking codes from marking code order” method (see section 4.4.6); — URL of the “Obtain MC from the MC order” method was corrected (see section 4.4.4); — Information on a possibility to specify a volume of the products in the marking code structure (templateId=28) for the “Non-alcoholic beer” goods group in the “Send Report on MC Utilization (Application)” method was added (see Section 4.4.11).
5	02.11.2022	4.13	The following modifications were introduced: — Information on opening of the sets for “Antiseptic/antibacterial skin cleansers and hand sanitizers” and “Biologically active food additives” goods groups was added (see Section 5.3.1.10, Section 8.15, Section 8.16).
			The following modifications were introduced: — The following methods were added: “Getting a list of Service Providers”, “Re-obtain marking codes from marking code order”, “Obtain a list of marking code package identifiers”, “Obtain a list of marking code orders”, “Receiving a document related to receipt”; — subjectId mandatory parameter was deleted from the extension of the “Create marking code emission order” method for the “Medicines for human use” goods group (see Section 4.4.1.1.7);

4	20.10.2022	4.12	— A description of the marking code structure and formats was corrected for all goods groups; subsections by MC types were added for tobacco goods groups (see Section 8 with subsections); — Information on the opening of the remains was deleted in connection with closing of the remaining items from September 30, 2022 for the units of goods and sets for the “Perfume and Eau de Toilette” and “Photo cameras (except cine cameras), flash lights and flash bulbs” goods groups (See Section 5.3.1.1); — An array of “poolInfos” objects was deleted from the structure of the responses of the methods titled “Get a status of MC array from the order” (see Section 4.4.2) and “Obtain a List of Marking Code Orders” (see section 4.4.3) — Support of several goods codes within one order was added. A structure of the order was updated with taking into account support of several goods codes, a description of extensions was corrected and examples of the orders were updated for the goods groups (see Section 4.4.1); — Support of “gtin” parameter was added in the request string of the method titled “Get a status of MC array from the order” and “Obtain MC from the MC order”, “Obtain a List of Marking Code Package Identifiers”, “Close MC order/suborder” (see Section 4.4.2, Section 4.4.4, Section 4.4.5, Section 4.4.8).
3	20.09.2022	4.10	The following modifications were introduced: — The following methods were added: “Get Goods Attributes”, “Send Report on MC Disposal / Rejection”, “Obtaining the list of identifiers of the reports “Application data””, “Obtaining the list of ICs from the “Application data” report”, “Receiving the business places”, “Receive a receipt by unique document identifier”, “Obtaining receipt by set filters”, “Search of documents”, “Get document contents”, “Delete document”, “Sign document”, “Check OMS availability”, “Obtain OMS and API version”, “Provision of the list of installations of the integration solution (external connection)”, “Delete installation of the integration solution instance”. In connection with the publication of the documentation on OMS API for EEU Operator: — “CROSSBORDER” value has been deleted from the guide “Method of Goods Introduction into Circulation” (see Section 5.3.1.1); — Notes on submission of the aggregation report and application report by EEU Operator were deleted (see Section 4.4.10, Section 4.4.11); — exporterTaxpayerId parameter with description of mandatory status of its sending in case of releaseMethodType = CROSSBORDER, was deleted from a list of the attributes of the “Create marking code emission

			order” method for the “Clothing items, bed, table, bath and kitchen linen”, “Footwear”, “New pneumatic rubber tires and tire casings”, “Perfume and eau de toilette”, “Photo cameras (except cine cameras), flash lights and flash bulbs”, “Dairy products” goods groups (see Section 4.4.1.1.2, Section 4.4.1.1.3, Section 4.4.1.1.4, Section 4.4.1.1.5, Section 4.4.1.1.6, Section 4.4.1.1.8).
2	25.08.2022	4.9	The following modifications were introduced: — “Send Report on MC Aggregation”, “Send Report on MC Utilization (Application)” methods were added (see Section 4.4.10, Section 0); — “Report Processing Status” guide was added (see Section 5.3.1.7); — The number of days and type of the MC shelf life calculation (from “business days” to “calendar days”) were changed for the “Tobacco products” and “Alternative tobacco products” goods groups in the “Cancellation of unused MCs” guide (see Section 5.3.1.12); — A note on disabling of sending of automatic application reports has been deleted due to uncertain implementation date (see Section 4.4.11).
1	11.02.2022	-	Document is created

LIST OF TERMS

The following terms are used in this document:

1) Hardware — PC (personal computer) or another computer equipment (mainframe, minicomputer, microcomputer, PDA (pocket digital assistant), computer terminal).

2) Individual user's hardware is a computer equipment providing the following:

- automation of computer component for the daily work of the Customer's personnel;
- access to information services automating processes of the Customer's enterprise.

3) Shared hardware is a computer equipment intended for

- arrangement of a computational platform automating processes of the Customer;
- adjustment and control of hardware included into the automated system;
- accumulation and processing of data used at automation of processes of the Customer.

4) General software is a complex of program components providing minimal hardware functionality:

- environment for start and operation of other program tools (operating system);
- tools for operation with structured data sets (DBMS);
- tools for accessing Internet resources (Web-browser);
- tools for hardware resources publication on the Internet (Webserver).

10. Special software is a set of software components specially developed for particular hardware (not a "box version" software).

11. End hardware is equipment and devices directly managed by automated system (via information communication channels) or indirectly (via functional interface with related systems) and intended for performance of process functions (printer, scanner, registrar, controller etc.).

12. Aggregation is a process of bundling products (in consumer package) into a first-level shipping package, as well as of first-level shipping packages into higher-level shipping package with application of shipping package identification code to the shipping package specifying information on the correlation among the identification codes of each included product, consumer package, shipping package.

13. Goods introduction into circulation (introduction into circulation), with regards to the manufacturing of dairy products in the Russian Federation: the act of manufacturer offering dairy products for retail sale, or initial transfer of dairy products, with or without charge, from a manufacturer to a new owner or another person with the purpose of

making such person their owner or for future sale, which makes those dairy products available for distribution and (or) use;

- outside the Russian Federation (with the exception of dairy products imported from the EEU countries): –released by customs authorities of dairy products for internal consumption imported to the Russian Federation; outside the Russian Federation related to the dairy products imported from EEU member-countries under the crossboarder trade on the customs EEU territory, - import by a legal entity or a physical entity registered as an individual entrepreneur, of dairy products to the Russian Federation;

14. Track and Trace Government Information System for the goods subject to the mandatory marking with the identification means (Track and Trace Information System, TT GIS) is a government information system created to automatize the processes of acquisition and processing of data on circulation of goods subject to mandatory marking with the identification means, store such information, provide access to it, deliver and distribute it, enhance the exchange efficiency for such information, and enable traceability of the goods mentioned, as well as for other purposes as stipulated in the federal laws.

15. Importer of goods (importer) is a legal entity or individual registered as an individual entrepreneur, who imports goods to the Russian Federation from the territories of the states which are not members of the Eurasian Economic Union, or goods purchased in the framework of cross-border trade in the customs territory of the Eurasian Economic Union.

16. Individual Serial Number (ISN) is a sequence of symbols that distinctly identifies a goods item (consumer package of goods) on the basis of the goods code.

17. Electronic Interface is aggregated resources and rules that enable interaction between the goods circulation participants' firmware and Track and Trace Information System.

18. Identification Code (IC) is a sequence of symbols comprising a unique number of goods items formed by the Track and Trace Information System operator in order to identify goods, including those in consumer package.

19. Shipping Package Identification Number (SPIN) is a sequence of symbols comprising a unique item of the goods shipping package in the form of a one-dimensional bar code which complies with GS1-128 international standard. The content of the transport packing identification code shall be determined by the goods circulation participant who carries out aggregation of goods into transport packing.

20. Marking Code (MC) is a unique sequence of symbols consisting of identification and verification codes, generated by the operator in order to identify goods, including those in consumer package.

21. Verification Code (VC) is a sequence of symbols generated by the operator as a result of cryptographic conversion of identification code which allows fake identification code detection while checking it with the use of a fiscal memory device and (or) technical means intended to check the verification code.

22. Goods Code (GC,) is a unique code assigned to a group of goods while describing them at an information resource that enables accounting and storage of reliable data on the goods by corresponding codes of the unified Foreign Economic Activity Goods Nomenclature of the Eurasian Economic Union (the goods nomenclature).

23. Contract manufacturing means manufacturing to order of goods under the customer's trademark at capacities of a third party that ensures full observance of technological cycle and quality control regarding finished goods in accordance with the customer's requirements.

24. User Account (UA) is an information service located in the Internet at the operator website, duly provided by the operator to a goods circulation participant or a federal executive body, and used by the operator, goods circulation participant and federal executive body.

25. Marked Goods are goods with identification means applied, the reliable information of which (including information about the applied identification means and/or material media having the identification means) is contained in the Track and Trace Information System.

26. Marking of goods with the identification means is application of goods identification means on the consumer package, or product label, or goods.

27. Goods Circulation means import into the Russian Federation, storage, transportation, reception and transfer of goods including procurement and implementation (sale) thereof in the territory of the Russian Federation.

28. Operator of the Track and Trace Information System (operator) is a legal entity registered in the territory of the Russian Federation, creating, developing, updating, and operating the Track and Trace Information System, ensuring its full availability, as well as receiving, storing and processing the information.

29. Remarking of goods is the repeated application of identification means on consumer package, or goods, or product label due to the loss or damage of previously applied identification means.

30. Consumer Package is a package intended for primary packaging of goods, as well as materials and components used for storage and presentation of goods sold to the end consumer along with the goods.

31. Goods Producer (producer) is a legal entity or an individual registered as an individual entrepreneur, being tax resident of the Russian Federation, which exercises production and sale of goods.

32. Identification Means of goods (identification means, IM) is a marking code in machine-readable form represented as a bar-code to be applied to the consumer package, or product label, or goods.

33. Product Label is a data media designed for marking information on the goods including goods identification means, attached directly to the consumer package or included into the consumer package.

34. Shipping Package of goods is a package consolidating goods used for storage and transportation of goods to protect them from transportation damages, and constituting a separate transportation unit. A shipping package may contain smaller shipping packages (by size or volume). Therewith, a package consolidating only goods with or without consumer package shall be considered as a first-level shipping package, while further shipping packages of various enclosure levels, starting from those containing first-level shipping packages only, shall be considered shipping packages of subsequent (second, third, etc.) level.

35. Emission registrar (ER) is a software and hardware encryption (cryptographic) technical means including a validator of verification code or compliant with the requirements to a validator of verification code, used by goods circulation participants to exchange information with the Track and Trace Information System in terms of obtainment of marking codes by the goods circulation participants and transfer of information to the Track and Trace Information System regarding the goods marking with identification means; for which the Federal Security Service of the Russian Federation issued a document on its compliance with the established requirements to encryption (cryptographic) means of information protection applicable to encryption (cryptographic) means for verification of marking codes.

36. Goods Circulation Participants are legal entities and individuals registered as individual entrepreneurs or accredited branches of foreign legal entities in the Russian Federation, being tax residents of the Russian Federation, exercising introduction of goods into circulation, circulation and (or) withdrawal of goods from circulation, excluding legal entities and individuals registered as individual entrepreneurs procuring goods to be

used in purposes not related to their further trade (sale), procuring or selling (disposing) the goods in transactions, details of which are a state secret (except for persons exercising withdrawal of the footwear from circulation in such transactions).

37. Eurasian Economic Union (EEU) is an international organization of regional economic integration having the international legal personality and established by the Treaty on the Eurasian Economic Union. Member States of the Eurasian Economic Union are the Republic of Armenia, the Republic of Belarus, the Republic of Kazakhstan, the Kyrgyz Republic and the Russian Federation.

38. The Eurasian Economic Commission (EEC) is a permanent regulatory body of the Eurasian Economic Union, providing conditions for the EEU functioning and development, development of proposals for the further integration development.

39. Technical Support Service (TSS) is a technical support service for the Track and Trace Information System users.

40. Goods nomenclature for foreign economic activities of the Eurasian Economic Union (goods nomenclature) is the goods classifier used by customs authorities and participants of foreign economic activities (FEA) to perform customs operations.

41. EQES is an enhanced qualified electronic signature.

42. EEU Operator – competent (authorized) authority of a State (the Eurasian Economic Union member), which includes government executives bodies of a State (the Eurasian Economic Union member) authorized in accordance with the legislation of this State to ensure the control over the circulation of the goods subject to the marking in the country and (or) to ensure the interagency coordination of activity of government executives bodies of a State (the Eurasian Economic Union member) in order to control the circulation of the goods subject to the marking and (or) the functioning of the goods marking information system national component by means of identification, and (or) the coordination of activities to ensure its functioning, as well as the private operators authorized by the specified competent (authorized) authority of a State (the Eurasian Economic Union member).

LIST OF ABBREVIATIONS

AWS	Automated working station
AS	Automated system
APCS	Automated process control system
EEU	Eurasian Economic Union is an international organization of regional economic integration having the international legal personality and established by the Treaty on the Eurasian Economic Union. Member States of the Eurasian Economic Union are the Republic of Armenia, the Republic of Belarus, the Republic of Kazakhstan, the Kyrgyz Republic and the Russian Federation
IS	Information security
TT GIS	Track and Trace Government Information System
MC	Marking code
GC	Goods code, GTIN
HC	Hardware complex
LAN	Local area network
UA	Unauthorized access
LAN	Local area network
NC	National Catalog
EHW	End hardware
OS	Operating system
GSW	General software
SW	Software
SHP	Software and hardware package
PC	Personal computer
OR	Operation registrar
ER	Emission registrar
VPM	Virus protection means
HW	Hardware
IM	Identification means
SCS	Structures cable system
IPT	Information protection tool
SSW	Specialized software
NT	Networking tools
OMS	Order Management Station
ES	Emission server
TOR	Terms of reference
GCP	Goods Circulation Participant
FLC	Format and Logical Control
TIN	Taxpayer Identification Number

LIST OF FIGURES

Figure 1.....20
Figure 2.....21
Figure 3.....24
Figure 4.....26
Figure 5.....28
Figure 6.....39
Figure 7.....42
Figure 8.....44
Figure 9.....46
Figure 10.....47
Figure 11.....49
Figure 12.....51
Figure 13.....52
Figure 14.....54
Figure 15.....57
Figure 16.....61
Figure 17.....64
Figure 18.....66
Figure 19.....69
Figure 20.....72
Figure 21.....75
Figure 22.....78
Figure 23.....80
Figure 24.....82
Figure 25.....85
Figure 26.....87
Figure 27.....89
Figure 28.....91
Figure 29.....94
Figure 30.....96
Figure 31.....98
Figure 32.....101
Figure 33.....103
Figure 34.....106
Figure 35.....109
Figure 36.....111
Figure 37.....113
Figure 38.....115

Figure 39..... 118
Figure 40..... 120
Figure 41..... 123
Figure 42..... 125
Figure 43..... 127
Figure 44..... 129
Figure 45..... 131
Figure 46..... 134
Figure 47..... 136
Figure 48..... 138
Figure 49..... 140
Figure 50..... 142
Figure 51..... 145
Figure 52..... 147
Figure 53..... 150
Figure 54..... 151
Figure 55..... 153
Figure 56..... 155
Figure 57..... 156
Figure 58..... 156
Figure 59..... 158
Figure 60..... 160
Figure 61..... 162
Figure 62..... 164
Figure 63..... 165
Figure 64..... 167
Figure 65..... 169
Figure 66..... 171
Figure 67..... 172
Figure 68..... 173
Figure 69..... 175
Figure 70..... 177
Figure 71..... 180
Figure 72..... 180
Figure 73..... 180
Figure 74..... 181
Figure 75..... 181
Figure 76..... 184
Figure 77..... 185
Figure 78..... 186

Figure 79..... 188
Figure 80..... 190
Figure 81..... 193
Figure 82..... 195
Figure 83..... 196
Figure 84..... 197
Figure 85..... 199
Figure 86..... 201
Figure 87..... 203
Figure 88..... 205
Figure 89..... 206
Figure 90..... 208
Figure 91..... 209
Figure 92..... 211
Figure 93..... 212
Figure 94..... 214
Figure 95..... 215
Figure 96..... 218
Figure 97..... 222
Figure 98..... 224
Figure 99..... 225
Figure 100..... 227
Figure 101..... 228
Figure 102..... 228
Figure 103..... 231
Figure 104..... 232
Figure 105..... 234
Figure 106..... 235
Figure 107..... 237
Figure 108..... 238
Figure 109..... 241
Figure 110..... 241
Figure 111..... 241
Figure 112..... 242
Figure 113..... 243
Figure 114..... 243
Figure 115..... 245
Figure 116..... 246
Figure 117..... 248
Figure 118..... 249

Figure 119 249
Figure 120 249
Figure 121 250
Figure 122 250
Figure 123 252
Figure 124 254
Figure 125 256
Figure 126 256
Figure 127 258
Figure 128 258
Figure 129 259
Figure 130 260
Figure 131 261
Figure 132 263
Figure 133 264
Figure 134 264
Figure 135 265
Figure 136 265
Figure 137 266
Figure 138 267
Figure 139 268
Figure 140 270
Figure 141 270
Figure 142 270
Figure 143 271
Figure 144 273
Figure 145 275
Figure 146 276
Figure 147 276
Figure 148 277
Figure 149 278
Figure 150 279
Figure 151 281
Figure 152 282
Figure 153 283
Figure 154 283
Figure 155 284
Figure 156 286
Figure 157 287
Figure 158 288

Figure 159 289
Figure 160 290
Figure 161 292
Figure 162 293
Figure 163 294
Figure 164 295
Figure 165 296
Figure 166 296
Figure 169 298
Figure 170 299
Figure 171 301
Figure 172 302
Figure 173 303
Figure 174 303
Figure 175 306
Figure 176 306
Figure 177 307
Figure 178 308
Figure 179 309
Figure 180 310
Figure 181 311
Figure 182 311
Figure 183 312
Figure 184 315
Figure 185 315
Figure 186 316
Figure 187 317
Figure 188 318
Figure 189 319
Figure 190 323
Figure 191 325
Figure 192 327
Figure 193 329
Figure 194 331
Figure 195 332
Figure 196 334
Figure 197 335
Figure 198 336
Figure 199 337
Figure 200 339

Figure 201 340
Figure 202 341
Figure 203 342
Figure 204 345
Figure 205 346
Figure 206 351
Figure 207 351
Figure 208 353
Figure 209 355
Figure 210 355
Figure 211 357
Figure 212 357
Figure 213 359
Figure 214 360
Figure 215 362
Figure 216 363
Figure 217 365
Figure 218 366
Figure 219 367
Figure 220 368
Figure 221 369
Figure 222 370
Figure 223 372
Figure 224 372
Figure 225 374
Figure 226 375
Figure 227 376
Figure 228 377
Figure 229 379
Figure 230 382
Figure 231 398
Figure 232 399
Figure 233 400
Figure 234 401
Figure 235 418
Figure 236 418
Figure 237 420
Figure 238 422
Figure 239 423
Figure 240 424

Figure 241 425
Figure 242 508
Figure 243 510
Figure 244 512
Figure 245 515
Figure 246 517
Figure 247 519
Figure 248 519
Figure 249 521
Figure 250 522
Figure 251 522
Figure 252 524
Figure 253 525
Figure 254 525
Figure 255 526
Figure 256 527
Figure 257 533
Figure 258 534
Figure 259 536
Figure 260 539
Figure 261 546
Figure 262 548
Figure 263 549
Figure 264 553
Figure 265 555
Figure 266 558
Figure 267 561
Figure 268 563
Figure 269 564
Figure 270 566
Figure 271 570
Figure 272 572
Figure 273 574
Figure 274 576
Figure 275 579

LIST OF TABLES

Table 1 – Example of Request with Handover of a Detached Signature 15
Table 2 — List of Applicability Indicators which the System shall be Compliant with..... 17
Table 3 – Valid MC-Symbols 19
Table 4 – Parameters of REST request 31
Table 5 – HTTP Header Parameters (HTTP Header) 31
Table 6 – Request String Parameters (Query string parameters) 32
Table 7 – Description of JSON Format of Request for Creation and Sending of MC Emission Order, object “Order”, message body (HTTP Body) 32
Table 8 – Description of JSON format of the “OrderProduct” object 33
Table 9 – List of the goods groups with indication of the serial number length 36
Table 10 – Structure of the attributes parameter of the “Order” object for the “Tobacco products” goods group 40
Table 11 – Structure of the attributes parameter of the “OrderProduct” object for the “Tobacco products” goods group 41
Table 12 – Description of attributes parameter of the “Order” object for “Light industry” goods group 42
Table 13 – Structure of the attributes parameter of the “OrderProduct” object for the “Light industry” goods group 43
Table 14 – Description of attributes parameter of the “Order” object for “Footwear” goods group 44
Table 15 – Structure of the attributes parameter of the “OrderProduct” object for the “Footwear” goods group 45
Table 16 – Description of attributes parameter of the “Order” object for Tire Manufacturers, “New Pneumatic Rubber Tires and Tire Casings” Goods Group Category 46
Table 17 – Description of attributes parameter of the “Order” object for “Perfume and Eau de Toilette” goods group 48
Table 18 – Structure of the attributes parameter of the “OrderProduct” object for the “Perfume and Eau de Toilette” goods group 48
Table 19 – Description of attributes parameter of “Order” object for “Photo Cameras (Except Cine Cameras), FlashLights and Flash Bulbs” goods group 50
Table 20 - Description of the attributes parameter of the “Order” object for the “Medicines for human use” goods group 51
Table 21 – Description of the attributes parameter of the “Order” object for the “Dairy products” goods group 53
Table 22 – Description of attributes parameter of the “Order” object for “Bicycles and Bicycle Frames” goods group 55
Table 23 – Structure of the attributes parameter of the “OrderProduct” object for the “Bicycles and bicycle frames” goods group 56

Table 24 – Description of the attributes parameter of the “Order” object for the manufacturers of medical products 58
Table 25 – Structure of the attributes parameter of the “OrderProduct” object for the “Medical products” goods group 58
Table 26 – Description of the attributes parameter of the “Order” object for the “Alternative tobacco products” goods group 62
Table 27 – Structure of the attributes parameter of the “OrderProduct” object for the “Alternative tobacco products” goods group 63
Table 28 – Description of the attributes parameter of the “Order” object for the “Packaged water” goods group 65
Table 29 – Description of attributes parameter of the “Order” object for the “Beer, beer-based and low-alcohol beverages” goods group 66
Table 30 – Structure of the attributes parameter of the “OrderProduct” object for the “Beer, beer-based and low-alcohol beverages” goods group 68
Table 31 – Description of the attributes parameter of the “Order” object for the “Nicotine products” goods group 70
Table 32 – Structure of the attributes parameter of the “OrderProduct” object for the “Nicotine products” goods group 71
Table 33 – Structure of the attributes parameter of the “Order” object for the “Specialized food products and biologically active food additives” goods group 73
Table 34 – Structure of the attributes parameter of the “OrderProduct” object for the “Specialized food products and biologically active food additives” goods group 73
Table 35 – Structure of the attributes parameter of the “Order” object for “Antiseptic/antibacterial skin cleansers and hand sanitizers” goods group 76
Table 36 – Structure of the attributes parameter of the “OrderProduct” object for the “Antibacterial skin cleansers and hand sanitizers” goods group 77
Table 37 – Structure of the attributes parameter of the “Order” object for the “Pet foods” goods group 79
Table 38 – Structure of the attributes parameter of the “Order” object for the “Seafood” goods group 81
Table 39 – Structure of the attributes parameter of the “Order” object for the “Non-alcoholic beer” goods group 83
Table 40 – Structure of the attributes parameter of the “OrderProduct” object for the “Non-alcoholic beer” goods group 84
Table 41 – Structure of the attributes parameter of the “Order” Object for “Juice products and non-alcoholic beverages” goods group 86
Table 42 – Structure of the attributes parameter of the “Order” object for the “Games and toys for children” goods group 87
Table 43 – Structure of the attributes parameter of the “OrderProduct” object for “Games and toys for children” goods group 88

Table 44 – Structure of the attributes parameter of the “Order” object for the “Titanium metal products” goods group 90
Table 45 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products” goods group 92
Table 46 – Structure of the attributes parameter of the “OrderProduct” object for the “Radio-electronic products” goods group 93
Table 47 – Structure of the attributes parameter of the “Order” object for the “Optical fiber and fiber optic products” goods group 95
Table 48 – Structure of the attributes parameter of the “Order” object for the “Vegetable oils” goods group 97
Table 49 – Structure of the attributes parameter of the “Order” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group 99
Table 50 – Structure of the attributes parameter of the “OrderProduct” object for the “Cosmetics, household chemicals, and personal hygiene products” goods group 100
Table 51 – Structure of the attributes parameter of the “Order” object for the “Canned foods” goods group 102
Table 52 – Structure of the attributes parameter of the “Order” object for the “Veterinary medicines” goods group 104
Table 53 – Structure of the attributes parameter of the “OrderProduct” object for the “Veterinary medicines” goods group 104
Table 54 – Structure of the attributes parameter of the “Order” object for the “Building materials” goods group 107
Table 55 – Structure of the attributes parameter of the “OrderProduct” object for the “Building materials” goods group 107
Table 56 – Structure of the attributes parameter of the “Order” object for the “Fire safety and firefighting equipment” goods group 110
Table 57 – Structure of the attributes parameter of the “Order” object for the “Printed goods” goods group 112
Table 58 – Structure of the attributes parameter of the “Order” object for the “Heaters” goods group 114
Table 59 – Structure of the attributes parameter of the “Order” object for the “Groceries” goods group 116
Table 60 – Structure of the attributes parameter of the “Order” object for the “Cabling and wiring products” goods group 119
Table 61 – Structure of the attributes parameter of the “Order” object for the “Engine oils” goods group 121
Table 62 – Structure of the attributes parameter of the “OrderProduct” object for the “Engine oils” goods group 121
Table 63 – Structure of the attributes parameter of the “Order” object for the “Polymer pipes” goods group 124

Table 64 – Structure of the attributes parameter of the “Order” object for the “Confectionery products” goods group 126
Table 65 – Structure of the attributes parameter of the “Order” object for the “Auto parts and components for vehicles” goods group 128
Table 66 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group 130
Table 67 – Structure of the attributes parameter of the “Order” object for the “Radio-electronic products. Laptops and smartphones” goods group 132
Table 68 – Structure of the attributes parameter of the “OrderProduct” object for the “Radio-electronic products. Laptops and smartphones” goods group 132
Table 69 – Structure of the attributes parameter of the “Order” object for the “Meat products” goods group 135
Table 70 – Structure of the attributes parameter of the “Order” object for the “Feed additives” goods group 137
Table 71 – Structure of the attributes parameter of the “Order” object for the “Home and kitchen goods” goods group 139
Table 72 – Structure of the attributes parameter of the “Order” object for the “Industrial equipment” goods group 141
Table 73 – Structure of the attributes parameter of the “Order” object for the “Fertilizers in consumer packaging” goods group 143
Table 74 – Structure of the attributes parameter of the “OrderProduct” object for the “Fertilizers in consumer packaging” goods group 143
Table 75 – Structure of the attributes parameter of the “Order” object for the “Semi-finished and frozen food products” goods group 146
Table 76 – Structure of the attributes parameter of the “Order” object for the “Real fur” goods group 148
Table 77 – Structure of the attributes parameter of the “OrderProduct” object for the “Real fur” goods group 149
Table 78 – Structure of the attributes parameter of the “Order” object for the “Pyrotechnic articles” goods group 150
Table 79 – Format of Response to Request 152
Table 80 – REST request parameters 153
Table 81 – HTTP Headers Parameters (HTTP Header) 153
Table 82 – Request String Parameters 154
Table 83 – Format of Response to Request, object “BufferInfo” 157
Table 84 – REST request parameters 158
Table 85 – HTTP Header Parameters (HTTP Header) 159
Table 86 – Request String Parameters 159
Table 87 – Format of Response to Request for Order Status 161
Table 88 – “OrderSummaryInfo” Object Format 161

Table 89 – REST request parameters 162
Table 90 – HTTP Header Parameters (HTTP Header) 162
Table 91 – Request String Parameters 163
Table 92 – Format of Response to Request for MC for the Goods Specified 164
Table 93 – REST request parameters 165
Table 94 – HTTP Header Parameters (HTTP Header) 165
Table 95 – Request String Parameters (Query string parameters) 166
Table 96 – Format of Response to Request for a List of MC Packet Identifiers for the Marking and Goods Code Order Specified 168
Table 97 – Format of MC Packet List, “Block” Object 168
Table 98 – REST request parameters 169
Table 99 – HTTP Header Parameters (HTTP Header) 170
Table 100 – Request String Parameters 170
Table 101 – Format of Response to Request for Re-obtainment of MC for the Goods Specified 171
Table 102 – REST request parameters 172
Table 103 – HTTP Header Parameters (HTTP Header) 172
Table 104 – Request String Parameters 172
Table 105 – Format of Response to Request 174
Table 106 – REST request parameters 175
Table 107 – HTTP Header Parameters (HTTP Header) 176
Table 108 – Request String Parameters 176
Table 109 – Description of JSON format of the request for closing the order, “Order” object, message body (HTTP Body) 177
Table 110 – Format of Response to Request to Close Suborder by GTIN Specified 178
Table 111 – REST request parameters 181
Table 112 – HTTP Header Parameters (HTTP Header) 181
Table 113 – Request String Parameters (Query string parameters) 182
Table 114 – “DropoutReport” Object Structure, message body (HTTP Body) 182
Table 115 – Description of “attributes” Parameter for “DropoutReport” Object for Tobacco Industry 184
Table 116 – Description of “attributes” parameter of “DropoutReport” object for nicotine products 185
Table 117 – Description of “attributes” parameter of “DropoutReport” object for alternative tobacco products 187
Table 118 – Format of Response to Request to Send Notification on MC Disposal / Rejection 188
Table 119 – REST request parameters 190
Table 120 – HTTP Header Parameters (HTTP Header) 191
Table 121 – Request String Parameters (Query string parameters) 191

Table 122 – “AggregationReport” Object Structure, message body (HTTP Body)..... 192
Table 123 – Object “AggregationUnit” Structure 192
Table 124 – Description of attributes Parameter for “AggregationReport” Object for Tobacco Industry 193
Table 125 – Description of attributes Parameter for “AggregationReport” Object for Alternative Tobacco Products 197
Table 126 – Description of “attributes” parameter of “AggregationReport” object for nicotine products 203
Table 127 – Format of Response to Request to Send Information on Aggregation 215
Table 128 – REST request parameters 218
Table 129 – HTTP Header Parameters (HTTP Header) 218
Table 130 – Request String Parameters 219
Table 131 – “UtilisationReport” Object Structure, message body (HTTP Body) 220
Table 132 – Description of attributes Parameter for “UtilisationReport” Object for Tobacco Industry 222
Table 133 – Description of “attributes” Parameter for “UtilisationReport” Object for Pharamceutical Industry 225
Table 134 – Description of “attributes” Parameter for “UtilisationReport” Object for Dairy Manufacturers 229
Table 135 – Description of attributes parameter for “UtilisationReport” object for manufacturers of alternative tobacco products 232
Table 136 – Description of attributes parameter for “UtilisationReport” object for manufacturers of packed water 234
Table 137 – Description of attributes parameter for “UtilisationReport” object for nicotine products 235
Table 138 – Description of attributes parameter for “UtilisationReport” object for manufacturers of beer, beer-based and low-alcohol beverages 239
Table 139 – Description of attributes Parameter for “UtilisationReport” Object for Manufacturers of Specialized Food Products and Biologically Active Food Additives 244
Table 140 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of non-alcoholic beer 247
Table 141 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of medical products 251
Table 142 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of juice products and non-alcoholic beverages 253
Table 143 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of antiseptic/antibacterial skin cleansers and hand sanitizers 255
Table 144 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of seafood 257

Table 145 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of titanium metal products 259
Table 146 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of radio-electronic products 262
Table 147 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of fiber optic products 267
Table 148 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of pet foods 268
Table 149 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of vegetable oils 272
Table 150 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of household chemicals 274
Table 151 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of canned foods 278
Table 152 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of veterinary products 280
Table 153 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of games and toys for children 281
Table 154 – Description of the attributes parameter of the “UtilisationReport” object for manufacturers of bicycles and bicycle frames 284
Table 155 – Description of the attributes parameter of the “UtilisationReport” object for the “Building materials” Goods Group 285
Table 156 – Description of the attributes parameter of the “UtilisationReport” object for the “Fire safety and firefighting equipment” Goods Group 286
Table 157 – Description of the attributes parameter of the “UtilisationReport” object for the “Printed goods” Goods Group 287
Table 158 – Description of the attributes parameter of the “UtilisationReport” object for the “Heaters” Goods Group 288
Table 159 – Description of the attributes parameter of the “UtilisationReport” object for the “Groceries” Goods Group 291
Table 160 – Description of the attributes parameter of the “UtilisationReport” object for the “Cabling and wiring products” Goods Group 293
Table 161 – Description of the attributes parameter of the “UtilisationReport” object for the “Engine oils” Goods Group 294
Table 162 – Description of the attributes parameter of the “UtilisationReport” object for the “Polymer pipes” Goods Group 295
Table 163 – Description of the attributes parameter of the “UtilisationReport” object for the “Confectionery products” goods group 297
Table 164 – Description of the attributes parameter of the “UtilisationReport” object for the “Auto parts and components for vehicles” goods group 299

Table 165 – Description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Electronic nicotine delivery systems” goods group 300
Table 166 – Description of the attributes parameter of the “UtilisationReport” object for the “Radio-electronic products. Laptops and smartphones” goods group 301
Table 167 – Description of the attributes parameter of the “UtilisationReport” object for the “Meat products” Goods Group 304
Table 168 – Description of the attributes parameter of the “UtilisationReport” object for the “Feed additives” Goods Group 307
Table 169 – Description of the attributes parameter of “UtilisationReport” object for “Home and kitchen goods” goods group 308
Table 170 – Description of the attributes parameter of the “UtilisationReport” object for “Industrial equipment” Goods Group 309
Table 171 – Description of the attributes parameter of “UtilisationReport” object for “Fertilizers in consumer packaging” goods group 310
Table 172 – Description of the attributes parameter of the “UtilisationReport” object for the “Semi-finished and frozen food products” goods group 313
Table 173 – Description of the attributes parameter of the “UtilisationReport” object for the “Real fur” goods group 316
Table 174 – Description of the attributes parameter of the “UtilisationReport” object for the “Pyrotechnic articles” goods group 317
Table 175 – Format of Response to Request to Send Report on MC Application 318
Table 176 – REST request parameters 320
Table 177 – HTTP Header Parameters (HTTP Header) 320
Table 178 – Request String Parameters 320
Table 179 – Structure of the “SurplusReport” object, message body (HTTP Body) 322
Table 180 – Format of Response to Request for Sending the Notification of Acceptance of ICs for Record-keeping Purposes 324
Table 181 – REST request parameters 325
Table 182 – HTTP Header Parameters (HTTP Header) 325
Table 183 – Request String Parameters (Query string parameters) 326
Table 184 – Format of Response to Request for the Report Processing Status 327
Table 185 – REST request parameters 329
Table 186 – HTTP Header Parameters (HTTP Header) 329
Table 187 – Request String Parameters (Query string parameters 330
Table 188 – Format of Response to Request 331
Table 189 – Format of Providers Object 331
Table 190 – REST request parameters 333
Table 191 – HTTP Header Parameters (HTTP Header) 333
Table 192 – Request String Parameters (Query string parameters) 334
Table 193 – Format of Response to Request 335

Table 194 – REST request parameters 336
Table 195 – HTTP Header Parameters (HTTP Header) 336
Table 196 – Request String Parameters (Query string parameters) 337
Table 197 – Format of Response to Request 338
Table 198 – Format of “IdentificationCode” Object 338
Table 199 – REST request parameters 339
Table 200 – HTTP Header Parameters (HTTP Header) 339
Table 201 – Request String Parameters (Query string parameters) 340
Table 202 – Format of Response to Request 341
Table 203 – Format of manufactureInfo object 342
Table 204 – REST request parameters 343
Table 205 – HTTP Header Parameters (HTTP Header) 343
Table 206 – Request String Parameters 344
Table 207 – Format of Response to Request 345
Table 208 – REST request parameters 346
Table 209 – HTTP Header Parameters (HTTP Header) 347
Table 210 – Request String Parameters (Query string parameters) 347
Table 211 – Request Body Structure (HTTP Body) 347
Table 212 – Request Body Structure (HTTP Body) 348
Table 213 – Format of Response to Request 352
Table 214 – REST request parameters 353
Table 215 – HTTP Header Parameters (HTTP Header) 354
Table 216 – Request String Parameters 354
Table 217 – Format of Response to Request 355
Table 218 – Description of document structure with errors 356
Table 219 - Format of cisList parameter object 356
Table 220 – REST request parameters 357
Table 221 – HTTP Header Parameters (HTTP Header) 357
Table 222 – Request String Parameters 358
Table 223 – Response Format 359
Table 224 – Format of “ResultSearch” Object 359
Table 225 – REST request parameters 360
Table 226 – HTTP Header Parameters (HTTP Header) 361
Table 227 – Request String Parameters 361
Table 228 – Response Format 362
Table 229 – REST request parameters 363
Table 230 – HTTP Header Parameters (HTTP Header) 363
Table 231 – Request String Parameters (Query string parameters) 364
Table 232 – Response Format 365
Table 233 – REST request parameters 366

Table 234 – HTTP Header Parameters (HTTP Header) 366
Table 235 – Request String Parameters 367
Table 236 – Request Body Parameters (HTTP Body) 367
Table 237 – Response Format 368
Table 238 – REST request parameters 368
Table 239 – HTTP Header Parameters (HTTP Header) 369
Table 240 – Request String Parameter 369
Table 241 – Format of Response to Request for OMS Availability 370
Table 242 – REST request parameters 370
Table 243 – HTTP Header Parameters (HTTP Header) 371
Table 244 – Request String Parameters (Query string parameters) 371
Table 245 – Format of Response to Request 373
Table 246 – Format of data on integration solution installations (external connection) of the GCP 373
Table 247 – REST request parameters 374
Table 248 – HTTP Header Parameters (HTTP Header) 374
Table 249 – Request String Parameters (Query string parameters) 375
Table 250 – Response Format 375
Table 251 – REST request parameters 376
Table 252 – HTTP Header Parameters (HTTP Header) 376
Table 253 – Response Format 378
Table 254 – REST request parameters 379
Table 255 – HTTP Headers Parameters (HTTP Header) 380
Table 256 – Request String Parameters 380
Table 257 – Request body parameters (HTTP Body) 381
Table 258 – Structure of the “OrderFilterDtoV3” object 381
Table 259 – Format of Response to Request to Get Information on Marking Code Orders 383
Table 260 – Structure of “OrderSummaryDto” object 383
Table 261 – Structure of “ BufferInfo ” object 384
Table 262 – Possible Values of Guide “Method of Goods Introduction into Circulation” releaseMethodType 389
Table 263 – Possible Values of Guide “Method of Individual Serial Number Generation” serialNumberType 391
Table 264 – Possible Values of Guide “Manufacturing Method” createMethodType 391
Table 265 – Possible Values of Guide “MC Template” templateId 391
Table 266 – Possible Values of Guide “MC Array Status” (status) 397
Table 267 – Possible Values of Guide “MC Buffer Status” bufferStatus 398
Table 268 – Possible Values of Guide “Report Processing Status” reportStatus 399
Table 269 – Possible Values of Guide “Order Status” orderStatus 400
Table 270 – Possible Values of Guide “Dropout Reason” dropoutReason 401

Table 271 – Possible Values of Guide “Marking Code Type” cisType 402
Table 272 – Possible Values of Guide “Country code” 406
Table 273 – Possible Values of Guide “Cancellation of unused MCs” 406
Table 274 – Possible Values of Guide “Printing Quality Class” 410
Table 275 – Types of receipts 410
Table 276 – Types of events 410
Table 277 – Goods Groups 412
Table 278 – Receipt statuses 413
Table 279 – Codes of the result of processing of the marking codes on the application report and rejection report (for all goods groups, except "Alternative tobacco products", "Nicotine products" and "Tobacco products”) 413
Table 280 – Codes of errors in processing of the marking codes for rejection report (for the “Tobacco products”, “Nicotine products”, “Alternative tobacco products” goods groups) and for aggregation report 415
Table 281 – Format of Response with Error 419
Table 282 – Object “ProtobeansError” Format 419
Table 283 – Object “OmsApiGlobalError” Format 419
Table 284 – Data Send Error Codes 420
Table 285 - Parameters of CMS Format Signature Generation Function 426
Table 286 – Marking Code Structure 428
Table 287 – Marking Code Structure 429
Table 288 – Marking Code Structure 430
Table 289 – Marking Code Structure 431
Table 290 – Marking Code Structure 431
Table 291 – Marking Code Structure 432
Table 292 – Marking Code Structure 433
Table 293 – Marking Code Structure 434
Table 294 – Marking Code Structure 435
Table 295 – Marking Code Structure 436
Table 296 – Marking Code Structure 437
Table 297 – Marking Code Structure 438
Table 298 – Marking Code Structure 438
Table 299 – Marking Code Structure 439
Table 300 – Marking Code Structure 440
Table 301 – Marking Code Structure 441
Table 302 – Marking Code Structure 442
Table 303 – Marking Code Structure 442
Table 304 – Marking Code Structure 443
Table 305 – Marking Code Structure 444
Table 306 – Marking Code Structure 445

Table 307 – Marking Code Structure 446
Table 308 – Marking Code Structure 447
Table 309 – Marking Code Structure 448
Table 310 – Marking Code Structure 449
Table 311 – Marking Code Structure 450
Table 312 – Marking Code Structure 451
Table 313 – Marking Code Structure 453
Table 314 – Marking Code Structure 454
Table 315 – Marking Code Structure 455
Table 316 – Marking Code Structure 455
Table 317 – Marking Code Structure 457
Table 318 – Marking Code Structure 459
Table 319 – Marking Code Structure 460
Table 320 – Marking Code Structure 461
Table 321 – Marking Code Structure 462
Table 322 – Marking Code Structure 463
Table 323 – Marking Code Structure 464
Table 324 – Marking Code Structure 465
Table 325 – Marking Code Structure 466
Table 326 – Marking Code Structure 467
Table 327 – Marking Code Structure 468
Table 328 – Marking Code Structure 469
Table 329 – Marking Code Structure 470
Table 330 – Marking Code Structure 471
Table 331 – Marking Code Structure 472
Table 332 – Marking Code Structure 473
Table 333 – Marking Code Structure 474
Table 334 – Marking Code Structure 475
Table 335 – Marking Code Structure 476
Table 336 – Marking Code Structure 477
Table 337 – Marking Code Structure 478
Table 338 – Marking Code Structure 478
Table 339 – Marking Code Structure 480
Table 340 – Marking Code Structure 481
Table 341 – Marking Code Structure 482
Table 342 – Marking Code Structure 483
Table 343 – Marking Code Structure 484
Table 344 – Marking Code Structure 485
Table 345 – Marking Code Structure 486
Table 346 – Marking Code Structure 487

Table 347 – Marking Code Structure 488
Table 348 – Marking Code Structure 489
Table 349 – Marking Code Structure 490
Table 350 – Marking Code Structure 491
Table 351 – Marking Code Structure 492
Table 352 – Marking Code Structure 493
Table 353 – Marking Code Structure 494
Table 354 – Marking Code Structure 495
Table 355 – Marking Code Structure 496
Table 356 – Marking Code Structure 497
Table 357 – Marking Code Structure 498
Table 358 – Marking Code Structure 499
Table 359 – Marking Code Structure 500
Table 360 – Marking Code Structure 501
Table 361 – Marking Code Structure 502
Table 362 – Marking Code Structure 503
Table 363 – Marking Code Structure 504
Table 364 – Marking Code Structure 505
Table 365 – Marking Code Structure 506
Table 366 – REST request parameters 515
Table 367 – HTTP Header Parameters (HTTP Header) 515
Table 368 – Request String Parameters (Query string parameters) 516
Table 369 – Request Body Structure (HTTP Body) 516
Table 370 – Format of Response to Request 517
Table 371 – REST request parameters 519
Table 372 – HTTP header parameters (HTTP Header) 520
Table 373 – Request Body Parameters (HTTP Body) 520
Table 374 – Format of Response to Request 521
Table 375 – REST request parameters 522
Table 376 – HTTP header parameters (HTTP Header) 522
Table 377 – Request String Parameters (Query string parameters) 523
Table 378 – Request Body Parameters (HTTP Body) 523
Table 379 – Format of Response to Request 524
Table 380 – REST request parameters 525
Table 381 – Format of Response to Request 525
Table 382 – REST request parameters 526
Table 383 – HTTP header parameters (HTTP Header) 526
Table 384 – Request String Parameters (Query string parameters) 527
Table 385 – Request Body Parameters (HTTP Body) 527
Table 386 – Format of Response to Request 528

Table 387 – Receipt Structure 529
Table 388 – User data of the receipt..... 530
Table 389 – Event Structure 531
Table 390 – Structure of the user data of the event CREATE_ORDER_RECEIVED 540
Table 391 – Structure of “products” parameter 540
Table 392 – Structure of the user data of the event CREATE_ORDER_VALIDATION 541
Table 393 – Structure of the user data of the event CREATE_ORDER_VALIDATION_RESULT 541
Table 394 – Structure of “products” parameter 542
Table 395 – Structure of the user data of the event CREATE_ORDER_EMISSION_TASK_SEND 542
Table 396 – Structure of “products” parameter 542
Table 397 – Structure of the user data of the event CREATE_ORDER_GIS_CREATED 543
Table 398 – Structure of the user data of the event CREATE_ORDER_GIS_GENERATED .. 543
Table 399 – Structure of the user data of the event CREATE_ORDER_GIS_SEND_TO_PROCESSING 544
Table 400 – Structure of the user data of the event CREATE_ORDER_SUBORDER_RESULT 544
Table 401 – Structure of “products” parameter 545
Table 402 – Structure of the user data of the event REPORT_UTILIZE_RECEIVED 549
Table 403 – Structure of the user data of the event REPORT_UTILIZE_VALIDATION 550
Table 404 – Structure of the user data of the event REPORT_UTILIZE_VALIDATION_RESULT 550
Table 405 – Structure of the user data of the event REPORT_UTILIZE_EMISSION_SEND .. 551
Table 406 – Structure of the user data of the event RNMS_GIS_ROUTED 551
Table 407 – Structure of the user data of the event RNMS_GIS_PROCESSED..... 552
Table 408 – Structure of the user data of the event REPORT_AGGREGATION_RECEIVED 555
Table 409 – Structure of the user data of the event REPORT_AGGREGATION_GIS_SEND 556
Table 410 – Structure of the user data of the event REPORT_AGGREGATION_GIS_ROUTED 556
Table 411 – Structure of the user data of the event REPORT_AGGREGATION_GIS_PROCESSED..... 557
Table 412 – Structure of the user data of the event ANNULMENT_CODES 559
Table 413 – Structure of “products” parameter 559
Table 414 – Structure of the user data of the event ANNULMENT_CODES_EMISSION_SEND 560
Table 415 – Structure of the user data of the event REPORT_DROPOUT_RECEIVED 566
Table 416 – Structure of the user data of the event REPORT_DROPOUT_EMISSION_SEND 567
Table 417 – Structure of the user data of the event REPORT_DROPOUT_GIS_ROUTED 568

Table 418 – Structure of the user data of the event REPORT_DROPOUT_GIS_PROCESSED 569
Table 419 – Structure of the user data of the event GET_CODES_RESULT 572
Table 420 – Structure of “products” parameter 572
Table 421 – Structure of the user data of the event GET_CODES_GENERATED_REPORT. 573
Table 422 – Structure of the user data of the event REPORT_QUALITY_RECEIVED 575
Table 423 – Structure of the user data of the event CLOSE_ORDER 577
Table 424 – Structure of the user data of the event REPORT_SURPLUS_RECEIVED 580
Table 425 – “Products” Object Structure 580
Table 426 – Structure of the user data of the event REPORT_SURPLUS_EMISSION_SEND 580
Table 427 – Structure of the user data of the event REPORT_SURPLUS _GIS_ROUTED 581
Table 428 – Structure of the user data of the event DOCUMENT_PROCESSED 581

Revision Sheet									
Numbers of sheets (pages)					*Total sheets (pages) in document*	*Document No.*	*Reference No. of supporting document and date*	*Sign.*	*Date*
Rev	*changed*	*replaced*	*new*	*cancelled*					