

PRACTICAL – 04

Name: Hansika Reddy Gunapati

Roll No: 2520030237

Sec: 8

PART 1: PROCESS SYNCHRONIZATION USING wait() AND waitpid()

Aim

To write a C program where a parent process creates multiple child processes and synchronizes their completion using wait() and waitpid(), and compare the behavior of both functions.

Theory

The fork() system call creates a new child process. The wait() system call makes the parent wait for any child process to terminate. The waitpid() system call allows the parent to wait for a specific child process using its PID.

Both functions are used for process synchronization and for collecting the termination status of child processes.

C Code

```
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <sys/wait.h>

int main()
{
    pid_t child1, child2, child3;
    int status;

    child1 = fork();

    if (child1 == 0)
    {
        printf("Child 1: PID = %d\n", getpid());
        sleep(2);
        printf("Child 1 completed.\n");
        exit(10);
    }
}
```

```

}

child2 = fork();

if (child2 == 0)
{
    printf("Child 2: PID = %d\n", getpid());
    sleep(1);
    printf("Child 2 completed.\n");
    exit(20);
}

child3 = fork();

if (child3 == 0)
{
    printf("Child 3: PID = %d\n", getpid());
    sleep(3);
    printf("Child 3 completed.\n");
    exit(30);
}

printf("Parent: PID = %d\n", getpid());

/* wait() waits for any child */
pid_t finished = wait(&status);

printf("wait(): Child PID %d terminated with status %d\n",
    finished, WEXITSTATUS(status));

/* waitpid() waits for a specific child */
waitpid(child1, &status, 0);

printf("waitpid(): Child PID %d terminated with status %d\n",
    child1, WEXITSTATUS(status));

waitpid(child3, &status, 0);

printf("waitpid(): Child PID %d terminated with status %d\n",
    child3, WEXITSTATUS(status));

printf("Parent process completed.\n");

return 0;

```

```
}
```

Compile

```
gcc process_sync.c -o process_sync
```

Run

```
./process_sync
```

Flow Chart

START



Create Parent Process



Create Multiple Child Processes



Children Execute Their Tasks



Children Terminate



Parent Calls wait()



Waits for Any Child



Parent Calls waitpid()



Waits for Specific Child



Parent Completes



STOP

Sample Output

Parent: PID = 4500

Child 1: PID = 4501

Child 2: PID = 4502

Child 3: PID = 4503

Child 2 completed.

wait(): Child PID 4502 terminated with status 20

Child 1 completed.

waitpid(): Child PID 4501 terminated with status 10

Child 3 completed.

waitpid(): Child PID 4503 terminated with status 30

Parent process completed.

Observation

Function	Behavior
wait()	Waits for any child process
waitpid()	Waits for a specific child process
Control	Less control
PID Selection	Not specified
Usage	Useful when any child can be waited for

OUTPUT:

```
simra@simran315:~$ nano wait_waitpid.c
simra@simran315:~$ gcc wait_waitpid.c -o wait_waitpid
simra@simran315:~$ ./wait_waitpid
Parent process started. PID = 773
Child 1: PID = 774, sleeping for 3 seconds...
Child 2: PID = 775, sleeping for 1 second...

Parent: Waiting for any child using wait()...
Child 3: PID = 776, sleeping for 2 seconds...
Child 2: Finished.
Parent: Child PID 775 finished.
Exit status = 20

Parent: Waiting specifically for Child 1 using waitpid()...
Child 3: Finished.
Child 1: Finished.
Parent: Child 1 (PID 774) finished.
Exit status = 10

Parent: Waiting for remaining children...
Parent: Another child has finished.

Parent: All children have completed.
```

Result

The parent successfully created multiple child processes and synchronized their execution using wait() and waitpid(). It was observed that wait() waits for any child, whereas waitpid() waits for a specific child.

PART 2: ZOMBIE PROCESS CREATION AND ELIMINATION

Aim

To create a scenario where a child process becomes a zombie process, investigate it using the process table, and modify the program to eliminate the zombie using proper synchronization techniques.

Theory

A **zombie process** is a child process that has completed execution, but its parent has not collected its termination status using `wait()` or `waitpid()`.

The zombie remains in the process table until the parent collects its exit status. The `ps` command can be used to observe the process state.

A zombie process can be eliminated by using `wait()` or `waitpid()` in the parent process.

C Code

```
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <sys/wait.h>

int main()
{
    pid_t pid;
    int status;

    pid = fork();

    if (pid < 0)
    {
        printf("Fork failed.\n");
        return 1;
    }

    if (pid == 0)
    {
        printf("Child: PID = %d\n", getpid());
        printf("Child terminating...\n");
        exit(0);
    }
    else
    {
        printf("Parent: PID = %d\n", getpid());

        printf("Child has terminated. Parent now waits...\n");

        waitpid(pid, &status, 0);
    }
}
```

```
        printf("Parent collected child status.\n");
        printf("Child terminated with status %d\n",
            WEXITSTATUS(status));
    }

    return 0;
}
```


Compile

gcc zombie.c -o zombie

Run

./zombie

Flow Chart

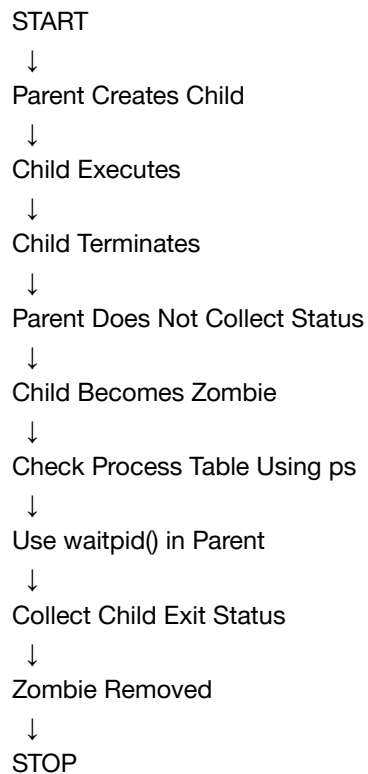

Sample Output

Parent: PID = 5000
Child: PID = 5001
Child terminating...
Child has terminated. Parent now waits...
Parent collected child status.

Child terminated with status 0

Observation

- The child process terminates before the parent collects its status.
- Without wait() or waitpid(), the child becomes a zombie.
- The ps -l command can be used to identify the zombie state.
- waitpid() collects the child's termination status and removes the zombie entry.
- Proper synchronization prevents accumulation of zombie processes.

OUTPUT:

```
simra@simran315:~$ nano zombie.c
simra@simran315:~$ gcc zombie.c -o zombie
simra@simran315:~$ ./zombie
Parent process started. PID = 825
Parent process: PID = 825
Child process: PID = 826
Parent will NOT call wait().
Parent is sleeping for 20 seconds...
Child process started. PID = 826
Child process terminating.
Parent process terminating.
```

```
simra@simran315:~$ nano no_zombie.c
simra@simran315:~$ gcc no_zombie.c -o no_zombie
simra@simran315:~$ ./no_zombie
Parent process started. PID = 868
Parent process: PID = 868
Child process: PID = 869
Parent is waiting for the child using waitpid()...
Child process started. PID = 869
Child process terminating.
Child terminated normally.
Child exit status = 0
Parent: Child has been properly reaped.
No zombie process remains.
```

Result

A zombie process was successfully demonstrated and investigated using the process table. The zombie process was eliminated by using `waitpid()` for proper synchronization between the parent and child processes.