


① HDD → Disks (Magnetic spinning)

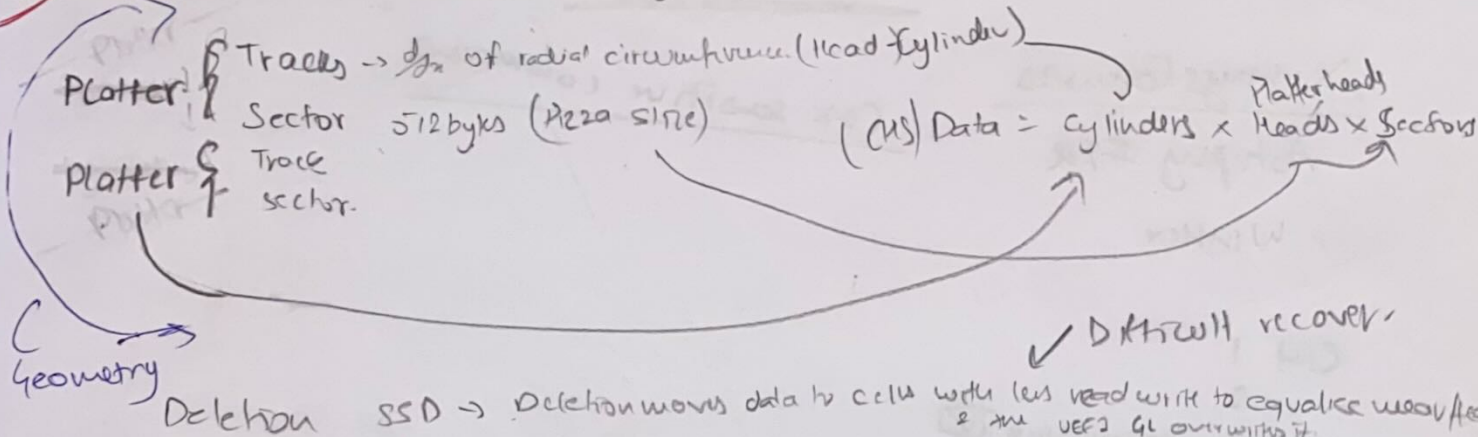

③ FAT / NTFS - Clusters { sectors 1.. sector

Q - Papers

Logical Addr (-2 + cluster offset) = cluster number
-2 + 100 = 98 (at address 100)
Phy Addr 0 + sector no ← NTFS

① Boot sequence.

- CMOS, BIOS, UEFI, EFI
- Boot to forensic disk
(U2 it causes overwriting to actual computer)
- Force open bios on system & boot to forensic disk

⑥ Win Registry

- ↳ Stores Hardware & Software config data
- ↳ Installation data
- ↳ Network settings
- ↳ Recently accessed files/folders
- ↳ User preferences
- Rich in metadata
- Major evidence sources
- User activity reconstruction
↳ USB, App use, File history

FAT

- ↳ Drive
- ↳ Range
- File } Slack

⑤ Uses pub & private key

↳ Blocker encryption for disks

Deletion: The MFT File entry

- is marked as deleted
- & deleted from run list
- ↳ Bitmap updated to track free & used disk space

File is unmarked but data present till overwritten

④

NTFS → Reduces File Slack

- ↳ Enhanced Sec & File info, file control
- JOURNALING
- ↳ Data compression

MFT contains all system files & folders as 1KB

records metadata and points to file data. (Master File table) includes in mae

File stored in chunks of clusters when

address points to another cluster for next loc if chain break file break is back address cluster only forward

Deleting FAT

File renamed with HEX OXES

HKEY Root	Description
HKEY_CLASSES_ROOT	File extension associations, app launch behavior
HKEY_CURRENT_USER	Config for the currently logged-in user (shortcut to HKEY_USERS\SID)
HKEY_LOCAL_MACHINE	Global system info—drivers, services, apps
HKEY_USERS	Settings for all users (mapped by SID)
HKEY_CURRENT_CONFIG	Dynamic hardware profile currently in use

Term	Meaning
HKEY	"Handle to a key" - major sections of the Registry
Key	A folder-like container for values or subkeys
Subkey	A key located inside another key (nested)
Branch	A key + all its subkeys + values
Value	Stores configuration data (name + data pair)
Hive	Logical group of keys stored in disk files (e.g., <code>Ntuser.dat</code>)