

AOS-CX 10.08 Security Guide

4100i, 6000, 6100 Switch Series



a Hewlett Packard
Enterprise company

Copyright Information

© Copyright 2021 Hewlett Packard Enterprise Development LP.

Open Source Code

This product includes code licensed under the GNU General Public License, the GNU Lesser General Public License, and/or certain other open source licenses. A complete machine-readable copy of the source code corresponding to such code is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company
6280 America Center Drive
San Jose, CA 95002
USA

Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Contents	3
About this document	11
Applicable products	11
Latest version available online	11
Command syntax notation conventions	11
About the examples	12
Identifying switch ports and interfaces	12
About security	14
About Authentication, Authorization, and Accounting (AAA)	14
Managing local users and groups	15
Default user admin	15
Example of first login with password setting	15
Built-in user groups and their privileges	15
User-defined user groups	16
User name requirements	16
Password requirements	17
User and user group management tasks	17
Resetting the switch admin password using the Service OS console	18
Resetting the admin password by reverting the switch to factory defaults	19
User and group commands	20
user	20
user-group	22
user password	26
service export-password	27
show user-group	28
show user information	29
show user-list	31
SSH server	33
SSH defaults	33
SSH server tasks	34
SSH server commands	34
show ssh host-key	34
show ssh server	36
show ssh server sessions	37
ssh ciphers	37
ssh host-key	39
ssh host-key-algorithms	40
ssh key-exchange-algorithms	41
ssh known-host remove	42
ssh macs	43
ssh maximum-auth-attempts	44
ssh public-key-algorithms	45
ssh server vrf	46

SSH client	47
SSH client commands	47
ssh (client login)	47
Local AAA	49
Local AAA defaults and limits	49
Local authentication	49
Password-based local authentication	49
SSH public key-based local authentication	50
Local authentication tasks	50
Local authorization	52
Local authorization tasks	52
Local accounting	52
Local accounting tasks	53
Local AAA commands	54
aaa accounting all-mgmt	54
aaa authentication console-login-attempts	55
aaa authentication limit-login-attempts	57
aaa authentication login	58
aaa authentication minimum-password-length	59
aaa authorization commands	60
show aaa accounting	62
show aaa authentication	63
show aaa authorization	64
show ssh authentication-method	64
show user	65
ssh password-authentication	66
ssh public-key-authentication	67
user authorized-key	67
Remote AAA with TACACS+	70
Default server groups	70
Remote AAA (TACACS+) defaults and limits	70
About global versus per-TACACS+ server passkeys (shared secrets)	71
Remote AAA TACACS+ server configuration requirements	71
User role assignment using TACACS+ attributes	72
TACACS+ server redundancy and access sequence	72
Single source IP address for consistent source identification to AAA servers	72
TACACS+ general tasks	73
TACACS+ authentication	73
About authentication fail-through	74
TACACS+ authentication tasks	74
TACACS+ authorization	75
Using local authorization as fallback from TACACS+ authorization	75
About authentication fail-through and authorization	75
TACACS+ authorization tasks	75
TACACS+ accounting	76
Sample accounting information on a TACACS+ server	76
Sample REST accounting information on a TACACS+ server	77
TACACS+ accounting tasks	77
Example: Configuring the switch for Remote AAA with TACACS+	78
Remote AAA with RADIUS	81
Default server groups	81

Remote AAA (RADIUS) defaults and limits	82
About global versus per-RADIUS server passkeys (shared secrets)	82
Remote AAA RADIUS server configuration requirements	83
User role assignment using RADIUS attributes	83
RADIUS server redundancy and access sequence	84
Single source IP address for consistent source identification to AAA servers	84
RADIUS general tasks	84
RADIUS authentication	85
About authentication fail-through	85
RADIUS authentication tasks	85
Configuring two-factor authentication	86
RADIUS accounting	88
Sample general accounting information	88
RADIUS accounting tasks	90
Example: Configuring the switch for Remote AAA with RADIUS	90

Remote AAA (TACACS+, RADIUS) commands 93

aaa accounting all-mgmt	93
aaa authentication allow-fail-through	95
aaa authentication login	96
aaa authorization commands	98
aaa group server	100
radius-server auth-type	101
radius-server host	102
radius-server host secure ipsec	106
radius-server key	111
radius-server retries	112
radius-server timeout	112
radius-server tracking	113
server	115
show aaa accounting	117
show aaa authentication	119
show aaa authorization	121
show aaa server-groups	122
show accounting log	124
show radius-server	127
show radius-server secure ipsec	129
show tacacs-server	130
show tacacs-server statistics	133
show tech aaa	133
tacacs-server auth-type	136
tacacs-server host	137
tacacs-server key	140
tacacs-server timeout	141
tacacs-server tracking	141

RADIUS dynamic authorization 144

Requirements and tips	144
RADIUS dynamic authorization commands	144
radius dyn-authorization enable	144
radius dyn-authorization client	145
radius dyn-authorization port	147
show radius dyn-authorization	147
show radius dyn-authorization client	149

PKI 151

PKI concepts	151
Digital certificate	151
Certificate authority	151
Root certificate	152
Leaf certificate	152
Intermediate certificate	152
Trust anchor	152
OCSP	152
PKI on the switch	152
Trust anchor profiles	152
Leaf certificates	153
Mandatory matching of peer device hostname	153
PKI EST	153
EST usage overview	153
Prerequisites for using EST for certificate enrollment	154
EST profile configuration	154
Certificate enrollment	154
Certificate re-enrollment	155
Checking EST profile and certificate configuration	155
EST best practices	155
Example using EST for certificate enrollment	155
Example including the use of an intermediate certificate	161
Installing a self-signed leaf certificate (created inside the switch)	163
Installing a self-signed leaf certificate (created outside the switch)	164
Installing a certificate of a root CA	165
Installing a CA-signed leaf certificate (initiated in the switch)	166
Installing a CA-signed leaf certificate (created outside the switch)	167
PKI commands	168
crypto pki application	168
crypto pki certificate	169
crypto pki ta-profile	170
enroll self-signed	171
enroll terminal	172
import (CA-signed leaf certificate)	173
import (self-signed leaf certificate)	175
key-type	177
ocsp disable-nonce	178
ocsp enforcement-level	179
ocsp url	179
ocsp vrf	180
revocation-check ocsp	181
show crypto pki application	182
show crypto pki certificate	182
show crypto pki ta-profile	184
ta-certificate	186
subject	188
PKI EST commands	189
arbitrary-label	189
arbitrary-label-enrollment	190
arbitrary-label-reenrollment	191
crypto pki est-profile	192
enroll est-profile	193
reenrollment-lead-time	194
retry-count	195
retry-interval	196
show crypto pki est-profile	197

url	198
username	199
vrf	201
Configuring enhanced security	202
Configuring enhanced security	202
password complexity	203
Configuring remote logging using SSH reverse tunnel	206
CLI user session management commands	207
cli-session	207
Port access	210
Port access and Private VLAN interoperability considerations	210
Port access 802.1X authentication	211
Port access 802.1X authentication commands	212
aaa authentication port-access dot1x authenticator	212
aaa authentication port-access dot1x authenticator auth-method	213
aaa authentication port-access dot1x authenticator cached-reauth	214
aaa authentication port-access dot1x authenticator cached-reauth-period	214
aaa authentication port-access dot1x authenticator discovery-period	215
aaa authentication port-access dot1x authenticator eapol-timeout	216
aaa authentication port-access dot1x authenticator max-eapol-requests	217
aaa authentication port-access dot1x authenticator max-retries	217
aaa authentication port-access dot1x authenticator quiet-period	218
aaa authentication port-access dot1x authenticator radius server-group	219
aaa authentication port-access dot1x authenticator reauth	220
aaa authentication port-access dot1x authenticator reauth-period	220
clear dot1x authenticator statistics interface	221
show aaa authentication port-access dot1x authenticator interface client-status	222
show aaa authentication port-access dot1x authenticator interface port-statistics	224
Port access MAC authentication	225
How MAC authentication works	226
How RADIUS server is used in MAC authentication	226
Port access MAC authentication commands	226
aaa authentication port-access mac-auth	226
aaa authentication port-access mac-auth addr-format	227
aaa authentication port-access mac-auth auth-method	228
aaa authentication port-access mac-auth cached-reauth	229
aaa authentication port-access mac-auth cached-reauth-period	229
aaa authentication port-access mac-auth password	230
aaa authentication port-access mac-auth quiet-period	231
aaa authentication port-access mac-auth radius server-group	232
aaa authentication port-access mac-auth reauth	232
aaa authentication port-access mac-auth reauth-period	233
clear mac-auth statistics	234
show aaa authentication port-access mac-auth interface client-status	235
show aaa authentication port-access mac-auth interface port-statistics	237
Port access general commands	238
aaa authentication port-access auth-mode	238
aaa authentication port-access auth-precedence	239
aaa authentication port-access auth-priority	240
aaa authentication port-access client-limit	241
aaa authentication port-access client-limit multi-domain	242
aaa authentication port-access (role)	242
aaa authentication port-access radius-override	243
port-access allow-flood-traffic	245

port-access client-move	245
port-access fallback-role	246
port-access log-off client	247
port-access onboarding-method precedence	248
port-access onboarding-method concurrent	249
port-access reauthenticate interface	250
show aaa authentication port-access interface client-status	251
show port-access clients	254
show port-access clients detail	256
show port-access clients onboarding-method	258
Port access 802.1X and MAC authentication configuration example	259
Multidomain authentication	261
Multidomain authentication requirements	261
Scenarios with Aruba-Port-Auth-Mode and Aruba-Device-Traffic-Class VSAs	261
Scenarios with device-traffic-class configuration in role	262
Port access auto-VLAN	263
Support for voice VLAN	263
Auto-VLAN limitations	263
Port access security violation	264
Port access security violation commands	264
port-access security violation action	264
port-access security violation action shutdown auto-recovery	265
port-access security violation action shutdown recovery-timer	266
show interface	267
show port-access aaa violation interface	267
show port-access port-security violation client-limit-exceeded interface	268
Port access policy	270
Classes and actions supported by port access policies	270
Port access policy commands	270
port-access policy	270
port-access policy copy	274
port-access policy resequence	275
port-access policy reset	276
clear port-access policy hitcounts	278
show port-access policy	280
show port-access policy hitcounts	281
Port access role	283
Operational notes	283
Mixed roles	284
Limitations	284
Supported RADIUS attributes in mixed roles	285
Special roles	285
Critical role	285
Reject role	285
Pre-authentication role	285
Auth-role	287
Fallback role	287
Port access role commands	287
associate policy	287
auth-mode	288
cached-reauth-period	289
client-inactivity timeout	290
device-traffic-class	291
description	291
mtu	292
poe-priority	293

port-access role	294
reauth-period	294
session timeout	295
show aaa authentication port-access interface client-status	296
show port-access role	297
stp-admin-edge-port	299
trust-mode	299
vlan	300
Port access VLAN groups	302
VLAN grouping limitations	302
VLAN group load balancing	303
Port access VLAN group commands	304
associate-vlan	304
port-access vlan-group	304
show running-config port-access vlan-group	305
Configurable RADIUS attributes (port access)	307
Configurable RADIUS attribute commands	307
aaa radius-attribute group	307
nas-id request-type	308
nas-id value	309
tunnel-private-group-id request-type	310
tunnel-private-group-id value	311
Supported RADIUS attributes	313
Attributes supported in 802.1X authentication	313
Attributes supported in MAC authentication	313
Attributes supported in dynamic authorization	314
Session authorization attributes supported in 802.1X and MAC authentication, and CoA	314
Standard session attributes supported	314
Vendor-Specific Attributes supported in session authorization	315
Description of VSAs	315
Attributes supported in RADIUS network accounting	316
Attributes supported in RADIUS server tracking	317
Port security	318
Port-security sticky MAC	318
Basic operation	318
Default port security operation	318
Intruder protection	319
General operation for port security	319
Blocking unauthorized traffic	319
Trunk group exclusion	320
Port security commands	320
port-access port-security	320
port-access port-security client-limit	321
port-access port-security mac-address	322
show port-access port-security interface client-status	323
show port-access port-security interface port-statistics	324
sticky-learn enable	325
show port-access security violation sticky-mac-client-move interface	325
Fault Monitor	327
Fault monitoring conditions	327
Excessive jabbers	327
Excessive CRC errors	327

Excessive oversize packets	327
Excessive fragments	327
Excessive TX drops	327
Excessive collisions	327
Excessive Late Collisions	327
Excessive alignment errors	328
Excessive link flaps	328
Excessive broadcasts	328
Excessive multicasts	328
Fault monitor commands	328
(enabling, disabling faults)	328
action	330
apply fault-monitor profile	331
fault-monitor profile	332
show fault-monitor profile	333
show interface fault-monitor profile	335
show interface fault-monitor status	336
show running-config	337
show running-config all	337
threshold	338
vsx-sync (fault monitor)	340

Auditors and auditing tasks 342

Auditing tasks (CLI)	342
Auditing tasks (Web UI)	342
REST requests and accounting logs	343

Support and Other Resources 344

Accessing Aruba Support	344
Accessing Updates	344
Aruba Support Portal	344
My Networking	345
Warranty Information	345
Regulatory Information	345
Documentation Feedback	345

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing Aruba switches on a network.

Applicable products

This document applies to the following products:

- Aruba 4100i Switch Series (JL817A, JL818A)
- Aruba 6000 Switch Series (R8N85A, R8N86A, R8N87A, R8N88A, R8N89A)
- Aruba 6100 Switch Series (JL675A, JL676A, JL677A, JL678A, JL679A)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in [Support and Other Resources](#).

Command syntax notation conventions

Convention	Usage
<code>example-text</code>	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example-text	In code and screen examples, indicates text entered by a user.
Any of the following: ■ <code><example-text></code> ■ <code><example-text></code> ■ <i>example-text</i> ■ <i>example-text</i>	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: ■ For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. ■ For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.
{ }	Braces. Indicates that at least one of the enclosed items is required.

Convention	Usage
[]	Brackets. Indicates that the enclosed item or items are optional.
... or ...	Ellipsis: ■ In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. ■ In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment. The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term `switch`, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch (CONTEXT-NAME)#
```

Indicates the configuration context for a feature. For example:

```
switch(config-if) #
```

Identifies the `interface` context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch(config-vlan-100) #
```

When referring to this context, this document uses the syntax:

```
switch(config-vlan-<VLAN-ID>) #
```

Where `<VLAN-ID>` is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format:

```
member/slot/port
```

On the 4100i Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface 1/1/4 in software is associated with physical port 4 on the switch.

On the 6000 and 6100 Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface 1/1/4 in software is associated with physical port 4 on the switch.

This AOS-CX Switch provides the following security features:

- Local user and group management.
- Authentication, Authorization, and Accounting (AAA), either local (password or SSH public key-based), or remote password-based TACACS+ or RADIUS.
- SSH server. SSH is a cryptographic protocol that encrypts all communication between devices.
- Ability to use enhanced security as described in [Configuring enhanced security](#).
- Making sensitive switch configuration information available for secure export/import between switches. For information, see `service export-password`.

About Authentication, Authorization, and Accounting (AAA)

- **Authentication:** identifies users, validates their credentials, and grants switch access.
- **Authorization:** controls authenticated users command execution and switch interaction privileges.
- **Accounting:** collects and manages user session activity logs for auditing and reporting purposes.

Local AAA on your Aruba switch provides:

- Authentication using local password or SSH public key.
- Authorization using role-based access control (RBAC), and optionally, using user-defined local user groups with command authorization rules defined per group.
- Accounting of user activity on the switch using accounting logs.

Remote AAA provides the following for your Aruba switch:

- Authentication using remote AAA servers with either TACACS+ or RADIUS.
- Authorization using remote AAA servers with TACACS+ fine-grained command authorization. Local RBAC or local rule-based authorization is also possible.
- Transmission of locally collected accounting information to remote TACACS+ and RADIUS servers.



TACACS+ (Terminal Access Controller Access-Control System Plus) and RADIUS (Remote Authentication Dial-In User Service) server software is readily available as either open source or from various vendors.



For switches that support multiple management modules such as the Aruba 8400, all AAA functionality discussed only applies to the active management module. See also *AAA on switches with multiple management modules* in the *High Availability Guide*.

Default user admin

A factory-default switch comes with a single user named `admin`.

The `admin` user:

- Has an empty password. Press **Enter** in response to the `admin` password prompt. At initial boot, you are prompted to define a password for the `admin` user. Although empty (blank) passwords are allowed, it is recommended that you use strong passwords for all production switches.
- Is a member of the `administrators` group.
- Cannot be removed from the switch.



The switch `admin` user is distinct from the Service OS `admin` user. The Service OS acts as the `bootloader` and recovery operating system. The Service OS has its own CLI.

Example of first login with password setting

```
switch login: admin
Password:

Please configure the 'admin' user account password.
Enter new password: *****
Confirm new password: *****
switch#
```

Built-in user groups and their privileges

The switch provides the following built-in user groups with corresponding roles. Each of these roles comes with a set of privileges.

Group/Role	Privileges
<code>administrators</code>	Administrators have full privileges, including: ■ Full CLI access. ■ Performing firmware upgrades. ■ Viewing switch configuration information, including sensitive information such as passwords which are displayed as ciphertext. ■ Performing switch configuration. ■ Adding/removing user accounts. ■ Configuring users accounts, including passwords. Once set, a password cannot be deleted or set to empty.

Group/Role	Privileges
	REST API: All methods (GET, PUT, POST, DELETE) and switch resources are available. The privilege level for <code>administrators</code> is 15.
<code>operators</code>	Operators have no switch configuration privileges. Operators are restricted to: - Basic display-only CLI access. - Viewing of nonsensitive switch configuration information. - REST API: Other than the <code>\login</code> and <code>\logout</code> resources, only the GET method is available. The privilege level for <code>operators</code> is 1.
<code>auditors</code>	Auditors are restricted to functions related to auditing only: - CLI: Access to commands in the auditor context (<code>auditor></code>) only. - Web UI: Access to the System > Log page only. - REST API: POST method available for the <code>\login</code> and <code>\logout</code> resources. GET method available for the following resources only: - Audit log: <code>/logs/audit</code> - Event log: <code>/logs/event</code> The privilege level for <code>auditors</code> is 19.

User-defined user groups

The switch enables you to create up to 29 user-defined local user groups, for the purpose of configuring local authorization. Each of the 29 user-defined groups support up to 1024 CLI command authorization rules that define what CLI commands can be executed by members of the group.

The local user groups with their command execution rules are useful for the following:

- Providing authorization for use with RADIUS servers.
- Providing fallback authorization for use with TACACS+ servers.
- Providing authorization when neither RADIUS or TACACS+ servers are used.

User name requirements

Specifies the user name. Requirements:

- Must start with a lowercase letter.
- Can contain numbers and lowercase letters.
- Can include only these three special characters: hyphens (-), dots (.), and underscores (_).
- Can have a maximum of 32 characters.
- Cannot be empty.
- Cannot contain uppercase letters.
- Cannot be: `admin`, `root`, or `remote_user`.
- Cannot be Linux reserved names such as:

`daemon`, `bin`, `sys`, `sync`, `proxy`, `www-data`, `backup`, `list`, `irc`, `gnats`, `nobody`, `systemd-bus-proxy`, `sshd`, `messagebus`, `rpc`, `systemd-journal-gateway`, `systemd-journal-remote`, `systemd-journal-upload`,

systemd-timesync, systemd-coredump, systemd-resolve, rpcuser, vagrant, opsd, rdanet, _lldpd, rdaadmin, rdaweb, docker_container, tss.

Password requirements

Passwords must:

- Contain only ASCII characters from hexadecimal 21 to hexadecimal 7E [\x21-\x7E] (decimal 33 to 126). Spaces are not allowed. When the password is entered directly without prompting, the "?" symbol (hexadecimal 3F [\x3F] (decimal 63)) is not permitted.
- Contain at most 32 characters.
- Contain at least the number of characters configured (optionally) for minimum-password-length.



Although empty passwords are supported, it is recommended that you use strong passwords for all production switches.



Only an administrator can change the password of a user assigned to the `operators` role.

User and user group management tasks

User and user group management common tasks are as follows:

Task	Command or procedure	Example
Creating a user	<code>user</code>	<code>user jamie group administrators password</code>
Changing a user password	<code>user password</code>	<code>user jamie password</code>
Removing a user	<code>user</code>	<code>no user jamie</code>
Setting a user account password	<code>user password</code>	<code>user admin password</code>
Resetting the admin password using the Service OS	(procedure)	
Resetting the admin password by reverting the switch to factory defaults	(procedure)	<code>erase startup-config</code> <code>boot system</code>
Showing a list of all users	<code>show user-list</code>	<code>show user-list</code>
Showing information for the logged-in user	<code>show user information</code>	<code>show user information</code>
Creating a user group	<code>user-group</code>	<code>user-group admuser2</code>

Task	Command or procedure	Example
Adding command authorization rules to a user group	permit or deny (within user-group)	10 deny cli command "show aaa .*" 20 permit cli command "show .*"
Adding comments to rules in a user group	comment (within user-group)	10 comment Deny all show aaa commands. 20 comment Permit all other show commands.
Resequencing rules in a user group	resequence (within user-group)	resequence 100 20
Showing a list of all user groups	show user-group	show user-group

Resetting the switch admin password using the Service OS console

Perform this task only when the switch (Product OS) `admin` user password has been forgotten.

Prerequisites

- You are connected to the switch through the console port.
- You know the Service OS password (if configured).



If you forget the Service OS password, the only recourse is to zeroize the switch, reverting it to factory defaults. For more information, see *Zeroization* in the *Diagnostics and Supportability Guide*.

Procedure

1. Reboot the switch.
2. At the boot prompt, select 0. Service OS Console.

```
0. Service OS Console
1. Primary Software Image [XL.01.01.0001]
2. Secondary Software Image [XL.01.01.0002]
```

3. At the Switch Login prompt, enter `admin` and press `Enter`. If prompted for a Service OS password, enter it and press `Enter`.

```
Switch login: admin
Password: *****
Hewlett Packard Enterprise
SVOS>
```

4. At the `SVOS>` prompt, enter `password` and press `Enter`.
5. Enter the new switch (Product OS) password at both password prompts.

```
SVOS> password
Enter password: ****
Confirm password: ****

SVOS>
```

6. Enter `boot` and press `Enter`.

```
SVOS> boot

ServiceOS Information:
  Version:          **.10.06.0001
  Build Date:       2020-12-18 05:25:54 PDT
  Build ID:         ServiceOS: **.01.07.0003-internal:ab08328b9622:202009090525
  SHA:              ab08328b96224e8d56b3e629da9de40bd0f02677

Boot Profiles:

0. Service OS Console
1. Primary Software Image [**.10.06.0001]
2. Secondary Software Image [**.10.06.0001]

Select profile(primary):
```

7. To boot with the primary switch image press `1` and then `Enter`. To boot with the secondary switch image, press `2` and then `Enter`. If you make no selection for approximately 10 seconds, the switch boots the default image. The default is shown in parentheses to the right of `Select profile`, for example: `Select profile(primary):`.
8. Once in AOS-CX, save the configuration to make the `admin` login user account password setting persistent.

Resetting the admin password by reverting the switch to factory defaults



This task erases all switch configuration, reverting the switch to its factory default state. Consider using other less-impacting techniques for admin password reset. For example, another administrator user can reset the admin user password to a known value. See also [Resetting the switch admin password using the Service OS console](#).

Prerequisites

If wanted, you have saved a copy of the switch configuration.

Procedure

1. At the manager command prompt, enter `erase startup-config`.

```
switch# erase startup-config
```

2. Enter `boot system`, responding `n` to the `Do you want to save the current configuration` prompt and then responding `y` to the `Continue` prompt.

```
switch# boot system
Do you want to save the current configuration (y/n)? n

This will reboot the entire switch and render it unavailable
until the process is complete.
Continue (y/n)? y
The system is going down for reboot.
```

3. At the login prompt, enter `admin` and press `Enter`. The admin password remains empty until it is set.

User and group commands

user

```
user <USERNAME> group {administrators | operators | auditors | <USER-GROUP>}
    password [ciphertext <CIPHERTEXT-PASSWORD> | plaintext <PLAINTEXT-PASSWORD>]
no user <USERNAME>
```

Description

Creates a user and adds the user to one of the user groups. Users are given the privileges of their group. For the three built-in user groups (`administrators`, `operators`, `auditors`), the privileges are fixed. For user-defined local user groups, the privileges are defined by the CLI command authorization rules of the group.

When entered without either optional `ciphertext` or `plaintext` parameters, the cleartext password is prompted for twice, with the characters entered masked with "*" symbols.

The `no` form of this command removes a user account from the switch. The administrator cannot delete the user account from which they are logged in. The `admin` user cannot be deleted.

Parameter	Description
<USERNAME>	Specifies the user name. Requirements: - Must start with a lowercase letter. - Can contain numbers and lowercase letters. - Can include only these three special characters: hyphens (-), dots (.), and underscores (_). - Can have a maximum of 32 characters. - Cannot be empty. - Cannot contain uppercase letters. - Cannot be: <code>admin</code>, <code>root</code>, or <code>remote_user</code>. - Cannot be Linux reserved names such as: <code>daemon</code>, <code>bin</code>, <code>sys</code>, <code>sync</code>, <code>proxy</code>, <code>www-data</code>, <code>backup</code>, <code>list</code>, <code>irc</code>, <code>gnats</code>, <code>nobody</code>, <code>systemd-bus-proxy</code>, <code>sshd</code>, <code>messagebus</code>, <code>rpc</code>, <code>systemd-journal-gateway</code>, <code>systemd-journal-remote</code>, <code>systemd-journal-upload</code>, <code>systemd-timesync</code>, <code>systemd-coredump</code>, <code>systemd-resolve</code>, <code>rpcuser</code>, <code>vagrant</code>, <code>opssd</code>, <code>rdanet</code>, <code>_lldpd</code>, <code>rdaadmin</code>, <code>rdaweb</code>, <code>docker_container</code>, <code>tss</code>.
group	Selects the local user group to which the new user will be assigned.

Parameter	Description
<code>administrators operators auditors</code>	Selects one of three built-in local user groups.
<code><USER-GROUP></code>	Specifies an existing user-defined local user group.
<code>ciphertext <CIPHERTEXT-PASSWORD></code>	Specifies a ciphertext password. No password prompts are provided and the ciphertext password is validated before the configuration is applied for the user. The variable <code><CIPHERTEXT-PASSWORD></code> is Base64 and is typically copied from another switch using the <code>show running-config</code> command output and then pasted into this command. NOTE: The administrator cannot construct ciphertext passwords themselves. The ciphertext is only created by an AOS-CX switch. The ciphertext is created by setting a password for a user with the <code>user</code> command. The ciphertext is available for copying from the <code>show running-config</code> output and pasting into the configuration on any other AOS-CX switch. The target switch must have the same export password (default or otherwise) as the source switch.
<code>plaintext <PLAINTEXT-PASSWORD></code>	Specifies the password without prompting. The password is visible as cleartext when entered but is encrypted thereafter. Command history does show the password as cleartext.

Usage

- Up to 63 local users can be added, for a total of 64 users including the default user `admin`. A user can belong to only one group.
- The switch ships with the `admin` user account and three built-in local user groups: `administrators`, `operators`, and `auditors`. The `admin` account belongs to the `administrators` group. The Service OS also includes the administrator user `admin`. The two `admin` users are entirely distinct.
- When a local user account is removed, the user loses all active login/SSH sessions. Any calls on the existing REST session with that local user account fail with a permissions issue as soon as the user is deleted. Soon afterwards, the existing REST sessions with the deleted local user account become invalidated. If a user is viewing the GUI while their account is deleted, the user is redirected to the login page within 60 seconds. The home directory associated with the user is also removed from the switch.
- Cleartext passwords (whether entered with prompting or entered directly) must:
 - Contain only ASCII characters from hexadecimal 21 to hexadecimal 7E [`\x21-\x7E`] (decimal 33 to 126). Spaces are not allowed. When the password is entered directly without prompting, the "?" symbol (hexadecimal 3F [`\x3F`] (decimal 63)) is not permitted.
 - Contain at most 32 characters.
 - Contain at least the number of characters configured (optionally) for `minimum-password-length`.



Although empty passwords are supported, it is recommended that you use strong passwords for all production switches.



Only an administrator can change the password of a user assigned to the `operators` role.

Examples

Creating local user `jamie` in the `administrators` group with a prompted password:

```
switch(config)# user jamie group administrators password
Adding user jamie
Enter password:*****
Confirm password:*****
```

Creating user `chris` in the existing user-defined local user group `admuser2` with a cleartext password, using direct entry without prompting:

```
switch(config)# user chris group admuser2 password plaintext passWORDxJ|989
```

Creating user `alex` in the `operators` group with a ciphertext password (the ciphertext shown is a placeholder that must be replaced with actual ciphertext):

```
switch(config)# user alex group operators password ciphertext NDcDI2...8igJfA=
```

Removing user `jamie`:

```
switch(config)# no user jamie
User jamie's home directory and active sessions will be deleted.
Do you want to continue [y/n]?y
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

user-group

```
user-group <GROUP-NAME>
no user-group <GROUP-NAME>
```

Description

If `<GROUP-NAME>` does not exist, this command creates a local user group and then enters its context. If `<GROUP-NAME>` exists, this command enters the context for the specified `<GROUP-NAME>`. Within the `<GROUP-NAME>` context, several subcommands are available for working with rules that specify what CLI commands are permitted or denied for all members of the local group.

In addition to the three built-in user groups `administrators`, `operators`, and `auditors`, up to 29 user-defined local user groups can be defined. All users can be members of only one of the up to 32 groups.

The no form of this command deletes the specified user group. All members of the deleted group lose all command authorization privilege.

Parameter	Description
<code><GROUP-NAME></code>	Specifies the user group name. A new group is created if the specified group does not exist and then the group context is entered. If the group name exists, its context is entered.



Do not causally delete user-defined local user groups without understanding the implications. Although user-defined local user groups can be deleted with the respective members losing all privileges, the three built-in groups `administrators`, `operators`, and `auditors` are always available and their privileges are unchangeable.

Subcommands

These subcommands are available within the user-defined local user group context (shown in the switch prompt as `config-usr-grp-<GROUP-NAME>`).

```
[<SEQ-NUM>] {permit | deny} cli command "<REGEX>"  
no <SEQ-NUM>
```

Defines a CLI command privilege `permit` or `deny` rule. There is an implicit "`deny .*`" rule at the end of every user-defined group rule list. Members of a user-defined group without any `permit` rules have no CLI command privileges.

The no form of this subcommand deletes the specified (by sequence number) rule from the group.



Rule evaluation proceeds from lowest to highest sequence number until the first successful match, resulting in either CLI command permission or denial. Rule evaluation ceases upon first match. Therefore, rules for related CLI commands must be defined in most restrictive to least restrictive order.

`<SEQ-NUM>`

Specifies the CLI command rule sequence number. When omitted, a sequence number that is 10 greater the highest existing sequence number is auto-assigned. When no rules exist, the first auto-assigned sequence number is 10.

`{permit | deny}`

Sets the rule type as either `permit` or `deny`. Rule order is important. For example, these two related rules together authorize all `show` commands except for the `show aaa` commands.

```
switch(config-usr-grp-admuser2) #10 deny cli command "show aaa .*"
switch(config-usr-grp-admuser2) #20 permit cli command "show ."
```

To achieve the wanted effect in this example, the `deny` rule must precede the `permit` rule. These two rules together achieve the following:

- All `show aaa` commands match on rule 10, triggering command denial, and the immediate cessation of further rule evaluation. Matching on rule 20 is never attempted.
- All other `show` commands (excluding `show aaa` commands) match on rule 20 and are therefore permitted.

`<REGEX>`

Specifies the CLI command matching criteria of the rule. The criteria can be expressed as `".*"` which matches all commands. Otherwise, the criteria is expressed as a POSIX-compliant regular expression (regex) string starting with an exact match command token (for example `show`) followed by a regex representing command arguments. The first word must be a string that contains only alphanumeric or hyphen characters.

For example, to allow all commands starting with the word `interface`, the regex must be `"interface .*"` or just `"interface"`. Using `"interface.*"` (without the space) is not supported. For example, `"show .*"` matches every `show` command. Consult the Extended regular expression information available at: https://pubs.opengroup.org/onlinepubs/9699919799/basedefs/V1_chap09.html#tag_09_04.

Sample matching criteria	Sample matched CLI command or specifier	Matches
<code>show .*</code>	<code>show accounting log</code>	All <code>show</code> commands
<code>bgp .*</code>	<code>bgp router-id 1.1.1.1</code>	All <code>bgp</code> commands
<code>interface .*</code>	<code>interface 1/1/1</code>	All interface specifiers
<code>vlan (3 4)</code>	<code>vlan 3</code>	VLAN 3 or 4
<code>vlan [1-9]</code>	<code>vlan 5</code>	A single VLAN in the range 1 to 9
<code>vlan ([1-9] 1[0-9])</code>	<code>vlan 19</code>	A single VLAN in the range 1 to 19

`[<SEQ-NUM>] comment <TEXT-STRING>`

`no <SEQ-NUM> comment`

Adds a comment to an existing rule. The `no` form of this subcommand removes an existing comment.

```
switch(config-usr-grp-admuser2)# 10 comment Deny all show aaa commands.
switch(config-usr-grp-admuser2)# 20 comment Permit all other show commands.
switch(config-usr-grp-admuser2)#
switch(config-usr-grp-admuser2)# show running-config current-context
user-group admuser2
  10 comment Deny all show aaa commands.
  10 deny cli command "show aaa .*"
  20 comment Permit all other show commands.
  20 permit cli command "show .*"
```

`include <GROUP-NAME> [no] include <GROUP-NAME>`

Include all rules from the specified user-defined `<GROUP-NAME>`. Only one group can be included in the definition of another group. The content of the included group is effectively placed at the top of the rules list in the current group. If the specified `<GROUP-NAME>` does not exist, it is created.

The `no` form of this subcommand removes the specified included group from the current group. The specified included group must exist and must be included in the current group or else an error message is shown.

The name of the included group is shown at the top of the `show user-group` command for the group with the `include`.

In this example, group `admuser1` is included in group `admuser2`. So the `admuser1` rules are evaluated first and then the rules in the `admuser2` group are only evaluated if no CLI command match occurs for the rules in group `admuser1`.


```

switch(config-usr-grp-admuser2)# include admuser1
switch(config-usr-grp-admuser2)# show user-group admuser2
User Group Summary
=====
Name           : admuser2
Type           : configuration
Included Group  : admuser1
Number of Rules : 2
User Group Rules
=====

```

SEQUENCE NUM	ACTION	COMMAND	COMMENT
10	deny	show aaa .*	Deny all show aaa commands.
20	permit	show .*	Permit all other show commands.

resequence [<STARTING-SEQ-NUM> <INCREMENT>]

Resequences the CLI command authorization rules. When entered without the optional parameters the rules are resequenced with a <STARTING-SEQ-NUM> of 10 and an <INCREMENT> of 10.

<STARTING-SEQ-NUM>

Specifies the starting sequence number.

<INCREMENT>

Specifies the sequence number increment.

Resequencing the rules to start at 100 with an increment of 20:

```

switch(config-usr-grp-admuser2)# resequence 100 20
switch(config-usr-grp-admuser2)# show running-config current-context
user-group admuser2
  100 comment Deny all show aaa commands.
  100 deny cli command "show aaa .*"
  120 comment Permit all other show commands.
  120 permit cli command "show .*"

```

Resequencing the rules to the default of starting at 10 with an increment of 10:

```

switch(config-usr-grp-admuser2)# resequence
switch(config-usr-grp-admuser2)# show running-config current-context
user-group admuser2
  10 comment Deny all show aaa commands.
  10 deny cli command "show aaa .*"
  20 comment Permit all other show commands.
  20 permit cli command "show .*"

```

show running-config current-context

Shows all the commands used to configure the rules in the current group context.

```

switch(config-usr-grp-admuser2)# show running-config current-context
user-group admuser2
  10 comment Deny all show aaa commands.
  10 deny cli command "show aaa .*"
  20 comment Permit all other show commands.
  20 permit cli command "show .*"

```

list

List the subcommands available within the user-defined group context.

exit

Exits the user-defined group context.

end

Exits the user-defined group context and then the config context.

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

user password

user <USERNAME> password [ciphertext <CIPHERTEXT-PASSWORD> | plaintext <PLAINTEXT-PASSWORD>]

Description

Changes a password for an account or enables the password for the admin account. When entered without either optional `ciphertext` or `plaintext` parameters, the cleartext password is prompted for twice, with the characters entered masked with "*" symbols.

Parameter	Description
<USERNAME>	Specifies the corresponding user name for the password you want to change.
ciphertext <CIPHERTEXT-PASSWORD>	Specifies a ciphertext password. No password prompts are provided and the ciphertext password is validated before the configuration is applied for the user. The variable <CIPHERTEXT-PASSWORD> is Base64 and is typically copied from another switch using the <code>show running-config</code> command output and then pasted into this command. NOTE: The administrator cannot construct ciphertext passwords themselves. The ciphertext is only created by an AOS-CX switch. The ciphertext is created by setting a password for a user with the <code>user</code> command. The ciphertext is available for copying from the <code>show running-config</code> output and pasting into the configuration on any other AOS-CX switch. The target switch must have the same export password (default or otherwise) as the source switch.
plaintext <PLAINTEXT-PASSWORD>	Specifies the password without prompting. The password is visible as cleartext when entered but is encrypted thereafter. Command history does show the password as cleartext.

Usage

The admin account is available on the switch without a password by default.

Cleartext passwords (whether entered with prompting or entered directly) must:

- Contain only ASCII characters from hexadecimal 21 to hexadecimal 7E [\x21-\x7E] (decimal 33 to 126). Spaces are not allowed. When the password is entered directly without prompting, the "?" symbol (hexadecimal 3F [\x3F] (decimal 63)) is not permitted.
- Contain at most 32 characters.
- Contain at least the number of characters configured (optionally) for `minimum-password-length`.



Although empty passwords are supported, it is recommended that you use strong passwords for all production switches.



Only an administrator can change the password of a user assigned to the `operators` role.

Examples

Enabling (or changing) a cleartext password for `admin`:

```
switch(config)# user admin password
Changing password for user admin
Enter password:*****
Confirm password:*****
```

Changing the cleartext password for user `chris`, using direct entry without prompting:

```
switch(config)# user chris password plaintext PASSwordZQ#@67
```

Changing the ciphertext password for user `alex` (the ciphertext shown is a placeholder that must be replaced with actual ciphertext):

```
switch(config)# user alex password ciphertext XqYJ36...W83D4Y=
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

service export-password

```
service export-password
no service export-password
```

Description

Configures a nondefault export password. The export password is used to transform critical security parameters (such as password hashes) into ciphertext suitable for exporting and showing by commands such as `show running-config`. This transformation enables safe switch configuration import and export. The `no` form of this command reverts the export password to its factory default.



All factory-default switches have identical default export passwords. For security, it is recommended that you set the same nondefault export password on every switch in a group that will exchange configuration information. Only switches with identical export passwords can exchange configuration information.

Usage

Prompts you twice for the new export password.

The export password must:

- Contain only ASCII characters from hexadecimal 21 to hexadecimal 7E [`\x21-\x7E`] (decimal 33 to 126). Spaces are not allowed.
- Contain at most 32 characters.
- Not be blank.

Examples

Configuring a new export password:

```
switch(config)# service export-password
Enter password:*****
Confirm password:*****
```

Reverting the export password to its factory default:

```
switch(config)# no service export-password
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show user-group

```
show user-group [<GROUP-NAME>]
```

Description

Shows user group information for the built-in groups plus any user-defined local user groups. When entered without `<GROUP-NAME>`, summary information is shown for all groups.

Parameter	Description
<GROUP-NAME>	Narrows the <code>show</code> command output to that of the specified group, and for local user groups, adds the User Group Rules list.

Examples

Show the list of all user groups, including built-in groups and local user groups.

```
switch# show user-group
GROUP NAME      GROUP TYPE      INCLUDED GROUP  NUMBER OF RULES
-----
administrators  built-in        n/a             n/a
admuser1        configuration    --             5
admuser2        configuration    admuser1        2
auditors        built-in        n/a             n/a
operators       built-in        n/a             n/a
```

Show detailed information for local user group `admuser2`.

```
switch(config-usr-grp-admuser2)# show user-group admuser2
User Group Summary
=====
Name           : admuser2
Type           : configuration
Included Group : admuser1
Number of Rules : 2
User Group Rules
=====
SEQUENCE NUM  ACTION  COMMAND  COMMENT
-----
---
10            deny    show aaa .*      Deny all show aaa commands.
20            permit  show .*          Permit all other show
commands.
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show user information

`show user information`

Description

Shows the following information for the logged-in user:

- User name.
- User authentication type: local, RADIUS, or TACACS+.
- User group: administrators, operators, or <GROUP-NAME>.
- User privilege level: For the built-in user groups and RADIUS or TACACS+, the role privilege level value is shown. For user-defined user groups, N/A is shown.

Examples

Showing information for the `admin` user:

```
switch# show user information
Username           : admin
Authentication type : Local
User group         : administrators
User privilege level : 15
```

Showing information for a member of the user-defined local user group `admuser2`:

```
switch# show user information
Username           : admin2-b
Authentication type : Local
User group         : admuser2
User privilege level : N/A
```

Showing information for a member of `operators`:

```
switch# show user information
Username           : operator
Authentication type : Local
User group         : operators
User privilege level : 1
```

Showing information for remote RADIUS user `rad_user1` mapped to local user group `administrators`:

```
switch# show user information
Username           : rad_user1
Authentication type : RADIUS
User group         : administrators
User privilege level : 15
```

Showing information for remote RADIUS user `rad_user2` mapped to local user group `operators`:

```
switch# show user information
Username           : rad_user2
Authentication type : RADIUS
User group         : operators
User privilege level : 1
```

Showing information for remote TACACS+ `tac_user1` logged in with `priv-lvl 15` (mapped to user group `administrators`):

```
switch# show user information
Username           : tac_user1
Authentication type : TACACS+
User group         : administrators
User privilege level : 15
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show user-list

```
show user-list
```

Description

Shows all configured users and their corresponding group names.

Examples

Show the user list from a switch with only the admin user defined.

```
switch# show user-list

USER                               GROUP
-----
admin                             administrators
```

Show the user list after adding a user to the operators built-in group.

```
switch# show user-list

USER                               GROUP
-----
admin                             administrators
oper1                             operators
```

Show the user list after adding a user to the auditors built-in group.

```
switch# show user-list

USER                               GROUP
-----
```

admin	administrators
oper1	operators
audit1	auditors

Show the user list after adding a total of three users to two user-defined user groups.

```
switch# show user-list
```

USER	GROUP
admin	administrators
oper1	operators
audit1	auditors
adm1a	admuser1
admin2-a	admuser2
admin2-b	admuser2

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

SSH (Secure Shell) is a cryptographic protocol that encrypts all communication between devices.

Each switch VRF includes an SSH server. The SSH server on the `mgmt` VRF is enabled by default in software version 10.02 and higher, and disabled in version 10.01 and lower. Only the SSH servers included in the switch are supported.

The SSH server provides SSH client to switch communications, enabling SSH clients (at least SSH v2.0) to connect to the switch for the purpose of managing it. The SSH server interfaces with the authentication service that provides local and/or remote AAA.



The SSH server will perform a rekey operation for all open SSH sessions at every hour or after 1 GB of data transferred, whichever occurs first. The rekey is performed to address a common security concern that encryption/decryption keys not be used for long periods of time. This limits the amount of data exposed in the unfortunate case where a key is exposed or refactored.



SSH public key authentication is separate from SSH server. Look for information on *SSH public key* under [Local authentication](#).

SSH defaults

Setting	Default value
Maximum SSH password retries	3 password retries.
Password-based (with SSH client) authentication	Enabled.
SSH password-based login grace period timeout	120 seconds.
SSH public key authentication	Enabled.
SSH idle session timeout	60 seconds.

SSH server tasks

SSH server tasks are as follows:

Task	Command name	Example
Enabling the SSH server	<code>ssh server vrf</code>	<code>ssh server vrf default</code>
Disabling the SSH server	<code>no ssh server vrf</code>	<code>no ssh server vrf default</code>
Generating an SSH host-key pair	<code>ssh host-key</code>	<code>ssh host-key rsa bits 2048</code>
Clearing the list of trusted SSH servers for your user account	<code>ssh known-host remove</code>	<code>ssh known-host remove 1.1.1.1</code>
Configuring SSH to use a set of ciphers	<code>ssh ciphers</code>	<code>ssh ciphers chacha20-poly1305@openssh.com aes256-ctr aes256-cbc</code>
Configuring SSH to use a set of host key algorithms	<code>ssh host-key-algorithms</code>	<code>ssh host-key-algorithms ssh-rsa ssh-ed25519 ecdsa-sha2-nistp256</code>
Configuring SSH to use a set of MACs	<code>ssh macs</code>	<code>ssh macs hmac-sha2-256 hmac-sha2-512</code>
Configuring SSH to use a set of key exchange algorithms	<code>ssh key-exchange-algorithms</code>	<code>ssh key-exchange-algorithms ecdh-sha2-nistp256</code>
Configuring SSH to use a set of public key algorithms	<code>ssh public-key-algorithms</code>	<code>ssh public-key-algorithms x509v3-ssh-rsa ssh-rsa rsa-sha2-256</code>
Configuring SSH idle session timeout	<code>cli-session</code>	<code>switch(config)# cli-session switch(config-cli-session)# timeout 20</code>
Showing the SSH server configuration	<code>show ssh server</code>	<code>show ssh server all-vrfs</code>
Showing the active SSH sessions	<code>show ssh server sessions</code>	<code>show ssh server sessions all-vrfs</code>
Showing the SSH server host keys	<code>show ssh host-key</code>	<code>show ssh host-key ecdsa</code>

SSH server commands



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

show ssh host-key

```
show ssh host-key [ecdsa | ed25519 | rsa]
```

Description

Shows the public host keys for the SSH server. If the key type is not provided, all available host-keys are shown.

Parameter	Description
ecdsa	Selects the ECDSA host-key pair.
ed25519	Selects the ED25519 host-key pair.
rsa	Selects the RSA host-key pair.

Examples

Showing the ECDSA public host-key:

```
switch# show ssh host-key ecdsa

Key Type : ECDSA      Curve : ecdsa-sha2-nistp256

ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAhtuv5rABBBGs
...
O4mjVFGMVkZ87RWkyrxeQa2fAGZZEp1902K33/k3q17fA4EivRzC75YvjDu8=
```

Showing all public host keys:

```
switch# show ssh host-key

Key Type : ECDSA      Curve : ecdsa-sha2-nistp256
ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAhtuv5rABBBGs
...
O4mjVFGMVkZ87RWkyrxeQa2fAGZZEp1902K33/k3q17fA4EivRzC75YvjDu8=

Key Type : ED25519
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIGb6910Jwoe8Hk19K5YhqijrWI3yovNbiJVq6tw4WjJr4

Key Type : RSA        Key Size : 2048
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQDdVCXlw43h4n1bwg9jI6DSBMngymCdPD0JUG42Sn9IS
...
nGSXtrNy6OmlFDJTAy+zz5Kd8d21ZLuhf07IHNgF3pff65Xc8qNJBv
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show ssh server

```
show ssh server [vrf default]
```

Description

Shows the SSH server configuration for the default VRF.

Parameter	Description
vrf default	Specifies the default VRF.

Examples

Showing the SSH server configuration on the default VRF:

```
switch# show ssh server

SSH server configuration on VRF default :

IP Version      : IPv4 and IPv6      SSH Version      : 2.0
TCP Port        : 22                  Grace Timeout (sec) : 120
Max Auth Attempts : 6

Ciphers:
chacha20-poly1305@openssh.com, aes128-ctr, aes192-cbc,
aes128-cbc, aes192-ctr, aes256-gcm@openssh.com,
aes128-gcm@openssh.com, aes256-ctr, aes256-cbc

Host Key Algorithms:
ecdsa-sha2-nistp256, ecdsa-sha2-nistp384, ecdsa-sha2-nistp521,
ssh-ed25519, rsa-sha2-256, rsa-sha2-512, ssh-rsa

Key Exchange Algorithms:
curve25519-sha256, curve25519-sha256@libssh.org,
ecdh-sha2-nistp256,ecdh-sha2-nistp384, ecdh-sha2-nistp521,
diffie-hellman-group-exchange-sha256,diffie-hellman-group16-sha512,
diffie-hellman-group18-sha512,diffie-hellman-group14-sha256,
diffie-hellman-group14-sha1

MACs:
hmac-sha1-etm@openssh.com, umac-64@openssh.com,
umac-128@openssh.com, hmac-sha2-256,hmac-sha2-512,hmac-sha1

Public Key Algorithms:
rsa-sha2-256, rsa-sha2-512ssh-rsa, ecdsa-sha2-nistp256,
ecdsa-sha2-nistp384, ecdsa-sha2-nistp521, ssh-ed25519,
x509v3-rsa2048-sha256, x509v3-ssh-rsa, x509v3-sign-rsa,
x509v3-ecdsa-sha2-nistp256, x509v3-ecdsa-sha2-nistp384,
x509v3-ecdsa-sha2-nistp521
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ssh server sessions

show ssh server sessions [vrf default]

Description

Shows the active SSH sessions on the default VRF.

Parameter	Description
vrf default	Specifies the default VRF.

Usage

If you provide the command with a VRF name, the command shows the active SSH session for the specified VRF. Any user can show sessions of all VRFs by using the `all-vrfs` parameter. The maximum number of sessions per VRF is five. The maximum SSH idle session timeout is 60 seconds.

Examples

Showing the active SSH sessions on the default VRF:

```
switch# show ssh server sessions

SSH sessions on VRF default
IPv4 SSH Sessions
  Server IP      : 10.1.1.1
  Client IP      : 10.1.1.2
  Client Port    : 58835

IPv6 SSH Sessions
  Server IP      : FF01:0:0:0:0:0:FB
  Client IP      : FF01:0:0:0:0:0:FC
  Client Port    : 58836
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

ssh ciphers

```
ssh ciphers <CIPHERS-LIST>
no ssh ciphers
```

Description

Configures SSH to use a set of ciphers in the specified priority order. Ciphers in SSH are used for privacy of data being transported over the connection. The first cipher type entered in the CLI is considered a first priority. Each option is an algorithm that is used to encrypt the link and each name indicates the algorithm and cryptographic parameters that are used. Only ciphers that are entered by the user are configured.

The `no` form of this command removes the configuration of ciphers and reverts SSH to use the default set of ciphers.

Parameter	Description
<code><CIPHERS-LIST></code>	Valid ciphers: ■ aes128-cbc ■ aes192-cbc ■ aes256-cbc ■ aes128-ctr ■ aes192-ctr ■ aes256-ctr ■ aes128-gcm@openssh.com ■ aes256-gcm@openssh.com ■ chacha20-poly1305@openssh.com Default set of ciphers in priority order (highest at top): ■ chacha20-1305@openssh.com ■ aes128-ctr ■ aes192-ctr ■ aes256-ctr ■ aes128-gcm@openssh.com ■ aes256-gcUm@openssh.com

Examples

Configuring SSH to use only specified ciphers in the priority order:

```
switch(config)# ssh ciphers chacha20-poly1305@openssh.com aes256-ctr aes256-cbc
```

Reverting SSH to use the default set of ciphers:

```
switch(config)# no ssh ciphers
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh host-key

```
ssh host-key {ecdsa [ecdsa-sha2-nistp256 | ecdsa-sha2-nistp384 | ecdsa-sha2-nistp521] |
ed25519 | rsa [bits {2048 | 4096}]} }
```

Description

Generates an SSH host-key pair.

Parameter	Description
ecdsa	Selects the ECDSA host-key pair type as ecdsa-sha2-nistp256 (the default), ecdsa-sha2-nistp384, or ecdsa-sha2-nistp521.
ed25519	Selects the ED25519 host-key pair.
rsa	Selects the RSA host-key pair. Optionally, the key bit length is selected with either bits 2048 (the default) or bits 4096.

Usage

When an SSH server is enabled on a VRF for the first time, host-keys are generated.

If the host-key of the given type exists, a warning message is displayed with a request to overwrite the previous host-key with the new key.

Examples

Overwriting an old ECDSA host-key with a new ecdsa-sha2-nistp384 host-key:

```
switch(config)# ssh host-key ecdsa ecdsa-sha2-nistp384
ecdsa host-key will be overwritten.
Do you want to continue (y/n)?
```

Overwriting an old RSA host-key with a new RSA host-key with 2048 bits:

```
switch(config)# ssh host-key rsa bits 2048
rsa host-key will be overwritten.
Do you want to continue (y/n)?
```

Overwriting an ECDSA host-key with an ED25519 host-key pair:

```
switch(config)# ssh host-key ed25519
ed25519 host-key will be overwritten.
Do you want to continue (y/n)?
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh host-key-algorithms

```
ssh host-key-algorithms <HOST-KEY-ALGORITHMS-LIST>
no ssh host-key-algorithms
```

Description

Configures SSH to use a set of host key algorithms in the specified priority order. Host key algorithms specify which host key types are allowed to be used for the SSH connection. The first host key entered in the CLI is considered a first priority. Each option represents a type of key that can be used. Host keys are used to verify the host that you are connecting to. This configuration allows you to control which host key types are presented to incoming clients, or which host key types to receive first from hosts. Only the host key algorithms that are specified by the user are configured.

The `no` form of this command removes the configuration of host key algorithms and reverts SSH to use the default set of algorithms.

Parameter	Description
<code><HOST-KEY-ALGORITHMS-LIST></code>	Default set of public key algorithms in priority order (highest at top), comprised of all possible valid algorithms: ■ <code>ecdsa-sha2-nistp256</code> ■ <code>ecdsa-sha2-nistp384</code> ■ <code>ecdsa-sha2-nistp521</code> ■ <code>ssh-ed25519</code> ■ <code>rsa-sha2-256</code> ■ <code>rsa-sha2-512</code> ■ <code>ssh-rsa</code>

Examples

Configuring SSH to use only specified host key algorithms:

```
switch(config)# ssh host-key-algorithms ssh-rsa ssh-ed25519 ecdsa-sha2-nistp521
```

Reverting SSH to use the default set of host key algorithms:

```
switch(config)# no host-key-algorithms
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh key-exchange-algorithms

```
ssh key-exchange-algorithms <KEY-EXCHANGE-ALGORITHMS-LIST>
no ssh key-exchange-algorithms
```

Description

Configures SSH to use a set of key exchange algorithm types in the specified priority order. The first key exchange type entered in the CLI is considered a first priority. Key exchange algorithms are used to exchange a shared session key with a peer securely. Each option represents an algorithm that is used to distribute a shared key in a way that prevents outside interference, manipulation, or recovery. Only the key exchange algorithms that are specified by the user are configured.

The `no` form of this command removes the configuration of key exchange algorithms and reverts SSH to use the default set of algorithms.

Parameter	Description
<code><KEY-EXCHANGE-ALGORITHMS-LIST></code>	Valid key exchange algorithms: ■ <code>curve25519-sha256</code> ■ <code>curve25519-sha256@libssh.org</code> ■ <code>diffie-hellman-group-exchange-sha1</code> ■ <code>diffie-hellman-group-exchange-sha256</code> ■ <code>diffie-hellman-group14-sha1</code> ■ <code>diffie-hellman-group14-sha256</code> ■ <code>diffie-hellman-group16-sha512</code> ■ <code>diffie-hellman-group18-sha512</code> ■ <code>ecdh-sha2-nistp256</code> ■ <code>ecdh-sha2-nistp384</code> ■ <code>ecdh-sha2-nistp521</code> Default set of key exchange algorithms in priority order (highest at top): ■ <code>curve25519-sha256</code> ■ <code>curve25519-sha256@libssh.org</code> ■ <code>ecdh-sha2-nistp256</code> ■ <code>ecdh-sha2-nistp384</code> ■ <code>ecdh-sha2-nistp521</code> ■ <code>diffie-hellman-group-exchange-sha256</code> ■ <code>diffie-hellman-group16-sha512</code> ■ <code>diffie-hellman-group18-sha512</code> ■ <code>diffie-hellman-group14-sha256</code> ■ <code>diffie-hellman-group-exchange-sha1</code>

Examples

Configuring SSH to use a set of specified key exchange algorithms:

```
switch(config)# ssh key-exchange-algorithms ecdh-sha2-nistp256 curve25519-sha256  
diffie-hellman-group-exchange-sha256
```

Reverting SSH to use the default set of key-exchange-algorithms:

```
switch(config)# no key-exchange-algorithms
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh known-host remove

```
ssh known-host remove {all | {<IPv4-ADDRESS> | <HOSTNAME> | <IPv6-ADDRESS>} }
```

Description

Clears the list of trusted SSH servers for your user account. When you download or upload a file to or from a server using SFTP, you establish a trusted SSH relationship with that server. Each user account maintains its own set of SSH server host-keys for every server to which the user previously connected.

Parameter	Description
all	Clears the trusted servers list.
<IPv4-ADDRESS>	Specifies the IPv4 address of the remote device.
<HOSTNAME>	Specifies the host name of the remote device. Range: up to 255 characters.
<IPv6-ADDRESS>	Specifies the IPv6 address of the remote device.

Examples

Clearing the trusted server list:

```
switch(config)# ssh known-host remove all
```

Removing a specified server from the trusted server list:

```
switch(config)# ssh known-host remove 1.1.1.1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh macs

```
ssh macs <MACS-LIST>  
no ssh macs
```

Description

Configures SSH to use a set of message authentication codes (MACs) in the specified priority order. The first MAC entered in the CLI is considered a first priority. MACs maintain the integrity of each message sent across an SSH connection. Each option represents an algorithm that can be used to provide integrity between peers. Only the MAC types that are specified by the user are configured.

The `no` form of this command removes the configuration of MACs and reverts SSH to use the default set of MACs.

Parameter	Description
<MACS-LIST>	Valid MACs: ■ hmac-sha1 ■ hmac-sha1-96 ■ hmac-sha1-etm@openssh.com ■ hmac-sha2-256 ■ hmac-sha2-512 ■ hmac-sha2-256-etm@openssh.com ■ hmac-sha2-512-etm@openssh.com Default set of MACs in priority order (highest at top): ■ hmac-sha2-256-etm@openssh.com ■ hmac-sha2-512-etm@openssh.com ■ hmac-sha1-etm@openssh.com ■ hmac-sha2-256 ■ hmac-sha2-512 ■ hmac-sha1

Examples

Configuring SSH to use a set of specified MACs:

```
switch(config)# ssh macs hmac-sha2-256 hmac-sha2-512
```

Reverting SSH to use the default set of MACs:

```
switch(config)# no ssh macs
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh maximum-auth-attempts

```
ssh maximum-auth-attempts <ATTEMPTS>  
no maximum-auth-attempts
```

Description

Sets the SSH maximum number of authentication attempts.

The `no` form of the command resets the maximum to its default of 6.

Parameter	Description
<ATTEMPTS>	Specifies the maximum number of SSH authentication attempts. Range: 1 to 10. Default: 6.

Examples

Setting the maximum number of authentication attempts:

```
switch(config)# ssh maximum-auth-attempts 3
```

Resetting the maximum number of authentication attempts to its default of 6:

```
switch(config)# no maximum-auth-attempts
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh public-key-algorithms

```
ssh public-key-algorithms <PUBLIC-KEY-ALGORITHMS-LIST>
no ssh public-key-algorithms
```

Description

Configures SSH to use a set of public key algorithms in the specified priority order. The first public key type entered in the CLI is considered a first priority. Public key algorithms specify which public key types can be used for public key authentication in SSH. Each option represents a public key type that the SSH server can accept or that the SSH client can present to a server. Only the public key algorithms that are chosen by the user are configured.

The `no` form of this command removes the configuration of public key algorithms and reverts SSH to use the default set.

Parameter	Description
<PUBLIC-KEY-ALGORITHMS-LIST>	Default set of public key algorithms in priority order (highest at top), comprised of all possible valid algorithms: ■ rsa-sha2-256 ■ rsa-sha2-512 ■ ssh-rsa ■ ecdsa-sha2-nistp256 ■ ecdsa-sha2-nistp384 ■ ecdsa-sha2-nistp521 ■ ssh-ed25519 ■ x509v3-rsa2048-sha256 ■ x509v3-ssh-rsa ■ x509v3-sign-rsa ■ x509v3-ecdsa-sha2-nistp256 ■ x509v3-ecdsa-sha2-nistp384 ■ x509v3-ecdsa-sha2-nistp521

Examples

Configuring SSH to use a set of specified public key algorithms:

```
switch(config)# ssh public-key-algorithms x509v3-ssh-rsa ssh-rsa rsa-sha2-256
```

Reverting SSH to use the default set of public key algorithms:

```
switch(config)# no ssh public-key-algorithms
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh server vrf

```
ssh server vrf <VRF-NAME>
no ssh server vrf <VRF-NAME>
```

Description

Enables the SSH server on the specified VRF.

The `no` form of the command disables the SSH server on the specified VRF.

Parameter	Description
<code>vrf <VRF-NAME></code>	Specifies the VRF name.

Examples

Enabling the SSH server on the management VRF:

```
switch(config)# ssh server vrf mgmt
```

Disabling the SSH server on the management VRF:

```
switch(config)# no ssh server vrf mgmt
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

The switch provides an SSH client that enables the switch to log in to an SSH server such as another switch, typically for command execution purposes. The SSH client provides secure encrypted communications between the switch and the SSH server over any network.

SSH client commands



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

ssh (client login)

```
ssh [<USERNAME>@]{<IPv4> | <HOSTNAME>} [vrf <VRF-NAME>] [port <PORT-NUMBER>]
```

Description

Establishes a client session with an SSH server which is typically another switch.

Parameter	Description
<USERNAME>	Specifies the username that the client uses to log in to an SSH server. When omitted, the username of the current session is used.
<IPv4>	Specifies the SSH server to which the SSH client will connect as an IPv4 address.
<HOSTNAME>	Specifies the SSH server to which the SSH client will connect as a host name.
vrf <VRF-NAME>	Specifies the VRF to be used for the SSH client session. When omitted, the default VRF named <code>default</code> is used.
port <PORT-NUMBER>	Specifies the SSH server TCP port number. When omitted, the default TCP port 22 is used.

Examples

Establishing an SSH client session (using the management VRF) with an SSH server:

```
switch# ssh admin@10.0.11.180 vrf mgmt
```

Establishing an SSH client session (using the default VRF and a specific port) with an SSH server:

```
switch# ssh admin@10.0.11.175 port 223
```

Configuring a test user on switch 1 and then connecting to switch 1 from switch 2 using the SSH client on the mgmt VRF:

```
** Configuring a test user on switch 1 **
switch(config)# user-group test
switch(config-usr-grp-test)# permit cli command ".*"
switch(config)# exit
switch(config)# user test-user group test password plaintext tst#9J

** On switch 2, connecting to switch 1 using the SSH client **
switch# ssh test-user@10.0.11.177 vrf mgmt
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

Local AAA on your Aruba switch provides:

- Authentication using local password or SSH public key.
- Authorization using local role-based access control (RBAC). Optional per-command authorization is possible through configuration of user-defined local user groups, with command authorization rules applied to respective group members.
- Accounting of user activity on the switch using accounting logs.



For switches that support multiple management modules such as the Aruba 8400, all AAA functionality discussed only applies to the active management module. See also *AAA on switches with multiple management modules* in the *High Availability Guide*.

Local AAA defaults and limits

Setting	Default value / limit
Local authentication	Enabled by default for all connection types: console, SSH, and REST.
Local role-based access control (RBAC) authorization	Enabled by default for all connection types: console, SSH, and REST.
Local accounting	Enabled.
Maximum number of local users	64 users, including the default <code>admin</code> user.
Maximum number of user-defined local user groups	32 groups, including the three built-in groups <code>administrators</code> , <code>operators</code> , <code>auditors</code> .
Password for default admin account	The password is empty by default.
SSH public key authentication	Enabled.

Local authentication

Authentication identifies users, validates their credentials, and grants switch access. Local authentication is either password-based or SSH public key-based.

Password-based local authentication

- Validates users with local user name and password credentials
- Is supported on all interfaces/channels (SSH, WebUI, Console, REST)

- Is enabled by default but can be superseded by remote authentication or with SSH client using SSH public key authentication

SSH public key-based local authentication

- Validates users identified with SSH public keys stored in the local user database
- Is supported on the SSH interface/channel with SSH client
- Takes precedence over password-based authentication whether local or remote
- Is enabled by default (also requires key configuration to work)

Local authentication tasks

The local authentication (local password and SSH public key) tasks are as follows:

Task	Command name	Example
Enable authentication as local for the specified connection types	<code>aaa authentication login</code>	Enable local authentication for the default and console connection types: <code>aaa authentication login default local</code> <code>aaa authentication login console local</code>
Show authentication configuration	<code>show aaa authentication</code>	<code>show aaa authentication</code>
Enable password-based authentication minimum password length checking	<code>aaa authentication minimum-password-length</code>	<code>aaa authentication minimum-password-length 12</code>
Disable password-based authentication minimum password length checking	<code>aaa authentication minimum-password-length</code>	<code>no aaa authentication minimum-password-length</code>
Enable local password-based authentication login attempt	<code>aaa authentication limit-login-attempts</code>	<code>aaa authentication limit-login-attempts 4 logout-time 20</code>

Task	Command name	Example
limiting		
Disable local password-based authentication login attempt limiting	aaa authentication limit-login-attempts	no aaa authentication limit-login-attempts
Enable local password-based authentication for use with SSH clients (enabled by default)	ssh password-authentication	ssh password-authentication
Disable local password-based authentication for use with SSH clients	ssh password-authentication	no ssh password-authentication
Enable SSH public key authentication (enabled by default)	ssh public-key-authentication	ssh public-key-authentication
Disable SSH public key authentication	ssh public-key-authentication	no ssh public-key-authentication
Show state of local password-based (for SSH) and SSH public key authentication	show ssh authentication-method	show ssh authentication-method
Copying the client SSH public key into the key	user authorized-key	user admin authorized-key ecdsa-sha2-nistp256 E2VjZH...QUiCAk=root@switch

Task	Command name	Example
list		
Removing SSH public keys from the key list	user authorized- key	no user admin authorized-key 2
Showing the SSH client public key list	show user	show user admin authorized-key

Local authorization

Authorization controls authenticated users command execution and switch interaction privileges. Local authorization uses role-based access control (RBAC) to provide role-based privilege levels plus optional user-defined local user groups with command execution rules. Authorization occurs only after successful authentication.

- **Administrators** have full command execution and switch interaction privilege.
- **Operators** are limited to the use of several nonsensitive `show` commands.
- **Auditors** are limited to a few auditing-related commands.

Optional per-command authorization is available through configuration of user-defined local user groups with command authorization rules applied to respective group members. see [User-defined user groups](#) .

Local authorization tasks

The local authorization tasks are as follows:

Task	Command name	Example
Enable authorization as local RBAC for the specified connection types	aaa authorization commands	Enable local authorization for the default and console connection types: aaa authorization commands default local aaa authorization commands console local
Show authorization configuration	show aaa authorization	show aaa authorization

Local accounting

Local accounting is always active. It cannot be turned off.

This accounting information is captured and made available locally (using `show accounting log`) and, if desired, for sending to remote AAA servers:

- Exec Accounting: user login/logout events.
- Command accounting: commands executed by users.
- System accounting: remote accounting On/Off events.

- CLI show commands.
- Interactions on the non-CLI interfaces: REST and WebUI.

The following is not captured or made available as accounting information:

- CLI commands that reboot the switch.
- Interactions in the bash shell.



See also the `show accounting log` command.

Local accounting tasks

The local accounting tasks are as follows:

Task	Command name	Example
Enable accounting as local for the specified connection types	<code>aaa accounting all-mgmt</code>	Enable local accounting for the default and console connection types: <code>aaa accounting all-mgmt default start-stop local</code> <code>aaa accounting all-mgmt console start-stop local</code>
Show accounting configuration	<code>show aaa accounting</code>	<code>show aaa accounting</code>
Show local accounting log contents	<code>show accounting log</code>	<code>show accounting log last 10</code>

aaa accounting all-mgmt

```
aaa accounting all-mgmt <CONNECTION-TYPE> start-stop {local | group <GROUP-LIST>}  
no aaa accounting all-mgmt <CONNECTION-TYPE>
```

Description

Defines accounting as being local (with the name `local`) (the default). Or defines a sequence of remote AAA server groups to be accessed for accounting purposes.

For remote accounting, the information is sent to the first reachable remote server that was configured with this command for remote accounting. If no remote server is reachable, local accounting remains available. Each available connection type (channel) can be configured individually as either local or using remote AAA server groups. All server groups named in your command, must exist. This command can be issued multiple times, once for each connection type. Local is always available for any connection type not configured for remote accounting.



The system accounting log is not associated with any connection type (channel) and is therefore sent to the accounting method configured on the default connection type (channel) only.

The `no` form of this command removes for the specified connection type, any defined remote AAA server group accounting sequence. Local accounting is available for connection types without a configured remote AAA server group list (whether default or for the specific connection type).

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Defines a list of accounting server groups to be used for the <code>default</code> connection type. This configuration applies to all other connection types (<code>console</code>, <code>https-server</code>, <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa accounting all-mgmt console...</code> to define the console accounting list, then this default configuration is used for console. <code>console</code> Defines a list of accounting server groups to be used for the <code>console</code> connection type. <code>https-server</code> Defines a list of accounting server groups to be used for the <code>https-server</code> (REST, Web UI) connection type. <code>ssh</code> Defines a list of accounting server groups to be used for the <code>ssh</code> connection type.
<code>start-stop</code>	Selects accounting information capture at both the beginning and

Parameter	Description
	end of a process.
local	Selects local-only accounting when used without the <code>group</code> parameter.
group <GROUP-LIST>	Specifies the list of remote AAA server group names. Each name can be specified one time. Predefined remote AAA group names <code>tacacs</code> and <code>radius</code> are available. Although not a group name, predefined name <code>local</code> is available. User-defined TACACS+ and RADIUS server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa group server</code> and servers are added to a server group with the command <code>server</code> .

Usage

Local accounting is always active. It cannot be turned off.

Examples

Setting local accounting for the default connection type:

```
switch(config)# aaa accounting all-mgmt default start-stop local
```

Setting local accounting for the console connection type:

```
switch(config)# aaa accounting all-mgmt console start-stop local
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authentication console-login-attempts

```
aaa authentication console-login-attempts <ATTEMPTS> console-lockout-time <LOCKOUT-TIME>
no aaa authentication console-login-attempts
```

Description

For the console interface only (not SSH or REST), enables console login attempt limiting. If the number of failed console login attempts equals the configured threshold, the user is locked out for the configured duration..

The `no` form of this command disables console login attempt limits.



Important: If you enable the lockout using this command and also enable the SSH and REST lockout using command `aaa authentication limit-login-attempts`, and then enter too many consecutive wrong passwords, you will become locked out, and will have to wait for the configured lockout time to elapse before logging in on any interface.



This console login attempt limiting feature is only available when not using remote authentication through AAA servers (TACACS+ or RADIUS) on any interface. Remote authentication through AAA servers (TACACS+ or RADIUS) is not possible when limit login attempts is configured on any interface.

Parameter	Description
<code><ATTEMPTS></code>	Specifies the threshold of failed console login attempts that triggers user lockout. Range: 1 to 10. For example, if <code><ATTEMPTS></code> is set to 1, a single failed login attempt triggers immediate user lockout.
<code><LOCKOUT-TIME></code>	Specifies the amount of time a user is locked out. Range: 1 to 3600 seconds.

Examples

Enabling console login attempt failure limiting with a 60 second lockout being triggered upon the third consecutive login attempt failure.

```
switch(config)# aaa authentication console-login-attempts 3 console-lockout-time 60
```

Disabling console login attempt failure limiting:

```
switch(config)# no aaa authentication console-login-attempts
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

aaa authentication limit-login-attempts

```
aaa authentication limit-login-attempts <ATTEMPTS> logout-time <LOCKOUT-TIME>  
no aaa authentication limit-login-attempts <ATTEMPTS> logout-time <LOCKOUT-TIME>
```

Description

For the SSH and REST interface, enables local login attempt limiting. If the number of failed local login attempts equals the configured threshold, the user is locked out for the configured duration.

The `no` form of this command disables local login attempt limits.



Important: If you enable the logout using this command and also enable the console logout using command `aaa authentication console-login-attempts`, and then enter too many consecutive wrong passwords, you will become locked out, and will have to wait for the configured logout time to elapse before logging in on any interface.



This local login attempt limiting feature is only available when not using remote authentication through AAA servers (TACACS+ or RADIUS) on any interface. Remote authentication through AAA servers (TACACS+ or RADIUS) is not possible when limit login attempts is configured on any interface.

Parameter	Description
<ATTEMPTS>	Specifies the threshold of failed local login attempts that triggers user logout. Range: 1 to 10. For example, if <ATTEMPTS> is set to 1, a single failed login attempt triggers immediate user logout.
<LOCKOUT-TIME>	Specifies the amount of time a user is locked out. Range: 1 to 3600 seconds.

Examples

Enabling local login attempt failure limiting with a 20 second logout being triggered upon the fourth consecutive login attempt failure.

```
switch(config)# aaa authentication limit-login-attempts 4 logout-time 20
```

Disabling login attempt failure limiting:

```
switch(config)# no aaa authentication limit-login-attempts
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authentication login

```
aaa authentication login <CONNECTION-TYPE> {local | group <GROUP-LIST>}
no aaa authentication login <CONNECTION-TYPE> {local | group <GROUP-LIST>}
```

Description

Defines authentication as being local (with the name `local`) (the default). Or defines a sequence of remote AAA server groups to be accessed for authentication purposes. Each available connection type (channel) can be configured individually as either local or using remote AAA server groups. All server groups named in your command, must exist. This command can be issued multiple times, once for each connection type. Local is always available for any connection type not configured for remote AAA authentication.

The `no` form of this command removes for the specified connection type, any defined remote AAA server group authentication sequence. Local authentication is available for connection types without a configured remote AAA server group list (whether default or for the specific connection type).

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Defines a list of accounting server groups to be used for the default connection type. This configuration applies to all other connection types (<code>console</code>, <code>https-server</code>, <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa accounting all-mgmt console...</code> to define the console accounting list, then this default configuration is used for console. <code>console</code> Defines a list of accounting server groups to be used for the console connection type. <code>https-server</code> Defines a list of accounting server groups to be used for the https-server (REST, Web UI) connection type. <code>ssh</code> Defines a list of accounting server groups to be used for the ssh connection type.
<code>local</code>	Selects local-only accounting when used without the <code>group</code> parameter.
<code>group <GROUP-LIST></code>	Specifies the list of remote AAA server group names. Each name can be specified one time. Predefined remote AAA group names <code>tacacs</code> and <code>radius</code> are available. Although not a group name, predefined name <code>local</code> is available. User-defined TACACS+ and RADIUS server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa</code>

Parameter	Description
	group <code>server</code> and servers are added to a server group with the command <code>server</code> . If no AAA server is reachable, local authentication is attempted.

Examples

Setting local authentication for the default connection type:

```
switch(config)# aaa authentication login default local
```

Setting local authentication for the console connection type:

```
switch(config)# aaa authentication login console local
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authentication minimum-password-length

```
aaa authentication minimum-password-length <LENGTH>
no aaa authentication minimum-password-length <LENGTH>
```

Description

Enables minimum password length checking. Existing passwords shorter than the minimum length are unaffected. Length checking does not apply to ciphertext passwords. Length checking applies both to local and remote authentication.

The `no` form of this command disables minimum password length checking.

Parameter	Description
<LENGTH>	Specifies the minimum password length. Range: 1 to 32.

Examples

Enabling password length checking, with a minimum length of 12.

```
switch(config)# aaa authentication minimum-password-length 12
```

Disabling minimum password length checking:

```
switch(config)# no aaa authentication minimum-password-length
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authorization commands

```
aaa authorization commands <CONNECTION-TYPE> {local | none}  
no aaa authorization commands <CONNECTION-TYPE> {local | none}  
aaa authorization commands <CONNECTION-TYPE> group <GROUP-LIST>  
no aaa authorization commands <CONNECTION-TYPE> group <GROUP-LIST>
```

Description

Defines authorization as being basic local RBAC (specified as `none`), or as full-fledged local RBAC specified as `local` (the default), or as remote TACACS+ (specified with `group <GROUP-LIST>`). Each available connection type (channel) can be configured individually. All server groups named in the command, must exist. This command can be issued multiple times, once for each connection type.

The `no` form of this command unconfigures authorization for the specified connection type, reverting to the default of `local`.



Although only TACACS+ servers are supported for remote authorization, local authorization (basic or full-fledged) can be used with remote RADIUS authentication.

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Selects the <code>default</code> connection type for configuration. This configuration applies to all other connection types (<code>console</code>, <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa authorization commands console...</code> to define the console authorization list, then this default configuration is used for console. <code>console</code> Selects the <code>console</code> connection type for configuration. <code>ssh</code> Selects the <code>ssh</code> connection type for configuration.

Parameter	Description
local	When used alone without <code>group <GROUP-LIST></code>, selects local authorization which can be used to provide authorization for a purely local setup without any remote AAA servers and also for when RADIUS is used for remote Authentication and Accounting but Authorization is local. When used after <code>group</code>, provides for fallback (to full-fledged local authorization) when every server in every specified TACACS+ server group cannot be reached. NOTE: If any TACACS+ server in the specified groups is reachable, but the command fails to be authorized by that server, the command is rejected and local authorization is never attempted. Local authorization is only attempted if every TACACS+ server cannot be reached.
none	When used alone without <code>group <GROUP-LIST></code>, selects basic local RBAC authorization, for use with the built-in user groups (administrators, operators, auditors). When used after <code>group</code>, provides for fallback (to basic local RBAC authorization) when every server in every specified TACACS+ server group cannot be reached. NOTE: With <code>none</code>, for users belonging to user-defined user groups, all commands can be executed regardless of what authorization rules are defined in such groups. For per-command local authorization, use <code>local</code> instead.
group <GROUP-LIST>	Specifies the list of remote AAA server group names. Predefined remote AAA group name <code>tacacs</code> is available. User-defined TACACS+ server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa server group</code> and servers are added to a server group using command <code>server</code>. It is recommended to always include either the special name <code>local</code> or <code>none</code> as the last name in the group list. If both <code>local</code> and <code>none</code> are omitted, and no remote AAA server is reachable (or the first reachable server cannot authorize the command), command execution for the current user will not be possible.

Examples

Setting the authorization for default to `local`:

```
switch(config)# aaa authorization commands default local
```

Setting the authorization for the SSH interface to `none`:

```
switch(config)# aaa authorization commands ssh none
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show aaa accounting

show aaa accounting

Description

Shows the accounting configuration per connection type (channel).

Example

Configuring and then showing local accounting for the default and console connection types:

```
switch(config)# aaa accounting all default start-stop local
switch(config)# aaa accounting all console start-stop local
switch(config)# exit
switch# show aaa accounting
AAA Accounting:
  Accounting Type           : all
  Accounting Mode           : start-stop
```

Accounting for default channel:

```
-----
GROUP NAME                | GROUP PRIORITY
-----
local                      | 0
-----
```

Accounting for console channel:

```
-----
GROUP NAME                | GROUP PRIORITY
-----
local                      | 0
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authentication

show aaa authentication

Description

Shows the authentication configuration per connection type (channel).

Example

Configuring and then showing local authentication for the default and console connection types (channels):

```
switch(config)# aaa authentication login default local
switch(config)# aaa authentication login console local
switch(config)# exit
switch# show aaa authentication
```

```
AAA Authentication:
  Fail-through           : Disabled
  Limit Login Attempts   : Not set
  Lockout Time           : 300
  Minimum Password Length : Not set
```

Authentication for default channel:

```
-----
GROUP NAME | GROUP PRIORITY
-----
local      | 0
-----
```

Authentication for console channel:

```
-----
GROUP NAME | GROUP PRIORITY
-----
local      | 0
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authorization

show aaa authorization

Description

Shows the authorization configuration per connection type (channel).

Example

Configuring and then showing full-fledged local RBAC authorization for the default and console connection types (channels):

```
switch(config)# aaa authorization commands default none
switch(config)#
switch(config)# aaa authorization commands console none
switch(config)# exit
switch#
switch# show aaa authorization
Authorization for default channel:
```

```
-----
GROUP NAME | GROUP PRIORITY
-----
none      | 0
-----
```

```
Authorization for console channel:
```

```
-----
GROUP NAME | GROUP PRIORITY
-----
none      | 0
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ssh authentication-method

show ssh authentication-method

Description

Shows the status of the SSH public key method and the local password-based (through SSH client) authentication method.

Example

Showing the authentication methods.

```
switch# show ssh authentication-method
SSH publickey authentication : Enabled
SSH password authentication : Enabled
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show user

show user <USERNAME> authorized-key

Description

Shows the SSH client public key list for a specified user.

Parameter	Description
<USERNAME>	Specifies the username for which you want to show the SSH client public key list.

Usage

Any user can show their own public key list; however, administrators can also show a public key list of other users.

Examples

Showing a client public key:

```
switch# show user admin authorized-key

1. Key Type : RSA      Key size : 2048
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQDMtyMBmmAaF6r1zx3f3DZNHSYVHBjhlbBlyAIqQ8DSHK
...
U+aE14UW/ifIukmK67sIHwK+FhhRYwPztQc5pjyOPk128a4pgKQaHCcOF169Z admin@switch
```

Showing two client public keys:

```
switch# show user admin authorized-key
1. Key Type : ECDSA      Curve : nistp256
ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBEqEFevZ0
...
176V+D0svdCJ9Wo32zqI9OeAdTJw/eZYp5qknhNgS81HjAI6J/4/kAqdZAJbqQUiCAk= admin@switch

2. Key Type : RSA      Key size : 2048
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQDXQHrQv7+/GcMdOhr//IRjJkX7TQKupW89j80bL7xq8
...
j8qKuHWSN0/h/HxjzQJuYDVmZN5vG3DhpXbBZU1ZNnchVod13QLCesqA3VLKN admin@switch
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

ssh password-authentication

ssh password-authentication

no ssh password-authentication

Description

Enables the password-based authentication method for use with SSH clients.

The **no** form of this command disables the password-based authentication method for use with SSH clients.

Usage

The switch ships with password-based authentication (for SSH clients) enabled. The maximum number of password retries is three.

Examples

Enabling password authentication for use with SSH clients:

```
switch(config)# ssh password-authentication
```

Disabling password authentication for use with SSH clients:

```
switch(config)# no ssh password-authentication
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ssh public-key-authentication

ssh public-key-authentication
no ssh public-key-authentication

Description

Enables the SSH public key authentication method. The switch ships with SSH public key authentication enabled.

The `no` form of this command disables the SSH public key authentication method.



Although SSH public key authentication is enabled by default, it cannot be used until SSH public keys are added with the `user authorized-key` command.

Examples

Enabling SSH public key authentication:

```
switch(config)# ssh public-key-authentication
```

Disabling SSH public key authentication:

```
switch(config)# no ssh public-key-authentication
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

user authorized-key

```
user <USERNAME> authorized-key <PUBKEY>
no user <USERNAME> authorized-key [<KEYNUM>]
```

Description

Copies an SSH client public key into the key list. If the key list and the public key do not exist, it creates a list with the public key. If the SSH client public key exists, the command appends the new key to the existing list. The client public key list holds a maximum of 32 client keys.

The `no` form of the command removes either one or all SSH public keys from the key list.

Parameter	Description
<USERNAME>	Specifies the name of the user.
<PUBKEY>	Specifies the SSH client public key to be copied into the key list.
<KEYNUM>	Specifies the key number. The range is 1 to 32. Use the <code>show user <USERNAME> authorized-key</code> command to find the key number associated with the key.

Usage

Each key on the key list has a key identifier. The `show user <USERNAME> authorized-key` command displays the key identifier associated with the key.

Administrators can add and remove the public keys of themselves and other users. Operators can add and remove only their own public keys. If the public key authentication method is enabled, the client public key present is used by the SSH server to authenticate the client. The authentication method reverts to the password authentication method and prompts for a client password when one of the following occurs:

- The client public keys are not present.
- The server does not have the keys enabled.
- The public key method is disabled.

You can either remove all keys or a specific key. Each key on the key list has a key identifier. If you provide the key identifier in this command, the command removes the corresponding key from the list. If you provide no key identifier, the command removes all keys from the key list.

Examples

Adding a public key:

```
switch(config)#user admin authorized-key ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBEqEFevZ0176V+D0svdCJ9Wo32zqI9OeAIdTJwT/eZYp50qkAnhZNgS81HBjAI6QJ/4/kAyqdZ9oAjbiqQUiCAk= root@switch
```

Removing all SSH public keys from the list:

```
switch(config)# no user admin authorized-key
```

Removing the specified SSH public key from the list:

```
switch(config)# no user admin authorized-key 2
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

Remote AAA provides the following for your Aruba switch:

- Authentication using remote TACACS+ AAA servers.
- Authorization using remote TACACS+ AAA servers, providing fine-grained command authorization. Optional user-defined local user groups with configured command authorization rules can be used to provide authorization fallback protection for when TACACS+ servers become temporarily unavailable.
- Transmission of locally collected accounting information to remote TACACS+ servers.



For switches that support multiple management modules such as the Aruba 8400, all AAA functionality discussed only applies to the active management module. See also *AAA on switches with multiple management modules* in the *High Availability Guide*.

Default server groups

The switch always has these four default groups:

- `tacacs`: for remote AAA, always contains every configured TACACS+ server.
- `radius`: for remote AAA, always contains every configured RADIUS server.
- `local`: for local authentication.
- `none`: for local (RBAC) authorization.

User-defined AAA servers are always added to the matching default group, either `tacacs` or `radius`. Optionally, each server can also be added to exactly one additional user-defined (custom) group. A maximum of 28 user-defined groups can be created.

The order in which servers are added to a group is important. The server added first is accessed first, and if necessary, the second server is accessed second, and so on.

Remote AAA (TACACS+) defaults and limits

Setting	Default value / limit
Authentication of REST sessions with TACACS+	Disabled

Setting	Default value / limit
Maximum number of TACACS+ servers in an AAA group	16
Maximum number of TACACS+ servers that can be configured	16
Maximum number of user-defined AAA server groups that can be configured	28
TACACS+ authentication	Disabled
TACACS+ authentication global timeout	5 seconds
TACACS+ authentication passkey (shared secret)	None
TACACS+ authentication tcp-port	49
TACACS+ global authentication protocol	PAP
TACACS+ server tracking default interval	300 seconds
TACACS+ server access through the default VRF	default*

*The default value is `default`, unless another VRF is specified during the server configuration.

About global versus per-TACACS+ server passkeys (shared secrets)

To communicate with a TACACS+ AAA server, the switch must have a passkey (shared secret) configured that matches what is configured on the server. Use one of these commands to achieve the desired configuration:

- For a global passkey common to every TACACS+ server, use `tacacs-server key`.
- For a per-TACACS+ server passkey, use `tacacs-server host` with the `key` parameter.



If both passkeys are configured on the switch, the per-TACACS+ server passkey is used.

Remote AAA TACACS+ server configuration requirements

The user-supplied TACACS+ server must:

- Have an IPv4/IPv6 address or fully qualified domain name (FQDN) that is visible to the switch.
- Have a passkey (shared secret) that matches what is configured on the switch.
- Provide username and password definitions for every switch user. Remote users do not require definition on the switch.
- Configure user role assignment using TACACS+ attributes.
- Have any needed command authorization configured to control what commands (per user or user role) will be executable on the switch.



Consult your TACACS+ server documentation for installation and general configuration details.



If SSH public key authentication is used, the key information is stored locally on the switch, making username and password definition on the TACACS+ server unnecessary.

User role assignment using TACACS+ attributes

User role assignment is configured on the TACACS+ server using VSAs (vendor-specific attributes) and TACACS+ specified attributes.

TACACS+ servers can return multiple attribute value pairs (AVPs) in response to an authentication request. The attributes are processed in this order of precedence to determine the user role assigned:

- If the `Aruba-Admin-Role` VSA is present, map the user to the matching corresponding local user-group name.
 - Else if the `priv-lvl` TACACS+ specified attribute is present, extract the privilege level (1, 15, or 19) and map the user to the local user-group corresponding to this privilege level (1=operators, 15=administrators, 19=auditors). Privilege levels 2 to 14 may also be used with matching local user groups named 2 to 14.
 - Otherwise, the user role cannot be determined, and authentication fails.

Aruba-Admin-Role	priv-lvl	User role assigned
<GROUP-NAME>	Do not care	Matching local user <GROUP-NAME>
Not present	1	Operators
Not present	15	Administrators
Not present	19	Auditors
Not present	2 to 14	Matching local user groups named 2 to 14
Not present	Not present	None (not authenticated)

TACACS+ server redundancy and access sequence

To prevent authentication and authorization interruption, it is common practice to configure more than one TACACS+ server. When identifying TACACS+ servers to the switch, server group order (and server order within the group), determines server access order.



When defining the server access sequence for authentication with `aaa authentication login default`, there is an implied `local` included as the last item in the list. If no TACACS+ server can be reached, local authentication will be attempted.



When defining the server access sequence for authorization with `aaa authorization commands`, it is recommended to always include either `local` or `none` as the last item in the list.

Single source IP address for consistent source identification to AAA servers



If applicable to your installation, it is recommended that you perform the optional configuration mentioned in this section.

If your topology allows the AAA server to be reached through multiple paths, the server interprets the incoming packets to be from different switches even though they are all coming from the same switch. Having a switch associated with multiple IP addresses makes it more difficult to interpret system logs and accounting data.

To ensure that all traffic sent from the switch to the AAA server uses the same source IP address, use `ip source-interface` or `ipv6 source-interface`. These two commands plus the related commands `show ip source-interface` and `show ipv6 source-interface` are described under *Layer 2/3 Interface commands* in the *Command-Line Interface Guide*.

TACACS+ general tasks

General TACACS+ tasks, not specific to authentication, authorization, or accounting, are as follows:

Task	Command name	Example
Configuring a TACACS+ server	<code>tacacs-server host</code>	<code>tacacs-server host 1.1.1.1 vrf default</code> <code>no tacacs-server host 1.1.1.1 vrf default</code>
Showing global and TACACS+ server configurations	<code>show tacacs-server</code>	<code>show tacacs-server detail</code>
Configuring a TACACS+ server group	<code>aaa group server</code>	<code>aaa group server tacacs sgl</code> <code>no aaa group server tacacs sgl</code>
Showing server groups	<code>show aaa server-groups</code>	<code>show aaa server-groups</code>
Adding a TACACS server to a server-group	<code>server</code>	<code>aaa group server tacacs sgl</code> <code>server 1.1.1.2 port 32 vrf default</code>
Deleting a TACACS server from a server-group	<code>server</code>	<code>aaa group server tacacs sgl</code> <code>no server 1.1.1.2 port 32 vrf default</code>
Configuring a TACACS+ global passkey	<code>tacacs-server key</code>	<code>tacacs-server key plaintext mypasskey123</code>
Configuring PAP or CHAP for TACACS+	<code>tacacs-server auth-type</code>	<code>tacacs-server auth-type chap</code> <code>no tacacs-server auth-type</code>
Configuring the TACACS+ global timeout	<code>tacacs-server timeout</code>	<code>tacacs-server timeout 20</code> <code>no tacacs-server timeout</code>

TACACS+ authentication

TACACS+ authentication occurs as follows:

- User credentials are sent from the switch to TACACS+ server using the PAP or CHAP authentication protocol.

- If a user is authenticated, their role is communicated to the switch as Administrator, Operator, or Auditor.
- An unknown user or a user who entered an invalid password is identified as such to the switch, which then rejects user login.

About authentication fail-through

Normally, authentication is performed by the first AAA server reached. A rarely needed feature named "Authentication fail-through" is available. If Authentication fail-through is enabled and authentication fails on the first reachable AAA server, authentication is attempted on the second AAA server, and so on, until successful authentication or the server list is exhausted.

Enabling Authentication fail-through is typically unnecessary because the user credential databases should be consistent across all AAA servers. Authentication fail-through might be helpful if your AAA user credential databases are not quickly synchronized across all AAA servers.

TACACS+ authentication tasks

The TACACS+ authentication-related tasks are as follows:

Task	Command name	Example
Configuring the authentication sequence for the default connection type	aaa authentication login	aaa authentication login default group tg1 tg2 tacacs local
Configuring the authentication sequence for the console connection type	aaa authentication login	aaa authentication login console group tg2 tg3 tacacs local
Configuring the authentication sequence for the ssh connection type	aaa authentication login	aaa authentication login ssh group tg2 tacacs local
Removing remote AAA for the default connection type	aaa authentication login	no aaa authentication login default
Configuring authentication fail-through	aaa authentication allow-fail-through	aaa authentication allow-fail-through no aaa authentication allow-fail-through
Showing the	show aaa	show aaa authentication

Task	Command name	Example
authentication sequence	authentication	

TACACS+ authorization

Upon successful user authentication, the user is assigned their role by the TACACS+ server. See also [User role assignment using TACACS+ attributes](#).

TACACS+ authorization provides command filtering to allow/disallow individual command or command set execution. Each command is sent to the TACACS+ server for approval, and the switch then allows/disallows command execution according to the server response.



TACACS+ authorization applies only to the CLI interface.

Using local authorization as fallback from TACACS+ authorization

Local authorization can be used for the situation in which communication is lost with all TACACS+ servers after a successful authentication. Users that are members of the built-in local user groups (administrators, operators, or auditors) are authorized according to the fixed roles and privilege levels of those groups. Optionally, local user-defined user groups can be configured with specific command execution rules per group. Users that are members of such groups, are authorized according to the command execution rules of the group to which they belong. For configuring local user groups, see `user-group`.

About authentication fail-through and authorization

For authorization, there is no equivalent of the authentication fail-through feature. Therefore, if the first reachable TACACS+ server responds with "Authorization Denied," no additional TACACS+ servers are interrogated.



Rare potential out-of-synchronization situation when using authentication fail-through: Successful authentication on one server can be followed by authorization denial on another. The user is known on the server doing the authentication but unknown on the server attempting the authorization. This situation typically arises only during brief periods in which user credential databases are not synchronized across all TACACS+ servers. See also TACACS+ server authorization considerations in [aaa authorization commands](#).

TACACS+ authorization tasks

The TACACS+ authorization-related tasks are as follows:

Task	Command name	Example
Configuring the authorization sequence for the default connection	aaa authorization commands	aaa authorization commands default group tgl tacacs local

Task	Command name	Example
type		
Configuring the authorization sequence for the console connection type	aaa authorization commands	aaa authorization commands console group tg1 tg2 tacacs none
Removing remote AAA for the default connection type	aaa authorization commands	no aaa authorization commands default
Showing the TACACS+ authorization sequence	show aaa authorization	show aaa authorization

TACACS+ accounting

This accounting information is captured and made available for sending to remote accounting servers:

- Exec Accounting: user login/logout events.
- Command accounting: commands executed by users.
- System accounting: remote accounting On/Off events.
- CLI show commands.
- Interactions on the non-CLI interfaces: REST and WebUI.

The following is not captured or made available as accounting information:

- CLI commands that reboot the switch.
- Interactions in the bash shell.



Local accounting (always enabled) must be functioning properly for remote Accounting to work.



The accounting information is sent to the first reachable remote TACACS+ AAA server (configured for remote accounting). If no remote TACACS+ server is reachable, local accounting remains available.

Sample accounting information on a TACACS+ server

```
Mon May 9 17:52:32 10.10.11.1 UNKNOWN tty 0.0.0.0 start task_id=1525899775430
timezone=UTC start_time=1525913552.428 service=system event=sys_acct
reason="System-accounting-ON" result=success
Mon May 9 17:52:48 10.10.11.1 admin tty 192.168.1.20 start task_id=1525899775431
timezone=UTC start_time=1525913567.611 service=shell priv_lvl=15 result=success
```

```

Mon May 9 17:52:48 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775432
timezone=UTC stop_time=1525913567.614 service=shell priv_lvl=15 cmd="enable"
result=success
Mon May 9 17:52:51 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775433
timezone=UTC stop_time=1525913570.851 service=shell priv_lvl=15 cmd="configure"
result=success
Mon May 9 17:52:53 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775434
timezone=UTC stop_time=1525913573.427 service=shell priv_lvl=15 cmd="interface
1/1/3" result=success
Mon May 9 17:52:54 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775435
timezone=UTC stop_time=1525913574.447 service=shell priv_lvl=15 cmd="no shutdown"
result=success
Mon May 9 17:52:58 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775436
timezone=UTC stop_time=1525913578.131 service=shell priv_lvl=15 cmd="ip address
10.10.13.1/24" result=success
Mon May 9 17:52:59 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775437
timezone=UTC stop_time=1525913579.468 service=shell priv_lvl=15 cmd="exit"
result=success
Mon May 9 17:53:10 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775442
timezone=UTC stop_time=1525913590.204 service=shell priv_lvl=15 cmd="exit"
result=success
Mon May 9 17:53:10 10.10.11.1 admin tty 192.168.1.20 stop task_id=1525899775431
timezone=UTC stop_time=1525913590.205 service=shell priv_lvl=15 result=success
Mon May 9 17:53:44 10.10.11.1 UNKNOWN tty 0.0.0.0 stop task_id=1525899775430
timezone=UTC stop_time=1525913624.473 service=system event=sys_acct
reason="System-accounting-OFF" result=success

```



This sample is representative and not from any particular TACACS+ server implementation.

Sample REST accounting information on a TACACS+ server

```

Oct 30 16:31:56 10.10.10.1 admin tty 127.0.0.1 start task_id=1540942055868
timezone=UTC start_time=1540942316.36 service=https-server priv_lvl=15
cmd="http-method=POST http-uri=/rest/v1/login" result=success

```



This sample is representative and not from any particular TACACS+ server implementation.

TACACS+ accounting tasks

The TACACS+ accounting-related tasks are as follows:

Task	Command name	Example
Configuring the accounting sequence for the default connection type	aaa accounting all-mgmt	aaa accounting all-mgmt default start-stop group tg1 tg2 tacacs local

Task	Command name	Example
Configuring the accounting sequence for the console connection type	aaa accounting all-mgmt	aaa accounting all-mgmt console start-stop group tg2 tg3 tacacs local
Configuring the accounting sequence for the ssh connection type	aaa accounting all-mgmt	aaa accounting all-mgmt ssh start-stop group tg2 tacacs local
Removing remote AAA for the default connection type	aaa accounting all-mgmt	no aaa accounting all-mgmt default start-stop
Showing the accounting configuration	show aaa accounting	show aaa accounting

Example: Configuring the switch for Remote AAA with TACACS+

Prerequisites

- TACACS+ servers configured in general according to the information in [Remote AAA TACACS+ server configuration requirements](#). The exact settings appropriate to your environment will vary.
- Logged in to the switch with Administrator privilege and in the `config` context.

Procedure

1. Configure the global TACACS+ passkey (shared secret) as "xjKW74932qX3j_\$"

```
switch(config)# tacacs-server key plaintext xjKW74932qX3j_$
switch(config)#
```

2. Add these configuration details for two remote TACACS+ servers:
 - Server 1 with IPv4 address 10.0.0.2, on the management interface (belonging to VRF "mgmt"), using the default PAP protocol.
 - Server 2 with IPv4 address 4.0.0.2, on the data interface (belonging to VRF "default"), using the CHAP protocol.

```
switch(config)# tacacs-server host 10.0.0.2 vrf mgmt
switch(config)# tacacs-server host 4.0.0.2 auth-type chap
switch(config)#
```

3. Create a TACACS+ group named `tac_grp1`, assign TACACS+ server 10.0.0.2 to the group, show the group information.



The default TACACS+ group named `tacacs` includes every TACACS+ server regardless of whether any TACACS+ servers are also assigned to a user-defined TACACS+ group.

```
switch(config)# aaa group server tacacs tac_grp1
switch(config-sg)# server 10.0.0.2 vrf mgmt
switch(config-sg)# exit
switch(config)#
switch(config)# do show aaa server-groups tacacs

***** AAA Mechanism TACACS+ *****
```

GROUP NAME	SERVER NAME	PORT	VRF	PRIORITY
tac_grp1	10.0.0.2	49	mgmt	1
tacacs (default)	10.0.0.2	49	mgmt	1
tacacs (default)	4.0.0.2	49	default	2

```
switch(config)#
```

4. Define the authentication sequence list so that the new TACACS+ group is first, the default TACACS+ group is second, and local is third. Show the authentication sequence.

```
switch(config)# aaa authentication login default group tac_grp1 tacacs local
switch(config)#
switch(config)# do show aaa authentication

AAA Authentication:
  Fail-through           : Disabled
  Limit Login Attempts   : Not set
  Lockout Time           : 300
  Minimum Password Length: Not set

Default Authentication for All Channels:
-----
---
GROUP NAME                | GROUP PRIORITY
-----
---
tac_grp1                  | 0
tacacs                    | 1
local                     | 2
---
switch(config)#
```

5. Define the authorization sequence list with two TACACS+ server groups plus local RBAC. Show the authorization sequence.

```

switch(config)# aaa authorization commands default group tac_grp1 tacacs local
switch(config)#
switch(config)# do show aaa authorization

Default command Authorization for All Channels:
-----
--
GROUP NAME                                | GROUP PRIORITY
-----
--
tac_grp1                                | 0
tacacs                                  | 1
local                                  | 2
-----
--
switch(config)#

```

6. Define the accounting sequence list with two TACACS+ server groups. Show the accounting sequence.

```

switch(config)# aaa accounting all default start-stop group tac_grp1 tacacs
switch(config)#
switch(config)# do show aaa accounting
AAA Accounting:
  Accounting Type                        : all
  Accounting Mode                        : start-stop

Default Accounting for All Channels:
-----
--
GROUP NAME                                | GROUP PRIORITY
-----
--
tac_grp1                                | 0
tacacs                                  | 1
-----
--

```




On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

Remote AAA provides the following for your Aruba switch:

- Authentication using remote RADIUS AAA servers. For added security, two-factor authentication may be used. In two-factor authentication, X.509 certificate-based authentication is combined with RADIUS authentication.
- Command authorization is not supported by RADIUS servers, however, user-defined local user groups can be configured with command-authorization rules, providing locally configured per-command authorization for members of such groups. See [User-defined user groups](#).

In the switch default state (without user-defined local groups), basic role-based authorization is available with the three built-in roles (`administrators`, `operators`, `auditors`).

- Transmission of locally collected accounting information to remote RADIUS servers.

AOS-CX supports IPv4/IPv6 Radius over the VXLAN overlay network without additional configuration from the user.

Network users are supported on the following switch series:

- 6300
- 6400

Management users are supported on the following switch series:

- 6300
- 6400
- 8325
- 8360
- 8400

Default server groups

The switch always has these four default groups:

- `tacacs`: for remote AAA, always contains every configured TACACS+ server.
- `radius`: for remote AAA, always contains every configured RADIUS server.
- `local`: for local authentication.
- `none`: for local (RBAC) authorization.

User-defined AAA servers are always added to the matching default group, either `tacacs` or `radius`. Optionally, each server can also be added to exactly one additional user-defined (custom) group. A maximum of 28 user-defined groups can be created.

The order in which servers are added to a group is important. The server added first is accessed first, and if necessary, the second server is accessed second, and so on.

Remote AAA (RADIUS) defaults and limits

Setting	Default value / limit
Maximum number of RADIUS servers in an AAA group	16
Maximum number of RADIUS servers that can be configured	16
Maximum number of user-defined AAA server groups that can be configured	28
RADIUS authentication	Disabled
RADIUS authentication global timeout	5 seconds
RADIUS authentication passkey (shared secret)	None
RADIUS authentication udp-port	1812
RADIUS global authentication protocol	PAP
RADIUS global retries	1 retry
RADIUS server tracking default interval	300 seconds
RADIUS server access through the default VRF	default*

*The default value is `default`, unless another VRF is specified during the server configuration.

About global versus per-RADIUS server passkeys (shared secrets)

To communicate with a RADIUS AAA server, the switch must have a passkey (shared secret) configured that matches what is configured on the server. Use one of these commands to achieve the desired configuration:

- For a global passkey common to every RADIUS server, use `radius-server key`.
- For a per-RADIUS server passkey, use `radius-server host` with the `key` parameter.



If both passkeys are configured on the switch, the per-RADIUS server passkey is used.

Remote AAA RADIUS server configuration requirements

The user-supplied RADIUS server must:

- Have an IPv4/IPv6 address or fully qualified domain name (FQDN) that is visible to the switch.
- Have a passkey (shared secret) that matches what is configured on the switch.
- Provide username and password definitions for every switch user. Remote users do not require definition on the switch.
- Configure user role assignment using RADIUS attributes.



Consult your RADIUS server documentation for installation and general configuration details.



If SSH public key authentication is used, the key information is stored locally on the switch, making username and password definition on the RADIUS server unnecessary.

User role assignment using RADIUS attributes

User role assignment is configured on the RADIUS server using VSAs (vendor-specific attributes).

RADIUS servers can return multiple attribute value pairs (AVPs) in response to an authentication request. The attributes are processed in this order of precedence to determine the user role assigned:

- If the `Aruba-Admin-Role` VSA is present, map the user to the matching local user-group name.
 - Else if the `Aruba-Priv-Admin-User` VSA is present, extract the privilege level (1, 15, or 19) and map the user to the local user-group corresponding to this privilege level (1=operators, 15=administrators, 19=auditors). Privilege levels 2 to 14 may also be used with matching local user groups named 2 to 14.
 - Else If Service-Type AVP is present, map `Administrative-User (6)` to administrators and map `NAS-Prompt-User (7)` to operators.
 - Otherwise, the user role cannot be determined, and the authentication fails.

Aruba-Admin-Role	Aruba-Priv-Admin-User	service-type	User role assigned
<GROUP-NAME>	Do not care	Do not care	Matching local user <GROUP-NAME>
Not present	privilege level =1	Do not care	Operators
Not present	privilege level =15	Do not care	Administrators
Not present	privilege level =19	Do not care	Auditors
Not present	privilege level =2 to 14	Do not care	Matching local user groups named 2 to 14
Not present	Not present	Administrative- User (6)	Administrators

Aruba-Admin-Role	Aruba-Priv-Admin-User	service-type	User role assigned
Not present	Not present	NAS-Prompt-User (7)	Operators
Not present	Not present	Not present (or = any other value)	None (not authenticated)



The `Service-Type` attribute is retained only for backward compatibility. It is recommended that you instead use the `Aruba-Admin-Role` or `Aruba-Priv-Admin-User` VSA.

RADIUS server redundancy and access sequence

To prevent authentication interruption, it is common practice to configure more than one RADIUS server. When identifying RADIUS servers to the switch, server group order (and server order within the group), determines server access order.



When defining the server access sequence for authentication with `aaa authentication login default`, there is an implied `local` included as the last item in the list. If no RADIUS server can be reached, local authentication will be attempted.

Single source IP address for consistent source identification to AAA servers



If applicable to your installation, it is recommended that you perform the optional configuration mentioned in this section.

If your topology allows the AAA server to be reached through multiple paths, the server interprets the incoming packets to be from different switches even though they are all coming from the same switch. Having a switch associated with multiple IP addresses makes it more difficult to interpret system logs and accounting data.

To ensure that all traffic sent from the switch to the AAA server uses the same source IP address, use `ip source-interface` or `ipv6 source-interface`. These two commands plus the related commands `show ip source-interface` and `show ipv6 source-interface` are described under *Layer 2/3 Interface commands* in the *Command-Line Interface Guide*.

RADIUS general tasks

General RADIUS tasks, not specific to authentication, are as follows:

Task	Command name	Example
Configuring a RADIUS server	<code>radius-server host</code>	<code>radius-server host 1.1.1.1 vrf default</code> <code>no radius-server host 1.1.1.1 vrf default</code>
Showing global and RADIUS server	<code>show radius-server</code>	<code>show radius-server detail</code>

Task	Command name	Example
configurations		
Configuring a RADIUS server group	aaa group server	aaa group server radius sg3 no aaa group server radius sg3
Showing server groups	show aaa server-groups	show aaa server-groups
Adding a RADIUS server to a server-group	server	aaa group server radius sg3 server 1.1.1.4 port 32 vrf default
Deleting a RADIUS server from a server-group	server	aaa group server tacacs sg3 no server 1.1.1.4 port 32 vrf default
Configuring a RADIUS global passkey	radius-server key	radius-server key plaintext mypasskey123
Configuring PAP or CHAP for RADIUS	radius-server auth-type	radius-server auth-type chap no radius-server auth-type
Configuring the RADIUS global timeout	radius-server timeout	radius-server timeout 15 no radius-server timeout
Configuring the RADIUS global retries	radius-server retries	radius-server retries 3 no radius-server retries
Overriding the global retries for a RADIUS server	radius-server host	radius-server host 1.1.1.1 retries 2

RADIUS authentication

RADIUS authentication occurs as follows:

- User credentials are sent from the switch to RADIUS server using the PAP or CHAP authentication protocol.
- If a user is authenticated, their role is communicated to the switch as Administrator, Operator, or Auditor.
- An unknown user or a user who entered an invalid password is identified as such to the switch, which then rejects user login.

About authentication fail-through

Normally, authentication is performed by the first AAA server reached. A rarely needed feature named "Authentication fail-through" is available. If Authentication fail-through is enabled and authentication fails on the first reachable AAA server, authentication is attempted on the second AAA server, and so on, until successful authentication or the server list is exhausted.

Enabling Authentication fail-through is typically unnecessary because the user credential databases should be consistent across all AAA servers. Authentication fail-through might be helpful if your AAA user credential databases are not quickly synchronized across all AAA servers.

RADIUS authentication tasks

The RADIUS authentication-related tasks are as follows:

Task	Command name	Example
Configuring the authentication sequence for the default connection type	<code>aaa authentication login</code>	<code>aaa authentication login default group rg1 rg2 radius local</code>
Configuring the authentication sequence for the https-server connection type	<code>aaa authentication login</code>	<code>aaa authentication login https-server group rg1 radius local</code>
Removing remote AAA for the default connection type	<code>aaa authentication login</code>	<code>no aaa authentication login default</code>
Configuring authentication fail-through	<code>aaa authentication allow-fail-through</code>	<code>aaa authentication allow-fail-through</code> <code>no aaa authentication allow-fail-through</code>
Showing the authentication sequence	<code>show aaa authentication</code>	<code>show aaa authentication</code>

Configuring two-factor authentication

Two-factor authentication is available for added security. In two-factor authentication, X.509 certificate-based authentication is combined with RADIUS authentication. When a user establishes an SSH connection to the switch, two factor-authentication occurs as follows:

- The username in the user's X.509 certificate is validated against the local user accounts on the switch.
- The username and password are validated against the accounts on the RADIUS server and the configured trust anchors.

Prerequisites

- The switch SSH server is enabled.
- Your switch management computer, though its SSH client, is connected to the switch.
- A remote RADIUS server is available to authenticate switch users and is configured on the switch.
- Every user that will use two-factor authentication is configured both on the RADIUS server and locally on the switch using identical usernames. Users are added locally on the switch with the `user` command. These usernames must precisely match the usernames identified by the X.509 user certificates.

- The X.509 CA certificate is both installed on your switch management computer and is also visible to your computer's SSH client. The X.509 CA certificate is the root of trust for the client certificate being used.
- One X.509 certificate per user is available on your switch management computer and is visible to your computer's SSH client. The usernames identified by these user certificates must be the same as the usernames already defined on the RADIUS server and locally on the switch.

Procedure

1. Create a TA profile with the command `crypto pki ta-profile`. This command switches to the TA configuration context. The TA profile is where the switch stores the root certificate of the CA that is used to validate the certificates of clients communicating with the SSH server.
2. Although optional, it is recommended that you enable certificate revocation checking with the command `revocation-check ocsp`.
3. Import the root certificate of the CA with the command `ta-certificate`.
4. Exit the TA configuration context with the command `exit`.
5. For each user that will be using two-factor authentication, import the public key from the individual X.509 user certificate with the command `user <USERNAME> authorized-key <PUBKEY>`. Each user identified by <USERNAME> must exist locally on the switch and on the RADIUS authentication server.
6. Enable two-factor authentication with the command `ssh two-factor-authentication`.

Example

This example installs the root certificate **root-cert** and enables two-factor authentication for user **admin**:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# revocation-check ocsp
switch(config-ta-root-cert)# ta-certificate
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-ta-cert)# -----BEGIN CERTIFICATE-----
switch(config-ta-cert)# MIIDuTCCAqECCQCuoXeJ2ZNYcjANBgkqhkiG9w0BAQsFADCBq
switch(config-ta-cert)# VVMxEzARBgNVBAGMCKNhGlmb3JuaWExEDAOBgNVBACMB1JvY
switch(config-ta-cert)# BAoMA0hQTjEVMBMGA1UECwwMSFB0Um9zZXZpbGxlMSowKAYDV
...
switch(config-ta-cert)# x3Wff3dFZ8o9sd5LVAHneH/ztb9MP34z+le1V346r12L2MDL8
switch(config-ta-cert)# BIzD/ST/HaWI+OS+S80rm93PSscEbb9GWk7vshh5E8DH73nW/
switch(config-ta-cert)# 3LvMLZcSSe5J2Ca2XIhfDme8UaNZ7syGYoCD/TMsAW0nG7yY
switch(config-ta-cert)# -----END CERTIFICATE-----
switch(config-ta-cert)#
The certificate you are importing has the following attributes:
Issuer: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,
       CN=site.com/emailAddress=test.ca@site.com
Subject: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,
        CN=8400/emailAddress=test.ca@site.com
Serial Number: 12121221634631568498 (0xaea51217d5945772)

Do you want to accept this certificate (y/n)? y
TA certificate accepted.
switch(config-ta-root-cert)# exit
switch(config)#
switch(config)# user admin authorized-key ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQACQC6krLTrFTnZg3YjLiZKTZEYnh4cUiuOK+cjduxFnZUa
...
iAfcGvqvWtWWBS0Wd011DeEZnKn008uEKEtEcAjfrnRHeOk2QJmw== "sv1@site.net"
switch(config)#
switch(config)# ssh two-factor-authentication
```

RADIUS accounting

This accounting information is captured and made available for sending to remote accounting servers:

- Port access accounting
- Exec Accounting: user login/logout events
- Command accounting: commands executed by users. The Vendor-Specific Attribute (VSA) `Aruba_Command_String` with a value of 46 is available.
- System accounting: remote accounting On/Off events.
- CLI show commands.
- Interactions on the non-CLI interfaces: REST and WebUI.



With RADIUS, command accounting logs a maximum of 247 characters per command entered by the user.

The following is not captured or made available as accounting information:

- CLI commands that reboot the switch.
- Interactions in the bash shell.



Local accounting (always enabled) must be functioning properly for remote Accounting to work.



The accounting information is sent to the first reachable remote RADIUS AAA server (configured for remote accounting). If no remote RADIUS server is reachable, local accounting remains available.

Sample general accounting information

```
~~~~~ EXEC ~~~~~~

Mon Jul 16 16:25:27 2018
  User-Name = "admin"
  NAS-Identifier = "switchx"
  NAS-Port = 331
  NAS-Port-Type = Virtual
  Acct-Status-Type = Start
  Acct-Session-Id = "1531769192494"
  Acct-Authentic = Local
  Calling-Station-Id = "0.0.0.0"
  Event-Timestamp = "Jul 16 2018 16:25:22 PDT"
  Acct-Delay-Time = 0
  NAS-IP-Address = 10.10.10.1
  Acct-Unique-Session-Id = "b83e29f4140c17b1"
  Timestamp = 1531783527

~~~ EXEC stop ~~~

Mon Jul 16 16:26:42 2018
  User-Name = "admin"
  NAS-Identifier = "switchx"
  NAS-Port = 331
  NAS-Port-Type = Virtual
  Acct-Status-Type = Stop
  Acct-Session-Id = "1531769192494"
  Acct-Authentic = Local
  Calling-Station-Id = "0.0.0.0"
  Event-Timestamp = "Jul 16 2018 16:26:37 PDT"
```



```

Acct-Delay-Time = 0
Acct-Session-Time = 75
NAS-IP-Address = 10.10.10.1
Acct-Unique-Session-Id = "b83e29f4140c17b1"
Timestamp = 1531783602

~~~~~ CMD ACCOUNTING ~~~~~
Mon Jul 16 16:26:42 2018
  User-Name = "admin"
  NAS-Identifier = "switchx"
  NAS-Port = 331
  NAS-Port-Type = Virtual
  Acct-Status-Type = Stop
  Acct-Session-Id = "1531769192496"
  Acct-Authentic = Local
  Aruba-Command-String = "exit"
  Calling-Station-Id = "0.0.0.0"
  Event-Timestamp = "Jul 16 2018 16:26:37 PDT"
  Acct-Delay-Time = 0
  NAS-IP-Address = 10.10.10.1
  Acct-Unique-Session-Id = "280710992629128c"
  Timestamp = 1531783602

~~~~~ SYSTEM ACCOUNTING ~~~~~

Mon Jul 16 17:13:02 2018
  User-Name = "UNKNOWN"
  NAS-Identifier = "UNKNOWN"
  NAS-Port = 331
  NAS-Port-Type = Virtual
  Acct-Status-Type = Accounting-On
  Acct-Session-Id = "1531769192506"
  Acct-Authentic = Local
  Calling-Station-Id = "0.0.0.0"
  Event-Timestamp = "Jul 16 2018 17:12:56 PDT"
  Acct-Delay-Time = 0
  NAS-IP-Address = 10.10.10.1
  Acct-Unique-Session-Id = "b478e6402c86933e"
  Timestamp = 1531786382

Mon Jul 16 17:12:55 2018
  User-Name = "UNKNOWN"
  NAS-Identifier = "UNKNOWN"
  NAS-Port = 331
  NAS-Port-Type = Virtual
  Acct-Status-Type = Accounting-Off
  Acct-Session-Id = "1531769192491"
  Acct-Authentic = Local
  Calling-Station-Id = "0.0.0.0"
  Event-Timestamp = "Jul 16 2018 17:12:49 PDT"
  Acct-Delay-Time = 0
  NAS-IP-Address = 10.10.10.1
  Acct-Unique-Session-Id = "93da1f094121f2ee"
  Timestamp = 1531786375

~~~~~

```



This sample is representative and not from any particular RADIUS server implementation.

RADIUS accounting tasks

The RADIUS accounting-related tasks are as follows:

Task	Command name	Example
Configuring the accounting sequence for the default connection type	<code>aaa accounting all-mgmt</code>	<code>aaa accounting all-mgmt default start-stop group rg1 rg2 radius local</code>
Configuring the accounting sequence for the https-server connection type	<code>aaa accounting all-mgmt</code>	<code>aaa accounting all-mgmt https-server start-stop group rg1 radius local</code>
Removing remote AAA for the default connection type	<code>aaa accounting all-mgmt</code>	<code>no aaa accounting all-mgmt default start-stop</code>
Showing the accounting configuration	<code>show aaa accounting</code>	<code>show aaa accounting</code>

Example: Configuring the switch for Remote AAA with RADIUS

Prerequisites

- RADIUS servers configured in general according to the information in [Remote AAA RADIUS server configuration requirements](#). The exact settings appropriate to your environment will vary.
- Logged in to the switch with Administrator privilege and in the `config` context.

Procedure

1. Configure the global RADIUS passkey (shared secret) as "xjKW74932qX3j_\$"

```
switch(config)# radius-server key plaintext xjKW74932qX3j_$
switch(config)#
```

2. Add these configuration details for two remote RADIUS servers.
 - Server 1 with IPv4 address 10.0.0.2, on the management interface (belonging to VRF “mgmt”), using the default PAP protocol.
 - Server 2 with IPv4 address 4.0.0.2, on the data interface (belonging to VRF “default”), using the CHAP protocol.

```
switch(config)# radius-server host 10.0.0.2 vrf mgmt
switch(config)# radius-server host 4.0.0.2 auth-type chap
switch(config)#
```

3. Create a RADIUS group named `rad_grp1`, assign RADIUS server 10.0.0.2 to the group, show the group information.



The default RADIUS group named `radius` includes every RADIUS server regardless of whether any RADIUS servers are also assigned to a user-defined RADIUS group.

```
switch(config)# aaa group server radius rad_grp1
switch(config-sg)# server 10.0.0.2 vrf mgmt
switch(config-sg)# exit
switch(config)#
switch(config)# do show aaa server-groups radius

***** AAA Mechanism RADIUS *****
-----
GROUP NAME          | SERVER NAME          | PORT | VRF   | PRIORITY
-----
rad_grp1            | 10.0.0.2             | 1812 | mgmt  | 1
-----
radius (default)    | 10.0.0.2             | 1812 | mgmt  | 1
radius (default)    | 4.0.0.2              | 1812 | default | 2
-----
switch(config)#
```

4. Define the authentication sequence list so that the new RADIUS group is first, the default RADIUS group is second, and local is third. Show the authentication sequence.

```
switch(config)# aaa authentication login default group rad_grp1 radius local
switch(config)#
switch(config)# do show aaa authentication

AAA Authentication:
  Fail-through           : Disabled
  Limit Login Attempts   : Not set
  Lockout Time           : 300
  Minimum Password Length : Not set

Default Authentication for All Channels:
-----
GROUP NAME          | GROUP PRIORITY
-----
rad_grp1            | 0
radius              | 1
local               | 2
```

```
switch(config)#
```

5. Define the accounting sequence list with two RADIUS server groups. Show the accounting sequence.

```
switch(config)# aaa accounting all default start-stop group rad_grp1 radius
switch(config)#
switch(config)# do show aaa accounting
AAA Accounting:
  Accounting Type           : all
  Accounting Mode           : start-stop
```

Default Accounting for All Channels:

GROUP NAME	GROUP PRIORITY
rad_grp1	0
radius	1



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

aaa accounting all-mgmt

```
aaa accounting all-mgmt <CONNECTION-TYPE> start-stop {local | group <GROUP-LIST>}  
no aaa accounting all-mgmt <CONNECTION-TYPE> start-stop {local | group <GROUP-LIST>}
```

Description

Defines accounting as being local (with the name `local`) (the default). Or defines a sequence of remote AAA server groups to be accessed for accounting purposes.

For remote accounting, the information is sent to the first reachable remote server that was configured with this command for remote accounting. If no remote server is reachable, local accounting remains available. Each available connection type (channel) can be configured individually as either local or using remote AAA server groups. All server groups named in your command, must exist. This command can be issued multiple times, once for each connection type. Local is always available for any connection type not configured for remote accounting.



The system accounting log is not associated with any connection type (channel) and is therefore sent to the accounting method configured on the default connection type (channel) only.

The `no` form of this command removes for the specified connection type, any defined remote AAA server group accounting sequence. Local accounting is available for connection types without a configured remote AAA server group list (whether default or for the specific connection type).

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Defines a list of accounting server groups to be used for the <code>default</code> connection type. This configuration applies to all other connection types (<code>console</code>, <code>https-server</code>, <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa accounting all-mgmt console...</code> to define the console accounting list, then this default configuration is used for console. <code>console</code> Defines a list of accounting server groups to be used for the

Parameter	Description
	console connection type. https-server Defines a list of accounting server groups to be used for the https-server (REST, Web UI) connection type. ssh Defines a list of accounting server groups to be used for the ssh connection type.
start-stop	Selects accounting information capture at both the beginning and end of a process.
local	Selects local-only accounting when used without the group parameter.
group <GROUP-LIST>	Specifies the list of remote AAA server group names. Each name can be specified one time. Predefined remote AAA group names tacacs and radius are available. Although not a group name, predefined name local is available. User-defined TACACS+ and RADIUS server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa group server</code> and servers are added to a server group with the command <code>server</code>.

Usage

Local accounting is always active. It cannot be turned off.

Examples

Defining the default accounting sequence based on two user-defined TACACS+ server groups, then the default TACACS+ server group, and finally (if needed), local accounting.

```
switch(config)# aaa accounting all-mgmt default start-stop group tg1 tg2 tacacs
local
```

Defining the console accounting sequence based on two user-defined TACACS+ server groups, then the default TACACS+ server group, and finally (if needed), local accounting.

```
switch(config)# aaa accounting all-mgmt console start-stop group tg2 tg3 tacacs
local
```

Defining the ssh accounting sequence based on one user-defined TACACS+ server group and then the default TACACS+ server group.

```
switch(config)# aaa accounting all-mgmt ssh start-stop group tg2 tacacs
```

Defining the default accounting sequence based on two user-defined RADIUS server groups, then the default RADIUS server group, and finally (if needed), local accounting.

```
switch(config)# aaa accounting all-mgmt default start-stop group rg1 rg2 radius local
```

Defining the https-server accounting sequence based on one user-defined RADIUS server group and then the default RADIUS server group.

```
switch(config)# aaa accounting all-mgmt https-server start-stop group rg1 radius
```

Setting local accounting for the default connection type:

```
switch(config)# aaa accounting all-mgmt default start-stop local
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authentication allow-fail-through

```
aaa authentication allow-fail-through  
no aaa authentication allow-fail-through
```

Description

Enables authentication fail-through. When this option is enabled, the next server/authentication method is tried after an authentication failure.

The `no` form of this command disables authentication fail-through. If the system fails to authenticate with a reachable TACACS+ or RADIUS server, the system does not attempt to authenticate with the next TACACS+/RADIUS server.

Example

Enabling authentication fail-through:

```
switch(config)# aaa authentication allow-fail-through
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authentication login

```
aaa authentication login <CONNECTION-TYPE> {local | group <GROUP-LIST>}  
no aaa authentication login <CONNECTION-TYPE> {local | group <GROUP-LIST>}
```

Description

Defines authentication as being local (with the name `local`) (the default). Or defines a sequence of remote AAA server groups to be accessed for authentication purposes. Each available connection type (channel) can be configured individually as either local or using remote AAA server groups. All server groups named in your command, must exist. This command can be issued multiple times, once for each connection type. Local is always available for any connection type not configured for remote AAA authentication.



If you do not want local authentication to occur in cases where all AAA servers contacted reject the user's credentials, do not enable authentication fail-through (command `aaa authentication allow-fail-through`).

The `no` form of this command removes for the specified connection type, any defined remote AAA server group authentication sequence. Local authentication is available for connection types without a configured remote AAA server group list (whether default or for the specific connection type).

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Defines a list of accounting server groups to be used for the <code>default</code> connection type. This configuration applies to all other connection types (<code>console</code> , <code>https-server</code> , <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa accounting all-mgmt console...</code> to define the console accounting list, then this default configuration is used for console. <code>console</code> Defines a list of accounting server groups to be used for the <code>console</code> connection type. <code>https-server</code> Defines a list of accounting server groups to be used for the <code>https-server</code> (REST, Web UI) connection type. <code>ssh</code> Defines a list of accounting server groups to be used for the <code>ssh</code> connection type.
<code>local</code>	Selects local-only accounting when used without the <code>group</code> parameter.
<code>group <GROUP-LIST></code>	Specifies the list of remote AAA server group names. Each name can be specified one time. Predefined remote AAA group names

Parameter	Description
	<code>tacacs</code> and <code>radius</code> are available. Although not a group name, predefined name <code>local</code> is available. User-defined TACACS+ and RADIUS server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa group server</code> and servers are added to a server group with the command <code>server</code>.

Examples

Defining the default authentication sequence based on two user-defined TACACS+ server groups, then the default TACACS+ server group, and finally (if needed), local authentication.

```
switch(config)# aaa authentication login default group tg1 tg2 tacacs local
```

Defining the console authentication sequence based on two user-defined TACACS+ server groups, then the default TACACS+ server group, and finally (if needed), local authentication.

```
switch(config)# aaa authentication login console group tg2 tg3 tacacs local
```

Defining the ssh authentication sequence based on one user-defined TACACS+ server group and then the default TACACS+ server group.

```
switch(config)# aaa authentication login ssh group tg2 tacacs
```

Defining the default authentication sequence based on two user-defined RADIUS server groups, then the default RADIUS server group, and finally (if needed), local authentication.

```
switch(config)# aaa authentication login default group rg1 rg2 radius local
```

Defining the https-server authentication sequence based on one user-defined RADIUS server group and then the default RADIUS server group.

```
switch(config)# aaa authentication login https-server group rg1 radius
```

Setting local authentication for the default connection type:

```
switch(config)# aaa authentication login default local
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa authorization commands

```
aaa authorization commands <CONNECTION-TYPE> {local | none}
no aaa authorization commands <CONNECTION-TYPE> {local | none}
aaa authorization commands <CONNECTION-TYPE> group <GROUP-LIST>
no aaa authorization commands <CONNECTION-TYPE> group <GROUP-LIST>
```

Description

Defines authorization as being basic local RBAC (specified as `none`), or as full-fledged local RBAC specified as `local` (the default), or as remote TACACS+ (specified with `group <GROUP-LIST>`). Each available connection type (channel) can be configured individually. All server groups named in the command, must exist. This command can be issued multiple times, once for each connection type.

The `no` form of this command unconfigures authorization for the specified connection type, reverting to the default of `local`.



Although only TACACS+ servers are supported for remote authorization, local authorization (basic or full-fledged) can be used with remote RADIUS authentication.

Parameter	Description
<code><CONNECTION-TYPE></code>	One of these connection types (channels): <code>default</code> Selects the <code>default</code> connection type for configuration. This configuration applies to all other connection types (<code>console</code>, <code>ssh</code>) that are not explicitly configured with this command. For example, if you do not use <code>aaa authorization commands console...</code> to define the console authorization list, then this default configuration is used for console. <code>console</code> Selects the <code>console</code> connection type for configuration. <code>ssh</code> Selects the <code>ssh</code> connection type for configuration.
<code>local</code>	When used alone without <code>group <GROUP-LIST></code>, selects local authorization which can be used to provide authorization for a purely local setup without any remote AAA servers and also for when RADIUS is used for remote Authentication and Accounting but Authorization is local. When used after <code>group</code>, provides for fallback (to full-fledged local authorization) when every server in every specified TACACS+ server group cannot be reached. NOTE: If any TACACS+ server in the specified groups is reachable, but the command fails to be authorized by that server, the command is rejected and local authorization is never attempted. Local authorization is only attempted if every TACACS+ server

Parameter	Description
	cannot be reached.
none	When used alone without <code>group <GROUP-LIST></code>, selects basic local RBAC authorization, for use with the built-in user groups (administrators, operators, auditors). When used after <code>group</code>, provides for fallback (to basic local RBAC authorization) when every server in every specified TACACS+ server group cannot be reached. NOTE: With <code>none</code>, for users belonging to user-defined user groups, all commands can be executed regardless of what authorization rules are defined in such groups. For per-command local authorization, use <code>local</code> instead.
group <GROUP-LIST>	Specifies the list of remote AAA server group names. Predefined remote AAA group name <code>tacacs</code> is available. User-defined TACACS+ server group names may also be used. The remote AAA server groups are accessed in the order that the group names are listed in this command. Within each group, the servers are accessed in the order in which the servers were added to the group. Server groups are defined using command <code>aaa server group</code> and servers are added to a server group using command <code>server</code>. It is recommended to always include either the special name <code>local</code> or <code>none</code> as the last name in the group list. If both <code>local</code> and <code>none</code> are omitted, and no remote AAA server is reachable (or the first reachable server cannot authorize the command), command execution for the current user will not be possible.

Usage

TACACS+ server authorization considerations



Use caution when configuring authorization, as it has no fail through. If the switch is not configured properly, the switch might get into an unusable state in which all command execution is prohibited.

To prevent authorization difficulties:

- Make sure that all listed TACACS+ servers can authorize users for command execution.
- Make sure that credential database changes are promptly synchronized across all TACACS+ servers.
- Make sure either `local` or `none` is included as the last name in the group list. If both `local` and `none` are omitted, and no remote TACACS+ server is reachable (or the first reachable server cannot authorize), authorization will not be possible.
- Although not recommended, if you choose to omit both `local` and `none` from the list, and are manipulating configuration files, special caution is necessary. If the source configuration includes TACACS+ authorization and you are copying configuration from an existing switch into the running configuration of a new switch, and you have not yet configured the interface or routing information to reach the TACACS+ server, the switch will enter an unusable state, requiring hard reboot.
To avoid getting into this situation that can occur when `local` and `none` have been omitted, do either of the following:

- In the configuration source, delete or comment-out the line configuring remote authorization. Then, after the configuration copy and paste, manually configure authorization.
- Move the line configuring the authorization to the end of the source configuration before copying and pasting.

Examples

Defining the default authorization sequence based on a user-defined TACACS+ server group, then the default TACACS+ server group, and finally (as a precaution), local authorization:

```
switch(config)# aaa authorization commands default group tg1 tacacs local
All commands will fail if none of the servers in the group list are reachable.
Continue (y/n)? y
```

Defining the console authorization sequence based on two user-defined TACACS+ server groups, and finally (as a precaution), local authorization:

```
switch(config)# aaa authorization commands console group tg1 tg2 local
All commands will fail if none of the servers in the group list are reachable.
Continue (y/n)? y
```

Setting the authorization for default to local:

```
switch(config)# aaa authorization commands default local
```

Setting the authorization for the SSH interface to none:

```
switch(config)# aaa authorization commands ssh none
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

aaa group server

```
aaa group server {tacacs | radius} <SERVER-GROUP-NAME>
no aaa group server {tacacs | radius} <SERVER-GROUP-NAME>
```

Description

Creates an AAA server group that is either empty or contains preconfigured RADIUS/TACACS+ servers. You can create a maximum of 28 server groups.

The `no` form of this command deletes a server group. Only a preconfigured user-defined RADIUS/TACACS+ server group can be deleted. RADIUS or TACACS+ servers that were in a deleted server group remain a part of their default server group. The default server group for TACACS+ servers is `tacacs`. The default server group for RADIUS servers is `radius`.

Parameter	Description
<code>server {tacacs radius}</code>	Select either <code>tacacs</code> or <code>radius</code> for the server type.
<code><SERVER-GROUP-NAME></code>	Specifies the name of the server group to be created. The name of the server group can have a maximum of 32 characters.

Examples

Creating TACACS+ server group sg1:

```
switch(config)# aaa group server tacacs sg1
```

Creating RADIUS server group sg3:

```
switch(config)# aaa group server radius sg3
```

Deleting TACACS+ server group sg1:

```
switch(config)# no aaa group server tacacs sg1
```

Deleting RADIUS server group sg3:

```
switch(config)# no aaa group server radius sg3
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

radius-server auth-type

```
radius-server auth-type {pap | chap}  
no radius-server auth-type {pap | chap}
```

Description

Enables the CHAP or PAP authentication protocol, which is used for communication with the RADIUS servers, at the global level. You can override this command with a fine-grained per server `auth-type` configuration.

The `no` form of this command resets the global authentication mechanism for RADIUS to PAP or CHAP. PAP is the default authentication mechanism for RADIUS.

Parameter	Description
<code>auth-type {pap chap}</code>	Selects either the PAP or CHAP authentication protocol.

Examples

Authenticating CHAP:

```
switch(config)# radius-server auth-type chap
```

Authenticating PAP:

```
switch(config)# radius-server auth-type pap
```

Removing CHAP authentication:

```
switch(config)# no radius-server auth-type chap
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

radius-server host

```
radius-server host {<FQDN> | <IPV4> | <IPV6>}  
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]  
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]  
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]  
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]  
no radius-server host {<FQDN> | <IPV4> | <IPV6>}  
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]  
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]  
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]  
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]
```

Description

Adds a RADIUS server. By default, the RADIUS server is associated with the server group named `radius`. The `no` form of this command removes a previously added RADIUS server.



For enhanced security with IPsec, the alternative command `radius-server host secure ipsec` is available. The standard non-IPsec `radius-server host` command does not modify any existing IPsec configuration. If IPsec is already configured for the RADIUS server, then IPsec will remain enabled for the server.

Parameter	Description
<code>{<FQDN> <IPv4> <IPv6>}</code>	Specifies the RADIUS server as: ■ <code><FQDN></code>: a fully qualified domain name. ■ <code><IPv4></code>: an IPv4 address. ■ <code><IPv6></code>: an IPv6 address.
<code>key [plaintext <PASSKEY> ciphertext <PASSKEY>]</code>	Selects either a plaintext or an encrypted local shared-secret passkey for the server. As per RFC 2865, shared-secret can be a mix of alphanumeric and special characters. Plaintext passkeys are between 1 and 32 alphanumeric and special characters. NOTE: When <code>key</code> is entered without either sub-parameter, plaintext passkey prompting occurs upon pressing Enter. Enter must be pressed immediately after the <code>key</code> parameter without entering other parameters. The entered passkey characters are masked with asterisks. When <code>key</code> is omitted, the server uses the global passkey. This command requires either the global or local passkey to be set; otherwise the server will not be contacted. Command <code>radius-server key</code> is available for setting the global passkey.
<code>timeout <TIMEOUT-SECONDS></code>	Specifies the timeout. Range: 1 to 60 seconds. If a timeout is not specified, the value from the global timeout for RADIUS is used.
<code>port <PORT-NUMBER></code>	Specifies the authentication port number. Range: 1 to 65535. Default: 1812.
<code>auth-type {pap chap}</code>	Selects either the PAP (the default) or CHAP authentication types. If this parameter is not specified, the RADIUS global default is used.
<code>acct-port <ACCT-PORT></code>	Specifies the UDP accounting port number. Range: 1 to 65535. Default: 1813.
<code>retries <RETRY-COUNT></code>	Specifies the number of retry attempts for contacting the specified RADIUS server. Range is 0 to 5 attempts. If no retry value is provided, the default value of 1 is used.
<code>tracking {enable disable}</code>	Enables or disables server tracking for the RADIUS server. Tracked servers are probed at the start of each server tracking interval to check if they are reachable. Use command <code>radius-server tracking</code> to configure RADIUS server tracking globally. NOTE: Server tracking uses authentication request and response packets to determine server reachability status. The server tracking user name and password are used to form the request packet which is sent to the server with tracking enabled. Upon

Parameter	Description
	receiving a response to the request packet, the server is considered to be reachable.
tracking-mode {any dead-only}	Configures tracking mode for the RADIUS server that has tracking enabled with the server. The tracking mode is used to monitor the status of RADIUS server reachability. The default tracking mode is any. any Track the RADIUS server irrespective of its server reachability. dead-only Track the RADIUS server only when the server is marked as unreachable.
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named default is used.

Usage

If the fully qualified domain name is provided for the RADIUS server, a DNS server must be configured and accessible through the same VRF which is configured for the RADIUS server. This configuration is required for the resolution of the RADIUS server hostname to its IP address. If a DNS server is not available for this VRF, the RADIUS servers reachable through this VRF must be configured by means of their IP addresses only.

Examples

Adding a RADIUS server with an IPv4 address and a prompted passkey:

```
switch(config)# radius-server host 1.1.1.5 key
Enter the RADIUS server key: *****
Re-Enter the RADIUS server key: *****
```

Deleting a RADIUS server with an IPv4 address and a prompted passkey:

```
switch(config)# no radius-server host 1.1.1.5 key
Enter the RADIUS server key: *****
Re-Enter the RADIUS server key: *****
```

Adding a RADIUS server with an IPv4 address and a named VRF:

```
switch(config)# radius-server host 1.1.1.1 vrf mgmt
```

Deleting a RADIUS server with an IPv4 address and a named VRF:

```
switch(config)# no radius-server host 1.1.1.1 vrf mgmt
```

Adding a RADIUS server with an IPv4 address, a port, and a named VRF:


```
switch(config)# radius-server host 1.1.1.2 port 32 vrf mgmt
```

Deleting a RADIUS server with an IPv4 address, a port, and a named VRF:

```
switch(config)# no radius-server host 1.1.1.2 port 32 vrf mgmt
```

Adding a RADIUS server with an IPv6 address:

```
switch(config)# radius-server host 2001:0db8:85a3:0000:0000:8a2e:0370:7334
```

Deleting a RADIUS server with an IPv6 address:

```
switch(config)# no radius-server host 2001:0db8:85a3:0000:0000:8a2e:0370:7334
```

Adding a RADIUS server with tracking enabled and tracking mode is set to dead-only:

```
switch(config)# radius-server host 1.1.1.1 tracking enable tracking-mode dead-only
```

Deleting a RADIUS server with tracking enabled and tracking mode is set to dead-only:

```
switch(config)# no radius-server host 1.1.1.1 tracking enable tracking-mode dead-only
```

Adding a RADIUS server with tracking disabled:

```
switch(config)# radius-server host 1.1.1.1 tracking disable
```

Deleting a RADIUS server with tracking disabled:

```
switch(config)# no radius-server host 1.1.1.1 tracking disable
```

Deleting a RADIUS server with an IPv4 address and specified VRF:

```
switch(config)# no radius-server host 1.1.1.1 vrf mgmt
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

radius-server host secure ipsec

Syntax for a RADIUS server that uses IPsec for authentication:

```
radius-server host {<FQDN> | <IPV4> | <IPV6>}
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]
    secure ipsec authentication spi <SPI-INDEX> <AUTH-TYPE> <AUTH-KEY-TYPE> [<AUTH-KEY>]
no radius-server host {<FQDN> | <IPV4> | <IPV6>}
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]
    secure ipsec authentication spi <SPI-INDEX><AUTH-TYPE><AUTH-KEY-TYPE> [<AUTH-KEY>]
```

Syntax for a RADIUS server that uses IPsec for both authentication and encryption:

```
radius-server host {<FQDN> | <IPV4> | <IPV6>}
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]
    secure ipsec encryption spi <SPI-INDEX> <AUTH-TYPE> <AUTH-KEY-TYPE>
    [<AUTH-KEY>] <ENCRYPT-TYPE> <ENCRYPT-KEY-TYPE> [<ENCRYPT-KEY>]
no radius-server host {<FQDN> | <IPV4> | <IPV6>}
    [key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
    [timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
    [auth-type {pap | chap}] [acct-port <ACCT-PORT>] [retries <RETRY-COUNT>]
    [tracking {enable | disable}] [tracking-mode {any | dead-only}] [vrf <VRF-NAME>]
    secure ipsec encryption spi <SPI-INDEX><AUTH-TYPE><AUTH-KEY-TYPE>
    [<AUTH-KEY>] <ENCRYPT-TYPE><ENCRYPT-KEY-TYPE> [<ENCRYPT-KEY>]
```

Description

Adds a RADIUS server that uses IPsec for enhanced security (authentication and possibly encryption). By default, the RADIUS server is associated with the server group named `radius`.

The `no` form of this command removes a previously added RADIUS (with IPsec) server.



Unless enhanced security with IPsec is required, use the `radius-server host` command instead.

Parameter	Description
{<FQDN> <IPV4> <IPV6>}	Specifies the RADIUS server as: ■ <FQDN>: a fully qualified domain name. ■ <IPV4>: an IPv4 address. ■ <IPV6>: an IPv6 address.
key [plaintext <PASSKEY> ciphertext <PASSKEY>]	Selects either a plaintext or an encrypted local shared-secret

Parameter	Description
	passkey for the server. As per RFC 2865, shared-secret can be a mix of alphanumeric and special characters. Plaintext passkeys are between 1 and 32 alphanumeric and special characters. NOTE: When <code>key</code> is entered without either sub-parameter, plaintext passkey prompting occurs upon pressing Enter. Enter must be pressed immediately after the <code>key</code> parameter without entering other parameters. The entered passkey characters are masked with asterisks. When <code>key</code> is omitted, the server uses the global passkey. This command requires either the global or local passkey to be set; otherwise the server will not be contacted. Command <code>radius-server key</code> is available for setting the global passkey.
<code>timeout <TIMEOUT-SECONDS></code>	Specifies the timeout. Range: 1 to 60 seconds. If a timeout is not specified, the value from the global timeout for RADIUS is used.
<code>port <PORT-NUMBER></code>	Specifies the authentication port number. Range: 1 to 65535. Default: 1812.
<code>auth-type {pap chap}</code>	Selects either the PAP (the default) or CHAP authentication types. If this parameter is not specified, the RADIUS global default is used.
<code>acct-port <ACCT-PORT></code>	Specifies the UDP accounting port number. Range: 1 to 65535. Default: 1813.
<code>retries <RETRY-COUNT></code>	Specifies the number of retry attempts for contacting the specified RADIUS server. Range is 0 to 5 attempts. If no retry value is provided, the default value of 1 is used.
<code>tracking {enable disable}</code>	Enables or disables server tracking for the RADIUS server. Tracked servers are probed at the start of each server tracking interval to check if they are reachable. Use command <code>radius-server tracking</code> to configure RADIUS server tracking globally. NOTE: Server tracking uses authentication request and response packets to determine server reachability status. The server tracking user name and password are used to form the request packet which is sent to the server with tracking enabled. Upon receiving a response to the request packet, the server is considered to be reachable.
<code>tracking-mode {any dead-only}</code>	Configures tracking mode for the RADIUS server that has tracking enabled with the server. The tracking mode is used to monitor the status of RADIUS server reachability. The default tracking mode is <code>any</code>. <code>any</code> Track the RADIUS server irrespective of its server reachability. <code>dead-only</code> Track the RADIUS server only when the server is marked as unreachable.
<code>vrf <VRF-NAME></code>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named

Parameter	Description
	default is used.
spi <SPI-INDEX>	Specifies the Security Parameters Index. The SPI is an identification tag carried in the IPsec AH header. The SPI must be unique on the switch. Range: 256 to 4294967295.
<AUTH-TYPE>	Specifies the authentication algorithm: md5, sha1, or sha256.
<AUTH-KEY-TYPE>	Specifies the authentication key type: plaintext, hex-string, or ciphertext.
[<AUTH-KEY>]	Specifies the authentication key. For <AUTH-TYPE> of ciphertext, this is the ciphertext string. For <AUTH-TYPE> of plaintext or hex-string: ■ md5 (plaintext): 1 to 16 characters, (hex-string): 2 to 32 hexadecimal digits. ■ sha1 (plaintext): 1 to 20 characters, (hex-string): 2 to 40 hexadecimal digits. ■ sha256 (plaintext): 1 to 32 characters, (hex-string): 2 to 64 hexadecimal digits. NOTE: When <AUTH-KEY-TYPE> is not followed by <AUTH-KEY>, plaintext authentication key prompting occurs upon pressing Enter. Enter must be pressed immediately after the <AUTH-KEY-TYPE> parameter without entering other parameters. The entered authentication key characters are masked with asterisks.
<ENCRYPT-TYPE>	Specifies the encryption algorithm: 3des, aes, des, or null.
<ENCRYPT-KEY-TYPE>	Specifies the encryption key type: plaintext, hex-string, or ciphertext.
[<ENCRYPT-KEY>]	Specifies the encryption key. For <ENCRYPT-TYPE> of ciphertext, this is the ciphertext string. For <ENCRYPT-TYPE> of plaintext or hex-string: ■ 3des (plaintext): 24 characters, (hex-string): 48 hexadecimal digits. ■ aes (plaintext): 16, 24, or 32 characters, (hex-string): 32, 48, or 64 hexadecimal digits. ■ des (plaintext): 8 characters, (hex-string): 16 hexadecimal digits. NOTE: When <ENCRYPT-KEY-TYPE> is not followed by <ENCRYPT-KEY>, plaintext encryption key prompting occurs upon pressing Enter. Enter must be pressed immediately after the <ENCRYPT-KEY-TYPE> parameter without entering other parameters. The entered encryption key characters are masked with asterisks.

Usage

If the fully qualified domain name is provided for the RADIUS server host, a DNS server must be configured and accessible through the same VRF as mentioned for the server host. This configuration is required for

the resolution of the RADIUS server hostname to its IP address. If a DNS server is not available for this VRF, the RADIUS servers reachable through this VRF must be configured by means of their IP addresses only.

Examples

Adding a RADIUS server with an IPv4 address, a plaintext passkey, and IPsec authentication (md5 plaintext).

```
switch(config)# radius-server host 1.1.1.1 key plaintext 98ab vrf mgmt secure
ipsec authentication spi 261 md5 plaintext labc
```

Deleting a RADIUS server with an IPv4 address, a plaintext passkey, and IPsec authentication (md5 plaintext).

```
switch(config)# no radius-server host 1.1.1.1 key plaintext 98ab vrf mgmt secure
ipsec authentication spi 261 md5 plaintext labc
```

Adding a RADIUS server with an IPv4 address and a prompted IPsec authentication (md5) plaintext authentication key.

```
switch(config)# radius-server host 1.1.1.1 secure ipsec authentication spi 261 md5
Enter the IPsec authentication key: *****
Re-Enter the IPsec authentication key: *****
```

Deleting a RADIUS server with an IPv4 address and a prompted IPsec authentication (md5) plaintext authentication key.

```
switch(config)# no radius-server host 1.1.1.1 secure ipsec authentication spi 261
md5
Enter the IPsec authentication key: *****
Re-Enter the IPsec authentication key: *****
```

Adding a RADIUS server with an IPv4 address, IPsec authentication (MD5 plaintext), and IPsec encryption (AES plaintext):

```
switch(config)# radius-server host 1.1.1.2 vrf mgmt secure
ipsec encryption spi 262 md5 plaintext 9xyz aes plaintext 1234567890abcdef
```

Deleting a RADIUS server with an IPv4 address, IPsec authentication (MD5 plaintext), and IPsec encryption (AES plaintext):

```
switch(config)# no radius-server host 1.1.1.2 vrf mgmt secure
ipsec encryption spi 262 md5 plaintext 9xyz aes plaintext 1234567890abcdef
```

Adding a RADIUS server by providing an IPv4 address and IPsec MD5 authentication type, and then responding to prompts for the keys and encryption type:

```
switch(config)# radius-server host 1.1.1.6 secure ipsec encryption spi 262 md5
Enter the IPsec authentication key: *****
Re-Enter the IPsec authentication key: *****
```

```
Enter the IPsec encryption type (3des/aes/des/null)? aes

Enter the IPsec encryption key: *****
Re-Enter the IPsec encryption key: *****
```

Deleting a RADIUS server by providing an IPv4 address and IPsec MD5 authentication type, and then responding to prompts for the keys and encryption type:

```
switch(config)# no radius-server host 1.1.1.6 secure ipsec encryption spi 262 md5
Enter the IPsec authentication key: *****
Re-Enter the IPsec authentication key: *****

Enter the IPsec encryption type (3des/aes/des/null)? aes

Enter the IPsec encryption key: *****
Re-Enter the IPsec encryption key: *****
```

Adding a RADIUS server with an IPv4 address, tracking enabled, tracking mode, IPsec authentication (MD5 plaintext), IPsec encryption (AES plaintext) is set to dead-only:

```
switch(config)# radius-server host 1.1.1.1 tracking enable tracking-mode dead-only
vrf mgmt secure ipsec encryption spi 262 md5 plaintext 9xyz
aes plaintext 1234567890abcdef
```

Deleting a RADIUS server with an IPv4 address, tracking enabled, tracking mode, IPsec authentication (MD5 plaintext), IPsec encryption (AES plaintext) is set to dead-only:

```
switch(config)# no radius-server host 1.1.1.1 tracking enable tracking-mode dead-only
vrf mgmt secure ipsec encryption spi 262 md5 plaintext 9xyz
aes plaintext 1234567890abcdef
```

Removing a RADIUS server:

```
switch(config)# no radius-server host 1.1.1.1 vrf mgmt
```

Removing the ipsec configuration from a RADIUS server:

```
switch(config)# no radius-server host 1.1.1.2 vrf mgmt secure ipsec encryption
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

radius-server key

```
radius-server key [plaintext <GLOBAL-PASSKEY> | ciphertext <GLOBAL-PASSKEY>]
no radius-server key [plaintext <GLOBAL-PASSKEY> | ciphertext <GLOBAL-PASSKEY>]
```

Description

Creates or modifies a RADIUS global passkey. The RADIUS global passkey is used as a shared-secret for encrypting the communication between all RADIUS servers and the switch. The RADIUS global passkey is required for authentication unless local passkeys have been set. By default, the RADIUS global passkey is empty. If the administrator has not set this key, the switch will not be able to perform RADIUS authentication. The switch will instead rely on the authentication mechanism configured with `aaa` authentication login.



When this command is entered without parameters, plaintext passkey prompting occurs upon pressing Enter. The entered passkey characters are masked with asterisks.

The `no` form of the command removes the global passkey.

Parameter	Description
<code>plaintext <GLOBAL-PASSKEY></code>	Specifies the RADIUS global passkey in plaintext format with a length of 1 to 31 characters. As per RFC 2865, a shared-secret can be a mix of alphanumeric and special characters.
<code>ciphertext <GLOBAL-PASSKEY></code>	Specifies the RADIUS global passkey in encrypted format.

Examples

Adding the global passkey:

```
switch(config)# radius-server key plaintext mypasskey123
```

Adding the global passkey with prompting:

```
switch(config)# radius-server key
Enter the RADIUS server key: *****
Re-Enter the RADIUS server key: *****
```

Removing the global passkey:

```
switch(config)# no radius-server key
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

radius-server retries

```
radius-server retries <0-5>
no radius-server retries <0-5>
```

Description

Sets at the global level the number of retries the switch makes before concluding that the RADIUS server is unreachable.

You can override this setting with a fine-grained per RADIUS server retries configuration.

The `no` form of this command resets the RADIUS global retries to the default retries value of 1.

Parameter	Description
<code>retries <0-5></code>	Specifies the number of retry attempts for contacting RADIUS servers. Range is 0 to 5 retries.

Example

```
switch(config)# radius-server retries 3
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

radius-server timeout

```
radius-server timeout [<1-60>]
no radius-server timeout [<1-60>]
```


Description

Specifies the number of seconds to wait for a response from the RADIUS server before trying the next RADIUS server. If a value is not specified, a default value of 5 seconds is used. You can override this value with a fine-grained per server timeout configured for individual servers.

The `no` form of this command resets the RADIUS global authentication timeout to the default of 5 seconds.

Parameter	Description
<code>timeout <1-60></code>	Specifies the timeout interval of 1 to 60 seconds. Default: 5 seconds.

Examples

Setting the RADIUS server timeout:

```
switch(config)# radius-server timeout 10
```

Resetting the timeout for the RADIUS server to the default:

```
switch(config)# no radius-server timeout
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

radius-server tracking

```
radius-server tracking interval <INTERVAL>  
no radius-server tracking interval
```

```
radius-server tracking retries <RETRIES>  
no radius-server tracking retries
```

```
radius-server tracking user-name <NAME>  
    [password [plaintext <PASSWORD> | ciphertext <PASSWORD>]]  
no radius-server tracking user-name <NAME>  
    [password [plaintext <PASSWORD> | ciphertext <PASSWORD>]]
```

Description

Configures RADIUS server tracking settings globally for all configured RADIUS servers that have tracking enabled with the `radius-server host` command on individual servers.

The `no` form of the command removes the specified configuration, reverting it to its default. The `no` form with `user-name` also clears the password (resets it to empty).

Parameter	Description
<code>interval <INTERVAL></code>	Specifies the time interval, in seconds, to wait before checking the server reachability status. Default: 300. Range 60 to 84600.
<code>retries <RETRIES></code>	Specifies the number of server retries. Default: Global RADIUS retries. Range: 0 to 5.
<code>user-name <NAME></code> <code>[password [plaintext <PASSWORD> </code> <code>ciphertext <PASSWORD>]]</code>	Specifies the user name (and optionally a password) to be used for server checking. The default user name is <code>radius-tracking-user</code> with an empty password. The password is optional and may be entered as <code>plaintext</code> or pasted in as <code>ciphertext</code>. The plaintext password is visible as cleartext when entered but is encrypted thereafter. Command history does show the password as cleartext. NOTE: When <code>password</code> is entered without a following sub-parameter, plaintext password prompting occurs upon pressing Enter. The entered password characters are masked with asterisks. NOTE: The user does not have to be configured on the server. Server tracking can still be performed with a user which is not configured on the server because authentication failure on the server achieves confirmation that the server is reachable. NOTE: Server tracking uses authentication request and response packets to determine server reachability status. The server tracking user name and password are used to form the request packet which is sent to the server with tracking enabled. Upon receiving a response to the request packet, the server is considered to be reachable.

Examples

Configuring a tracking interval of 120 seconds:

```
switch(config)# radius-server tracking interval 120
```

Reverting the tracking interval to its default of 300 seconds:

```
switch(config)# no radius-server tracking interval
```

Configuring three retries:

```
switch(config)# radius-server tracking retries 3
```

Configuring user `radius-tracker` with a plaintext password.

```
switch(config)# radius-server tracking user-name radius-tracker
password plaintext track$1
```

Configuring user `radius-tracker` with a prompted plaintext password.

```
switch(config)# radius-server tracking user-name radius-tracker password
Enter the RADIUS server tracking password: *****
Re-Enter the RADIUS server tracking password: *****
```

Reverting the tracking user name to its default of `radius-tracking-user`:

```
switch(config)# no radius-server tracking user-name
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

server

```
server {<FQDN> | <IPv4> | <IPv6>} [port <PORT-NUMBER>] [vrf <VRF-NAME>]
no server {<FQDN> | <IPv4> | <IPv6>} [port <PORT-NUMBER>] [vrf <VRF-NAME>]
```

Description

Adds a TACACS+/RADIUS server to a server-group. Only the configured TACACS+/RADIUS servers are allowed to be added within the server group. If the same server name exists with multiple ports or multiple VRFs, specify the server name, port, and VRF when adding the server to the server-group.

The `no` form of this command removes a TACACS+/RADIUS server from a server-group.

Parameter	Description
{<FQDN> <IPv4> <IPv6>}	Specifies the RADIUS server as: ■ <FQDN>: a fully qualified domain name. ■ <IPv4>: an IPv4 address. ■ <IPv6>: an IPv6 address.
port <PORT-NUMBER>	Specifies the authentication port number. Range: 1 to 65535. Default TACACS+ (TCP): 49, RADIUS (UDP): 1812. If a port number is not provided, the system searches the TACACS+/RADIUS server by host name and sets the default authentication port. Group server priority is assigned based on the

Parameter	Description
	sequence in which the servers are added.
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named default is used.

Examples

Adding a server to TACACS+ server group sg1 by providing an IPv4 address, port number, and VRF name:

```
switch(config)# aaa group server tacacs sg1
switch(config-sg)# server 1.1.1.2 port 32 vrf default
```

Adding a server to TACACS+ server group sg2 by providing an IPv6 address and default VRF:

```
switch(config)# aaa group server tacacs sg2
switch(config-sg)# server 2001:0db8:85a3:0000:0000:8a2e:0370:7334 vrf default
```

Adding a server to RADIUS server group sg3 by providing an IPv4 address, port number, and VRF name:

```
switch(config)# aaa group server radius sg3
switch(config-sg)# server 1.1.1.5 port 12 vrf default
```

Adding a server to RADIUS server group sg4 by providing an IPv6 address and default VRF:

```
switch(config)# aaa group server radius sg4
switch(config-sg)# server 2001:0db8:85a3:0000:0000:8a2e:0371:7334 vrf default
```

Adding a server to RADIUS server group sg4 by providing an IPv4 address, port number, and VRF name:

```
switch(config)# aaa group server radius sg4
switch(config-sg)# server 1.1.1.6 port 32 vrf vrf_red
```

Specifying an IPv4 address when removing a TACACS+ server from server group sg1:

```
switch(config)# aaa group server tacacs sg1
switch(config-sg)# no server 1.1.1.2 port 12 vrf default
```

Specifying an IPv6 address when removing a TACACS+ server from server group sg2 with the default VRF:

```
switch(config)# aaa group server tacacs sg2
switch(config-sg)# no server 2001:0db8:85a3:0000:0000:8a2e:0370:7334 vrf default
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-sg	Administrators or local user group members with execution rights for this command.

show aaa accounting

show aaa accounting

Description

Shows the accounting configuration per connection type (channel).

Examples

Configuring and then showing the accounting sequence for TACACS+ groups and local:

```
switch(config)# aaa accounting all default start-stop group tg1 tg2 tacacs local
switch(config)# aaa accounting all ssh start-stop group tg1 tg2
switch(config)# aaa accounting all console start-stop group tg4 tacacs local
switch(config)# aaa accounting all https-server start-stop local group tacacs tg3
switch(config)# exit
switch# show aaa accounting
AAA Accounting:
  Accounting Type           : all
  Accounting Mode           : start-stop

Accounting for default channel:
-----
GROUP NAME                  | GROUP PRIORITY
-----
tg1                          | 0
tg2                          | 1
tacacs                       | 2
local                        | 3
-----

Accounting for ssh channel:
-----
GROUP NAME                  | GROUP PRIORITY
-----
tg1                          | 0
tg2                          | 1
-----

Accounting for console channel:
-----
GROUP NAME                  | GROUP PRIORITY
-----
tg4                          | 0
tacacs                       | 1
local                        | 2
-----
```

```
-----  
Accounting for https-server channel:  
-----
```

GROUP NAME	GROUP PRIORITY
local	0
tacacs	1
tg3	2

```
-----
```

Configuring and then showing the accounting sequence for RADIUS groups and local:

```
switch(config)# aaa accounting all default start-stop group rg1 rg2 radius local  
switch(config)# aaa accounting all console start-stop group rg4 radius local  
switch(config)# exit  
switch# show aaa accounting  
AAA Accounting:  
  Accounting Type           : all  
  Accounting Mode           : start-stop
```

```
Accounting for default channel:  
-----
```

GROUP NAME	GROUP PRIORITY
rg1	0
rg2	1
radius	2
local	3

```
-----
```

```
Accounting for console channel:  
-----
```

GROUP NAME	GROUP PRIORITY
tg4	0
radius	1
local	2

```
-----
```

Configuring and then showing only local accounting for default:

```
switch(config)# aaa accounting all default start-stop local  
switch(config)# exit  
switch# show aaa accounting  
AAA Accounting:  
  Accounting Type           : all  
  Accounting Mode           : start-stop
```

```
Accounting for default channel:  
-----
```

GROUP NAME	GROUP PRIORITY
local	0

```
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authentication

show aaa authentication

Description

Shows the authentication configuration per connection type (channel).

Example

Configuring TACACS+ authentication sequences and then showing the configuration per connection type (channel):

```
switch(config)# aaa authentication login default group tg1 tg2 tg3 tg4 tacacs local
switch(config)# aaa authentication login ssh group tg1 tg2
switch(config)# aaa authentication login console group tg4 tacacs local
switch(config)# aaa authentication login https-server local group tacacs tg3
switch(config)# exit
switch# show aaa authentication
AAA Authentication:
  Fail-through           : Enabled
  Limit Login Attempts   : Not set
  Lockout Time           : 300
  Minimum Password Length : Not set
```

Authentication for default channel:

```
-----
GROUP NAME | GROUP PRIORITY
-----
tg1         | 0
tg2         | 1
tg3         | 2
tg4         | 3
tacacs      | 4
local       | 5
-----
```

Authentication for ssh channel:

```
-----
GROUP NAME | GROUP PRIORITY
-----
tg1         | 0
tg2         | 1
-----
```

Authentication for console channel:

```

-----
GROUP NAME | GROUP PRIORITY
-----
tg4 | 0
tacacs | 1
local | 2
-----

Authentication for https-server channel:
-----
GROUP NAME | GROUP PRIORITY
-----
local | 0
tacacs | 1
tg3 | 2
-----

```

Configuring RADIUS authentication sequences and then showing the configuration per connection type (channel):

```

switch(config)# aaa authentication login default group rg1 rg2 rg3 rg4 radius local
switch(config)# aaa authentication login console group rg4 radius local
switch(config)# exit
switch# show aaa authentication
AAA Authentication:
  Fail-through      : Enabled
  Limit Login Attempts : Not set
  Lockout Time      : 300
  Minimum Password Length : Not set

Authentication for default channel:
-----
GROUP NAME | GROUP PRIORITY
-----
rg1 | 0
rg2 | 1
rg3 | 2
rg4 | 3
radius | 4
local | 5
-----

Authentication for console channel:
-----
GROUP NAME | GROUP PRIORITY
-----
rg4 | 0
radius | 1
local | 2
-----

```

Configuring only default authentication and then showing the default connection type (channel):

```

switch(config)# aaa authentication login default local
switch(config)# exit
switch# show aaa authentication

AAA Authentication:
  Fail-through : Disabled

```



```
Limit Login Attempts      : Not set
Lockout Time              : 300
Minimum Password Length   : Not set
```

Authentication for default channel:

```
-----
GROUP NAME                | GROUP PRIORITY
-----
local                     | 0
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authorization

```
show aaa authorization
```

Description

Shows the authorization configuration per connection type (channel).

Example

Configuring and then showing the authorization sequence for default and console connection types (channels):

```
switch(config)# aaa authorization commands default group tg1 tacacs none
All commands will fail if none of the servers in the group list are reachable.
Continue (y/n)? y
switch(config)#
switch(config)# aaa authorization commands console group tg1 tg2 tacacs none
All commands will fail if none of the servers in the group list are reachable.
Continue (y/n)? y
switch(config)# exit
switch#
switch# show aaa authorization
Authorization for default channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
tg1                       | 0
tacacs                    | 1
none                      | 2
-----
```

Authorization for console channel:

GROUP NAME	GROUP PRIORITY
tg1	0
tg2	1
tacacs	2
none	3

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa server-groups

show aaa server-groups [tacacs | radius]

Description

Shows TACACS+ and RADIUS AAA server group information for all server types or for the specified server type.

Parameter	Description
tacacs	Narrows the command output to only TACACS+ servers.
radius	Narrows the command output to only RADIUS servers.

Example

Showing all AAA server group information:

```
switch# show aaa server-groups

***** AAA Mechanism TACACS+ *****
-----
GROUP NAME      | SERVER NAME                               | PORT | VRF      | PRIORITY
-----
sg2              | 2001:0db8:85a3:0000:0000:8a2e:         | 49   | default | 1
                  0370:7334
-----
sg1              | 1.1.1.2                                | 12   | mgmt    | 1
```

```

-----
tacacs (default) | FQDN.com | 32 | mgmt | 1
tacacs (default) | 1.1.1.1 | 49 | mgmt | 2
tacacs (default) | 1.1.1.2 | 12 | mgmt | 3
tacacs (default) | abc.com | 32 | vrf_red | 4
tacacs (default) | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 49 | default | 5
tacacs (default) | 1.1.1.3 | 32 | vrf_blue | 6
-----

***** AAA Mechanism RADIUS *****

GROUP NAME | SERVER NAME | PORT | VRF | PRIORITY
-----
sg4 | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 1812 | default | 1
-----
sg3 | 1.1.1.5 | 12 | mgmt | 1
-----
radius (default) | 1.1.1.4 | 1812 | mgmt | 1
radius (default) | 1.1.1.5 | 12 | mgmt | 2
radius (default) | abc1.com | 32 | mgmt | 3
radius (default) | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 1812 | default | 4
radius (default) | 1.1.1.6 | 32 | vrf_red | 5
radius (default) | 1.1.1.7 | 32 | vrf_blue | 6
-----

```

Showing TACACS+ server group information:

```

switch# show aaa server-groups tacacs

***** AAA Mechanism TACACS+ *****

GROUP NAME | SERVER NAME | PORT | VRF | PRIORITY
-----
sg2 | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 49 | default | 1
-----
sg1 | 1.1.1.2 | 12 | mgmt | 1
-----
tacacs (default) | FQDN.com | 32 | mgmt | 1
tacacs (default) | 1.1.1.1 | 49 | mgmt | 2
tacacs (default) | 1.1.1.2 | 12 | mgmt | 3
tacacs (default) | abc.com | 32 | vrf_red | 4
tacacs (default) | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 49 | default | 5
tacacs (default) | 1.1.1.3 | 32 | vrf_blue | 6
-----

```

Showing RADIUS server group information:

```

switch# show aaa server-groups radius

***** AAA Mechanism RADIUS *****

GROUP NAME | SERVER NAME | PORT | VRF | PRIORITY
-----
sg4 | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 1812 | default | 1
-----

```

```

-----
sg3 | 1.1.1.5 | 12 | mgmt | 1
-----
radius (default) | 1.1.1.4 | 1812 | mgmt | 1
radius (default) | 1.1.1.5 | 12 | mgmt | 2
radius (default) | abc1.com | 32 | mgmt | 3
radius (default) | 2001:0db8:85a3:0000:0000:8a2e:
0370:7334 | 1812 | default | 4
radius (default) | 1.1.1.6 | 32 | vrf_red | 5
radius (default) | 1.1.1.7 | 32 | vrf_blue | 6
-----

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show accounting log

show accounting log [last <QTY-TO-SHOW> | all]

Description

Entered without optional parameters, this command shows all accounting log records for the current boot. Sensitive information is masked from the log, by being represented as asterisks.



This `show accounting log` command replaces the `show audit-log` command that is supported only in 10.00 releases.

Parameter	Description
last <QTY-TO-SHOW>	Specifies how many most-recent accounting log records to show for the current boot. Range: 1 to 1000.
all	Selects for showing, all accounting records from the current boot and the previous boot.

Usage

The log message starts with the record type, which is specific to AOS-CX. Values are the following:

USER_START

Record of a user login action.

USER_END

Record of a user logout action.

USYS_CONFIG

Record of a command executed by the user.

The three types of accounting log information are identified by the `msg=` element starting with the `rec=` item as follows:

- Exec is identified with: `msg='rec=ACCT_EXEC'`
- Command is identified with: `msg='rec=ACCT_CMD'`
- System is identified with: `msg='rec=ACCT_SYSTEM'`

The user group is indicated by `priv-lvl`, which is specific to AOS-CX. Values are the following:

Privilege level	User group
1	operators
15	administrators
19	auditors

The value of `service` indicates which user interface was used:

`service=shell`

Indicates that the log entry is a result of a CLI command.

`service=https-server`

Indicates that the log entry is a result of a REST API request or a Web UI action.

The string value of `data` identifies the CLI command or REST API request that was executed.

These elements are shown in context under *Examples*.

Examples

Showing the accounting log for the previous and current boot. Line breaks have been added for readability.

```
switch# show accounting log all

-----
Local accounting logs from previous boot
-----
----
type=DAEMON_START msg=audit(Nov 05 2018 23:00:58.607:9057) :
auditd start, ver=2.4.3 format=raw kernel=4.9.119-yocto-standard res=success
----
type=USER_START msg=audit(Nov 05 2018 23:06:42.398:42) :
msg='rec=ACCT_EXEC op=start session=CONSOLE timezone=UTC user=user1 priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no
hostname=8xxx addr=0.0.0.0 res=success'
----
type=USYS_CONFIG msg=audit(Nov 05 2018 23:06:42.399:43) :
msg='rec=ACCT_CMD op=stop session=CONSOLE timezone=UTC user=user1 priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no
data="enable" hostname=8xxx addr=0.0.0.0 res=success'
----
type=USYS_CONFIG msg=audit(Nov 05 2018 23:08:24.693:51) :
msg='rec=ACCT_CMD op=stop session=CONSOLE timezone=UTC user=user1 priv-lvl=1
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no
data="configure terminal" hostname=8xxx addr=0.0.0.0 res=success'
----
```

```

type=USYS_CONFIG msg=audit(Nov 05 2018 23:08:39.108:52) :
msg='rec=ACCT_CMD op=stop session=CONSOLE timezone=UTC user=user1 priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=yes
data="https-server rest access-mode read-write"
hostname=8xxx addr=0.0.0.0 res=success'
----
type=USER_START msg=audit(Nov 05 2018 23:10:57.238:58) :
msg='rec=ACCT_EXEC op=start session=REST timezone=UTC user=admin priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=https-server
data="http-method=POST http-uri=/rest/v1/login"
hostname=8xxx addr=127.0.0.1 res=success'
----
type=USYS_CONFIG msg=audit(Nov 05 2018 23:15:11.958:75) :
msg='rec=ACCT_CMD op=stop session=CONSOLE timezone=UTC user=user1 priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=yes
data="tacacs-server host 2.2.2.2" hostname=8xxx addr=0.0.0.0 res=success'
----
type=USYS_CONFIG msg=audit(Nov 05 2018 23:15:37.090:76) :
msg='rec=ACCT_CMD op=stop session=REST timezone=UTC user=admin priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=https-server
data="http-method=GET http-uri=/rest/v1/system/vrfs/mgmt/tacacs_servers"
hostname=8xxx addr=127.0.0.1 res=success'
----
type=USER_END msg=audit(Nov 05 2018 23:26:59.207:90) :
msg='rec=ACCT_EXEC op=stop session=REST timezone=UTC user=admin priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=https-server
data="http-method=POST http-uri=/rest/v1/logout"
hostname=8xxx addr=127.0.0.1 res=success'
----
type=USER_END msg=audit(Nov 05 2018 23:27:49.164:93) :
msg='rec=ACCT_EXEC op=stop session=CONSOLE timezone=UTC user=user1 priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no
hostname=8xxx addr=0.0.0.0 res=success'

-----
Local accounting logs from current boot
-----
----
type=DAEMON_START msg=audit(Nov 05 2018 23:32:05.642:626) :
auditd start, ver=2.4.3 format=raw kernel=4.9.119-yccto-standard res=success
----
type=USER_START msg=audit(Nov 05 2018 23:35:52.915:11) :
msg='rec=ACCT_EXEC op=start session=CONSOLE timezone=UTC user=admin priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no
hostname=8xxx addr=0.0.0.0 res=success'
----
type=USYS_CONFIG msg=audit(Nov 05 2018 23:35:52.917:12) :
msg='rec=ACCT_CMD op=stop session=CONSOLE timezone=UTC user=admin priv-lvl=15
auth-method=LOCAL auth-type=LOCAL service=shell isconfig=no data="enable"
hostname=8xxx addr=0.0.0.0 res=success'

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#) or Auditor (auditor)	Auditors or Administrators or local user group members with execution rights for this command. Auditors can execute this command from the auditor context (auditor>) only.

show radius-server

show radius-server [detail]

Description

Shows configured RADIUS servers information.

Parameter	Description
detail	Selects additional RADIUS server details and global parameters for showing.

Usage

When the `show radius-server` command shows `None` for the shared-secret, the passkey is missing.

Examples

Showing a summary of the global RADIUS configuration:

```
switch# show radius-server
***** Global RADIUS Configuration *****

Shared-Secret: None
Timeout: 60
Auth-Type: pap
Retries: 5
Tracking Time Interval (seconds): 60
Tracking Retries: 5
Tracking User-name: radius-tracking-user
Tracking Password: None
Number of Servers: 1

-----
SERVER NAME                               | PORT | VRF
-----
20.1.1.129                               | 1812 | default
1.1.1.4                                   | 1812 | default
1.1.1.5                                   | 12   | default
abc1.com                                  | 32   | default
2001:0db8:85a3:0000:0000:8a2e:0371:7334 | 1812 | default
-----
```

Showing a summary of a RADIUS server when the per-server shared key or the global RADIUS shared key is not set:

```
switch# show radius-server
***** Global RADIUS Configuration *****
```

```

Shared-Secret: None
Timeout: 60
Auth-Type: pap
Retries: 5
Tracking Time Interval (seconds): 60
Tracking Retries: 5
Tracking User-name: radius-tracking-user
Tracking Password: None
Number of Servers: 1

```

```

-----
SERVER NAME                               | PORT | VRF
-----
20.1.1.129                               | 1812 | default
-----

```

Showing details of a global RADIUS configuration:

```

switch# show radius-server detail
***** Global RADIUS Configuration *****

Shared-Secret: AQBapb+HsdpqVlQcA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout: 5
Auth-Type: pap
Retries: 5
Tracking Time Interval (seconds): 60
Tracking Retries: 5
Tracking User-name: radius-tracking-user
Tracking Password: None
Number of Servers: 1

***** RADIUS Server Information *****
Server-Name       : 20.1.1.129
Auth-Port         : 1812
Accounting-Port   : 1813
VRF               : default
Shared-Secret     : None
Timeout           : 60
Retries           : 5
Auth-Type         : pap
Server-Group      : radius
Default-Priority   : 4
Tracking          : disabled
Tracking-Mode      : any
Reachability-Status : N/A
ClearPass-Username : 
ClearPass-Password : None

```

Showing details of a RADIUS server when the per-server shared key and the global RADIUS shared key are not set:

```

switch# show radius-server detail
***** Global RADIUS Configuration *****

Shared-Secret: None
Timeout: 5
Auth-Type: pap
Retries: 1
Number of Servers: 1

```



```

***** RADIUS Server Information *****
Server-Name           : 1.1.1.1
Auth-Port             : 2083
VRF                   : default
Shared-Secret (default) : None
Timeout (default)     : 5
Retries (default)     : 1
Auth-Type (default)   : pap
Server-Group (default) : radius
Default-Priority       : 1

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show radius-server secure ipsec

```

show radius-server secure ipsec { server-list | host {<FQDN> | <IPv4> | <IPv6>}
[port <PORT-NUMBER>] [vrf <VRF-NAME>] }

```

Description

Shows information for one or all RADIUS servers configured with IPsec.

Parameter	Description
server-list	Selects all servers for showing.
{<FQDN> <IPv4> <IPv6>}	Specifies the RADIUS server as: ■ <FQDN>: a fully qualified domain name. ■ <IPv4>: an IPv4 address. ■ <IPv6>: an IPv6 address.
port <PORT-NUMBER>	Specifies the authentication port number. Range: 1 to 65535. Default: 1812.
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named default is used.

Usage

The IPsec key is shown in an exportable ciphertext format.

Examples

Showing information for RADIUS server 1.1.1.1 secured with IPsec:

```
switch# show radius-server secure ipsec host 1.1.1.1
IPsec           : enabled
Protocol        : ESP
Authentication   : MD5
Encryption      : AES
SPI             : 1234
```

Showing information for all RADIUS servers secured with IPsec:

```
switch# show radius-server secure ipsec server-list
Server          : 1.1.1.1
IPsec           : enabled
Protocol        : ESP
Authentication   : MD5
Encryption      : AES
SPI             : 1234

Server          : 1.1.1.2
IPsec           : enabled
Protocol        : ESP
Authentication   : MD5
Encryption      : AES
SPI             : 12341
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platorms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show tacacs-server

show tacacs-server [detail]

Description

Shows the configured TACACS+ servers.

Parameter	Description
detail	Selects additional TACACS+ server details and global parameters for showing.

Examples

Showing a summary of a global TACACS+ configuration with a shared-secret:

```
switch# show tacacs-server
***** Global TACACS+ Configuration *****

Shared-Secret: AQBapb+HsdpqVlQ3CPCBMQTG8elcA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout: 5
Auth-Type: pap
Number of Servers: 5

-----
SERVER NAME                               | PORT | VRF
-----
1.1.1.1                                   | 49    | mgmt
1.1.1.2                                   | 12    | mgmt
abc.com                                   | 32    | vrf_blue
2001:0db8:85a3:0000:0000:8a2e:0370:7334 | 49    | default
1.1.1.3                                   | 32    | vrf_red
-----
```

Showing details of a global TACACS+ configuration:

```
switch# show tacacs-server detail
***** Global TACACS+ Configuration *****

Shared-Secret: AQBapb+HsdpqVlQ3CPCBMQTG8elcA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout: 5
Auth-Type: pap
Number of Servers: 5

***** TACACS+ Server Information *****

Server-Name           : 1.1.1.2
Auth-Port              : 12
VRF                    : mgmt
Shared-Secret (default) : AQBapb+HsdpqVlQ3CPCBMQTG8eeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout (default)      : 5
Auth-Type (default)    : pap
Server-Group           : sg1
Group-Priority          : 1

Server-Name           : 2001:0db8:85a3:0000:0000:8a2e:0370:7334
Auth-Port              : 49
VRF                    : default
Shared-Secret (default) : AQBapb+HsdpqVlQ3CPCBMQTG8eeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout (default)      : 5
Auth-Type (default)    : pap
Server-Group           : sg2
Group-Priority          : 1

Server-Name           : 1.1.1.1
Auth-Port              : 49
VRF                    : mgmt
Shared-Secret (default) : AQBapb+HsdpqVlQ3CPCBMQTG8eeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout (default)      : 5
Auth-Type (default)    : pap
Server-Group (default) : tacacs
Default-Priority        : 1

Server-Name           : abc.com
Auth-Port              : 32
VRF                    : vrf_red
```

```

Shared-Secret (default) : AQBapb+HsdpqVlQ3CPCBMQTG8eeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout                  : 15
Auth-Type (default)     : pap
Server-Group (default)  : tacacs
Default-Priority         : 3

Server-Name              : 1.1.1.3
Auth-Port                : 32
VRF                      : vrf_blue
Shared-Secret           : AQBapfnqbSswqKC476tdUFZ+AncIRY92hDTYkQCAAAAFEaHn43vNC
Timeout                  : 15
Auth-Type                : chap
Server-Group (default)  : tacacs
Default-Priority         : 5

```

Showing TACACS+ server when per-server shared key and global TACACS+ shared key is not set:

```

switch# show tacacs-server
***** Global TACACS+ Configuration *****

Shared-Secret: None
Timeout: 5
Auth-Type: pap
Number of Servers: 1

-----
SERVER NAME                               | PORT | VRF
-----
1.1.1.1                                   | 49   | default
-----

```

Showing TACACS+ server details when per-server shared key and global TACACS+ shared key is not set:

```

switch# show tacacs-server detail
***** Global TACACS+ Configuration *****

Shared-Secret: None
Timeout: 5
Auth-Type: pap
Number of Servers: 1

***** TACACS+ Server Information *****
Server-Name          : 1.1.1.1
Auth-Port            : 49
VRF                  : default
Shared-Secret (default) : None
Timeout (default)    : 5
Auth-Type (default)  : pap
Server-Group (default) : tacacs
Default-Priority      : 1

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show tacacs-server statistics

show tacacs-server statistics

Description

Shows authentication statistics for all configured TACACS+ servers.

Examples

Showing TACACS+ server authentication statistics:

```
switch# show tacacs-server statistics
Server Name      : tac1
Auth-Port       : 49
VRF             : mgmt
Authentication Statistics
-----
Round Trip Time      : 1
Pending Requests    : 0
Timeout            : 0
Unknown Types       : 0
Packet Dropped      : 0
Auth Start          : 8
Auth challenge       : 0
Auth Accepts        : 4
Auth Rejects        : 4
Auth reply malformed : 0
Tracking Requests   : 0
Tracking Responses   : 0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show tech aaa

show tech aaa

Description

Shows the AAA configuration settings.

Example

Showing the AAA configuration settings:

```
switch# show tech aaa
=====
Show Tech executed on Tue Feb 14 02:19:11 2017
=====

[Begin] Feature aaa
=====

*****
Command : show aaa authentication
*****

AAA Authentication:
  Fail-through           : Enabled
  Limit Login Attempts   : Not set
  Lockout Time           : 300
  Minimum Password Length : Not set

Authentication for ssh channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
local                      | 0
-----

Authentication for https-server channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
local                      | 0
-----

Authentication for console channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
local                      | 0
-----

Authentication for default channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
tacacs                    | 0
local                     | 1
-----

*****
Command : show aaa accounting
*****

AAA Accounting:
  Accounting Type         : all
  Accounting Mode         : start-stop

Accounting for default channel:
-----
GROUP NAME                | GROUP PRIORITY
-----
```

```
local | 0
```

```
-----  
Accounting for ssh channel:
```

```
-----  
GROUP NAME | GROUP PRIORITY
```

```
-----  
tacacs | 0
```

```
local | 1  
-----
```

```
Accounting for https-server channel:
```

```
-----  
GROUP NAME | GROUP PRIORITY
```

```
-----  
tacacs | 0  
-----
```

```
*****
```

```
Command : show aaa authorization
```

```
*****
```

```
Authorization for default channel:
```

```
-----  
GROUP NAME | GROUP PRIORITY
```

```
-----  
none | 0  
-----
```

```
Authorization for console channel:
```

```
-----  
GROUP NAME | GROUP PRIORITY
```

```
-----  
none | 0  
-----
```

```
Authorization for ssh channel:
```

```
-----  
GROUP NAME | GROUP PRIORITY
```

```
-----  
tacacs | 0
```

```
none | 1  
-----
```

```
*****
```

```
Command : show aaa server-groups
```

```
*****
```

```
***** AAA Mechanism TACACS+ *****
```

```
-----  
GROUP NAME | SERVER NAME | PORT | PRIORITY | VRF
```

```
-----  
tacacs (default) | 1.1.1.1 | 49 | 1 | mgmt  
-----
```

```
***** AAA Mechanism RADIUS *****
```

```
-----  
GROUP NAME | SERVER NAME | PORT | PRIORITY | VRF
```

```
*****
```

```
Command : show tacacs-server detail
```

```

*****
***** Global TACACS+ Configuration *****

Shared-Secret: G8ekK1cA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout: 5
Auth-Type: pap
Tracking: disabled
Tracking Time Interval (seconds): 300
Tracking User-name: tacacs-tracking-user
Tracking Password: None
Number of Servers: 1

***** TACACS+ Server Information *****
Server-Name           : 1.1.1.1
Auth-Port             : 49
VRF                   : mgmt
Shared-Secret         : KCdmOMxMD26T0fQoXfJbtj9j2AUxlGn6eCAAAAF2MkfMTtojqX
Timeout (default)     : 5
Auth-Type (default)   : pap
Server-Group (default): tacacs
Default-Priority       : 1
Tracking               : disabled
Reachability-Status   : N/A

*****
Command : show radius-server detail
*****
***** Global RADIUS Configuration *****

Shared-Secret: CPCBMQTG8ekK1cA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
Timeout: 5
Auth-Type: pap
Retries: 1
Number of Servers: 0

=====
[End] Feature aaa
=====

=====
Show Tech commands executed successfully
=====

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

tacacs-server auth-type


```
tacacs-server auth-type {pap | chap}
no tacacs-server auth-type [pap | chap]
```

Description

Enables the CHAP or PAP authentication protocol, which is used for communication with the TACACS+ servers, at the global level. You can override this command with a fine-grained per server `auth-type` configuration.

The `no` form of this command resets the global authentication mechanism for TACACS+ to PAP, which is the default authentication mechanism for TACACS+.

Parameter	Description
<code>auth-type {pap chap}</code>	Selects either the PAP or CHAP authentication protocol.

Examples

Enabling command for CHAP authentication:

```
switch(config)# tacacs-server auth-type chap
```

Enabling command for PAP authentication:

```
switch(config)# tacacs-server auth-type pap
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

tacacs-server host

```
tacacs-server host {<FQDN> | <IPV4> | <IPV6>}
[key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
[timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
[auth-type {pap | chap}] [tracking {enable | disable}] [vrf <VRF-NAME>]
```

```
no tacacs-server host {<FQDN> | <IPV4> | <IPV6>}
[key [plaintext <PASSKEY> | ciphertext <PASSKEY>]]
[timeout <TIMEOUT-SECONDS>] [port <PORT-NUMBER>]
[auth-type {pap | chap}] [tracking {enable | disable}] [vrf <VRF-NAME>]
```

Description

Adds a TACACS+ server. By default, the TACACS+ server is associated with the server group named `tacacs`.

The `no` form of this command removes a previously added TACACS+ server.

Parameter	Description
{<FQDN> <IPV4> <IPv6>}	Specifies the TACACS+ server as: ■ <FQDN>: a fully qualified domain name. ■ <IPV4>: an IPv4 address. ■ <IPv6>: an IPv6 address.
key [plaintext <PASSKEY> ciphertext <PASSKEY>]	Selects either a plaintext or an encrypted local shared-secret passkey for the server. As per RFC 2865, shared-secret can be a mix of alphanumeric and special characters. Plaintext passkeys are between 1 and 32 alphanumeric and special characters. NOTE: When <code>key</code> is entered without either sub-parameter, plaintext passkey prompting occurs upon pressing Enter. Enter must be pressed immediately after the <code>key</code> parameter without entering other parameters. The entered passkey characters are masked with asterisks. When <code>key</code> is omitted, the server uses the global passkey. This command requires either the global or local passkey to be set; otherwise the server will not be contacted. Command <code>tacacs-server key</code> is available for setting the global passkey.
timeout <TIMEOUT-SECONDS>	Specifies the timeout. Range: 1 to 60 seconds. Default : 5 seconds.
port <PORT-NUMBER>	Specifies the TCP authentication port number. Range: 1 to 65535. Default: 49.
auth-type {pap chap}	Selects either the PAP (the default) or CHAP authentication types. If this parameter is not specified, the TACACS+ global default is used.
tracking {enable disable}	Enables or disables server tracking for the RADIUS server. Tracked servers are probed at the start of each server tracking interval to check if they are reachable. Use command <code>tacacs-server tracking</code> to configure TACACS+ server tracking globally.
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named <code>default</code> is used.

Usage

If the fully qualified domain name is provided for the TACACS+ server, a DNS server must be configured and accessible through the same VRF which is configured for the TACACS+ server. This configuration is required for the resolution of the TACACS+ server hostname to its IP address. If a DNS server is not available for this VRF, the TACACS+ servers reachable through this VRF must be configured by means of their IP addresses only.

Examples

Adding a TACACS+ server with an IPv4 address, plaintext passkey, timeout, port, authentication type, and VRF name:

```
switch(config)# tacacs-server host 1.1.1.3 key plaintext test-123 timeout 15 port 32
auth-type chap vrf vrf_red
```

Adding a TACACS+ server with an IPv4 address and prompted plaintext passkey:

```
switch(config)# tacacs-server host 1.1.1.5 key
Enter the TACACS server key: *****
Re-Enter the TACACS server key: *****
```

Adding a TACACS+ server with an IPv4 address and a named VRF:

```
switch(config)# tacacs-server host 1.1.1.1 vrf mgmt
```

Adding a TACACS+ server with an IPv4 address, a port, and a named VRF:

```
switch(config)# tacacs-server host 1.1.1.2 port 32 vrf mgmt
```

Adding a TACACS+ server with an FQDN, a timeout, port number, and a named VRF:

```
switch(config)# tacacs-server host abc.com timeout 15 port 32 vrf vrf_blue
```

Adding a TACACS+ server with an IPv6 address:

```
switch(config)# tacacs-server host 2001:0db8:85a3:0000:0000:8a2e:0370:7334
```

Deleting a TACACS+ server with an IPv4 address and specified VRF:

```
switch(config)# no tacacs-server host 1.1.1.1 vrf mgmt
```

Deleting a TACACS+ server with an FQDN, port, and specified VRF:

```
switch(config)# no tacacs-server host abc.com port 32 vrf vrf_blue
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

tacacs-server key

tacacs-server key [plaintext <GLOBAL-PASSKEY> | ciphertext <GLOBAL-PASSKEY>]
no tacacs-server key [plaintext <GLOBAL-PASSKEY> | ciphertext <GLOBAL-PASSKEY>]

Description

Creates or modifies a TACACS+ global passkey. The TACACS+ global passkey is used as a shared-secret for encrypting the communication between all TACACS+ servers and the switch. The TACACS+ global passkey is required for authentication unless local passkeys have been set. By default, the TACACS+ global passkey is empty. If the administrator has not set this key, the switch will not be able to perform TACACS+ authentication. The switch will instead rely on the authentication mechanism configured with `aaa` authentication login.



When this command is entered without parameters, plaintext passkey prompting occurs upon pressing Enter. The entered passkey characters are masked with asterisks.

The `no` form of the command removes the global passkey.

Parameter	Description
plaintext <GLOBAL-PASSKEY>	Specifies the TACACS+ global passkey in plaintext format with a length of 1 to 31 characters. As per RFC 2865, a shared-secret can be a mix of alphanumeric and special characters.
ciphertext <GLOBAL-PASSKEY>	Specifies the TACACS+ global passkey in encrypted format.

Examples

Adding the global passkey:

```
switch(config)# tacacs-server key plaintext mypasskey123
```

Adding the global passkey with prompting:

```
switch(config)# tacacs-server key
Enter the TACACS server key: *****
Re-Enter the TACACS server key: *****
```

Removing the global passkey:

```
switch(config)# no tacacs-server key
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

tacacs-server timeout

```
tacacs-server timeout [<1-60>]
no tacacs-server timeout [<1-60>]
```

Description

Specifies the number of seconds to wait for a response from the TACACS+ server before trying the next TACACS+ server. If a value is not specified, a default value of 5 seconds is used. You can override this value with a fine-grained per server timeout configured for individual servers.

The `no` form of this command resets the TACACS+ global authentication timeout to the default of 5 seconds.

Parameter	Description
<code>timeout <1-60></code>	Specifies the timeout interval of 1 to 60 seconds. Default: 5 seconds.

Examples

Specifying the TACACS+ server timeout:

```
switch(config)# tacacs-server timeout 10
```

Resetting the timeout for the TACACS+ server to the default:

```
switch(config)# no tacacs-server timeout
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

tacacs-server tracking

```
tacacs-server tracking interval <INTERVAL>
no tacacs-server tracking interval [<INTERVAL>]
```

```
tacacs-server tracking user-name <NAME>
```

```
[password [plaintext <PASSWORD> | ciphertext <PASSWORD>]]  
no tacacs-server tracking [user-name [<NAME>] [ciphertext <PASSWORD>]]
```

Description

Configures TACACS+ server tracking settings globally for all configured TACACS+ servers that have tracking enabled with the `tacacs-server host` command on individual servers.

The `no` form of the command removes the specified configuration, reverting it to its default. The `no` form with `user-name` also clears the password (resets it to empty).

Parameter	Description
<code>interval <INTERVAL></code>	Specifies the time interval, in seconds, to wait before checking the server reachability status. Default: 300. Range 60 to 84600.
<code>user-name <NAME></code> <code>[password [plaintext <PASSWORD> </code> <code>ciphertext <PASSWORD>]]</code>	Specifies the user name (and optionally a password) to be used for server checking. The default user name is <code>tacacs-tracking-user</code> with an empty password. The password is optional and may be entered as <code>plaintext</code> or pasted in as <code>ciphertext</code>. The plaintext password is visible as cleartext when entered but is encrypted thereafter. Command history does show the password as cleartext. NOTE: When <code>password</code> is entered without a following sub-parameter, plaintext password prompting occurs upon pressing Enter. The entered password characters are masked with asterisks. NOTE: The user does not have to be configured on the server. Server tracking can still be performed with a user which is not configured on the server because authentication failure on the server achieves confirmation that the server is reachable. NOTE: Server tracking uses authentication request and response packets to determine server reachability status. The server tracking user name and password are used to form the request packet which is sent to the server with tracking enabled. Upon receiving a response to the request packet, the server is considered to be reachable.

Examples

Configuring a tracking interval of 120 seconds:

```
switch(config)# tacacs-server tracking interval 120
```

Reverting the tracking interval to its default of 300 seconds:

```
switch(config)# no tacacs-server tracking interval
```

Configuring user `tacacs-tracker` with a plaintext password.

```
switch(config)# tacacs-server tracking user-name tacacs-tracker password plaintext track$1
```

Configuring user `tacacs-tracker` with a prompted plaintext password.

```
switch(config)# tacacs-server tracking user-name tacacs-tracker password
Enter the TACACS server tracking password: *****
Re-Enter the TACACS server tracking password: *****
```

Reverting the tracking user name to its default of `tacacs-tracking-user`:

```
switch(config)# no tacacs-server tracking user-name
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

RADIUS dynamic authorization provides the ability to make changes to a user account session while it is in progress. This ability includes disconnecting a session or updating some aspect of the authorization for the session. It also includes "pot bounce" in which the interface on which a client is connected is brought down and then back up (using COA (change of authorization)).

RADIUS dynamic authorization enables or disables the processing of "Disconnect" and "Change of Authorization (CoA)" messages from the RADIUS server. When enabled, the RADIUS server can dynamically terminate or change the authorization parameters (such as VLAN/user-role assignment) used in an active client session on the switch.



See also *RFC 3576* available at <http://www.ietf.org/rfc/rfc3576.txt> for general information on the dynamic authorization extensions to RADIUS.

Requirements and tips

The switch validates these mandatory attributes that must be present in the CoA/Disconnect Message:

- Username
- NAS IP or NAS IPV6 or NAS Identifier
- Any one of the following combinations is used to identify the client session:
 - NAS-Port and Calling-Station-ID
 - NAS-Port-ID and Calling-Station-ID
 - Accounting-Session-ID

RADIUS server requirements:

- For ClearPass to provide CoA capabilities, in the case where the switch sends the NAS-IP address as a routable IP address, the CLI command `ip source interface` must be executed with the `radius` parameter.
- In CISCO ISE, to send the CoA request with the same username as in the RADIUS Accept, the Identity rewrite option has to be configured.

RADIUS dynamic authorization commands



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

radius dyn-authorization enable


```
radius dyn-authorization enable
no radius dyn-authorization enable
```

Description

Enables RADIUS dynamic authorization. This command must be issued before the configuration set with other `radius dyn-authorization` commands takes effect.

The `no` form of this command disables RADIUS dynamic authorization.

Examples

Enabling RADIUS dynamic authorization:

```
switch(config)# radius dyn-authorization enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

radius dyn-authorization client

```
radius dyn-authorization client {<IPv4> | <IPv6> | <HOSTNAME>}
    [secret-key [plaintext <PASSKEY> | ciphertext] <PASSKEY>]]
    [time-window <WIDTH>] [replay-protection {enable|disable}]
no radius dyn-authorization client {<IPv4> | <IPv6> | <HOSTNAME>} [vrf <VRF-NAME>]
    [secret-key [plaintext <PASSKEY> | ciphertext] <PASSKEY>]]
    [time-window <WIDTH>] [replay-protection {enable|disable}]
```

Description

Configures RADIUS dynamic authorization for the specified client on the specified (or `default`) VRF.

The `no` form of this command unconfigures RADIUS dynamic authorization for the specified client on the specified (or `default`) VRF.

Parameter	Description
<IPv4> <IPv6> <HOSTNAME>	Specifies the client IPv4 address, IPv6 address, or host name.
secret-key [plaintext <PASSKEY> ciphertext <PASSKEY>]	Specifies the dynamic authorization server (RADIUS server) shared secret key required for client access. Provide either a plaintext or an encrypted shared-secret passkey. As per RFC 2865, the shared-secret can be a mix of alphanumeric and special characters. Plaintext passkeys are between 1 and 32 alphanumeric and special characters.

Parameter	Description
	NOTE: When <code>secret-key</code> is entered without either sub-parameter, plaintext shared secret prompting occurs upon pressing Enter. Enter must be pressed immediately after the <code>secret-key</code> parameter without entering other parameters. The entered shared secret characters are masked with asterisks.
<code>time-window <WIDTH></code>	Specifies the width of the synchronization window (in seconds) between the RADIUS dynamic authorization client and the RADIUS dynamic authorization server. Default 300. Range: 1 to 65535.
<code>replay-protection {enable disable}</code>	Enables or disables RADIUS dynamic authorization replay protection for the specified client on the specified (or default) VRF.
<code>vrf <VRF-NAME></code>	Specifies the VRF on which the identified client is connected. When omitted, VRF <code>default</code> is assumed.

Examples

Configuring RADIUS dynamic authorization with replay protection for a client on the default VRF:

```
switch(config)# radius dyn-authorization client 1.1.2.5 replay-protection enable
```

Configuring RADIUS dynamic authorization with time window and shared secret for a client on the default VRF:

```
switch(config)# radius dyn-authorization client 1.1.2.7 time-window 8
secret-key plaintext skF82#450
```

Configuring RADIUS dynamic authorization with a prompted shared secret:

```
switch(config)# radius dyn-authorization client 1.1.2.7 secret-key
Enter the RADIUS dyn-authorization key: *****
Re-Enter the RADIUS dyn-authorization key: *****
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

radius dyn-authorization port

radius dyn-authorization port <PORT-NUMBER>

Description

Sets the RADIUS dynamic authorization server UDP or TCP port.

Parameter	Description
<PORT-NUMBER>	Specifies the UDP or TCP port. Default UDP: 3799 and TCP:2083.

Examples

Setting the RADIUS dynamic authorization server UDP port back to its default 3799:

```
switch(config)# radius dyn-authorization port 3799
```

Setting the RADIUS dynamic authorization server TCP port back to its default 2083:

```
switch(config)# radius dyn-authorization port 2083
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

show radius dyn-authorization

show radius dyn-authorization

Description

Shows RADIUS dynamic authorization configuration and summarized statistics for all clients configured for dynamic authorization.

Usage

Show command output item identification:

- Radius Dynamic Authorization: Enabled or Disabled status, system wide.
- Radius Dynamic Authorization Port: The UDP or TCP port used for dynamic authorization (default 3799).

- Invalid Client Address in CoA Requests: The number of CoA (change of authorization) requests received with an incorrect DAC (dynamic authorization client) address.
- Invalid Client Address in Disconnect Requests: The number of disconnect requests received with incorrect DAC address.
- Disconnect Requests: The number of disconnect requests received from the DAC.
- Disconnect ACKs: The number of Disconnect-ACKs sent to the DAC.
- Disconnect NAKs: The number of Disconnect-NAKs sent to the DAC.
- CoA Requests: The number of CoA-requests received from the DAC.
- CoA ACKs: The number of CoA-ACKs sent to the DAC.
- CoA NAKs: The number of CoA-NAKs sent to the DAC.

Example

Showing RADIUS dynamic authorization summarized statistics for all clients configured for dynamic authorization:

```
switch# show radius dyn-authorization
Status and Counters - RADIUS Dynamic Authorization Information

RADIUS Dynamic Authorization          : Enabled
RADIUS Dynamic Authorization UDP Port : 3799
Invalid Client Addresses in CoA Requests : 0
Invalid Client Addresses in Disconnect Requests: 0

Dynamic Authorization Client Information
=====

IP Address      : 1.1.2.1
VRF             : adm2
Replay Protection : Disabled
Time Window     : 20
Disconnect Requests : 1
Disconnect ACKs   : 1
Disconnect NAKs   : 0
CoA Requests     : 7
CoA ACKs         : 2
CoA-NAKs        : 5
Shared-Secret    :
AQBapb+HsdpqVlQ3CPCBMQTG8ekK1cA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=

IP Address      : 1.1.2.5
VRF             : default
Replay Protection : Enabled
Time Window     : 20
Disconnect Requests : 6
Disconnect ACKs   : 6
Disconnect NAKs   : 0
CoA Requests     : 9
CoA ACKs         : 5
CoA-NAKs        : 4
Shared-Secret    :
AQBapb+HsdpqVlQ3CPCBMQTG8ekK1cA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=

IP Address      : 1.1.2.7
VRF             : default
Replay Protection : Disabled
```

```
Time Window      : 8
Disconnect Requests : 6
Disconnect ACKs   : 6
Disconnect NAKs   : 0
CoA Requests     : 9
CoA ACKs         : 5
CoA-NAKs         : 4
Shared-Secret    :
AQBapb+HsdpqVlQ3CPCBMQTG8ekK1cA+CyD0RvfbeA8BEgikCgAAAJOWZSNzA2SWrLA=
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show radius dyn-authorization client

`show radius dyn-authorization client <IP-ADDR> [vrf <VRF-NAME>]`

Description

Shows RADIUS dynamic authorization statistics for the specified client on the specified VRF.

Parameter	Description
<IP-ADDR>	Specifies the client IPv4 or IPv6 address.
vrf <VRF-NAME>	Specifies the VRF on which the identified client is connected. When omitted, VRF default is assumed.

Usage

Show command output item identification:

- **Total Requests:** The number of Disconnect and CoA (change of authorization) requests received from the DAC (dynamic authorization client).
- **Authorize Only Requests:** The number of Disconnect and CoA requests received from the DAC with an "Authorize only" Service-Type attribute.
- **Malformed Requests:** The number of malformed Disconnect and CoA requests received from the DAC.
- **Bad Authenticator Requests:** The number of Disconnect and CoA requests received from this DAC with an invalid authenticator field.
- **Dropped Requests:** The number of Disconnect and CoA requests from this DAC that have been silently discarded for reasons other than malformed, bad authenticators, or unknown type.
- **Total ACK Responses:** The number of Disconnect-ACKs sent to the DAC.

- **Total NAK Responses:** The number of Disconnect-NAKs sent to the DAC.
- **Session Not Found Responses:** The number of Disconnect-NAKs sent to the DAC because no session context could be found.
- **User Sessions Modified:** The number of user sessions for which authorization changed due to Disconnect and CoA requests received from the DAC.

Example

Showing RADIUS dynamic authorization statistics for client 1.1.2.1 on VRF default:

```
switch# show radius dyn-authorization client 1.1.2.1 vrf default
Status and Counters - RADIUS Dynamic Authorization Client Information

VRF Name           : default
Authorization Client : 1.1.2.1
Unknown Packets     : 55
Message-Type                Disconnect                CoA
-----
Total Requests              2147483647                10
Authorize Only Requests      10                  10
Malformed Requests           10                  10
Bad Authenticator Requests   2147483647          2147483647
Dropped Requests             10                  10
Total ACK Responses          10                  10
Total NAK Responses          10                  10
Session Not Found Responses  10                  10
User Sessions Modified       20                  20
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

The public key infrastructure (PKI) feature enables administrators to manage digital certificates on the switch. The switch uses certificates to validate SSH clients when acting as an SSH server, and when communicating with syslog servers when TLS encryption is used.



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

PKI concepts

Digital certificate

A digital certificate is an electronic form of identification that stores important information about an entity (such as a computer, program, or website). Certificates help secure digital transactions by enabling the end parties to validate each other's identity. Digital certificates are issued by a certificate authority (CA) and are composed of an encoded string of characters (usually stored in a file). For example:

```
-----BEGIN CERTIFICATE-----
MIIDSDCCApGCCQDJotuPPj9GCDANBgkqhkiG9w0BAQsAAADCBQzELMAkGA1UEBh
VVMxEzARBgNVBAgMCkNhbgG1mb3JuaWExEDAOBgNVBACBM1JvY2tsaW4xDDAKBg
BAoMA0hQTjEVMBMGAlUECwwMSFBOUm9zZXZpbGx1MSokwAYDVQQDDCFocG5zd
...
MioDy0096DvSMPsnOaI+jnZ3AozN8y+nLgotXUsg36pO/Ncc51oQhyUdcAbgA1
rzSLgyTnpXZKumvlaoTk3pZrIf7m5V103GTbgHGSFCzgO6QWxVxu9d7ju1o59S
aOIT7JSsYI5LsLpVz9ZqS599rj/1LoH+rLN1RDVXpS+J51
-----END CERTIFICATE-----
```

The switch can import PEM encoded ITU-T X.509 v3 certificates. (Certificates can be converted to human-readable form using a software decoder.)

An X.509 digital certificate typically includes the following information:

- Signature algorithm: The cryptographic algorithm used to generate the digital signature.
- Signature value: Digital signature of the certificate generated using the CA's private key.
- Version number: X.509 version number.
- Serial number: Certificate serial number.
- Issuer name: Name of the certificate authority (CA) that issued the certificate.
- Validity period: Beginning and ending dates.
- Subject name: Name of the entity to which the certificate is issued.
- Subject public key and key algorithm.
- Key usage extension: Purpose of the certificate.

Certificate authority

A certificate authority (CA) is an entity that can issue and sign digital certificates. A CA can be a well-known, trusted commercial company, or a private entity controlled by your organization. For a commercial CA, the CA validates the credentials of a user before issuing a certificate and signing it, guaranteeing a certificate holder's identity. For a private CA, self-signed certificates can be generated as needed for devices on your network without paying a commercial company.

Root certificate

A root certificate is a self-signed certificate that is deemed the root of trust for a certificate chain. This is the certificate that identifies a CA, and is used by the CA to sign any certificates that it issues. When two peers attempt to establish a secure connection, they use the CA's public key to verify that each other's certificates were indeed signed by a trusted certificate authority.

Each root CA certificate has a unique fingerprint, which is the hash value of the certificate content. The fingerprint of a root CA certificate can be used to authenticate the validity of the root CA.

In a certificate chain, the root CA generates a self-signed certificate, and each lower level CA holds a CA certificate (intermediate certificate) issued by the CA immediately above it. The hierarchy of these certificates forms a *chain of trust*.

Leaf certificate

This is the certificate used by a software entity, such as a syslog client, to identify itself to a peer when establishing a secure connection.

Intermediate certificate

An intermediate certificate is a CA which has been issued by the root certificate or by another intermediate certificate. Intermediate CAs can issue leaf certificates and sit in between the root and leaf certificates. The use of an intermediate CA allows administrators to segregate their PKI groups.

Trust anchor

This is the certificate that acts as the base of trust for the validation of other certificates. A trust anchor can be a root or intermediate certificate issued by a CA.

OCSP

The online certificate status protocol (OCSP) is a real-time method for determining the revocation status of a certificate. When two peers attempt to establish a secure connection, they can query an OCSP responder to determine the status (valid or revoked) of each other's certificates. The OCSP responder for a certificate is typically provided by a server managed by the CA that issued the certificate.

PKI on the switch

The AOS-CX Switch Series switches provides for installation of certificate authority (CA) certificates and the generation and installation of leaf certificates.

Trust anchor profiles

The switch supports 64 trust anchor (TA) profiles. Each TA profile stores a trusted CA certificate. The certificate can be either a root CA certificate, which must be self-signed, or an intermediate CA certificate that is issued by another CA.



The certificate must have its `BasicConstraints` field with CA key set to `true`, and its `KeyUsage` extension field set with `keyCertSign` and/or `cRLSign`.

CA certificates are used to:

- Validate the certificates that remote peers present when attempting to establish a secure connection with a service on the switch, for example, the SSH server.
- Validate leaf certificates installed on the switch that are used, for example, by the syslog client, the Web UI, or REST API.

The TA profile also enables configuration of real-time checking of certificate revocation (through OCSP).

Leaf certificates

Leaf certificates can be installed on the switch for use by features such as the syslog client, the Web UI, or REST API. If you are purchasing a certificate from a trusted CA, the switch can generate the certificate signing request (CSR) that is used to obtain the certificate. The switch can also directly generate self-signed certificates. Alternatively, the certificate and private key can be generated outside the switch and then imported. X509 certificate management software such as OpenSSL can be used to generate the private key and CSR and then combine the certificate and private key into one PEM or PKCS#12 file suitable for importation into the switch.

Mandatory matching of peer device hostname

While validating the peer device certificates, the switch checks that the peer device configured hostname matches either the Subject Alternative Name (SAN) field or the Common Name (CN) within the certificate Subject field. If the SAN field is present and matches the hostname, validation succeeds, otherwise it fails. If the SAN field is not present, and the CN matches the hostname, validation succeeds, otherwise it fails.

PKI EST

EST (Enrollment over Secure Transport) (RFC 7030) defines the protocol that devices use to request trusted certificate authority (CA) certificates and to enroll / re-enroll device certificates from CA services using secure channels, specifically HTTP over TLS.

Devices can be configured to request the trusted CA certificates and to request enrollment, and re-enrollment of device certificates automatically, without the need for administrator intervention, while maintaining the security and integrity of the whole enrollment process.

The switch includes an EST client implemented as a part of the PKI infrastructure.

For detailed CLI command descriptions, see:

- [PKI commands](#)
 - [PKI EST commands](#)
-



EST usage overview

- The EST client on the switch requires EST profile configuration, including EST server URL and the VRF providing HTTP connection to the EST server.

- At the time the URL is set in the EST profile, the switch connects to the EST server and downloads the trusted CA certificate chain. To accommodate CA certificate updates, the certificate chain is also downloaded before a certificate enrollment or re-enrollment is attempted.
- EST supports up to:
 - 16 EST profiles
 - 63 trusted CA certificates downloaded from EST servers.
 - 18 device certificates enrolled through EST services.
- EST profile configuration is supported through the CLI and the REST API `PKI_EST_Profile`.
- CA certificate request and device certificate enrollment is supported through the CLI and the REST custom API `CertificateManager /certificate`.

Prerequisites for using EST for certificate enrollment

- Establish the PKI infrastructure for your organization, with the CA chain and service ready to issue certificates. Issue a service certificate for the EST server.
- Install the root CA certificate in a TA profile on the switch that will validate the EST server certificate using CLI commands `crypto pki ta-profile` and `ta-certificate`.
- Optionally, preconfigure an EST client certificate on the switch.
- Make the EST server reachable from the switch. Connect the CA service(s) to the EST server. If there is a client certificate for the EST client, install the root CA certificate on the server that will validate the client certificate.

EST profile configuration

In the global configuration context, create an EST profile and enter its context:

```
crypto pki est-profile <EST-NAME>
```

In an EST profile context, configure the EST profile parameters using these commands:

```
url <URL>
vrf <VRF-NAME>
username <USERNAME> password [ciphertext <CIPHERTEXT-PASSWORD> |
                               plaintext <PLAINTEXT-PASSWORD>]
retry-interval <INTERVAL>
retry-count <RETRIES>
arbitrary-label <LABEL>
arbitrary-label-enrollment <LABEL>
arbitrary-label-reenrollment <LABEL>
reenrollment-lead-time <LEAD-TIME>
```

Certificate enrollment

In the global configuration context, create a certificate and enter its context:

```
crypto pki certificate <CERT-NAME>
```

In a certificate configuration context, configure the certificate parameters:

```
key-type {rsa [key-size <K-SIZE>] | ecdsa [curve-size <C-SIZE>]}
subject [common-name <COMMON-NAME>]
        [country <COUNTRY>]
        [locality <LOCALITY>]
        [org <ORG-NAME>]
        [org-unit <ORG-UNIT>]
        [state <STATE>]
```

In a certificate configuration context, enroll the certificate using an EST service:

```
enroll est-profile <EST-NAME>
```

Certificate re-enrollment

- The re-enrollment request is sent automatically to the same EST server that was used for the original enrollment.
- The switch presents the enrolled certificate being re-enrolled to the EST server for authentication. If the certificate has expired or authentication fails for any reason, the switch falls back to using the EST client certificate or the username and password in the EST profile, whichever is configured, and performs a new certificate enrollment.
- Re-enrollment lead-time is configurable in the EST profile using CLI command `reenrollment-lead-time`. It sets the number of days before certificate expiry date that certificate re-enrollment will be initiated.

Checking EST profile and certificate configuration

Show the list of EST profiles or details of a specific EST profile:

```
show crypto pki est-profile [<EST-NAME>]
```

Show a list of TA profiles whether directly configured or EST-enrolled, or details of a specific TA profile:

```
show crypto pki ta-profile [<TA-NAME>]
```

Show the list of certificates whether directly configured or EST-enrolled, or details of a specific certificate:

```
show crypto pki certificate [<CERT-NAME> [plaintext | pem]]
```

Show all certificates assigned to the switch EST client as well as certificates that are assigned to other applications on the switch.:

```
show crypto pki application
```

EST best practices

Ensure the following:

- A time synchronization service is used on both the switch (the EST client) and the EST server.
- In all CA certificates, the `Basic Constraints` field has `CA` set to `true`, `pathlen` is set appropriately, and `Key Usage` is set with `keyCertSign`.
- In all leaf certificates, the `Extended Key Usage` field is set with the appropriate purpose as follows:
 - For server certificates, set with `serverAuth`. The `Key Usage` field has at least one of `digitalSignature`, `keyEncipherment`, or `keyAgreement`.
 - For client certificates, set with `clientAuth`. The `Key Usage` field has at least one of `digitalSignature`, or `keyAgreement`.
- The EST server is configured to include the intermediate issuer CA certificates in the trusted CA certificate chain that the EST server sends to the switch (the EST client) upon request.

Example using EST for certificate enrollment

This example illustrates the configuration of an EST profile and enrolling application certificates using an EST server.

Prerequisites:

- An EST server is reachable from the switch management port.
- Availability of the root CA certificate used to validate the server certificate.

This example shows the following:

- Installing the root CA certificate as a TA profile for validation of the EST server certificate.
- Configuring an EST profile with the EST server information, including the username and password for client authentication and the EST server URL.
- Issuing a request to enroll a leaf certificate using the EST server.
- Assigning the enrolled certificate to the EST client and syslog client on the switch.

Each section in the below example is preceded by descriptive text.

Example

```
=====
The switch in its default configuration state.
=====
```

```
switch# show running-config
Current configuration:
!
!Version ArubaOS-CX FL.10.06.0001CM
!export-password: default
user admin group administrators password ciphertext AQBapTLgcT+DNrtd0bmdXIP2L0AY
NUpwwyQEIZX4oMKtwlXcYgAAAOMKlfXh+ugf3Fe2JuWar2uKG7A/R6bqMO/ZHS364NompXV/Ko37ZhCq
cFpaOJsk01+IJPRUkbpigCeEObM67Od8/vrASJaO6EAj+RBnWCrifwdChcUUS3XpbCUl7dmxYHNq
!
!
ssh server vrf default
ssh server vrf mgmt
vsf member 1
    type j1668a
vlan 1
spanning-tree
interface mgmt
    no shutdown
    ip dhcp
interface 1/1/1
    no shutdown
    no routing
    vlan access 1
interface 1/1/2
    no shutdown
    no routing
    vlan access 1
interface 1/1/3
    no shutdown
    no routing
    vlan access 1
...
interface 1/1/26
    no shutdown
    no routing
    vlan access 1
interface 1/1/27
    no shutdown
    no routing
    vlan access 1
interface 1/1/28
    no shutdown
    no routing
    vlan access 1
interface vlan 1
```

```

ip dhcp
!
!
https-server vrf default
https-server vrf mgmt
switch#

```

```

=====
The mgmt port is connected to a network with DNS available and the
EST server reachable.
=====

```

```

switch# show interface mgmt
  Address Mode           : dhcp
  Admin State            : up
  Mac Address            : 38:21:c7:59:cd:81
  IPv4 address/subnet-mask : 999.100.205.146/24
  Default gateway IPv4    : 999.100.205.1
  IPv6 address/prefix     :
  IPv6 link local address/prefix: fe80::3a21:c7ff:fe59:cd81/64
  Default gateway IPv6    :
  Primary Nameserver      :
  Secondary Nameserver    :
switch#

```

```

=====
Configure the root CA cert as a TA profile that will validate the server cert.
=====

```

```

switch# config
switch(config)#
switch(config)# crypto pki ta-profile root-ca-for-est-server
switch(config-ta-root-ca-for-est-server)#
switch(config-ta-root-ca-for-est-server)# ta-certificate import terminal
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-ta-cert)# -----BEGIN CERTIFICATE-----
NVBAYTonfig-ta-cert)# MIIB2DCCAX6gAwIBAgIJAKtmJvZZy9RdMAoGCCqGSM49BAMCMGIXCzAJBg
QKEWNIonfig-ta-cert)# AlVTMQswCQYDVQQIEwJDQTESMBAGA1UEBxMJUm9zZXZpbGx1MQwwCgYDVQ
0yMDAlonfig-ta-cert)# UEUxDjAMBgNVBAsTBUFYdWJhMRQwEgYDVQQDEWtkYW51c3QtcmlvvdAeFw
...
YDVR0Ponfig-ta-cert)# VCnKtlhxfmV72nfxYpI979UsopuP5nCjHTAbMAwGA1UdEwQFMAMBAf8wCw
eo6yN0onfig-ta-cert)# BAQDAgEGMAoGCCqGSM49BAMCA0gAMEUCIQDb/uHvU8DFRTyfnP9wkli6sd
c=00 (config-ta-cert)# UvUO5t7/rrVxRQIgMHGjHhaNlnkjYBG8Ei3C1UDILiKl07McMTCWVo4Ik5
switch(config-ta-cert)# -----END CERTIFICATE-----
switch(config-ta-cert)#
The certificate you are importing has the following attributes:
Subject: C = US, ST = CA, L = Roseville, O = HPE, OU = Aruba, CN = danest-root
Issuer: C = US, ST = CA, L = Roseville, O = HPE, OU = Aruba, CN = danest-root
Serial Number: 0xAB6626FXXXXD45D
TA certificate import is allowed only once for a TA profile
Do you want to accept this certificate (y/n)? y
switch(config-ta-root-ca-for-est-server)#
switch(config-ta-root-ca-for-est-server)# exit
switch(config)#
switch(config)# show crypto pki ta-profile

```

TA Profile Name	TA Certificate	Revocation Check
root-ca-for-est-server	Installed, valid	disabled

```
switch(config)#
```

```
=====
Configure the EST profile with the EST server URL, username/password.
=====
```

```
switch(config)# crypto pki est-profile test-est-server
switch(config-est-test-est-server)#
switch(config-est-test-est-server)# user fred password plaintext barney
switch(config-est-test-est-server)#
switch(config-est-test-est-server)# url https://999.0.10.229:8443/.well-known/est
switch(config-est-test-est-server)#
switch(config-est-test-est-server)# exit
switch(config)#
```

```
=====
At the time the EST URL is set, the switch sends a request to the EST server to
get the set of trusted CA certs. If that is successful, TA profiles will be
auto-created for those CA certs.
=====
```

```
Display the list of TA profiles and EST profile details.
=====
```

```
switch(config)# show crypto pki ta-profile
```

TA Profile Name	TA Certificate	Revocation Check
test-est-server-est-ta00	Installed, valid	OCSP
test-est-server-est-ta02	Installed, valid	OCSP
test-est-server-est-ta05	Installed, valid	OCSP
test-est-server-est-ta01	Installed, valid	OCSP
root-ca-for-est-server	Installed, valid	disabled
test-est-server-est-ta04	Installed, valid	OCSP
test-est-server-est-ta03	Installed, valid	OCSP

```
switch(config)# show crypto pki est-profile
```

Profile Name	Downloaded TA Profiles	Enrolled Certificates
test-est-server	6	1

```
switch(config)# show crypto pki est-profile test-est-server
```

```
Profile Name      : test-est-server
Service VRF       : mgmt
Service URL       : https://999.0.10.229:8443/.well-known/est
Arbitrary Label   : not configured
Arbitrary Label Enrollment : not configured
Arbitrary Label Reenrollment : not configured
Authentication Username : fred
Authentication Password :
    AQBapR7ndgoxkMlWQUQvK+Dvd3S6m+s9fdaPQwdkMbIYEMnMBgAAAHRhliYwA==
Retry Interval    : 30 seconds
Retry Count       : 3 times
Reenrollment Lead Time : 2 days
Downloaded TA Profiles : 6
Enrolled Certificates :
    cert-for-app
switch(config)#
```

```
=====
Originally, the switch only has two built-in certificates.
=====
```

```
switch(config)# show crypto pki certificate
```

Certificate Name	Cert Status	EST Status	Associated Applications
local-cert	installed	n/a	est-client, https-server, syslog-client
device-identity	installed	n/a	none

```
switch(config)#
```

```
=====
Create a new certificate, configure its key type, key size, and subject fields.
=====
```

```
switch(config)# crypto pki certificate cert-for-app
switch(config-cert-cert-for-app)#
switch(config-cert-cert-for-app)# key-type ecdsa curve-size 521
switch(config-cert-cert-for-app)# subject
Do you want to use the switch serial number as the common name (y/n)? n
Common Name: 999.100.205.146
Org Unit: Aruba-Roseville
Org Name: HPE
Locality: Roseville
State: CA
Country: US
switch(config-cert-cert-for-app)#
```

```
=====
Request to enroll the certificate through the EST server.
=====
```

```
switch(config-cert-cert-for-app)# enroll est-profile test-est-server
You are enrolling a certificate with the following attributes:
Subject: C=US, ST=CA, L=Roseville, OU=Aruba-Roseville, O=HPE,
        CN=999.100.205.146
Key Type: ECDSA (521)

Continue (y/n)? y
Certificate enrollment via test-est-server has been initiated. Please use
'show crypto pki certificate cert-for-app' to check its status.
switch(config-cert-cert-for-app)#
```

```
=====
Check the cert status to see if enrollment is successful. It is.
=====
```

```
switch(config-cert-cert-for-app)# show crypto pki certificate
```

Certificate Name	Cert Status	EST Status	Associated Applications
------------------	-------------	------------	-------------------------

```

-----
--
local-cert                installed      n/a                est-client, https-server,
                        syslog-client
device-identity           installed      n/a                none

cert-for-app              installed      enroll success     none

switch(config-cert-cert-for-app)#
switch(config-cert-cert-for-app)# exit
switch(config)#
switch(config)# show crypto pki certificate cert-for-app pem
Certificate Name: cert-for-app
Associated Applications:
    est-client
Certificate Status: installed
EST Status: enroll success
Certificate Type: regular
Intermediates:
    Subject: C = US, ST = CA, O = HPE, OU = Aruba, CN = danest-int2
    Issuer: C = US, ST = CA, O = HPE, OU = Aruba, CN = danest-int1
    Serial Number: 0x02
    Subject: C = US, ST = CA, O = HPE, OU = Aruba, CN = danest-int1
    Issuer: C = US, ST = CA, L = Roseville, O = HPE, OU = Aruba, CN = danest-root
    Serial Number: 0x01
    Subject: C = US, ST = CA, L = Roseville, O = HPE, OU = Aruba, CN = danest-root
    Issuer: C = US, ST = CA, L = Roseville, O = HPE, OU = Aruba, CN = danest-root
    Serial Number: 0xAB6626FXXXXD45D
-----BEGIN CERTIFICATE-----
MIICizCCAjKgAwIBAgICAIGwCQYHKoZiZj0EATBOMQswCQYDVQQGEwJVUzELMAkG
A1UECBMCQ0ExDDAKBgNVBAoTA0hQRTEOMAwGA1UECzMFXQXJlYmExFDASBgNVBAMT
C2RhbmVzdC1pbmQyMB4XDTIwMTAyODE5NTczOVVoXDTIwMTEyNTE5NTczOVowbzel
...
RTEOMAwGA1UECzMFXQXJlYmExFDASBgNVBAMTC2RhbmVzdC1pbmQxggECMAkGBYqG
SM49BAEDSAAwRQIgVC1kVieWxhpBSQVqVsQ36MbZrhR4XsaGbQeu7+08gbUCIQCH
cS17gcLbNxJlWVr2jnZpPBxy9vID38FjirJiGZ5cZw==
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
MIIBpzCCAU2gAwIBAgIBAJBgqhkJOPQQBME4xCzAJBgNVBAYTA1VTMQswCQYD
VQQIEwJDQTEEMMAoGA1UEChMDSFBFMQ4wDAYDVQQLEwVBcnViYTEUMBIGA1UEAxML
ZGFuZXR0LWludDEwHhcNMjAwNTIwMDUyNDE5WhcNMzAwNTE4MDUyNDE5WjBOMQsw
...
7ovbXodgn8lqDvBl1VTJY1LBSz19FKMdMBswDAYDVR0TBAUwAwEB/zALBgNVHQ8E
BAMCAQYwCQYHKoZiZj0EAQNJADBGAiEA+i3x7KEZsxObVruM1kwqWe+QXiLKbgNL
fL077jsSMhYCIQD/dFBkH/yN0NFzb3wI7Oaoo083HY2p/47t2pIBk/JNfg==
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
MIIBuTCCAWGgAwIBAgIBATAJBgcqhkJOPQQBMGIxCzAJBgNVBAYTA1VTMQswCQYD
VQQIEwJDQTESMBAGA1UEBxMJUm9zZXZpbGx1MQwwCgYDVQQKEwNIUEUxDjAMBGNV
BAsTBUFYdWJhMRQwEgYDVQQDEWtkYW5lc3QtcmlvZDAeFw0yMDA1MjAwNTE1MjNa
...
BgNVHRMEBTADAQH/MASGA1UdDwQEAwIBBjAJBgqhkJOPQQBA0cAMEQCIGr1ZmBX
SmbhDvG9pRiXG0YMqVbvZd37jRQdE+mEk2jfAiBFGHzMjUadhQbuPUTNs9A7bdYk
wej0mJe5bRpd7sqwRQ==
-----END CERTIFICATE-----
-----BEGIN CERTIFICATE-----
MIIB2DCCAX6gAwIBAgIJAKtmJvZZy9RdMAoGCCqGSM49BAMCMGIxCzAJBgNVBAYT
A1VTMQswCQYDVQQIEwJDQTESMBAGA1UEBxMJUm9zZXZpbGx1MQwwCgYDVQQKEwNI
UEUxDjAMBGNVBAsTBUFYdWJhMRQwEgYDVQQDEWtkYW5lc3QtcmlvZDAeFw0yMDA1
...
VCnKt1hxfmV72nfxYpI979UsopuP5nCjHTAbMAwGA1UdEwQFMAMBAf8wCwYDVR0P
BAQDAgEGMAoGCCqGSM49BAMCA0gAMEUCIQDb/uHvU8DFRTyfnP9wk1i6sdeo6yN0

```



```

UvU05t7/rrVxRQIgMHGjHhAnlnkjYBG8Ei3C1UDILiKlO7McMTCWVo4Ik5c=
-----END CERTIFICATE-----
switch(config)#

=====
Initially, all applications use the default local-cert.
=====

switch(config)# show crypto pki application

Associated Applications      Certificate Name      Cert Status
-----
est-client                  not configured, using local-cert
https-server                not configured, using local-cert

syslog-client              not configured, using local-cert
switch(config)#

=====
Assign the newly enrolled cert to applications as desired.
In this example, the cert is assigned to the est-client and syslog.
=====

switch(config)# crypto pki application est-client certificate cert-for-app
switch(config)# crypto pki application syslog-client certificate cert-for-app
switch(config)#
switch(config)# show crypto pki application

Associated Applications      Certificate Name      Cert Status
-----
est-client                  cert-for-app         valid
https-server                not configured, using local-cert
syslog-client              cert-for-app         valid
switch(config)#

```

Example including the use of an intermediate certificate

This example shows the following:

- Installing a root CA as a TA profile.
- Creating a CSR for a leaf certificate.
- Installing the signed leaf certificate issued by an intermediate CA. The intermediate CA certificate is included after the signed leaf certificate.

Each section in the below example is preceded by descriptive text.

Example

```

=====
Install root CA as a TA profile
=====

```

```

switch(config)# crypto pki ta-profile root
switch(config-ta-root)# ta-certificate import terminal
Paste the certificate in PEM format below, then hit enter and ctrl-D:

```

```

switch(config-ta-cert)# -----BEGIN CERTIFICATE-----
switch(config-ta-cert)# MIIGATCCA+mgAwIBAgIJAL/JIZfJ0GpcMA0GCSqGSIUAMIGOMQswCQYD
switch(config-ta-cert)# VQQGEwJVUzETMBEGA1UECAwKQ2FsaWZvcn5pYTESBwwJUm9zZXZpbGxl
switch(config-ta-cert)# MQwwCgYDVQQKDANIUEUxEzARBgNVBASMCk5ldmcxFTATBgNVBAMMDFRl
...
switch(config-ta-cert)# rvadRXSAsUlevJRNNOyINrEJyOfUX2hAfLaiBYp+In6gKTAwVhlxLiXn
switch(config-ta-cert)# LlryAb2/go4BTYjil3eJyXxweUHheuBeesEslBawLv0cPCQPTTdbc970
switch(config-ta-cert)# iWbyAmfSpD/TS3AgCLnBFPKEKsms0f0LF3/C9dRUXjIHT/LDBr+lgzY3
switch(config-ta-cert)# m2NCvxY=
switch(config-ta-cert)# -----END CERTIFICATE-----
switch(config-ta-cert)#
The certificate you are importing has the following attributes:
Subject: C = US, ST = California, L = Roseville, O = HPE, OU = Networking,
        CN = Test CA root, emailAddress = generic@corp.com
Issuer:  C = US, ST = California, L = Roseville, O = HPE, OU = Networking,
        CN =Test CA root, emailAddress = generic@corp.com
Serial Number: 0xBFC92197xxxxxxxx
TA certificate import is allowed only once for a TA profile
Do you want to accept this certificate (y/n)? y
switch(config-ta-root)# exit

```

```

=====
Create a CSR for a leaf certificate
=====

```

```

switch(config)# crypto pki certificate leaf
switch(config-cert-leaf)# subject
Do you want to use the switch serial number as the common name (y/n)? y
Common Name: SG9Zxxxxxx
Org Unit:
Org Name:
Locality:
State:
Country:
switch(config-cert-leaf)# enroll terminal
You are enrolling a certificate with the following attributes:
Subject: C=<empty>, ST=<empty>, L=<empty>, OU=<empty>, O=<empty>,
        CN=SG9Zxxxxxx
Key Type: RSA (2048)

Continue (y/n)? y

```

```

-----BEGIN CERTIFICATE REQUEST-----
MIICWjCCAUICAQIwFTETMBEGA1UEAwKU0c5WktONDawSoZlhcN
AQEBBQADggEPADCCAQoCggEBAMKdtoucDEMeuZjPGvCcWTm4D39A
WBA8K/bduJvM1E2B/uirU2TX7mF6lN30akClSxZOoofZAmBPCzI3
...
wZtb5c8fYCSR+TpLwZAdoXrvGJqJ1aGzV6/kVfb7rM6ulBksfBo/
JwO+7x8Vn5h1dGCrsl9CPJienni/fq24+1CJzspMbY9BKu9EIL+P
5ND9BmN0IzEmDO26F+Ip74DqFCIYjXt13uPJk4cwJkXq12lh1crG
UlatpvjNEpZotfoEryDJSs0pHXky7VjltYABiuDy
-----END CERTIFICATE REQUEST-----

```

```

=====
Install the signed leaf certificate issued by an intermediate CA. The
lintermediate CA certificate is included after the signed leaf certificate.
=====

```

```

switch(config-cert-leaf)# import terminal ta-profile root
Paste the certificate in PEM format below, then hit enter and ctrl-D:

```

```

switch(config-cert-import) # -----BEGIN CERTIFICATE-----
switch(config-cert-import) # MIIeKTCCAhGgAwIBAgIJA01LS0BmKxtbMA0GCSqGSIYxCzAJBgNV
switch(config-cert-import) # BAYTAKFVMRUwEwYDVQQIDAxJbnRlcm1lZG9VBAoMGE1udGVybmV0
switch(config-cert-import) # IFdpZGdpdHMGUHR5IEx0ZDENMAsGA1UEAw0yMDA1MTQyMDI3MTla
...
switch(config-cert-import) # axnZcIaNp4eNi95in+TvckXA0eMLScNyR7IF+Wjn56H0fQKYsHp/
switch(config-cert-import) # jllbCkyBlxKnn6IpzIj/hvAx3NpA0jXx/qJA+V/cltaAL6+QPZmI
switch(config-cert-import) # vr5GZsoV72BHFOXxoteZlmWMUdVldYXXP2DzEUbttr9z0jwz0MyK
switch(config-cert-import) # Qz5tc0BlGfJAtghykw==
switch(config-cert-import) # -----END CERTIFICATE-----
switch(config-cert-import) # -----BEGIN CERTIFICATE-----
switch(config-cert-import) # MIIFyzCCA7OgAwIBAgIJA01LS0BmKxtwMA0GCSqGSIYwCQYD
switch(config-cert-import) # VQqGEwJVUzETMBEGA1UECAwKQ2FsaWZvc1UEBwwJUm9zZXZpbGx1
switch(config-cert-import) # MQwwCgYDVQQKDANIUEUxEzARBgNVBAsMCmcxFTATBgNVBAMMDFRl
...
switch(config-cert-import) # LM9DV3YNWOM4UMMP2HXaDDfqxZPX9Zsj6G1/stRCh8SVfsF2duYR
switch(config-cert-import) # 5brLfEpiDhXrZVXxF91ljRAB02JPLSUufg7xr6M/K5aCujxVYzK7
switch(config-cert-import) # DQaCEw5Nlmc1vpYlY2TG3dlUQPZDeQOAHwuBd4HewqDHWfp/T04=
switch(config-cert-import) # -----END CERTIFICATE-----
switch(config-cert-import) #
Leaf certificate is validated with root and imported successfully.
switch(config-cert-leaf) #

```

Installing a self-signed leaf certificate (created inside the switch)

This procedure describes how to create (wholly inside the switch) and install a self-signed X.509 leaf certificate. And associate it with one of the following switch features: syslog client, HTTPS server, or HSC (hardware switch controller).

Procedure

1. Create a leaf certificate context with the command `crypto pki certificate`. This switches to the leaf certificate configuration context.
2. Define leaf certificate properties with the command `subject`.
3. Set the encryption key type for the leaf certificate with the command `key-type`.
4. Generate and install the self-signed certificate with the command `enroll self-signed`.
5. Exit the leaf certificate context with the command `exit`.
6. Associate the leaf certificate with a switch feature (syslog client, HTTPS server, or HSC) with the command `crypto pki application`.

Example

This example:

- Creates the leaf certificate context.
- Defines the leaf certificate characteristics.
- Creates and installs the self-signed leaf certificate.
- Associates the leaf certificate with the syslog client (application) on the switch.

```

switch(config)# crypto pki cert SS_LC
8400X(config-cert-SS_LC)# subject common-name SSLeaf country US
state CA locality Rocklin org Company org-unit Site

```

```

8400X(config-cert-SS_LC)# key-type rsa key-size 3072
8400X(config-cert-SS_LC)# enroll self-signed
You are enrolling a certificate with the following attributes:
Subject: C=US, ST=CA, L=Rocklin, OU=Site, O=Company,
        CN=SSLeaf
Key Type: RSA (3072)

Continue (y/n)? y
Self-signed certificate is created and enrolled successfully.
8400X(config-cert-SS_LC)# exit
switch(config)# crypto pki application syslog-client certificate SS_LC

```

Installing a self-signed leaf certificate (created outside the switch)

This procedure describes how to install a self-signed X.509 leaf certificate (that was created outside the switch). And then associate the certificate with one of the following switch features: syslog client, HTTPS server, or HSC (hardware switch controller).

Prerequisites

A self-signed leaf certificate (including private-key data) must be created outside the switch.

Procedure

1. Create the leaf certificate context with the command `crypto pki certificate` which then switches to the created leaf certificate context.
2. Import the leaf certificate data into the switch with the command `import (self-signed leaf certificate)`.
3. Exit the leaf certificate context with the command `exit`.
4. Associate the leaf certificate with a switch feature (syslog client, HTTPS server, or HSC) with the command `crypto pki application`.

Example

This example:

- Creates the leaf certificate context.
- Imports the self-signed leaf certificate.
- Associates the leaf certificate with the syslog client (application) on the switch.

```

switch(config)# switch(config)# crypto pki certificate SS_LC2
switch(config)# switch(config-cert-SS_LC)# import terminal self-signed
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-cert-import)# -----BEGIN CERTIFICATE-----
switch(config-cert-import)# MIIFRDCCAyGawIBAgIQP8nnS2Vp15u07xXMdktDJzANBgkqhkiG9
switch(config-cert-import)# MQswCQYDVQGEwJVUEOMAwGA1UECgwFXJlYmxDAOgNBAMMB1Jvb3gw
switch(config-cert-import)# HhcNMTkNDEwMjIwNT1WbWMTA0MjIwNE1WbWZQswQYDVQGEwJV
...
switch(config-cert-import)# 1fIYZYGQyla0AwFuPTTxBXHYwRxTPbUYU5tumJrfwRPmE4OVY8S9D
switch(config-cert-import)# 1NGNm3NG03GqPScs/TF9bVyFA5BOrS5lmm7kNfRYlK8D/kMTfRreS
switch(config-cert-import)# YQ1u1NqShps=
switch(config-cert-import)# -----END CERTIFICATE-----
switch(config-cert-import)# -----BEGIN ENCRYPTED PRIVATE KEY-----

```

```

switch(config-cert-import)# MIIFDjBABgkqhkiG9wBBQ0wMzAbBgkqhkiw0QwwDQImNpJMN7sVGwC
switch(config-cert-import)# MBQGCCqGS1b3DQMHAit+2qadNAASCMg5LYJ4AFm3EffhH5p51Ggr8
switch(config-cert-import)# IJ6L/UhEtH523nUkdV6gvoAWgoYaeD83PeswToAGv5VS8OMFTPttr
...
switch(config-cert-import)# OgSecqZsG6arbx0ESaYBirlc/6rPslpcjbDxw283DiD1MWOpes2a
switch(config-cert-import)# iKnXnUMpVPfLc74ty2S41DtH0X9Sgf6aa1LjiStg+N7cND9XfGtj/
switch(config-cert-import)# cb4=
switch(config-cert-import)# -----END ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)#
Enter import password: *****
Leaf certificate is validated as self-signed certificate and imported successfully.
switch(config-cert-SS_LC2)# exit
switch(config)# crypto pki application syslog-client certificate SS_LC2

```

Installing a certificate of a root CA

Prerequisites

- A certificate of a root CA (that is used as the signer).
- Revocation checking URLs for the CA (optional).

Procedure

1. Create a TA profile with the command `crypto pki ta-profile` which then switches to the created TA profile context.



Step 2 is optional and suggested only for advanced users.

2. Optionally enable certificate revocation checking with the command `revocation-check ocsp`. Most certificates contain revocation checking URLs for OCSP. If you want to override these URLs, configure custom revocation checking URLs with the command `ocsp url`.
3. Import the certificate of the root CA with the command `ta-certificate`.

Example

This example installs the certificate **root-cert** and defines custom revocation checking URLs:

```

switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# revocation-check ocsp
switch(config-ta-root-cert)# ocsp url primary http://ocsp-server.site.com
switch(config-ta-root-cert)# ocsp url secondary http://ocsp-server2.site.com
switch(config-ta-root-cert)# ta-certificate import terminal
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-ta-cert)# -----BEGIN CERTIFICATE-----
switch(config-ta-cert)# MIIDuTCCAqECCQCuoxeJ2ZNYcjANBgkqhkiG9w0BAQsFADCBqzELMAEBh
switch(config-ta-cert)# VVMxEzARBgNVBAgMCKNhGlmb3JuaWEExEDAOBgNVBAcMB1JvY2tsDAKBg
switch(config-ta-cert)# BAoMA0hQTjEVMBMGA1UECwwMSFB0Um9zZXZpbGxlMSowKAYDVQOCG5zd
...
switch(config-ta-cert)# x3WFf3dFZ8o9sd5LVAHneH/ztb9MP34z+le1V346r12L2kpxmTOVJVyTO
switch(config-ta-cert)# BIzD/ST/HaWi+OS+S80rm93PSscEbb9GWk7vshh5EnW/moehBKcE40lzy
switch(config-ta-cert)# 3LvMLZcssSe5J2Ca2XIhfDme8UaNZ7syGYMsAW0nG7yYHWkEOQu9s
switch(config-ta-cert)# -----END CERTIFICATE-----
switch(config-ta-cert)#
The certificate you are importing has the following attributes:
Issuer: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,

```

```
CN=site.com/emailAddress=test.ca@site.com
Subject: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,
        CN=8400/emailAddress=test.ca@site.com
Serial Number: 12121221634631568498 (0xaea51217d5945772)

TA certificate import is allowed only once for a TA profile
Do you want to accept this certificate (y/n)? y
TA certificate accepted.
switch(config-ta-root-cert)#
```

Installing a CA-signed leaf certificate (initiated in the switch)

This procedure describes how to create and install an X.509 leaf certificate that is initiated inside the switch but signed outside the switch by a CA. And then associate the certificate with one of the following switch features: syslog client, HTTPS server, or HSC (hardware switch controller).

Prerequisites

Root CA certificate `root-cert` must be installed as described in [Installing a certificate of a root CA](#).

Procedure

1. Create a leaf certificate context with the command `crypto pki certificate` which then switches to the created leaf certificate configuration context.
2. Define leaf certificate properties with the command `subject`.
3. Set the encryption key type for the leaf certificate with the command `key-type`.
4. Generate the certificate signing request (CSR) with the command `enroll terminal`.
5. Use the CSR to obtain a leaf certificate from the root CA, using the root CA directly as the signer CA.
6. Import the leaf certificate into the switch with the command `import (CA-signed leaf certificate)`.
7. Exit the leaf certificate context with the command `exit`.
8. Associate the leaf certificate with a switch feature (syslog client, HTTPS server, or HSC) with the command `crypto pki application`.

Example

This example:

- Creates the leaf certificate context.
- Defines the leaf certificate characteristics.
- Generates the leaf certificate signing request in the switch for getting signed outside the switch by a CA.
- Imports the CA-signed leaf certificate into the switch.
- Associates the leaf certificate with the syslog client (application) on the switch.

```
switch(config)# crypto pki certificate lcert
switch(config-cert-lcert)# subject common-name Leaf country US state CA
locality Rocklin org Company org-unit Site
switch(config-cert-lcert)# key-type rsa key-size 3072
switch(config-cert-lcert)# enroll terminal
You are enrolling a certificate with the following attributes:
```

```

Subject: C=US, ST=CA, L=Rocklin, O=Company, OU=Site
        CN=Leaf
Key Type: RSA (2048)

Continue (y/n)? y

-----BEGIN CERTIFICATE REQUEST-----
MIIBozCCAQwCAQAwYzEVMBMGAlUEAxMMcG9kMDEtODQwMC0xMQ4wDAYDV
nViYTEMMAoGAlUEChMDSFBFMRiWEAYDVQQHEw1Sb3Nldm1sbGUxCzAJBg
NBMQswCQYDVQQGEwJVUzCBnzANBjG9w0BAQEFAAOBjQAwgYkCgYE
...
GBAJ4L3lFFfWBEL+KAKpOGjZcVmw1BMqSKftOFNF9nzmUmONmU3SKy6dz
7Au22mf3lWDxzrtCC/dj5RtWJeJekxp2LCIK/3eRXUwbYveQDKcxH7j9Z
ace+2tA68F2vlgRCQ/hcQH0YmNuaq4Ne3w0dhm7HlUrx
-----END CERTIFICATE REQUEST-----

switch(config-cert-lcert)# import terminal ta-profile root-cert
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-cert-import)# -----BEGIN CERTIFICATE-----
switch(config-cert-import)# MIIFRDCCAyygWIBAgIQPnnS2Vp5u07XMdktDJzANBgkqhkiG9w0Bv
switch(config-cert-import)# MQswCQYDVQGEwJVEOMAwG1UECgwFJlYmxDAOgNBMMB1Jvb3QgQ0Ew
switch(config-cert-import)# HhcNMTkNDEwMjIwNTWcjIwMTA0MjwNE1WBzQswCQYDVQGEwJVUzEL
...
switch(config-cert-import)# 1fIYZYGqYla0AwFuTtXBXYwRxPbUYU5tumrfwRPM40VY8S9DQgcr
switch(config-cert-import)# 1NGNm3NG03GqPcs/T9bVyF5BOrS5lmm7kNfRYl8D/kMTfRreSdxis
switch(config-cert-import)# YQ1ulNqShps=
switch(config-cert-import)# -----END CERTIFICATE-----
switch(config-cert-import)#
Leaf certificate is validated with root-cert and imported successfully.
switch(config-cert-lcert)# exit
switch(config)# crypto pki application syslog-client certificate lcert

```

Installing a CA-signed leaf certificate (created outside the switch)

This procedure describes how to install an X.509 leaf certificate that was created and signed (by a CA) outside the switch. And then associate the certificate with one of the following switch features: syslog client, HTTPS server, or HSC (hardware switch controller).

Prerequisites

- Root CA certificate `root-cert` installed as described in [Installing a certificate of a root CA](#).
- A CA-signed leaf certificate (including private-key data) created outside the switch.

Procedure

1. Create the leaf certificate context with the command `crypto pki certificate` which then switches to the created leaf certificate context.
2. Import the leaf certificate into the switch with the command `import (CA-signed leaf certificate)`.
3. Exit the leaf certificate context with the command `exit`.
4. Associate the leaf certificate with a switch feature (syslog client, HTTPS server, or HSC) with the command `crypto pki application`.

Example

This example:

- Creates the leaf certificate context.
- imports the CA-signed leaf certificate.
- Associates the leaf certificate with the syslog client (application) on the switch.

```
switch(config)# switch(config)# crypto pki certificate CA_LC
switch(config)# switch(config-cert-CA_LC)# import terminal ta-profile root-cert
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-cert-import)# -----BEGIN CERTIFICATE-----
switch(config-cert-import)# MIIFRDCCAyygAwIBAgIQP8nn2Vp15u07XMktDJANBgkqhkiG9w0Bv
switch(config-cert-import)# MQswCQYDVQGEwJVUEOMAw1UECgwFX1YmxDOgNBAMMB1Jvb3QgQ0Ew
switch(config-cert-import)# HhcNMTkNDEwMjIwNTIWhjIMTAOMjIwNE1jBzQswYDVQQGEwJVUzEL
...
switch(config-cert-import)# 1fIYZYGQyla0AwFuPTTxBXHYRxTPbUYUtmJrwrPmE4OVY8S9DQgcr
switch(config-cert-import)# 1NGNm3NG03GqPScs/TF9bVyFABOrlmm7kNfRlK8D/kMTfRreSdxis
switch(config-cert-import)# YQ1ulNqShps=
switch(config-cert-import)# -----END CERTIFICATE-----
switch(config-cert-import)# -----BEGIN ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)# MIIFDjBABgkqhkiG9wBBQ0wMzAbBgkiwQwwQImNpJMN7sVGwCaggA
switch(config-cert-import)# MBQGCCqGSib3DQMHAit+2qadNAASCMgLYJ4AFEfhH5p51Ggr86VqS
switch(config-cert-import)# IJ6L/UhEtH523nUkdV6gvoAWgoYaeD8eswAGv5VS8OMFTPttrn5/K
...
switch(config-cert-import)# OgSecqZsG6arbx0ESaYBirlc6rPslpcbDx283DD1MWOpes2aEmOX
switch(config-cert-import)# iKnXnUMpVPfLc74ty2S41tH0X9gfaa1LiStg+N7cND9XfGtjaV2+/
switch(config-cert-import)# cb4=
switch(config-cert-import)# -----END ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)#
Enter import password: *****
Leaf certificate is validated with root-cert and imported successfully.
switch(config-cert-CA_LC)# exit
switch(config)# crypto pki application syslog-client certificate CA_LC
```

PKI commands



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

crypto pki application

```
crypto pki application <APP-NAME> certificate <CERT-NAME>
no crypto pki application <APP-NAME> certificate <CERT-NAME>
```

Description

Associates a leaf certificate with a feature (application) on the switch. By default, all features are associated with the default, self-signed certificate `local-cert`. This certificate is created by the switch the first time it starts.

The `no` form of this command associates the specified feature with the default certificate.

Parameter	Description
<code><APP-NAME></code>	Specifies the name of a feature on the switch: ■ <code>est-client</code>: EST client ■ <code>hsc</code>: Hardware switch controller ■ <code>https-server</code>: HTTPS server ■ <code>syslog-client</code>: Syslog client <code>syslog-client</code> communicates with syslog server over TLS. You can associate a certificate with the <code>syslog-client</code> application by enrolling the certificate manually or through EST.
<code><CERT-NAME></code>	Specifies the name of an installed leaf certificate.

Examples

Associating the EST client with leaf certificate **leaf-cert1**:

```
switch(config)# crypto pki application est-client certificate leaf-cert1
```

Associating the syslog client with leaf certificate **leaf-cert**:

```
switch(config)# crypto pki application syslog-client certificate leaf-cert
```

Setting the syslog client to use the default certificate:

```
switch(config)# no crypto pki application syslog-client certificate
```

Associating the HTTPS server with leaf certificate **leaf-cert2**:

```
switch(config)# crypto pki application https-server certificate leaf-cert2
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

crypto pki certificate

```
crypto pki certificate <CERT-NAME>
no crypto pki certificate <CERT-NAME>
```

Description

Creates a leaf certificate and changes to its context `config-cert-<CERT-NAME>`. If the specified leaf certificate exists, this command changes to its context.

The first time the switch starts it creates a self-signed, default leaf certificate called `local-cert`. This certificate is used by any switch application that does not have an associated leaf certificate.

The `no` form of this command deletes the specified leaf certificate. The default leaf certificate `local-cert` cannot be deleted.

Parameter	Description
<code><CERT-NAME></code>	Specifies the name of a leaf certificate. Range: 1 to 32 alphanumeric characters (excluding ").

Examples

Creating leaf certificate **leaf-cert**:

```
switch(config)# crypto pki certificate leaf-cert
switch(config-cert-leaf-cert)#
```

Deleting leaf certificate **leaf-cert**:

```
switch(config)# no crypto pki certificate leaf-cert
The leaf certificate has associated applications. Deleting the certificate
will make the applications use the default certificate local-cert.
Continue (y/n)? y
switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

crypto pki ta-profile

```
crypto pki ta-profile <TA-NAME>
no crypto pki ta-profile <TA-NAME>
```

Description

Creates a trust anchor (TA) profile and changes to the `config-ta-<TA-NAME>` context for the profile. Each TA profile stores the certificate for a trusted CA. Up to 64 profiles can be defined.

If the specified TA profile exists, this command changes to the `config-ta-<TA-NAME>` context for the profile.

The `no` form of this command removes the specified TA profile.



When creating a new profile, if you exit the `config-ta-<TA-NAME>` context without importing the TA certificate, the profile is discarded.

Parameter	Description
<code><TA-NAME></code>	Specifies the TA profile name. Range: 1 to 48 alphanumeric characters excluding ".". NOTE: The TA profile name cannot end with <code>est-ta<nn></code> where <code><nn></code> is 00 to 99. For example, <code>company-trust-anchor-est-ta01</code> is not allowed. This TA profile name suffix is reserved for TA profiles that are created for CA certificates from EST servers.

Examples

Creating the TA profile **root-cert**:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)#
```

Removing TA profile **root-cert**:

```
switch(config)# no crypto pki ta-profile root-cert
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

enroll self-signed

`enroll self-signed`

Description

Generates a key pair and generates a self-signed certificate with it.

The subject fields and key type of the current leaf certificate must be defined before running this command. If not, you are prompted to fill in the subject fields, and the key type is set to `RSA 2048`.

Example

Enrolling the leaf certificate **leaf-cert**:

```

switch(config-cert-leaf-cert)# enroll self-signed
You are enrolling a certificate with the following attributes:
Subject: C=US, ST=CA, L=Rocklin, OU=Site, O=Comp,
        CN=Leaf01
Key Type: RSA (2048)

Continue (y/n)? y
Self-signed certificate is created and enrolled successfully.

switch(config-cert-leaf-cert)#

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert-<CERT-NAME>	Administrators or local user group members with execution rights for this command.

enroll terminal

enroll terminal

Description

Generates a key pair and certificate signing request (CSR) for the current leaf certificate. Use the CSR to obtain a signed certificate from a certificate authority (CA), and then import the certificate onto the switch with the command `import terminal`.

The key type, and the certificate common name in the subject fields of the current leaf certificate must be completed before running this command.

Example

Enrolling the leaf certificate **leaf-cert**:

```

switch(config-cert-leaf-cert)# enroll terminal
You are enrolling a certificate with the following attributes:
Subject: C=US, ST=CA, L=Rocklin, OU=Site, O=Comp,
        CN=Leaf01
Key Type: RSA (2048)

Continue (y/n)? y

-----BEGIN CERTIFICATE REQUEST-----
MIIBozCCAQAwYzEVMBMGA1UEAxMMcG9kMDEtODQwMC0xMQ4wDAYDVQQLEwV
nViYTEMMAoGA1UEChMDSFBFMRiWEAYDVQQHEwlsb3Nldm1sbGUxYzA5
NBQMswCQYDVQQGEwJVUzCBnzANBgkqhkiG9w0BAQEFAAOBjQAwgYkCg
YEAAtKcLS
...
GBAJ4L3lFFfWBEL+KAKpOGjZcVmw1BMqSKFtOFNF9nzmUmONmU3SKy6dzQ+6ynR
7Au22mf3lWDxzrtCC/dj5RtWJeJekxp2LCIK/3eRXUwbYveQDKcxH7j9ZB+BAP2
ace+2tA68F2vlgRCQ/hcQH0YmNuaq4Ne3w0dhm7HlUrx

```

```
-----END CERTIFICATE REQUEST-----
switch(config-cert-leaf-cert) #
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert-<CERT-NAME>	Administrators or local user group members with execution rights for this command.

import (CA-signed leaf certificate)

```
import terminal ta-profile <TA-NAME> [password <PW>]
import <REMOTE-URL> ta-profile <TA-NAME> [password <PW>] [vrf <VRF-NAME>]
import <STORAGE-URL> ta-profile <TA-NAME> [password <PW>]
```

Description

Imports a CA-signed leaf certificate and then validates the certificate against the specified TA profile. If the imported data includes a private key, the private key must match the leaf certificate being imported. If the imported data does not include a private key, the certificate must match a CSR that was previously generated with the command `enroll terminal` and must be signed by the CA whose root certificate is installed in the specified TA profile. The TA profile must exist and have a TA certificate configured.

Parameter	Description
terminal	Import the certificate by pasting PEM-format data at the console. Upon execution, the <code>config-cert-import</code> context is entered for certificate pasting. To complete certificate data entry press Control-D in your terminal program. Alternatively, the pasted certificate data can include at its end the delimiter <code>END_OF_CERTIFICATE</code> (after the <code>-----END CERTIFICATE-----</code> line), making entry of Control-D unnecessary.
ta-profile <TA-NAME>	Specifies the TA profile name. Range: 1 to 48 alphanumeric characters excluding ".".
password <PW>	Specifies the plaintext password used to decrypt the private key in the imported certificate data. When this parameter is omitted, the password is prompted for as required. Range: 1 to 32 alphanumeric characters.
<REMOTE-URL>	Specifies a certificate data file on a remote TFTP or SFTP server. The URL syntax is: {tftp:// sftp://<USER>@} {<IP> <HOST>} [:<PORT>] [;blocksize=<SIZE>]/<FILE>
vrf <VRF-NAME>	Specifies the name of the VRF to use for the remote URL file

Parameter	Description
	transfer. The default is <code>mgmt</code> .
<code><STORAGE-URL></code>	Available on switch families that provide USB device file import capability, specifies a certificate data file on a USB storage device inserted in the switch USB port. The URL syntax is <code>usb:/<FILE></code> .

Usage

- The imported data must include all the intermediate CA certificates in the certificate chain leading to the certificate imported into the specified TA profile.
- This command cannot be used with the default certificate `local-cert`.
- The PEM data format is supported for all import sources. The PKCS#12 data format is supported for `<REMOTE-URL>` and `<STORAGE-URL>`.
- The PEM data must be delimited with these lines for the certificate data:

```
-----BEGIN CERTIFICATE-----
-----END CERTIFICATE-----
```

And the PEM data must be delimited with either of these line pairs for the private key data:

```
-----BEGIN PRIVATE KEY-----
-----END PRIVATE KEY-----
```

```
-----BEGIN ENCRYPTED PRIVATE KEY-----
-----END ENCRYPTED PRIVATE KEY-----
```

Examples

Importing a leaf certificate from the console:

```
switch(config)# crypto pki certificate leaf-cert
switch(config-cert-leaf-cert1)# import terminal ta-profile root-cert
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-cert-import)# -----BEGIN CERTIFICATE-----
switch(config-cert-import)# MIIFRDCCAyYgAwIBAgQP8nS2Vp15u0xXMdkDJzANBgkqhkiG9w0Bv
switch(config-cert-import)# MQswCQYDVQGEwJVUEOMAwGA1UCgwFXJlYmDAgNBAMM1Jvb3QgQ0Ew
switch(config-cert-import)# HhcNMTkNDEwMjIwNTIWhcjIwMTOMjwNE1WjzQswQDVQGEwJVUzEL
...
switch(config-cert-import)# 1fIYZYGQyla0AwFuPTTxBXHYwRxTPbUYU5umJfRPmE4VY8S9DQgcr
switch(config-cert-import)# 1NGNm3NG03GqPScs/TF9bVyFA5BOS5lmmkfRYK8D/kMTfRreSdxis
switch(config-cert-import)# YQ1u1NqShps=
switch(config-cert-import)# -----END CERTIFICATE-----
switch(config-cert-import)# -----BEGIN ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)# MIIFDjBABGkqhkiG9wBBQ0wMzAbBgqkw0QwwDQIpJMN7sVGwCAggA
switch(config-cert-import)# MBQGCCqGSib3DQMHait+2qadNAASCgLYJ4Am3EfhH5p51Ggr86VqS
switch(config-cert-import)# IJ6L/UhEtH523nUkdV6gvAgoYaD83PswToAGv5VS8OMFTPTtrn5/K
...
switch(config-cert-import)# OgSecqZsG6arbx0ESaYBir1c/6rPspcjbx283iD1MWQpeoS2aEmOX
switch(config-cert-import)# iKnXnUMpVPfLc74ty2S41DtH0X9gf6aaljStg+7cND9XfGtjaV2+/
switch(config-cert-import)# cb4=
switch(config-cert-import)# -----END ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)#
Enter import password: *****
Leaf certificate is validated with root-cert and imported successfully.
switch(config-cert-leaf-cert)#
```

Importing a leaf certificate from a remote file:

```

switch(config)# crypto pki certificate leaf-cert2
switch(config-cert-leaf-cert2)# import tftp://1.1.1.2/c2.p12 ta-profile root-cert
% Total      % Received % Xferd  Average Speed   Time    Time       Time  Current
             %                   Dload  Upload    Total     Spent    Left     Speed
100  3722  100  3722    0      0   391k      0  --:--:-- --:--:-- --:--:--   391k
100  3722  100  3722    0      0  376k      0  --:--:-- --:--:-- --:--:--   376k
Enter import password: *****
Leaf certificate is validated with root-cert and imported successfully.
switch(config-cert-leaf-cert2)#

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert- <i><CERT-NAME></i>	Administrators or local user group members with execution rights for this command.

import (self-signed leaf certificate)

```

import terminal self-signed [password <PW>]
import <REMOTE-URL> self-signed [password <PW>] [vrf <VRF-NAME>]
import <STORAGE-URL> self-signed [password <PW>]

```

Description

Imports a self-signed leaf certificate including its matching private key.

Parameter	Description
terminal	Import the certificate by pasting PEM-format data at the console. Upon execution, the <code>config-cert-import</code> context is entered for certificate pasting. To complete certificate data entry press Control-D in your terminal program. Alternatively, the pasted certificate data can include at its end the delimiter <code>END_OF_CERTIFICATE</code> (after the <code>-----END CERTIFICATE-----</code> line), making entry of Control-D unnecessary.
password <PW>	Specifies the plaintext password used to decrypt the private key in the imported certificate data. When this parameter is omitted, the password is prompted for as required. Range: 1 to 32 alphanumeric characters.
<REMOTE-URL>	Specifies a certificate data file on a remote TFTP or SFTP server. The URL syntax is: {tftp:// sftp://<USER>@} {<IP> <HOST>} [:<PORT>] [;blocksize=<SIZE>]/<FILE>
vrf <VRF-NAME>	Specifies the name of the VRF to use for the remote URL file transfer. The default is <code>mgmt</code> .

Parameter	Description
<STORAGE-URL>	Available on switch families that provide USB device file import capability, specifies a certificate data file on a USB storage device inserted in the switch USB port. The URL syntax is <code>usb:/<FILE></code> .

Usage

- This command cannot be used with the default certificate `local-cert`.
- The PEM data format is supported for all import sources. The PKCS#12 data format is supported for <REMOTE-URL> and <STORAGE-URL>.
- The PEM data must be delimited with these lines for the certificate data:

```
-----BEGIN CERTIFICATE-----
-----END CERTIFICATE-----
```

And the PEM data must be delimited with either of these line pairs for the private key data:

```
-----BEGIN PRIVATE KEY-----
-----END PRIVATE KEY-----
```

```
-----BEGIN ENCRYPTED PRIVATE KEY-----
-----END ENCRYPTED PRIVATE KEY-----
```

Example

Importing a self-signed leaf certificate from the console:

```
switch(config)# crypto pki certificate ss-leaf-cert
switch(config-cert-ss-leaf-cert)# import terminal self-signed
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-cert-import)# -----BEGIN CERTIFICATE-----
switch(config-cert-import)# MIID2TCCAsGgAwIBAgIJAKcrqokm6p9GMA0GCSqGSIb3DQEBcwUAM
switch(config-cert-import)# tDCCA5ygAwIBAgICEAEwDQYJKoZIhvcNAQELBQAwYgxCzABAYTA1
switch(config-cert-import)# VQQGEwJVUzELMAkGA1UECAwCQ0ExDTALBgNVBACMBFJvc2UxDDAKB
...
switch(config-cert-import)# +fWQLxhp+jKJGZGOZz/FENt2uSfZHxlXiu8n3g+EgqExenY1pBRJr
switch(config-cert-import)# VuEEoNb/YfkPXHHva4Zfx223q+f694wlVsHkENSzqr2goHpa2fOzq
switch(config-cert-import)# alewwdmVqCES+x8bvhf3C/6IB6ePkEsnMlHNTeM=
switch(config-cert-import)# -----END CERTIFICATE-----
switch(config-cert-import)# -----BEGIN ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)# MIIFDjBABGkqhkiG9w0BBQ0wMzAbBgkqhkiG9w0BBQwwDgQIT8Ni3
switch(config-cert-import)# MBQGCCqGSIB3DQMHBAiBHrejkcdpdASCBMjVxrrYYPNT3V1abr9k8
switch(config-cert-import)# 5GE0U99awh9ys4360WR95xOFGThvjkTyRWG511nGwVeLZs/7TPXWI
...
switch(config-cert-import)# hzc5ZT/w2F08icRI5mFbGoTAAw9IIWMOXGweaWQJDyKGrhg89GrnV
switch(config-cert-import)# M2UuP/tYuuO328QcenKZEJmZKCbX78oFRR+pgma4oeMaFTIyXE6Pr
switch(config-cert-import)# GAdCK8tkDiJ9DKbqdM5W0/nTJfqwUQlfl27dNrBAodsHdwr3UR99H
switch(config-cert-import)# SPO=
switch(config-cert-import)# -----END ENCRYPTED PRIVATE KEY-----
switch(config-cert-import)#
Enter import password: *****
Leaf certificate is validated as self-signed certificate and imported successfully.
switch(config-cert-ss-leaf-cert)#
```

Importing a leaf certificate from a remote file:

```
switch(config)# crypto pki certificate ss-leaf-cert2
switch(config-cert-ss-leaf-cert2)# import tftp://1.1.1.2/ss2.p12 self-signed
% Total      % Received % Xferd  Average Speed   Time    Time       Time  Current
```



```

Dload  Upload   Total   Spent    Left  Speed
100  3230  100  3230    0    0   875k      0  --:--:-- --:--:-- --:--:--   875k
100  3230  100  3230    0    0   831k      0  --:--:-- --:--:-- --:--:--   831k
Enter import password: *****
Leaf certificate is validated as self-signed certificate and imported successfully.
switch(config-cert-ss-leaf-cert2)#

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert-<CERT-NAME>	Administrators or local user group members with execution rights for this command.

key-type

```
key-type {rsa [key-size <K-SIZE>] | ecdsa [curve-size <C-SIZE>]}
```

Description

Sets the key type and key size for the current leaf certificate. The key type of the default certificate `local-cert` cannot be changed.

Parameter	Description
<code>rsa</code>	Selects the RSA key type.
<code>key-size <K-SIZE></code>	Specifies the RSA key size in bits. Supported values: 2048, 3072, 4096. Default: 2048
<code>ecdsa</code>	Selects the ECDSA key type.
<code>curve-size <C-SIZE></code>	Specifies the ECDSA elliptic curve size in bits. Supported values: 256, 348, 521. Default: 256

Examples

Setting RSA encryption on the leaf certificate **leaf-cert**:

```

switch(config)# crypto pki certificate leaf-cert
switch(config-cert-leaf-cert)# key-type rsa key-size 3072

```

Setting ECDSA encryption on the leaf certificate **leaf-cert**:

```

switch(config)# crypto pki certificate leaf-cert
switch(config-cert-leaf-cert)# key-type ecdsa curve-size 521

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert-<CERT-NAME>	Administrators or local user group members with execution rights for this command.

ocsp disable-nonce

```
ocsp disable-nonce
no ocsp disable-nonce
```

Description

Configures exclusion of the nonce from OCSF requests. A nonce is a unique identifier that an OCSF client inserts in an OCSF request and expects the OCSF responder to include it in the corresponding OCSF response. The nonce mechanism helps prevent replay attacks in which a malicious player attempts to masquerade as the OCSF responder. Although the nonce is included by default, it can be excluded. Some OCSF responders choose to not support the use of the nonce due to performance considerations.

The `no` form of this command re-enables nonce inclusion in OCSF requests.

Examples

Disable inclusion of the nonce in OCSF requests for TA profile `root-cert`:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# ocsp disable-nonce
```

Enable inclusion of the nonce in OCSF requests for TA profile `root-cert`:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# no ocsp disable-nonce
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-ta-<TA-NAME>	Administrators or local user group members with execution rights for this command.

ocsp enforcement-level

ocsp enforcement-level {strict | optional}
no enforcement-level

Description

Sets either strict or reduced enforcement of the OCSF check of certificates. Strict enforcement is enabled by default.

The `no` form of this command resets enforcement to its default of `strict`.

Parameter	Description
<code>strict</code>	Sets strict OCSF checking of certificates. The certificate is accepted only if all possible checking (including validation failures, software system errors, configuration errors, transactional errors) is successful.
<code>optional</code>	Sets reduced OCSF checking of certificates. The certificate is accepted unless one or more of these validation errors occur: ■ Response signature invalid. ■ Nonce in response mismatch. ■ Certificate revoked, but only when revocation checking is possible. if revocation check is not possible, the certificate is still accepted if there are no other validation errors.

Examples

Setting reduced OCSF checking of certificates:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# ocsp enforcement-level optional
```

Setting strict OCSF checking of certificates:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# ocsp enforcement-level strict
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-ta-<TA-NAME></code>	Administrators or local user group members with execution rights for this command.

ocsp url

ocsp url {primary | secondary} <URL>

```
no obsp url {primary | secondary}
```

Description

Configures the OSCP responder URLs that the current TA profile uses to verify the revocation status of an X.509 digital certificate. These URLs override the OSCP responder URL contained within the peer certificate being verified (as well as URLs defined in any intermediate CAs in the chain of trust).

If no OSCP responder URLs are defined for a TA profile (default setting), then the OSCP responder URL in the peer certificate is used for revocation status checking. (The OSCP responder URL is contained in a certificate's Authority Information Access field, which is an X.509 v3 certificate extension.)

The `no` form of this command deletes the specified OSCP responder URL (primary or secondary) from the current TA profile.

Parameter	Description
{primary secondary} <URL>	Specify the HTTP URL of the primary or secondary OSCP responder using either a fully qualified domain name or IPv4 address.

Examples

Defining the primary OSCP URL for the TA profile **root-cert**:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# revocation-check obsp
switch(config-ta-root-cert)# obsp url primary http://osp-server.site.com
```

Removing the primary OSCP URL from the TA profile **root-cert**:

```
switch(config)# crypto pki ta-profile oot-cert
switch(config-ta-root-cert)# revocation-check obsp
switch(config-ta-root-cert)# no obsp url primary
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-ta-<TA-NAME>	Administrators or local user group members with execution rights for this command.

osp vrf

```
osp vrf <VRF-NAME>
no osp vrf
```

Description

Sets the VRF that the switch uses to communicate with OCSP responders for OCSP checking. VRF mgmt is used by default.

The `no` form of this command resets the VRF to its default `mgmt`.

Parameter	Description
<code><VRF-NAME></code>	Specifies the name of the VRF the switch uses to communicate with OCSP responders. Default: <code>mgmt</code> .

Examples

Reverting the OCSP responder VRF to its default:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# no ocsf vrf
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-ta-<TA-NAME></code>	Administrators or local user group members with execution rights for this command.

revocation-check ocsf

```
revocation-check ocsf
no revocation-check
```

Description

Enables certificate revocation checking for the current profile using the online certificate status protocol (OCSP).

The `no` form of this command disables certificate revocation checking for the current profile.

Examples

Enabling revocation checking for the TA profile **root-cert**:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# revocation-check ocsf
```

Disabling revocation checking for the TA profile **root-cert**:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# no revocation-check
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-ta-<TA-NAME>	Administrators or local user group members with execution rights for this command.

show crypto pki application

show crypto pki application

Description

Shows certificate information for all features (applications) using leaf certificates that are managed by PKI.

Examples

Showing certificate information for all features (applications) using leaf certificates:

```
switch# show crypto pki application1

Associated Applications  Certificate Name      Cert Status
-----
https-server           local-cert            not configured, using local-cert
syslog-client          xhscert              valid
hsc                    xhscert              invalid, using local-cert
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show crypto pki certificate

show crypto pki certificate [<CERT-NAME> [plaintext | pem]]

Description

Shows a list of all configured leaf certificates, or detailed information for a specific leaf certificate.

Possible values for Cert Status are: CSR pending, expired, expires soon, installed, malformed, not yet known.

Possible values for EST Status are: enroll failed, enroll pending, enroll retrying, enroll success, n/a (certificate is not EST-enrolled), reenroll failed, reenroll pending, reenroll retrying.

Parameter	Description
<CERT-NAME>	Specifies the leaf certificate name. Range: 1 to 32 alphanumeric characters excluding "
plaintext	Shows certificate information in plain text.
pem	Shows certificate information in PEM format.

Examples

Showing a list of all configured leaf certificates:

```
switch# show crypto pki certificate
```

Certificate Name	Cert Status	EST Status	Associated Applications
device-identity	installed	n/a	none
pod01-99-1	installed	n/a	https-server, est-client
syslog-1	CSR pending	enroll retrying	syslog-client
leaf-cert1	installed	enroll success	none
leaf-cert2	CSR pending	enroll failed	none

Showing detailed information (in plaintext format) for leaf certificate pod01-99-1:

```
switch# show crypto pki certificate pod01-99-1 plaintext
```

```
Certificate Name: pod01-99-1
Associated Applications:
  https-server, est-client
Certificate Status: installed
EST Status: n/a
Certificate Type: regular
Intermediates:
  Subject: C = US, ST = CA, O = Company, OU = Lab-IT, CN = DeviceCA
  Issuer: C = US, ST = CA, O = Company, OU = Lab-IT, CN = Lab-CA
  Serial Number: 0x02
  Subject: C = US, ST = CA, O = Company, OU = Lab-IT, CN = Lab-CA
  Issuer: C = US, ST = CA, O = Company, OU = Lab-IT, CN = Lab-Root
  Serial Number: 0x01
Certificate:
  Data:
    Version: 1 (0x0)
    Serial Number: 14529416756121781768 (0xc9a2db8f3e3f4608)
  Signature Algorithm: sha256WithRSAEncryption
  Issuer: C=US, ST=CA, OU=Lab-IT, O=Company, CN=DeviceCA
  Validity
    Not Before: Jan 12 23:36:57 2018 GMT
    Not After : Nov  1 23:36:57 2020 GMT
  Subject: C=US, ST=CA, OU=Lab-IT, O=Company, CN=pod01-99-1
  Subject Public Key Info:
    Public Key Algorithm: rsaEncryption
    Public-Key: (2048 bit)
    Modulus:

      00:a0:cd:ef:1b:f9:b8:bd:39:fc:7a:0e:00:17:ff:
```

```

2b:72:d8:4e:d4:df:49:36:ca:3a:f9:05:05:d7:e3:
d1:97:29:71:e6:33:b8:bb:8e:f0:ee:a6:e4:4a:f8:
...
fe:dd:d9:a0:af:59:47:25:b4:34:06:af:03:1d:33:
30:c3:85:fe:5c:e7:19:7f:ff:3a:b2:21:b8:e8:ed:
83:09
Exponent: 65537 (0x10001)
Signature Algorithm: sha256WithRSAEncryption
39:f6:03:86:03:d9:05:61:39:25:5f:0d:75:cc:05:ae:04:7e:
4c:a3:13:0b:f0:1e:af:68:0e:40:9f:ed:48:b6:5e:56:8c:53:
46:5b:c9:a4:e0:b0:bc:31:4b:a7:5d:0a:ed:7c:9c:f6:bf:1e:
...
39:f5:26:58:68:e2:13:ec:94:ac:60:8e:4b:b0:ba:45:cf:d6:
6a:4b:9f:7d:ae:3f:e5:2e:81:fe:ac:b3:65:44:35:47:a5:2f:
89:e7:58:a0

```

Showing detailed information (in PEM format) for leaf certificate `leaf-cert1` with a status of `CSR pending`:

```

switch# show crypto pki certificate leaf-cert1 pem

Certificate Name: leaf-cert1

Associated Applications:
  syslog-client
Certificate Status: CSR pending
EST Status: enroll retrying
Certificate Type: regular
-----BEGIN CERTIFICATE REQUEST-----

MIICtTCCAzoCAQAwcDEWMBQGA1UEAxMNc3lzbG9nLTg0MBYGA1UECjMPQ
XJlYmEtUm9zZXZpbGx1MQ4wDAYDVQQKEyTESMBAGA1EBxMJU9zZXZpbG
xlMQswCQYDVQQLIEwJDQTELMAGA1UEBhMCVVMwggEiMSIb3DQEBARUAA4I
...
cw2ytN6Idgh81k59x6DH7V/eORaKd5lq+oO7nkr6+QBf5L3f5Kb+TOFio
lei+EdCHMxxc07MK0n3dkziSW25HFUGsyEXVMK+BiD3zbKDoUe6XVhvqI
mamXyghigLYDcbnsn6WVw==
-----END CERTIFICATE REQUEST-----

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show crypto pki ta-profile

`show crypto pki ta-profile [<TA-NAME>]`

Description

Shows a list of all configured TA profiles, or detailed information for a specific profile.



This command shows information for both directly-configured TA profiles and TA profiles that were dynamically downloaded from EST servers.

Parameter	Description
<TA-NAME>	Specifies the TA profile name. Range: 1 to 48 alphanumeric characters excluding ".".

Examples

Showing a list of all configured TA profiles:

```
switch# show crypto pki ta-profile
```

Profile Name	TA Certificate	Revocation Check
BASE_CA	Installed,valid	disabled
BASE02_CA	Installed,expired	disabled
root-cert	Installed,valid	OCSP
ROOT-A_CA	Not Installed	OCSP
EST-Service1	Installed,valid	None
EST-Service2	Installed,valid	None

Showing detailed information for TA profile **root-cert**:

```
switch# show crypto pki ta-profile root-cert
```

TA Profile Name : root-cert
Revocation Check : OCSP
OCSP Primary URL : http://ocsp1.domain.com
OCSP Secondary URL : Not Configured
OCSP Disable-nonce : false
OCSP Enforcement Level: strict
OCSP VRF : mgmt
TA Certificate: Installed and valid
Version: 3 (0x2)
Serial Number:
74:e6:6d:22:3f:52:cc:94:43:41:ab:66:a8:8d:47:b1
Signature Algorithm: sha1withRSAEncryption
Issuer: OU=DeviceTrust, OU=Operations, O=Site, C=US,
CN=Site Trusted Computing Root CA 1.0
Validity
Not Before: Sep 14 03:12:06 2007 GMT
Not After : Sep 14 03:21:14 2032 GMT
Subject: OU=DeviceTrust, OU=Operations, O=Site, C=US,
CN=Site Trusted Computing Root CA 1.0
Subject Public Key Info:
Public Key Algorithm: rsaEncryption
RSA Public Key: (2048 bit)
Modulus (2048 bit):
30:0d:06:09:2a:86:48:86:f7:0d:01:01:01:05:33:
03:82:01:0f:00:30:82:01:3a:02:82:01:01:00:ac:
3d:60:3a:2e:ca:a4:34:db:5c:3b:6b:07:df:73:62:
...
20:c8:df:63:14:5a:e8:d3:ea:83:d8:47:a3:b5:2e:
bb:64:51:f0:be:13:b6:91:e4:32:45:58:5e:1f:0d:
02:03:01:00:01

```

    Exponent: 65537 (0x10001)
X509v3 extensions:
    X509v3 Key Usage:
        Digital Signature, Certificate Signing, CRL Signing
    X509v3 Basic Constraints:
        CA:TRUE, pathlen:4
    X509v3 Subject Key Identifier:
        eb:d7:ec:db:8a:cb:f2:51:d5:06:e1:42:7b:39:a7:d0:1e:31:6e:bf

Signature Algorithm: sha1withRSAEncryption
1c:90:f3:a4:f0:0d:e2:e3:e9:ae:01:e1:7d:a7:13:e2:cc:0b:
17:31:26:92:a2:5d:1d:19:60:54:03:13:9b:e1:73:6c:e4:b3:
01:4f:4e:ae:61:bd:ae:b6:12:d3:ab:08:ae:8c:47:92:d7:0d:
...
ca:cf:11:78:55:6d:06:49:fa:d4:8d:f3:ef:7f:79:38:35:5d:
16:5a:57:7f:a8:dc:b0:f8:a2:04:0d:17:0b:bb:58:32:30:e0:
2d:a8:37:a2

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

ta-certificate

```
ta-certificate { [import [terminal]] | import {<REMOTE-URL> | <STORAGE-URL>} }
```

Description

Imports a CA certificate for use in the current TA profile. The certificate must be in PEM format. The PEM data must be delimited with these lines:

```

-----BEGIN CERTIFICATE-----
-----END CERTIFICATE-----

```



Only the first certificate in the PEM data is imported. Any additional certificates are ignored.

Parameter	Description
[import [terminal]]	Import the certificate by pasting PEM-format data at the console. Upon execution, the <code>config-cert-import</code> context is entered for certificate pasting. To complete certificate data entry press Control-D in your terminal program. Alternatively, the pasted certificate data can include at its end the delimiter <code>END_OF_CERTIFICATE</code> (after the <code>-----END CERTIFICATE-----</code> line), making entry of Control-D unnecessary.

Parameter	Description
<code>import <REMOTE-URL></code>	Import the certificate from a file on a remote TFTP or SFTP server. The URL syntax is: {tftp:// sftp://<USER>@} {<IP> <HOST>} [:<PORT>] [;blocksize=<SIZE>]/<FILE>
<code>import <STORAGE-URL></code>	Available on switch families that provide USB device file import capability, import the certificate from a file on a USB storage device inserted in the switch USB port. The URL syntax is usb:/<FILE>.

Example

Importing a certificate into the TA profile **root-cert** by pasting PEM-format certificate data at the console:

```
switch(config)# crypto pki ta-profile root-cert
switch(config-ta-root-cert)# ta-certificate import terminal
Paste the certificate in PEM format below, then hit enter and ctrl-D:
switch(config-ta-cert)# -----BEGIN CERTIFICATE-----
switch(config-ta-cert)# MIIDuTCCAqECCQCuoxeJ2ZNYcjANBgkqhkiG9w0BAQsFADCBQzELMAEBh
switch(config-ta-cert)# VVMxEzARBgNVBAgMCKNhbGlmb3JuaWExEDAOBgNVBACMB1JvY2tsDAKBg
switch(config-ta-cert)# BAoMA0hQTjEVMBMGA1UECwwMSFBOUm9zZXZpbGxlMSowKAYDVQOCG5zd
...
switch(config-ta-cert)# x3WFf3dFZ8o9sd5LVAHneH/ztb9MP34z+le1V346r12L2kpxmTOVJVyTO
switch(config-ta-cert)# BIzD/ST/HaWI+OS+S80rm93PSscEbb9GWk7vshh5EnW/moehBKcE40lzy
switch(config-ta-cert)# 3LvMLZcSSe5J2Ca2XIhfDme8UaNZ7syGYMSAW0nG7yYHWkEOQu9s
switch(config-ta-cert)# -----END CERTIFICATE-----
switch(config-ta-cert)#
The certificate you are importing has the following attributes:
Issuer: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,
       CN=site.com/emailAddress=test.ca@site.com
Subject: C=US, ST=CA, L=Rocklin, O=Company, OU=Site,
        CN=9000/emailAddress=test.ca@site.com
Serial Number: 12121221634631568498 (0xaea51217d5945772)

TA certificate import is allowed only once for a TA profile
Do you want to accept this certificate (y/n)? y
TA certificate accepted.
switch(config-ta-root-cert)#
```

Importing a certificate into the TA profile **root-cert2** from file `rcert2-data` on the USB device:

```
switch(config)# crypto pki ta-profile root-cert2
switch(config-ta-root-cert2)# ta-certificate import usb:/rcert2-data
The certificate you are importing has the following attributes:
Issuer: C=US, ST=California, L=Rocklin, O=Company, OU=Site,
       CN=site.com/emailAddress=test.ca@site.com
Subject: C=US, ST=California, L=Rocklin, O=Company, OU=Site,
        CN=9000/emailAddress=test.ca@site.com
Serial Number: 12121221634631568498 (0xaea51217d5945772)

TA certificate import is allowed only once for a TA profile
Do you want to accept this certificate (y/n)? y
TA certificate accepted.
switch(config-ta-root-cert2)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-ta-<TA-NAME>	Administrators or local user group members with execution rights for this command.

subject

```
subject [common-name <COMMON-NAME>] [country <COUNTRY>] [locality <LOCALITY>]
        [org <ORG-NAME>] [org-unit <ORG-UNIT>] [state <STATE>]
```

Description

Sets the subject fields for the current leaf certificate. If the `common-name` parameter is not specified, then you are prompted to define a value for each field. If a configured value exists for any field, it is presented as the default.

The subject fields of the default certificate `local-cert` cannot be changed.

Parameter	Description
<code>common-name <COMMON-NAME></code>	Specifies the common name.
<code>country <COUNTRY></code>	Specifies the country or region.
<code>locality <LOCALITY></code>	Specifies the locality such as city.
<code>org <ORG-NAME></code>	Specifies the organization.
<code>org-unit <ORG-UNIT></code>	Specifies the organizational unit.
<code>state <STATE></code>	Specifies the state.

Examples

Setting subject fields for the leaf certificate **leaf-cert**:

```
switch(config-cert-leaf-cert)# subject common-name Leaf01 country US
locality CA org Company org-unit Site state CA
```

Setting subject fields for the leaf certificate **leaf-cert** interactively:

```
switch(config-cert-leaf-cert)# subject
Do you want to use the switch serial number as the common name (y/n)? n
Enter Common Name : Leaf01
Enter Org Unit : Site
Enter Org Name : Company
Enter Locality : Rocklin
Enter State : CA
```

```
Enter Country : US
switch(config-cert-leaf-cert) #
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-cert- <i><CERT-NAME></i>	Administrators or local user group members with execution rights for this command.

PKI EST commands



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

arbitrary-label

```
arbitrary-label <LABEL>
no arbitrary-label
```

Description

Within the EST profile context, configures the generic optional label (also known as arbitrary label) to be concatenated to the EST server URL that is configured with the `url` command. There is no arbitrary label configured by default. Any existing arbitrary label is replaced by this command. The use of arbitrary labels is optional.

RFC 7030 allows the use of arbitrary labels so that one EST server may serve multiple CAs with the same server URL that gets concatenated with different arbitrary labels. The same label is used for every request made under a particular EST profile.

Some EST schemes use arbitrary labels in a more sophisticated way, defining different labels for different types of requests under the same EST profile. For example, the CA certificate request could use the generic label (configured with this `arbitrary-label` command), the certificate enrollment request could use the enrollment label (configured with the `arbitrary-label-enrollment` command), and the re-enrollment request could use the re-enrollment label (configured with the `arbitrary-label-reenrollment` command). Note that only one label of each of the three available types can be configured in any EST profile.

The no form of this command removes the generic arbitrary label.

Parameter	Description
<LABEL>	Specifies the generic arbitrary label. Range: Up to 64 characters.

Examples

Configuring the URL and generic arbitrary label. Note that with the URL and arbitrary label configured in this example, the final URL the switch uses to request CA certificates from the EST server is `https://est-service999.com/.well-known/est/rsa2048/cacerts`.

```
switch(config)# crypto pki est-profile EST-service1
switch(config)# url https://est-service999.com/.well-known/est
switch(config-est-EST-service1)# arbitrary-label rsa2048
```

Removing the generic arbitrary label:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# no arbitrary-label
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-est-<EST-NAME>	Administrators or local user group members with execution rights for this command.

arbitrary-label-enrollment

```
arbitrary-label-enrollment <LABEL>
no arbitrary-label-enrollment
```

Description

Within the EST profile context, configures the arbitrary enrollment label to be concatenated to the EST server URL that is configured with the `url` command. This label is specific to the enrollment operation. There is no arbitrary enrollment label configured by default. Any existing arbitrary enrollment label is replaced by this command. The use of arbitrary enrollment labels is optional.

When the enrollment label is not configured, the generic arbitrary label (created with the `arbitrary-label` command) is used (if configured) for enrollment.

RFC 7030 allows the use of arbitrary labels so that one EST server may serve multiple CAs with the same server URL that gets concatenated with different arbitrary labels. The same label is used for every request made under a particular EST profile.

Some EST schemes use arbitrary labels in a more sophisticated way, defining different labels for different types of requests under the same EST profile. For example, the CA certificate request could use the generic label (configured with the `arbitrary-label` command), the certificate enrollment request could use the

enrollment label (configured with this `arbitrary-label-enrollment` command), and the re-enrollment request could use the re-enrollment label (configured with the `arbitrary-label-reenrollment` command). Note that only one label of each of the three available types can be configured in any EST profile. The no form of this command removes the arbitrary enrollment label.

Parameter	Description
<code><LABEL></code>	Specifies the arbitrary enrollment label. Range: Up to 64 characters.

Examples

Configuring the arbitrary enrollment label:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# arbitrary-label-enrollment ipsec-v7
```

Removing the arbitrary enrollment label :

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# no arbitrary-label-enrollment
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-est-<EST-NAME></code>	Administrators or local user group members with execution rights for this command.

arbitrary-label-reenrollment

```
arbitrary-label-reenrollment <LABEL>
no arbitrary-label-reenrollment
```

Description

Within the EST profile context, configures the arbitrary re-enrollment label to be concatenated to the EST server URL that is configured with the `url` command. This label is specific to the re-enrollment operation. There is no arbitrary re-enrollment label configured by default. Any existing arbitrary re-enrollment label is replaced by this command. The use of arbitrary re-enrollment labels is optional.

When the re-enrollment label is not configured, the generic arbitrary label (created with the `arbitrary-label` command) is used (if configured) for re-enrollment.

RFC 7030 allows the use of arbitrary labels so that one EST server may serve multiple CAs with the same server URL that gets concatenated with different arbitrary labels. The same label is used for every request made under a particular EST profile.

Some EST schemes use arbitrary labels in a more sophisticated way, defining different labels for different types of requests under the same EST profile. For example, the CA certificate request could use the generic label (configured with the `arbitrary-label` command), the certificate enrollment request could use the enrollment label (configured with the `arbitrary-label-enrollment` command), and the re-enrollment request could use the re-enrollment label (configured with this `arbitrary-label-reenrollment` command). Note that only one label of each of the three available types can be configured in any EST profile.

The no form of this command removes the arbitrary re-enrollment label.

Parameter	Description
<code><LABEL></code>	Specifies the arbitrary re-enrollment label. Range: Up to 64 characters.

Examples

Configuring the arbitrary re-enrollment label:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# arbitrary-label-reenrollment ipsec-v7
```

Removing the arbitrary re-enrollment label :

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# no arbitrary-label-reenrollment
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-est-<EST-NAME></code>	Administrators or local user group members with execution rights for this command.

crypto pki est-profile

```
crypto pki est-profile <EST-NAME>
no crypto pki est-profile <EST-NAME>
```

Description

Creates a certificate Enrollment over Secure Transport (EST) profile and changes to the `config-est-<EST-NAME>` context for the profile. Each EST profile stores information about the EST service, including EST server URL. Up to 16 profiles can be created.

If the specified EST profile exists, this command changes to the `config-est-<EST-NAME>` context for the profile.

The `no` form of this command deletes the specified EST profile. It also deletes the TA profiles whose CA certificates were downloaded from the corresponding EST server, and the leaf certificates that were enrolled

using this EST profile.



The deletion of the related TA profiles and enrolled certificates is permanent. If the EST profile is in the startup configuration and the EST profile is deleted but this deletion is not updated in the startup configuration before a switch reboot, the EST profile will still exist after the reboot but the related TA profiles and enrolled certificates will not exist.

Parameter	Description
<code><EST-NAME></code>	Specifies the EST profile name. Range: Up to 32 alphanumeric characters (excluding ").

Examples

Creating EST profile **EST-Service1**:

```
switch(config)# crypto pki est-profile EST-Service1
switch(config-est-service1)#
```

Removing EST profile **service1**:

```
switch(config)# no crypto pki est-profile EST-Service1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

enroll est-profile

```
enroll est-profile <EST-NAME>
```

Description

Enrolls a leaf certificate through a remote EST (Enrollment over Secure Transport) server.

Per RFC 7030, EST enables clients to request certificate signing services over secure TLS connections. The switch generates a key pair and the corresponding CSR. The CSR is sent to the EST server to request signing, and the signed certificate is returned to the switch where it is validated. If the whole process succeeds, the certificate can be used as a leaf certificate on the switch. When the leaf certificate approaches its expiry date, it will be renewed automatically through the same EST server.

Each enrollment or re-enrollment attempt starts with a `/cacerts` request sent to the EST server to get the latest chain of CA certificates. After the enrollment or re-enrollment succeeds, this chain of CA certificates

will be compared with those downloaded previously from the same EST server. Updates will be made as appropriate.

The subject fields of the current leaf certificate must be defined before running this command. If the common name subject field is not configured, this command is rejected.

This command cannot be used to enroll or renew the default certificate "local-cert."

Parameter	Description
<code><EST-NAME></code>	Specifies an existing EST profile name. Range: Up to 32 alphanumeric characters (excluding ").

Example

Enrolling leaf certificate **leaf-cert1** through the EST server identified in EST profile `EST-service1`:

```
switch(config-cert-leaf-cert1)# enroll est-profile EST-service1
You are enrolling a certificate with the following attributes:
  Subject: C=US, ST=CA, L=Roseville, OU=Aruba-Roseville, O=Aruba,
          CN=leaf-cert1
  Key Type: RSA (2048 bits)

Continue (y/n)? y
Certificate enrollment via EST-service1 has been initiated.
Please use `show crypto pki certificate leaf-cert1` to check its status.

switch(config-cert-leaf-cert1)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-cert-<CERT-NAME></code>	Administrators or local user group members with execution rights for this command.

reenrollment-lead-time

```
reenrollment-lead-time <LEAD-TIME>
no reenrollment-lead-time
```

Description

Within the EST profile context, sets the certificate re-enrollment lead time which is the number of days before certificate expiry date that certificate re-enrollment will be initiated.

The no form of this command resets the EST server re-enrollment lead time to its default of 2 days.

Parameter	Description
<code><LEAD-TIME></code>	Specifies the certificate re-enrollment lead time in days. Range: 0 to 30 days. Default: 2 days.

Examples

Setting the certificate re-enrollment lead time to 15 days:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# reenrollment-lead-time 15
```

Resetting the certificate re-enrollment lead time to its default of 2 days :

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# no reenrollment-lead-time
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-est-<EST-NAME></code>	Administrators or local user group members with execution rights for this command.

retry-count

```
retry-count <RETRIES>
no retry-count
```

Description

Within the EST profile context, sets the maximum number of retries to be attempted after the initial certificate enrollment request fails.

The no form of this command resets the maximum number of certificate enrollment request retries to its default of 3.

Parameter	Description
<code><RETRIES></code>	Specifies the maximum number of certificate enrollment request retries. Range: 0 to 32 retries. Default: 3 retries.

Examples

Setting the retry count to 5 retries:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# retry-count 5
```

Resetting the retry count to its default of 3 retries:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# no retry-count
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-est- <i><EST-NAME></i>	Administrators or local user group members with execution rights for this command.

retry-interval

```
retry-interval <INTERVAL>  
no retry-interval
```

Description

Within the EST profile context, sets the interval at which a failed certificate enrollment request is retried. The no form of this command resets the enrollment request retry interval to its default of 30 seconds.

Parameter	Description
<i><INTERVAL></i>	Specifies the enrollment request retry interval in seconds. Range: 30 to 600 seconds. Default: 30 seconds.

Examples

Setting the certificate enrollment request retry interval to 45 seconds:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# retry-interval 45
```

Resetting the retry interval to its default of 30 seconds:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# no retry-interval
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-est-<EST-NAME>	Administrators or local user group members with execution rights for this command.

show crypto pki est-profile

show crypto pki est-profile [<EST-NAME>]

Description

Shows a list of all configured EST profiles, or detailed information for a specific profile.

Parameter	Description
<EST-NAME>	Specifies the EST profile name. Range: Up to 32 alphanumeric characters (excluding ").

Examples

Showing a list of all configured EST profiles:

```
switch# show crypto pki est-profile
Profile Name          Downloaded  Enrolled
TA Profiles  Certificates
-----
EST-service1         2           3
EST-service2         1           2
EST-service3         2           0
```

Showing detailed information for EST profile **EST-service1**:

```
switch# show crypto pki est-profile EST-service1
Profile Name          : EST-service1
Service VRF           : mgmt
Service URL            : https://est-service999.com
Arbitrary Label        : not configured
Arbitrary Label Enrollment : /ipsec-VP7
Arbitrary Label Reenrollment : not configured
Authentication Username : est1
Authentication Password :
  AQBapREALpWYm2z7L1LanOtR3vGkqhBNlhBUU2CuvQXUF/ggYgAAnAnGTnKq49P4c
  dNQ6UqPbjHL4XzCO0T04djkhsUXPKGfnsWuFEONveh+JbEobgKImfwJjc3eWHiaUb
  eNpPx2zN2Q1DdyxAAQi4rmKr8LITMTTmd7qr
Retry Interval        : 45 seconds
Retry Count           : 5 times
Reenrollment Lead Time : 2 days
Downloaded TA Profiles : 2
Enrolled Certificates :
  leaf-cert1
```

```
leaf-cert2
leaf-cert3
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

url

```
url <URL>
no url
```

Description

Within the EST profile context, configures the URL of the certificate enrollment EST server. This is not configured by default. Any existing URL is replaced by this command.

The no form of this command removes the EST server URL within the selected EST profile. The removal of the URL does not affect the TA profiles and enrolled certificates from the EST server.

Parameter	Description
<URL>	Specifies the EST server URL. Range: Up to 192 characters.

Usage

- The configuration and update of the EST profile URL triggers the sending of a `/cacerts` request to the EST server. A successful request will result in a chain of trusted CA certificates being downloaded from the EST server. Each CA certificate, either root CA certificates or intermediate CA certificates, will be saved as a TA profile, with TA profile name `<est-name>-est-taNN` with `NN` representing two numerical digits. This TA profile naming scheme with the `-est-taNN` suffix is reserved for TA profiles downloaded from EST servers.
- Upon connection with an EST server, the switch authenticates the server by validating the server certificate. For this validation to succeed, a TA profile needs to pre-exist in the switch with a CA certificate from the issuer chain of the server certificate. Once the server is authenticated, all CA certificates in its `/cacerts` response will be trusted, with no further validation occurring for them.
- The TA profiles with CA certificates downloaded from an EST server will have their revocation check set to OSCP, enforcement set to optional, and the OSCP VRF set to the same as that of the EST profile.

Examples

Configuring the EST server URL:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# url https://est-service999.com/.well-known/est
```

Removing the EST server URL:

```
switch(config)# crypto pki est-profile EST-service1  
switch(config-est-EST-service1)# no url
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-est- <i><EST-NAME></i>	Administrators or local user group members with execution rights for this command.

username

```
username <USERNAME> password [ciphertext <CIPHERTEXT-PASSWORD> |  
                               plaintext <PLAINTEXT-PASSWORD>]  
no username
```

Description

Within the EST profile context, configures the user account information for the EST server that is used to authenticate the switch before accepting requests from the switch. This is not configured by default. Any existing username and password is replaced by this command.

When entered without either optional `ciphertext` or `plaintext` parameters, the plaintext password is prompted for twice, with the characters entered masked with "*" symbols.

The no form of this command removes the user account information within the selected EST profile.

There are two ways the EST client on a CX switch can prove itself to an EST server: a certificate, and/or username and password. At least one of the two must be configured for the EST request to succeed. If both are configured, certificate authentication will be used. If a certificate is not configured or certificate authentication fails, and username and password is configured, the username and password will be sent to the EST server for authentication.

Parameter	Description
<i><USERNAME></i>	Specifies the EST server account user name. The exact user name requirements are set by the chosen EST service. Range: Up to 32 alphanumeric characters.
<code>ciphertext</code> <i><CIPHERTEXT-PASSWORD></i>	Specifies the EST server account password as Base64 ciphertext. No password prompts are provided and the ciphertext password is validated before the configuration is applied for the user.

Parameter	Description
	NOTE: The ciphertext password must be gotten from the EST service.
<code>plaintext <PLAINTEXT-PASSWORD></code>	Specifies the password without prompting. The password is visible as cleartext when entered but is encrypted thereafter. The exact password requirements are set by the chosen EST service. Range: Up to 64 alphanumeric characters.

Examples

Configuring an EST user with prompted cleartext password entry :

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# username est1 password
Enter password: *****
Confirm password: *****
switch(config-est-EST-service1)#
```

Configuring an EST user with direct cleartext password entry:

```
switch(config)# crypto pki est-profile EST-service2
switch(config-est-EST-service2)# username est1 password plaintext concept_leap739
```

Configuring an EST user with ciphertext password entry :

```
switch(config)# crypto pki est-profile EST-service3
switch(config-est-EST-service3)# username est1 password ciphertext
AQBpRALpWYm2z7L1LanOtR3vGkqhNlhBU2CuvQXUF/ggYgAAAHWaPqxU6nAnGTnKq49P4cdNQ6U
qPbjHL4XzO0T04djKUPKGfnsWuFEONveh+JbEobq63+1k80qBKImfwJjc3eWHiaUbeNpPx2zN2Q
1DdyxAAQi4rmKr8LITMTTmd7qr
```

Removing the EST user account information for EST profile EST-service2:

```
switch(config)# crypto pki est-profile EST-service2
switch(config-est-EST-service2)# no username
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-est-<EST-NAME></code>	Administrators or local user group members with execution rights for this command.

vrf

```
vrf <VRF-NAME>
no vrf
```

Description

Within the EST profile context, selects the VRF through which the EST server can be reached. Any existing VRF selection is replaced by this command. When this command is not used, VRF `mgmt` is used by default on switch families supporting the `mgmt` VRF, otherwise the default VRF named `default` is used.

The no form of this command selects the default VRF either `mgmt` or `default`.

Parameter	Description
<VRF-NAME>	Specifies the name of the VRF to use for EST server communication

Examples

Selecting VRF `it-services` for EST server communications:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# vrf it-services
```

Resetting the VRF to its default of `mgmt` for EST server communications:

```
switch(config)# crypto pki est-profile EST-service1
switch(config-est-EST-service1)# no vrf
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-est-<EST-NAME></code>	Administrators or local user group members with execution rights for this command.



On the 6000 and 6100 Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.



On the 4100i Switch Series, only the vrf named `default` is available. Replace any references to the `mgmt` or other VRFs with `default`.

Several measures can be taken to enhance switch security, including setting secure mode to enhanced in the Service OS. For maximum security, perform all the configuration described in this chapter.

Configuring enhanced security

Prerequisites

If you have switch configuration that you want to retain, create a backup. This procedure erases all configuration, including the current running configuration, the startup configuration, and all historical configuration checkpoints.

Procedure

1. Set enhanced security mode:
 - a. Reboot the switch into the Service OS with command `boot system serviceos`. If on an 8400 Switch with both Management Modules:
 - i. Issue the `boot` command only on the active Management Module. This command ensures that both Management Modules are booted into the Service OS.
 - ii. Perform steps b to e on both modules starting with the active module.
 - b. Log in to the Service OS as `admin`.
 - c. Enter command `secure-mode enhanced`.
 - d. When prompted about the mode change, respond with `y` for "yes."
 - e. Wait for the reboot and zeroization to complete. The switch firmware boots automatically.
2. Ensure adequate password requirements:
 - a. Before adding users, enable and configure password complexity as described in [password complexity](#). To maintain enhanced security, configure the `password complexity` subcommand settings no smaller than their defaults.
 - b. Configure passwords for all users, including `admin`. To make your password complexity settings applicable to the default admin user, change the admin password after enabling password complexity. The new admin password must respect your password complexity settings.
3. Ensure proper login management as follows:
 - a. Configure local user session management as described in [CLI user session management commands](#) using `cli-session` and its subcommands `max-per-user`, `timeout`, and `tracking-`

range to achieve the wanted configuration. To maintain enhanced security, configure `cli-session` subcommand settings no smaller than their defaults.

- b. Restrict remote SSH connections to only use certified crypto algorithms using `ssh certified-algorithms-only`.
 - c. Configure pre- and post-login banners using respectively, `banner motd`, and `banner exec`.
4. Ensure that the switch date and time is accurately set using `clock datetime <DATE> <TIME>`.
 5. When logging to a remote syslog server is required, ensure that the connection to the server is cryptographically secure. See [Configuring remote logging using SSH reverse tunnel](#).

To ensure that enhanced security is maintained, also respect these requirements:

- Do not configure remote logging with a remote server directly without setting up an SSH tunnel.
- Do not configure passwords and secret keys using the plaintext option.



When in enhanced security mode, the switch (Product OS) `start-shell` command is disabled for security purpose. If you attempt to use this command while in enhanced security mode, it is rejected and the following error message is displayed:

The `start-shell` command is not available in enhanced secure mode.



When in enhanced security mode, the following Service OS commands are disabled for security purposes: `config-clear`, `password`, `sh`, and `update`. If you attempt to use any of these Service OS commands while in enhanced security mode, the command is rejected and an error message is displayed.

password complexity

Syntax

```
password complexity
no password complexity
```

Description

Enters the password-complexity context (shown in the switch prompt as `config-pwd-cplx`) for the purpose of enabling and configuring password complexity. Password complexity enhances security by enforcing specific password complexity requirements. Password complexity is disabled by default and must be enabled by execution of the `enable` command.

The no form of this command reverts all settings to their default values and disables password complexity enforcement.



To ensure that enhanced security is maintained, it is recommended that you do not set any values to less than their defaults.



Password complexity applies only to local authentication. For remote authentication, you may choose to set up an equivalent of password complexity according to whatever is supported on your particular TACACS+ or RADIUS server.

Command context

```
config
```

Subcommands

These subcommands are available within the password complexity context (shown in the switch prompt as `config-pwd-cplx`).

`enable`

Enables password complexity enforcement. The enforcement only applies to passwords created after this enabling. Existing passwords are not checked against password complexity.

`disable`

Disables password complexity enforcement.

`[no] history-count <COUNT>`

Specifies the number of previous passwords checked to prevent excessive reuse. Not applicable when adding new users. The no form of this subcommand resets the value to its default. Default: 5. Range: 1 to 5.

`[no] minimum-length <LENGTH>`

Specifies the minimum password length. The no form of this subcommand resets the value to its default. Default: 8. Range: 1 to 32.

`[no] position-changes <POSITIONS>`

Specifies the minimum number of characters that must change in the new password compared to the previous password. Not applicable if no previous password exists, including when adding new users. The no form of this subcommand resets the value to its default. Default: 8. Range: 1 to 32.

The number of password position changes is based on the number of simple character insertions, deletions, or replacements. For example:

Old password: abCD4\$ New password: abCD\$ Position changes=1 ("4" deleted) Old password: abCD4\$ New password: abCDEF4\$ Position changes=2 ("EF" inserted) Old password: abCD4\$ New password: ebCD4\$1 Position changes=2 ("a" replaced with "e," "1" added) Old password: abCD4\$ New password: abC\$# Position changes=3 ("D4" deleted, "#" added)

`[no] lowercase-count <COUNT>`

Specifies the minimum lowercase character count for new passwords. The no form of this subcommand resets the value to its default. Default: 1. Range: 0 to 32.

`[no] uppercase-count <COUNT>`

Specifies the minimum uppercase character count for new passwords. The no form of this subcommand resets the value to its default. Default: 1. Range: 0 to 32.

`[no] numeric-count <COUNT>`

Specifies the minimum numeric digit count for new passwords. The no form of this subcommand resets the value to its default. Default: 1. Range: 0 to 32.

`[no] special-char-count <COUNT>`

Specifies the minimum special character count for new passwords. The no form of this subcommand resets the value to its default. Default: 1. Range: 0 to 32.

`list`

List the subcommands available within the password complexity context.

`exit`

Exits the password complexity context.

`end`

Exits the password complexity context and then the config context.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- Password complexity is only for use with plaintext passwords. With password complexity enabled, existing ciphertext passwords will continue working until a password is changed. All new passwords must

be entered in plaintext form and be compliant with your password complexity configuration.

- The effective minimum password length may be larger than the configured `minimum-length` value. The effective minimum password length is calculated as follows:

LARGEST-of: (minimum-length, position-changes, (SUM-of: lowercase-count+uppercase-count+numeric-count+special-char-count))

For example, with `minimum-length=8`, and `position-changes=10` (and the sum of the other four count settings ≤ 9), the **effective minimum-length is 10** (because `position-changes` is largest). Similarly, with a `minimum-length=12`, `position-changes=8`, `lowercase-count=8`, `uppercase-count=4`, `numeric-count=1`, `special-char-count=1`, the **effective minimum-length is 14** ($8+4+1+1=14$) (because sum off the four counts is largest).

Examples

Configuring password complexity settings with an effective minimum length of 10 (because `position-changes` is 10):

```
switch(config)# password complexity
switch(config-pwd-cplx)# history-count 3
switch(config-pwd-cplx)# minimum-length 8
switch(config-pwd-cplx)# position-changes 10
switch(config-pwd-cplx)# lowercase-count 2
switch(config-pwd-cplx)# uppercase-count 2
switch(config-pwd-cplx)# numeric-count 2
switch(config-pwd-cplx)# special-char-count 2
switch(config-pwd-cplx)# enable
switch# exit
```

Configuring password complexity settings with an effective minimum length of 14 (because the sum of the four count items is 14):

```
switch(config)# password complexity
switch(config-pwd-cplx)# history-count 4
switch(config-pwd-cplx)# minimum-length 12
switch(config-pwd-cplx)# position-changes 8
switch(config-pwd-cplx)# lowercase-count 8
switch(config-pwd-cplx)# uppercase-count 4
switch(config-pwd-cplx)# numeric-count 1
switch(config-pwd-cplx)# special-char-count 1
switch(config-pwd-cplx)# enable
switch# exit
```

Enabling password complexity (with default settings) and changing a user (admin1) password successfully but failing to change another user (admin2) password due to not meeting complexity requirements:

```
switch(config)# password complexity
switch(config-pwd-cplx)# enable
switch(config-pwd-cplx)# exit
switch(config)#
switch(config)# user admin1 password
Changing password for user admin1
Enter old password:*****
Enter new password:*****
Confirm new password:*****
switch(config)#
switch(config)# user admin2 password
```

```

Changing password for user admin2
Enter old password:*****
Enter new password:*****
Confirm new password:*****
User password not changed.
The new password does not meet one or more of the following complexity requirements:
Minimum length           : 8
Position changes         : 8
Numeric count            : 1
Lowercase count          : 1
Uppercase count          : 1
Special character count  : 1
switch(config)#

```

With password complexity already enabled, attempting to change an existing user password but failing because the new password is identical to a recently used one (`history-count`).

```

switch(config)# user admin1 password
Changing password for user admin1
Enter old password:*****
Enter new password:*****
Confirm new password:*****
User password not changed.
The new password is the same as a recently used password.
switch(config)#

```

With password complexity already enabled, creating a new admin user (admin3) with a plaintext password that meets complexity requirements.

```

switch(config)# user admin3 group administrators password
Adding user admin3
Enter password:*****
Confirm password:*****
switch(config)#

```

With password complexity already enabled, attempting to create a new admin user (admin4) with a ciphertext password but failing because ciphertext passwords are not supported with password complexity enabled.

```

switch(config)# user admin4 group administrators password ciphertext AQBapPd...==
Ciphertext passwords cannot be used when password complexity is enabled.
switch(config)#

```

Configuring remote logging using SSH reverse tunnel

Logging to a remote syslog server can be made cryptographically secure by using SSH reverse tunnel. The `syslog` daemon on the switch forwards log messages to the SSH tunnel, and the SSH tunnel endpoint on the remote server host forwards messages to the listening `syslog` server.



This procedure includes sample configuration commands for a user-supplied syslog server based on Ubuntu 14.04.5 LTS with `rsyslog`. It is up to the user to check their server documentation and adjust the sample commands as required. Optionally see your server documentation for information on how to use the `systemd` and `autossh` services to automatically restore the SSH tunnel after system reboot.

Prerequisites

The user-supplied remote syslog server must be on a network that can reach the switch management interface.

Procedure

1. Configure SSH server on the switch.
 - a. Enter these commands (although this example uses the mgmt VRF, other VRFs can be used):

```
switch(config)# interface mgmt
switch(config-if-mgmt)# no shutdown
switch(config-if-mgmt)# ip address <switch_mgmt_IP>
switch(config-if-mgmt)# exit
switch(config)# ssh server vrf mgmt
```
 - b. If public key authentication is desired for remote SSH users, configure it on the switch:

```
switch(config)# user admin authorized-key <PUBKEY>
```
2. Configure logging on the switch to forward to localhost:

```
switch(config)# logging localhost tcp <switch_tcp_port> vrf mgmtinclude-auditables
events
```
3. Configure the `rsyslog` server on the remote host:
 - a. Make `rsyslog` accept TCP connections and specify the log file, by adding the following to `/etc/rsyslog.conf`:

```
$ModLoad imtcp
$InputTCPServerRun <server_tcp_port>
$template RemoteLogs, "/var/log/remote.log"
*. * ?RemoteLogs
```
 - b. To activate the added configuration, restart the `rsyslog` server:

```
root@Ubuntu4479:~#sudo service rsyslog restart
```
4. Establish an SSH reverse tunnel from the remote host to the switch:

```
root@Ubuntu4479:~#ssh -nNTx -R
<switch_tcp_port>:127.0.0.1:<server_tcp_port>
admin@<switch_mgmt_IP>
```

CLI user session management commands

cli-session

```
cli-session
no cli-session
```

Description

Enters the CLI session context (shown in the switch prompt as `config-cli-session`) for the purpose of configuring CLI user session management. Session management enhances security by enforcing specific CLI user session requirements. The following information is provided at time of successful login:

- When applicable, the number of failed login attempts since the most recent successful login.
- The date, time, and location (console or IP address or hostname) of the most recent previous successful login.
- The count of successful logins within the past (configurable) time period.

For example:

```
switch login: admin
Password:
```

```
There were 3 failed login attempts since the last successful login
Last login: 2019-04-20 08:51:33 from the console
User "admin" has logged in 73 times in the past 30 days
```

The no form of this command disables concurrent CLI user session restrictions and reverts `timeout` and `tracking-range` to their default values.



To ensure that enhanced security is maintained, it is recommended that you keep CLI user session management fully enabled by setting `max-per-user` to a nondefault value.



The `cli-session` command applies only to SSH/console login connection types. It does not apply to other connection types such as REST.

Subcommands

These subcommands are available within the CLI session context.

```
[no] max-per-user <SESSIONS>
```

Specifies the maximum number of concurrent CLI sessions per user. The no form of this subcommand disables concurrent CLI user session restrictions. Default: Disabled (no value). Range: 1 to 5.



When the same user name is configured for both local and remote authentication, both users, regardless of privilege level, are considered to be the same user for the purpose of counting concurrent CLI sessions. For example, with `max-per-user` set to 1 and user `admin1` configured for local and remote authentication, only the local user `admin1` or the remote user `admin1` can be logged in at any given moment. Both `admin1` users cannot be logged in simultaneously unless `max-per-user` is increased to at least 2.

```
[no] timeout <MINUTES>
```

Specifies the number of minutes a CLI session can be idle before the session is automatically terminated and the user is logged out. A value of 0 minutes disables the session timeout. The no form of this subcommand sets the timeout value to the default. Default 30: Range 0 to 4320.



This subcommand is the recommended replacement for the `session-timeout` command.

```
[no] tracking-range <DAYS>
```

Specifies the maximum number of days to track CLI user session logins. The no form of this subcommand resets the value to its default. Default 30: Range 1 to 30.

```
exit
```

Exits the CLI session context.

```
end
```

Exits the CLI session context and then the config context.

Examples

Configuring CLI user session settings for a maximum of one concurrent session, a 20-minute timeout, and tracking for a maximum of 25 days.


```
switch(config)# cli-session
switch(config-cli-session)# max-per-user 1
switch(config-cli-session)# timeout 20
switch(config-cli-session)# tracking-range 25
switch# exit
```

After successful earlier logins, logging in from the console without any intervening unsuccessful logins.

```
switch login: admin1
Password:

Last login: 2019-04-15 14:10:21 from the console
User 'admin1' has logged in 65 times in the past 25 days
```

Attempting to log in as admin1 when already logged in as admin1 from elsewhere.

```
switch login: admin1
Password:
Too many logins for 'admin1'
```

After successful earlier logins, attempting to log in twice with an invalid password, followed by a successful login.

```
switch login: admin1
Password:

Login incorrect
switch login: admin1
Password:

Login incorrect
switch login: admin1
Password:

There were 2 failed login attempts since the last successful login
Last login: 2019-04-15 17:22:45 from 192.168.1.1
User 'admin1' has logged in 72 times in the past 25 days
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

Port access and Private VLAN interoperability considerations

See also the *Private VLAN* section in the *Layer 2 Bridging Guide*.

- RADIUS server authorized VLANs for a client can be a member of the Private VLAN domain, meaning that the applied VLAN on the client port can be a `primary`, `isolated`, or `community` VLAN, based on the `private-vlan-type` associated with that VLAN.
- RADIUS sever authorization attributes can include "`private-vlan port-type`" configuration using the VSA-ID:64 "Aruba-PVLAN-Port-Type" which means that the client on-boarded port can be dynamically applied with `private-vlan port-type` as "`promiscuous`" or "`secondary`."
- The VLANs applied from local or downloadable user roles can be a member of the Private VLAN (`primary`, `isolated`, or `community` VLAN), based on the `private-vlan-type` associated with that VLAN.
- More than one secondary VLAN of the same PVLAN domain cannot be applied to the clients on-boarded on same port.
- The `private-vlan port-type` configuration (`promiscuous` or `secondary`) can be applied for a client on-boarded on a port from a local or downloadable user role. **Note:** The `private-vlan port-type` must be the same for all clients on-boarded on a particular port.
- The Private VLAN (`primary`, `isolated`, or `community`) and the `private-vlan port-type` (`promiscuous` or `secondary`) will be applied on the client port as part of the authorization process, whereas the authentication methods remain the same (802.1X, Mac authentication, or device profile).
- The authorization process of applying the Private VLANs of `primary`, `isolated`, or `community` type and the `private-vlan port-type` of `promiscuous` or `secondary` on the port, will succeed only when the applied configurations do not violate any of the Private VLAN restrictions. Otherwise the authorization process will fail and all clients on-boarded on that port will change to the un-authorized state. For more information on PVLAN restrictions, see the *Private VLAN* section in the *Layer 2 Bridging Guide*.
- Private VLAN and port type can be configured on a port enabled with port-security.
- Features such as Port-Security, MAC lockout, and MAC lock-down are agnostic to Private VLAN. The configured MAC address for such features can belong to a VLAN of type `primary`, `isolated`, or `community` and the `private-vlan port-type` can be `promiscuous` or `secondary`.

A basic port access role with private vlan can be created as follows:

```
switch(config)# port-access role Role1
switch(config-pa-role)# private-vlan port-type secondary
switch(config-pa-role)# vlan access 100
switch(config-pa-role)# exit
switch(config)# show port-access role name Role1
```

Role Information:


Name : Role1

```
Type : local
-----
Reauthentication Period      :
Cached Reauthentication Period :
Authentication Mode          :
Session Timeout              :
Client Inactivity Timeout    :
Description                  :
Gateway Zone                  :
UBT Gateway Role              :
UBT Gateway Clearpass Role   :
Access VLAN                   : 100
Native VLAN                   :
Allowed Trunk VLANs           :
Access VLAN Name              :
Native VLAN Name              :
Allowed Trunk VLAN Names      :
VLAN Group Name               :
MTU                           :
QOS Trust Mode                :
STP Administrative Edge Port  :
PoE Priority                   :
PVLAN Port Type               : secondary
Captive Portal Profile        :
Policy                        :
GBP                           :
Device Type                   :
```

Port access 802.1X authentication

IEEE 802.1X is a standard for port-based authentication. This standard provides administrators with an authentication mechanism for devices trying to access a LAN or WLAN. 802.1X defines the encapsulation of the Extensible Authentication Protocol (EAP) over IEEE 802, which is known as EAP over LAN (EAPOL).

802.1X port-based authentication provides port-level security. It allows LAN access only on ports where a single 802.1X-capable client (supplicant) has entered authorized RADIUS user credentials. 802.1X authentication is recommended for applications where only one client can connect to the port at a time. Using this option, the port processes all IP traffic as if it comes from the same client.

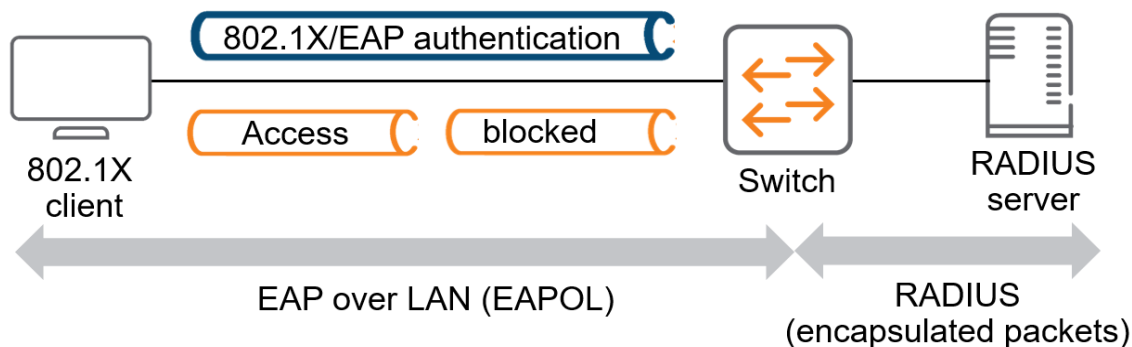

802.1X authentication involves the following entities:

- **Supplicant:** A client device that tries to access the LAN.
- **Authenticator:** A network device (typically a switch) that authenticates the supplicant.
- **Authentication Server:** A host running software supporting the RADIUS and EAP protocols that provides an authentication service to the authenticator.

Until the supplicant is authenticated, the authenticator allows only EAPOL traffic through the port to which the supplicant is connected. Only after the authentication is successful, the authenticator allows normal traffic

f from the supplicant.

802.1X requires a supplicant (client), authenticator (switch), and authentication server (RADIUS). Aruba ClearPass provides a RADIUS server, as well as other capabilities for monitoring and managing user access.

You can alternatively use a third-party RADIUS server such as Microsoft Network Policy Server (NPS) or an open source server such as FreeRADIUS.

Port access 802.1X authentication commands

aaa authentication port-access dot1x authenticator

```
aaa authentication port-access dot1x authenticator {enable | disable}  
no aaa authentication port-access dot1x authenticator {enable | disable}
```

Description

Enables or disables 802.1X authentication globally or at the port-level.

The `no` form of the command deletes global 802.1X configuration details and disables 802.1x authentication.

Examples

Enabling 802.1X authentication globally:

```
switch(config)# aaa authentication port-access dot1x authenticator enable
```

Disabling 802.1X authentication globally:

```
switch(config)# aaa authentication port-access dot1x authenticator disable
```

Deleting and disabling global 802.1X authentication:

```
switch(config)# no aaa authentication port-access dot1x authenticator
```

Enabling 802.1X authentication on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator enable
```

Disabling 802.1X authentication on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator disable
```

Deleting and disabling 802.1X authentication configuration on a port:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator auth-method

```
aaa authentication port-access dot1x authenticator auth-method eap-radius
no aaa authentication port-access dot1x authenticator auth-method eap-radius
```

Description

Configures the authentication mechanism used to control access to the network. The configured authentication method will be used to authenticate 802.1X clients.

The `no` form of the command resets the authentication mechanism to the default, `eap-radius`.

Parameter	Description
<code>eap-radius</code>	Specifies the EAP RADIUS as the 802.1X authentication method.

Examples

Enabling the EAP RADIUS 802.1X authentication method on the switch:

```
switch(config)# aaa authentication port-access dot1x authenticator auth-method eap-radius
```

Resetting the EAP RADIUS 802.1X authentication method on the switch:

```
switch(config)# no aaa authentication port-access dot1x authenticator auth-method eap-radius
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator cached-reauth

```
aaa authentication port-access dot1x authenticator cached-reauth
no aaa authentication port-access dot1x authenticator cached-reauth
```

Description

Enables cached reauthentication on a port. Cached reauthentication allows 802.1X reauthentications to succeed when the RADIUS server is unavailable. Users already authenticated retain their currently assigned RADIUS attributes.

The `no` form of the command disables the cached reauthentication on a port.

Examples

Enabling cached reauthentication on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator cached-reauth
```

Disabling cached reauthentication on a port:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator cached-reauth
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator cached-reauth-period

```
aaa authentication port-access dot1x authenticator cached-reauth-period <PERIOD>
no aaa authentication port-access dot1x authenticator cached-reauth-period
```

Description

Configures the period during which an authenticated client, which has failed to reauthenticate because the RADIUS server is unreachable, remains authenticated.

The `no` form of the command resets the cached reauthentication period to the default, 30 seconds.

Parameter	Description
<PERIOD>	Specifies the cached reauthentication period (in seconds). Default: 30. Range: 30 to 86400.

Examples

Configuring the cached reauthentication period on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator cached-reauth-period 300
```

Resetting the cached reauthentication period to the default value:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator cached-reauth-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator discovery-period

```
aaa authentication port-access dot1x authenticator discovery-period <PERIOD>  
no aaa authentication port-access dot1x authenticator discovery-period
```

Description

Configures the period the port waits to retransmit the next EAPOL request identity frame on an 802.1X enabled port that has no authenticated clients.

The **no** form of the command resets the discovery period to the default, 30 seconds.

Parameter	Description
<PERIOD>	Specifies the discovery period (in seconds). Default: 30. Range: 1 to 65535.

Examples

Configuring the discovery period on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator discovery-period 120
```

Resetting the discovery period to the default value:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator discovery-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator eapol-timeout

aaa authentication port-access dot1x authenticator eapol-timeout <EAPOL-TIMEOUT>
no aaa authentication port-access dot1x authenticator eapol-timeout

Description

Configure the period the switch waits for a response from a client before retransmitting an EAPOL PDU. If the value is 0, the time period is calculated as per RFC 2988.



As per RFC 2988 2.1: Before Round-Trip Time (RTT) measurement, set Retransmission Timeout (RTO) to 3 seconds for initial retransmission and then double the RTO to provide back off as per section 5.5. Limit the maximum RTO (RTOmax) to 20 seconds as per section 4.3 of RFC 3748.

The **no** form of the command resets the timeout period to the default.

Parameter	Description
<EAPOL-TIMEOUT>	Specifies the EAPOL timeout period (in seconds). Range: 1 to 65535.

Examples

Configuring EAPOL timeout on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator eapol-timeout 120
```

Resetting the EAPOL timeout to the default value:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator eapol-timeout
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator max-eapol-requests

```
aaa authentication port-access dot1x authenticator max-eapol-requests <MAX-EAPOL-REQUESTS>
no aaa authentication port-access dot1x authenticator max-eapol-requests
```

Description

Configures the number of EAPOL requests to send to a supplicant that must time out before authentication fails and the authentication session ends.

The `no` form of the command resets the maximum number of EAPOL requests to the default, 5.

Parameter	Description
<MAX-EAPOL-REQUESTS>	Specifies the maximum number of EAPOL requests. Default: 5. Range: 1 to 10.

Examples

Configuring maximum EAPOL requests on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator max-eapol-requests 3
```

Resetting the maximum EAPOL requests on a port to default:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator max-eapol-requests
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator max-retries

```
aaa authentication port-access dot1x authenticator max-retries <max-retries>
no aaa authentication port-access dot1x authenticator max-retries
```

Description

Configures the maximum number of retries that the switch attempts to authenticate a client on a port before marking the client as unauthenticated.

The `no` form of the command resets the maximum number of retries to the default, 2.

Parameter	Description
<code><max-retries></code>	Indicates the number of authentication attempts. Default: 2. Range: 1 to 10.

Examples

Configuring maximum authentication attempts on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator max-retries 5
```

Resetting the maximum authentication attempts on a port to default:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator max-retries
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator quiet-period

```
aaa authentication port-access dot1x authenticator quiet-period <PERIOD>  
no aaa authentication port-access dot1x authenticator quiet-period
```

Description

Configures the period during which the port does not try to acquire a supplicant. This period begins after the last authentication attempt, authorized by the maximum retries parameter, fails.

You can configure the number of maximum retries with the `aaa authentication port-access dot1x authenticator max-retries` command.

The `no` form of the command resets the quiet period to the default, 60 seconds.

Parameter	Description
<code><PERIOD></code>	Specifies the quiet period (in seconds). Default: 60. Range: 0 to 65535.

Examples

Configuring quiet period on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator quiet-period 100
```

Resetting the quiet period on a port to default:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator quiet-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator radius server-group

```
aaa authentication port-access dot1x authenticator radius server-group <GROUP-NAME>  
no aaa authentication port-access dot1x authenticator radius server-group
```

Description

Configures the switch to use an existing RADIUS server group for 802.1X authentication.

The **no** form of the command resets the server group to the default, **radius**.

Parameter	Description
<GROUP-NAME>	Specifies the name of the RADIUS server group.

Examples

Configuring the switch to use RADIUS server group **employee**:

```
switch(config)# aaa authentication port-access dot1x authenticator radius server-group employee
```

Resetting RADIUS server group configuration to default:

```
switch(config)# no aaa authentication port-access dot1x authenticator radius server-group
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator reauth

```
aaa authentication port-access dot1x authenticator reauth
no aaa authentication port-access dot1x authenticator reauth
```

Description

Enables periodic reauthentication of authenticated clients on the port.
The `no` form of the command disables periodic reauthentication.

Examples

Enabling periodic reauthentication on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator reauth
```

Disabling periodic reauthentication on a port:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator reauth
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access dot1x authenticator reauth-period

```
aaa authentication port-access dot1x authenticator reauth-period <PERIOD>
no aaa authentication port-access dot1x authenticator reauth-period
```

Description

Configures the period after which the authenticated clients are reauthenticated on the port. You must enable reauthentication on the port before configuring the reauthentication period.

The `no` form of the command resets the reauthentication period to the default, 3600 seconds.

Parameter	Description
<code><PERIOD></code>	Specifies the reauthentication period (in seconds). Default: 3600. Range: 1 to 65535.

Examples

Configuring reauthentication period on a port:

```
switch(config-if)# aaa authentication port-access dot1x authenticator reauth-period 100
```

Resetting the reauthentication period to the default value:

```
switch(config-if)# no aaa authentication port-access dot1x authenticator reauth-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

clear dot1x authenticator statistics interface

```
clear dot1x authenticator statistics [interface <IF-NAME>]
```

Description

Clears the 802.1X authentication statistics associated with the port and all the authenticator clients attached to this port.

If no interface is specified, the statistics is cleared for all 802.1X enabled ports.

Parameter	Description
<code><IF-NAME></code>	Specifies the interface name.

Examples

Clearing authentication statistics on a port (6200 and 6300 Switch Series):

```
switch# clear dot1x authenticator statistics interface 1/1/1
```

Clearing authentication statistics on a port (6400 Switch Series):

```
switch# clear dot1x authenticator statistics interface 1/3/1
```

Clearing authentication statistics on all ports:

```
switch# clear dot1x authenticator statistics
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show aaa authentication port-access dot1x authenticator interface client-status

```
show aaa authentication port-access dot1x authenticator interface {all|<IF-NAME>}  
client-status [mac <MAC-ADDRESS>]
```

Description

Shows information about active 802.1X authentication sessions. The output can be filtered by interface or MAC address.

Parameter	Description
all	Specifies all interfaces.
<IF-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing client status information for all ports.

```
switch# show aaa authentication port-access dot1x authenticator interface all  
client-status
```

Client FE:04:D7:50:89:37, johndoe, 1/1/1

=====

Authentication Details

Status : Authenticated
Type : Pass-Through
EAP-Method : MD5
Time Since Last State Change : 10s

Authentication Statistics

Authentication : 0
Authentication Timeout : 0
EAP-Start While Authenticating : 0
EAP-Logoff While Authenticating : 0
Successful Authentication : 0
Failed Authentication : 0
Re-Authentication : 0
Successful Re-Authentication : 0
Failed Re-Authentication : 0
EAP-Start When Authenticated : 0
EAP-Logoff When Authenticated : 0
Re-Auths When Authenticated : 0
Cached Re-Authentication : 0

Client 9A:B4:59:97:D0:7E, janedoe, 1/1/1

=====

Authentication Details

Status : Authenticated
Type : Pass-Through
EAP-Method : TLS
Time Since Last State Change : 5s

Authentication Statistics

Authentication : 0
Authentication Timeout : 0
EAP-Start While Authenticating : 0
EAP-Logoff While Authenticating : 0
Successful Authentication : 0
Failed Authentication : 0
Re-Authentication : 0
Successful Re-Authentication : 0
Failed Re-Authentication : 0
EAP-Start When Authenticated : 0
EAP-Logoff When Authenticated : 0
Re-Auths When Authenticated : 0
Cached Re-Authentication : 0

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authentication port-access dot1x authenticator interface port-statistics

show aaa authentication port-access dot1x authenticator interface {all|<IF-NAME>} port-statistics

Description

Shows information about 802.1X ports. The output can be filtered by interface.

Parameter	Description
all	Specifies all interfaces.
<IF-NAME>	Specifies the interface name.

Examples

Showing information for all ports.

```
switch# show aaa authentication port-access dot1x authenticator interface all port-statistics
```

```
Port 1/1/1
=====
```

```
Client Details
```

```
-----
```

```
Number of Clients           : 1
Number of Authenticated Clients : 1
Number of Unauthenticated Clients : 0
```

```
Statistics
```

```
-----
```

```
EAPOL Frames Received           : 4
EAPOL Frames Transmitted         : 3
EAPOL Start Frames Received      : 1
EAPOL Logoff Frames Received     : 0
EAPOL Response ID Frames Received : 2
EAPOL Response Frames Received   : 1
EAPOL Request ID Frames Transmitted : 2
EAPOL Request Frames Transmitted : 1
EAPOL Invalid Frames Received    : 0
EAPOL EAP Length Error Frames Received : 0
EAPOL Last Received Frame Version : 0
EAPOL Last Received Frame Client MAC : 0
```

```
Port 1/1/2
=====
```

```
Client Details
```

```
-----
```

```
Number of Clients           : 1
Number of Authenticated Clients : 1
Number of Unauthenticated Clients : 0
```



```

Statistics
-----
EAPOL Frames Received           : 4
EAPOL Frames Transmitted        : 3
EAPOL Start Frames Received     : 1
EAPOL Logoff Frames Received    : 0
EAPOL Response ID Frames Received : 2
EAPOL Response Frames Received  : 1
EAPOL Request ID Frames Transmitted : 2
EAPOL Request Frames Transmitted : 1
EAPOL Invalid Frames Received   : 0
EAPOL EAP Length Error Frames Received : 0
EAPOL Last Received Frame Version : 0
EAPOL Last Received Frame Client MAC : 0

```

Command History


Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port access MAC authentication

MAC authentication is designed to be used at the edge of a network. It provides port-based security measures for protecting private networks and switches from unauthorized access. Because this method does not require clients to run special supplicant software (unlike 802.1X authentication), it is suitable to be used in legacy systems, IoT devices, and temporary access situations where introducing supplicant software is not an attractive option. Only a MAC address is required for authentication. MAC authentication allows clients to move between switch ports without having to reauthenticate.

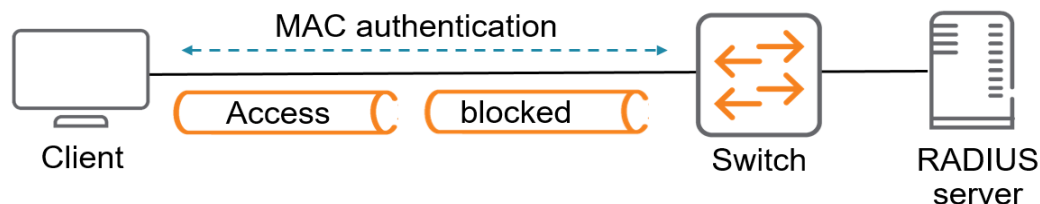

MAC authentication relies on a RADIUS server to authenticate clients. This technique simplifies access security management by using a master database on a single server to control client access. Up to three RADIUS servers can be used for backup in case access to the primary server fails. It also means that the same credentials can be used for authentication, regardless of which switch or switch port is the current access point into the LAN.

On a port configured for MAC authentication, the switch operates as a port-access authenticator using a RADIUS server, and the Challenge-Handshake Authentication Protocol (CHAP) and Password Authentication Protocol (PAP) protocols. Inbound traffic is processed by the switch alone, until authentication occurs.

Some traffic from the switch to an unauthorized client is supported (for example, broadcast or unknown destination packets) before authentication occurs.

How MAC authentication works

MAC authentication grants access to a secure network by authenticating devices. When a device connects to the switch, either by direct link or through the network, the switch forwards the device MAC address to the RADIUS server for authentication. The RADIUS server uses the device MAC address as the user name and password, and grants or denies network access in the same way that it does for clients capable of interactive logons. The process does not use a client device configuration or a logon session. MAC authentication is well suited for clients not capable of providing interactive logons, such as telephones, printers, and wireless access points. Also, because most RADIUS servers allow for authentication to depend on the source switch and port through which the client connects to the network, you can use MAC authentication to lock a particular device to a specific switch and port.



802.1X port access and MAC authentication can be configured at the same time on a port. A total of 32 clients can be configured per port and 1024 clients on the entire switch, irrespective of the authentication method. After the limit of 1024 clients is reached, no additional authentication clients are allowed on any port for any method. The default is one client.

MAC authentication, MAC lockout, and port security are mutually exclusive on a given port. If you configure any of these authentication methods on a port, you must disable LACP on the port.

How RADIUS server is used in MAC authentication

MAC authentication uses a RADIUS server to temporarily assign a port to a static VLAN to support an authenticated client. During client authentication, the switch port membership is determined according to the following hierarchy:

- A RADIUS-assigned VLAN.
- A static, port-based, untagged VLAN to which the port is configured. A RADIUS-assigned VLAN has priority over switch-port membership in any VLAN.

Port access MAC authentication commands

aaa authentication port-access mac-auth

```
aaa authentication port-access mac-auth {enable | disable}
no aaa authentication port-access mac-auth {enable | disable}
```

Description

Enables or disables MAC authentication globally or at the port-level.

Examples

Enabling MAC authentication on all interfaces:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# enable
```

Disabling MAC authentication on all interfaces:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# disable
```

Enabling MAC authentication on an interface:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# enable
```

Disabling MAC authentication on an interface:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# disable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth addr-format

```
aaa authentication port-access mac-auth addr-format {no-delimiter | single-dash |
multi-dash | multi-colon | no-delimiter-uppercase | single-dash-uppercase |
multi-dash-uppercase | multi-colon-uppercase}
no aaa authentication port-access mac-auth addr-format {no-delimiter | single-dash |
multi-dash | multi-colon | no-delimiter-uppercase | single-dash-uppercase |
multi-dash-uppercase | multi-colon-uppercase}
```

Description

Configures the MAC address format that the switch must use in the RADIUS request message.

The **no** form of the command resets the MAC address format to the default, **no-delimiter**.

Examples

Setting the MAC address format on the switch:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# addr-format single-dash
```

Resetting the MAC address format on the switch to its default:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# no addr-format
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth auth-method

```
aaa authentication port-access mac-auth auth-method {chap | pap}
no aaa authentication port-access mac-auth auth-method
```

Description

Configures the RADIUS authentication method for MAC authentication.

Following are the MAC authentication methods supported:

- CHAP
- PAP



The PEAP-MSCHAPv2 method of authentication is not supported.

The `no` form of the command resets the authentication method to the default, `chap`.

Examples

Configuring the RADIUS authentication method on the switch:

```
switch# config
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# auth-method pap
```

Resetting the RADIUS authentication method on the switch:

```
switch(config)# no aaa authentication port-access mac-auth auth-method
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth cached-reauth

```
aaa authentication port-access mac-auth cached-reauth
no aaa authentication port-access mac-auth cached-reauth
```

Description

Enables cached reauthentication on a port. Cached reauthentication allows MAC reauthentications to succeed when the RADIUS server is unavailable. Users who are already authenticated, retain their currently assigned RADIUS attributes.

The `no` form of the command disables cached reauthentication.

Examples

Enabling cached reauthentication on a port:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# cached-reauth
```

Disabling cached reauthentication on a port:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# no cached-reauth
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth cached-reauth-period

```
aaa authentication port-access mac-auth cached-reauth-period <PERIOD>
no aaa authentication port-access mac-auth cached-reauth-period
```

Description

Configures the period during which an authenticated client, which has failed to reauthenticate because the RADIUS server is unreachable, remains authenticated.

The **no** form of the command resets the cached reauthentication period to the default, 30 seconds.

Parameter	Description
<code><PERIOD></code>	Specifies the cached reauthentication period (in seconds). Default: 30. Range: 30 to 86400.

Examples

Configuring cached reauthentication period on a port:

```
switch(config-if)# aaa authentication port-access mac-auth  
switch(config-if-macauth)# cached-reauth-period 300
```

Resetting the cached reauthentication period to the default value:

```
switch(config-if)# aaa authentication port-access mac-auth  
switch(config-if-macauth)# no cached-reauth-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth password

```
aaa authentication port-access mac-auth password {plaintext|ciphertext}<PASSWORD>  
no aaa authentication port-access mac-auth password
```

Description

Enables and configures the global password that the switch must use for MAC authentication. The password can be either in ciphertext or plaintext format.

The **no** form of the command disables the password for MAC authentication.

Parameter	Description
<code>{plaintext ciphertext} <PASSWORD></code>	Specifies the global password to be used by all MAC authenticating devices in either plaintext or ciphertext format.

Examples

Setting the MAC authentication password:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# password plaintext maX99J#
```

Disabling the MAC authentication password:

```
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# no password
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth quiet-period

```
aaa authentication port-access mac-auth quiet-period <PERIOD>
no aaa authentication port-access mac-auth quiet-period
```

Description

Configures the period during which the switch does not try to authenticate a rejected client.

The `no` form of the command resets the quiet period to the default, 60 seconds.

Parameter	Description
<PERIOD>	Specifies the quiet period (in seconds). Default: 60. Range: 0 to 65535.

Examples

Configuring the quiet period on a port:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# quiet-period 65
```

Resetting the quiet period on a port to default:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# no quiet-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth radius server-group

```
aaa authentication port-access mac-auth radius server-group <GROUP-NAME>
no aaa authentication port-access mac-auth radius server-group
```

Description

Configures the MAC authentication server group.

The `no` form of the command resets the authentication server group to the default value, `radius`.

Parameter	Description
<GROUP-NAME>	Specifies the name of the MAC authentication server group.

Examples

Configuring the MAC authentication server group:

```
switch# config
switch(config)# aaa authentication port-access mac-auth
switch(config-macauth)# radius server-group group1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth reauth

```
aaa authentication port-access mac-auth reauth
no aaa authentication port-access mac-auth reauth
```

Description

Enables periodic MAC reauthentication of authenticated clients on the port.
The `no` form of the command disables periodic MAC reauthentication on the port.

Examples

Enabling reauthentication on a port:

```
switch(config-if)# aaa authentication port-access mac-auth  
switch(config-if-macauth)# reauth
```

Disabling reauthentication on a port:

```
switch(config-if)# aaa authentication port-access mac-auth  
switch(config-if-macauth)# no reauth
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access mac-auth reauth-period

```
aaa authentication port-access mac-auth reauth-period <PERIOD>  
no aaa authentication port-access mac-auth reauth-period
```

Description

Configures the period after which MAC authenticated clients must be reauthenticated on the port. You must first enable MAC reauthentication on the port before configuring the MAC reauthentication period. The `no` form of the command resets the MAC reauthentication period to the default, 3600 seconds.

Parameter	Description
<PERIOD>	Specifies the MAC reauthentication period (in seconds). Default: 3600. Range: 1 to 65535.

Examples

Configuring the MAC reauthentication period on a port:

```
switch(config-if)# aaa authentication port-access mac-auth  
switch(config-if-macauth)# reauth-period 60
```

Resetting the MAC reauthentication period to its default:

```
switch(config-if)# aaa authentication port-access mac-auth
switch(config-if-macauth)# no reauth-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

clear mac-auth statistics

```
clear mac-auth statistics [interface <IF-NAME>]
```

Description

Clears the MAC authentication statistics associated with the port and all the authenticator state machines associated to this port.

If no interface is specified, the statistics is cleared for all MAC authentication enabled ports.

Parameter	Description
<IF-NAME>	Specifies the interface name.

Examples

Clearing MAC authentication statistics on a port (6200 and 6300 Switch Series):

```
switch# clear mac-auth statistics interface 1/1/1
```

Clearing MAC authentication statistics on a port (6400 Switch Series):

```
switch# clear mac-auth statistics interface 1/3/1
```

Clearing MAC authentication statistics on all ports:

```
switch# clear mac-auth statistics
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authentication port-access mac-auth interface client-status

```
show aaa authentication port-access mac-auth interface {all|<IF-NAME>}  
client-status [mac <MAC-ADDRESS>]
```

Description

Shows information about MAC authentication clients status. The output can be filtered by interface or MAC address.

Parameter	Description
all	Specifies all interfaces.
<IF-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing client status information for all ports:

```
switch# show aaa authentication port-access mac-auth interface all client-status
```

```
Port Access Client Status Details
```

```
Client AB:CD:DE:FF:AA:BB, 1/1/1
```

```
=====
```

```
Authentication Details
```

```
-----
```

```
Status                : Authenticated  
Type                  : Pass-Through  
Auth-Method           : CHAP  
Time Since Last State Change : 10 secs
```

```
Authentication Statistics
```

```
-----
```

```
Authentication          : 1  
Authentication Timeout  : 0  
Successful Authentication : 1  
Failed Authentication    : 0  
Re-Authentication       : 0  
Successful Re-Authentication : 0  
Failed Re-Authentication : 0  
Re-Auths When Authenticated : 0  
Cached Re-Authentication : 0
```

```
Client DD:CD:AB:CS:EE:OI, 1/1/2
```

```
=====
```

```
Authentication Details
```

```
-----
```

```

Status                : Unauthenticated
Type                  : Pass-Through
Auth-Method           : CHAP
Auth Failure reason    : Server reject/ Server timeout
Time Since Last State Change : 15 secs

```

Authentication Statistics

```

-----
Authentication          : 1
Authentication Timeout   : 0
Successful Authentication : 0
Failed Authentication     : 1
Re-Authentication       : 0
Successful Re-Authentication : 0
Failed Re-Authentication : 0
Re-Auths When Authenticated : 0
Cached Re-Authentication : 0

```

Showing status information for a client:

```

switch# show aaa authentication port-access mac-auth interface 1/1/1 client-status
mac ab:cd:de:ff:aa:bb

```

Port Access Client Status Details

Client AB:CD:DE:FF:AA:BB, 1/1/1

Authentication Details

```

-----
Status                : Authenticated
Type                  : Pass-Through
Auth-Method           : CHAP
Time Since Last State Change : 10 secs

```

Authentication Statistics

```

-----
Authentication          : 1
Authentication Timeout   : 0
Successful Authentication : 1
Failed Authentication     : 0
Re-Authentication       : 0
Successful Re-Authentication : 0
Failed Re-Authentication : 0
Re-Auths When Authenticated : 0
Cached Re-Authentication : 0

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager	Operators or Administrators or local user group members with

Platforms	Command context	Authority
6000 6100	(#)	execution rights for this command. Operators can execute this command from the operator context (>) only.

show aaa authentication port-access mac-auth interface port-statistics

show aaa authentication port-access mac-auth interface {all|<IF-NAME>} port-statistics

Description

Shows information about MAC authentication ports. The output can be filtered by interface.

Parameter	Description
all	Specifies all interfaces.
<IF-NAME>	Specifies the interface name.

Examples

Showing information for all ports.

```
switch# show aaa authentication port-access mac-auth interface all port-statistics

Port 1/1/1
=====

Client Details
-----
Number of Clients           : 3
Number of authenticated clients : 2
Number of unauthenticated clients : 1
Number of authenticating clients : 0

Port 1/1/2
=====

Client Details
-----
Number of Clients           : 4
Number of authenticated clients : 2
Number of unauthenticated clients : 2
Number of authenticating clients : 0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port access general commands

aaa authentication port-access auth-mode

```
aaa authentication port-access auth-mode {client-mode | device-mode | multi-domain}
```

Description

Configures the authentication mode for the port. By default, client mode is enabled.

Parameter	Description
client-mode	Selects client mode. In this mode, all clients connecting to the port are sent for authentication. The maximum number of clients allowed to connect to the port is limited by the client limit value configured with the <code>aaa authentication port-access client-limit</code> command.
device-mode	Selects device mode. In this mode, only the first client connecting to the port is sent for authentication. Once this client is authenticated, the port is considered as open and all subsequent clients trying to connect on that port are not sent for authentication.
multi-domain	Selects multidomain mode. In this mode only one voice device is allowed to be authenticated in addition to the configured data devices on a port. By default only one data device is allowed to be authenticated on the multidomain mode along with one voice device. You can configure the maximum number of data devices allowed with the <code>aaa authentication port-access client-limit multi-domain</code> command. If a second voice device or a data device greater than the configured data client limit onboards, a violation is triggered. You must configure a voice VLAN for IP phones to onboard a voice device in the multidomain authentication mode. To authorize a voice device, you must perform one of the following: ■ Configure the AAA server to send the <code>Aruba-Device-Traffic-Class</code> Aruba VSA with value 1. ■ Configure the <code>device-traffic-class</code> parameter in the role to be applied to indicate a voice device. Without this VSA value or the device type in the role, the switch considers the voice device as a data device.

Examples

Configuring device mode authentication for a port:

```
switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access auth-mode device-mode
```

Configuring multidomain mode authentication for a port:

```
switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access auth-mode multi-domain
```

Command History

Release	Modification
10.08	Added multi-domain parameter
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access auth-precedence

```
aaa authentication port-access auth-precedence [dot1x mac-auth | mac-auth dot1x]
no aaa authentication port-access auth-precedence [dot1x mac-auth | mac-auth dot1x]
no aaa authentication port-access auth-precedence
```

Description

Configures the per port authentication precedence using the space separator.

By default, 802.1X authentication (`dot1x`) takes a higher precedence than MAC authentication (`mac-auth`).

The `no` form of the command resets the port access authentication precedence to the default, 802.1X authentication followed by MAC authentication.

Parameter	Description
<code>dot1x mac-auth</code>	Specifies that the port access authentication precedence is 802.1X authentication followed by MAC authentication.
<code>mac-auth dot1x</code>	Specifies that the port access authentication precedence is MAC authentication followed by 802.1X authentication.

Examples

Configuring MAC authentication precedence on a port:

```
switch(config-if)# aaa authentication port-access auth-precedence mac-auth dot1x
```

Resetting the authentication precedence to the default value:

```
switch(config-if)# no aaa authentication port-access auth-precedence mac-auth dot1x
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access auth-priority

```
aaa authentication port-access auth-priority [dot1x mac-auth | mac-auth dot1x]
no aaa authentication port-access auth-priority [dot1x mac-auth | mac-auth dot1x]
no aaa authentication port-access auth-priority
```

Description

Configures the authentication priority using the space separator to specific interface.

Default `auth-priority` with concurrent onboarding is 802.1x followed by MAC authentication. With authentication precedence, the default `auth-priority` follows the `auth-precedence` order.

The `no` form of the command resets the port access authentication priority to the default, is same as the configured `auth-precedence` order.

The authentication priority is useful in deployments where clients such as wireless access points (APs), IT-compliant-laptops or phones, or laptops without pre-loaded supplicant software must download the supplicant software or firmware patches before attempting 802.1X authentication. In such cases, configure the MAC authentication as the primary authentication method followed by 802.1X for the authentication order. Meanwhile, configure 802.1x as the primary authentication priority and MAC authentication as secondary to enforce access based on 802.1X. Thus the client (or end access device) will initially be authenticated by MAC authentication with the access required to onboard and install the software or patches, and subsequently attempt the 802.1X authentication.

Reauthentication will be triggered for all high priority methods and not just the final successful authentication method.

Parameter	Description
<code>dot1x mac-auth</code>	Specifies that the port access authentication precedence is 802.1X authentication followed by MAC authentication.
<code>mac-auth dot1x</code>	Specifies that the port access authentication precedence is MAC authentication followed by 802.1X authentication.

Examples

Configuring MAC authentication priority on a port:

```
switch(config-if)# aaa authentication port-access auth-priority mac-auth dot1x
```

Resetting the authentication priority to the default value:


```
switch(config-if)# no aaa authentication port-access auth-priority mac-auth dot1x
switch(config-if)# no aaa authentication port-access auth-priority
```

Sample configuration:

```
interface 1/1/1
  no shutdown
  no routing
  vlan access 1
  aaa authentication port-access auth-precedence mac-auth dot1x
  aaa authentication port-access auth-priority dot1x mac-auth
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access client-limit

```
aaa authentication port-access client-limit <CLIENTS>
no aaa authentication port-access client-limit
```

Description

Configures the maximum number of clients that can simultaneously connect to a port. The **no** form of this command resets the number of clients to the default.

Parameter	Description
<CLIENTS>	Specifies the maximum number of clients. Default: 1. Range: 1 to 32 (6000, 6100, 4100i).

Examples

Configuring the client limit for a port:

```
switch(config-if)# aaa authentication port-access client-limit 25
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access client-limit multi-domain

aaa authentication port-access client-limit multi-domain <DATA-CLIENT-LIMIT>

Description

Configures the data client limit on the multidomain enabled interface. By default, the data client limit on a multidomain enabled interface is 1, and the maximum number of data clients supported on a multidomain enabled port is 5.

Parameter	Description
<DATA-CLIENT-LIMIT>	Specifies the maximum data client limit on the multidomain enabled interface. Range: 1 to 5

Examples

Configuring data client limit of **4** on the multidomain enabled interface **1/1/4**:

```
switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access client-limit multi-domain 4
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access (role)

```
aaa authentication port-access [critical-role|preauth-role|reject-role|
auth-role|critical-voice-role] <ROLE-NAME>
no aaa authentication port-access [critical-role|preauth-role|reject-role|
auth-role|critical-voice-role]
```

Description

Configures the role to assign to the clients depending on the client authentication state.

The `no` form of the command disassociates the roles that you assign to clients based on the authentication state.

Parameter	Description
<code>critical-role</code>	Specifies the role that is applied when the RADIUS server is unreachable for authentication or when there is a request timeout.
<code>preauth-role</code>	Specifies the role that is applied when authentication is still in progress.
<code>reject-role</code>	Specifies the role that is applied when authentication has failed.
<code>auth-role</code>	Specifies the role that is applied to authenticated clients when a specific role is not assigned in the RADIUS server.
<code>critical-voice-role</code>	Specifies the role for a voice client when the RADIUS server is unreachable for authentication during reauthentication period. This is applicable when multidomain authentication mode is enabled with the <code>aaa authentication port-access auth-mode</code> command.
<code><ROLE-NAME></code>	Specifies the role name.

Examples

Configuring critical role for clients:

```
switch(config-if)# aaa authentication port-access critical-role role1
```

Command History

Release	Modification
10.08	Added <code>critical-voice-role</code> parameter
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	<code>config-if</code>	Administrators or local user group members with execution rights for this command.

aaa authentication port-access radius-override

```
aaa authentication port-access radius-override {enable | disable}  
no aaa authentication port-access radius-override {enable | disable}
```

Description

Enables or disables `radius-override` support at the interface context. When `radius-override` support is enabled, a new RADIUS overridden role is created with a combination of LUR/DUR along with RADIUS attributes for the corresponding client-role attributes such as VLANs, captive portal URL, and downloadable gateway role. When the RADIUS override support is disabled, then only the user-roles get applied to the client.

The `no` form of this command disables the support for `radius-override`.



The `radius-override` support is applicable only for Auth-role.

Usage

The following table describes the access-response for the combination of roles with `radius-override` enabled and disabled:

Combination of roles in Access-Accept	Action with <code>radius-override</code> disabled	Action with <code>radius-override</code> enabled
Local User Role and RADIUS attributes	Local User Role is applied	New RADIUS Overridden role with Local User Role and RADIUS attributes is created and applied
Downloadable User Role and RADIUS attributes	Downloadable User Role is applied	New RADIUS Overridden role with Downloadable User Role and RADIUS attribute is created and applied
Local User Role and Downloadable User Role	Local User Role is applied	Local User Role is applied
Local User Role, Downloadable User Role, and RADIUS attributes	Local User Role is applied	New RADIUS Overridden role with Local User Role and RADIUS attributes is created and applied

Examples

Enabling `radius-override` support:

```
switch(config-if) # aaa authentication port-access radius-override enable
```

```
switch(config-if) # no aaa authentication port-access radius-override disable
```

Disabling `radius-override` support:

```
switch(config-if) # aaa authentication port-access radius-override disable
```

```
switch(config-if) # no aaa authentication port-access radius-override enable
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access allow-flood-traffic

```
port-access allow-flood-traffic {enable | disable}
```

Description

Enables or disables transmission of flood traffic, such as broadcast, multicast, and unknown unicast messages through a security enabled port on which no client has been authenticated.

By default, transmission of flood traffic is disabled.

Usage

This command can be used to allow Wake-on-LAN packets on security enabled ports, before a client is authenticated.

Examples

Enabling flood traffic on a port:

```
switch(config-if)# port-access allow-flood-traffic enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access client-move

```
port-access client-move {enable | disable}
```

Description

When client move is enabled (the default), a port access client can move to other port access-enabled interfaces, at which time they will be re-authenticated on the new interface.

When client move is disabled, a client cannot move to other port access-enabled interfaces.

Examples

Enabling client move:

```
switch(config)# port-access client-move enable
```

Disabling client move:

```
switch(config)# port-access client-move disable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

port-access fallback-role

```
port-access fallback-role <ROLE-NAME>  
no port-access fallback-role <ROLE-NAME>
```

Description

Configures the fallback role to assign to the clients onboarding on a port. This role is applied only when no derived role is applied to the clients.

The `no` form of the command resets the fallback role.

Parameter	Description
<ROLE-NAME>	Specifies the fallback role name. The maximum number of characters supported is 64.

Usage

Following are the conditions for the fallback role to be applied on onboarding devices:

- The device profile local MAC match feature with block-until-profile-applied mode is configured.
- Device profile along with AAA is configured but no match was found for the device profile client.
- AAA method with no reject or critical role is configured, and the connection to RADIUS server failed.

- 802.1X authentication is enabled on the port, but the supplicant of the device timed out to respond to the authentication request.

Example

Configuring fallback role for a port:

```
switch(config)# interface 1/1/3
switch(config-if)# port-access fallback-role fallback01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access log-off client

```
port-access log-off client mac <MAC-ADDRESS>
port-access log-off client interface <INTERFACE-NAME>
port-access log-off client role <ROLE-NAME>
```

Description

Logs off the client connected to a port access-enabled interface.

Parameter	Description
<MAC-ADDRESS>	Specifies the client MAC address.
<INTERFACE-NAME>	Specifies the client interface.
<ROLE-NAME>	Specifies the client MAC address.

Example

Logging a client off from the switch, specifying the MAC address:

```
switch# port-access log-off client mac 00:50:56:bd:04:2d
```

Logging a client off from the switch, specifying the interface:

```
switch# port-access log-off client interface 1/1/1
```

Logging a client off from the switch, specifying the role:

```
switch# port-access log-off client role r1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

port-access onboarding-method precedence

```
port-access onboarding-method precedence [aaa device-profile | device-profile aaa]
no port-access onboarding-method precedence [aaa device-profile | device-profile aaa]
```

Description

Configures the precedence for the method to be used to authenticate onboarding devices for each interface.

The `no` form of the command resets the authentication method precedence to the default precedence of AAA followed by device profile.

AAA includes the 802.1X and MAC authentication methods whose precedence can be configured using the `aaa authentication port-access auth-precedence` command. Here, the default precedence is 802.1X authentication.

For example, if you configure AAA (both 802.1X and MAC) authentication methods and device profile on a port, by default, the authentication precedence would be 802.1X, then MAC, and lastly device profile.



`aaa` in the parameters refers to the authentication precedence configured using the `aaa authentication port-access auth-precedence` command.

Parameter	Description
<code>aaa device-profile</code>	Specifies that the precedence for per port onboarding authentication method is AAA followed by device profile.
<code>device-profile aaa</code>	Specifies that the precedence for per port onboarding authentication method is device profile followed by AAA.

Examples

Configuring AAA method precedence on a port:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access onboarding-method precedence device-profile aaa
```


Resetting the authentication method precedence:

```
switch(config)# interface 1/1/1
switch(config-if)# no port-access onboarding-method precedence device-profile aaa
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access onboarding-method concurrent

port-access onboarding-method concurrent <enable | disable>

Description

Configures all methods to start concurrently for faster onboarding process. If authentication priority is not configured when enabling concurrent onboarding, the priority will be 802.1x followed by `mac-auth` and `device-profile`.

Default priority for concurrent onboarding is 802.1x followed by `mac-auth` and `device-profile`.

When enabling concurrent onboarding on the port, existing clients will be de-authenticated and freshly onboarded concurrently.

When concurrent onboarding is enabled, then auth-precedence will be ignored.

If concurrent onboarding is configured, the client will stay in pre-auth role till it gets succeeded by one authentication method or gets failed by all the authentication methods.

When the authentication method with the highest priority fails, the profile of the next successful authentication method is applied.

If all methods fail, the reject or critical role is applied based on the 802.1X authentication failure reason and continues to reauthenticate with the 802.1X method.

Reauthentication will be triggered for all high priority methods and not just the final successful authentication method.

Some RADIUS server may block the client when it receives two requests, `mac-auth` and 802.1X, from the same client at the same time. This is because the RADIUS server allows only one authentication request. In such cases, concurrent onboarding is not feasible. To prevent such scenarios, configure `auth-precedence` with `auth-priority`.

Parameter	Description
enable	Enable clients to be onboarded concurrently.
disable	Disable clients to be onboarded concurrently.

Examples

Enabling concurrent onboarding on a port:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access onboarding-method concurrent enable
```

Disabling concurrent onboarding on a port:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access onboarding-method concurrent disable
```

Sample configuration:

```
interface 1/1/1
  no shutdown
  no routing
  vlan access 999
  !aaa authentication port-access auth-precedence mac-auth dot1x
  port-access onboarding-method concurrent enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access reauthenticate interface

port-access reauthenticate interface <INTERFACE-NAME>

Description

Forcefully reauthenticates all clients connected to an interface.



Clients that are in the HELD state are ignored.

Parameter	Description
<INTERFACE-NAME>	Specifies the interface name.

Examples

Configuring reauthentication of all clients on a port (6200 and 6300 Switch Series):

```
switch# port-access reauthenticate interface 1/1/1
```

Configuring reauthentication of all clients on a port (6400 Switch Series):

```
switch# port-access reauthenticate interface 1/3/1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show aaa authentication port-access interface client-status

```
show aaa authentication port-access interface {all|<INTERFACE-NAME>} client-status [mac <MAC-ADDRESS>]
```

Description

Shows information about active port access sessions. The output can be filtered by interface or MAC address.

Parameter	Description
all	Specifies all interfaces.
<INTERFACE-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing information for all ports.

```
switch# show aaa authentication port-access interface all client-status
```

```
Port Access Client Status Details
```

```
Client 00:50:56:96:93:d6, John Doe
```

```
=====
```

```
Session Details
```

```
-----
```

```
Port      : 1/1/13
```

```
Session Time : 30s
```

```
Device Type  :
```

```

Authentication Details
-----
Status      : dot1x Authenticated
Auth Precedence : dot1x - Authenticated, mac-auth - Not attempted

Authorization Details
-----
Role       : Employee
Status    : Applied

Client 00:50:56:96:50:28
=====
Session Details
-----
Port       : 1/1/14
Session Time : 10s
Device Type :

Authentication Details
-----
Status      : mac-auth Authenticated
Auth Precedence : dot1x - Unauthenticated, mac-auth - Authenticated

Authorization Details
-----
Role       : RADIUS_773420618
Status    : Applied

```

Showing information for all ports when multidomain mode is enabled.

```

switch# show aaa authentication port-access interface all client-status

Port Access Client Status Details

Client 00:50:56:96:93:d6, John Doe
=====
Session Details
-----
Port       : 1/1/13
Session Time : 90s
IPv4 Address : 10.0.0.1
IPv6 Address :
Device Type : data

Authentication Details
-----
Status      : dot1x Authenticated
Auth Precedence : dot1x - Authenticated, mac-auth - Not attempted

Authorization Details
-----
Role       : Employee, Auth role
Status    : Applied

Client 00:50:56:96:50:28
=====
Session Details
-----

```

```

Port          : 1/1/14
Session Time  : 35s
IPv4 Address  : 10.0.0.2
IPv6 Address  :
Device Type   : voice

Authentication Details
-----
Status          : dot1x Authenticated
Auth Precedence : dot1x - Authenticated, mac-auth - Not attempted

Authorization Details
-----
Role   : Employee, Auth role
Status : Applied

```

Showing information for all ports when multidomain mode is enabled and when the RADIUS server is unreachable.

```

switch# show aaa authentication port-access interface all client-status

Port Access Client Status Details

Client 00:50:56:96:2d:4f, steve
=====
Session Details
-----
Port          : 1/3/2
Session Time  : 833s
IPv4 Address  :
IPv6 Address  :
Device Type   : voice

Authentication Details
-----
Status          : Authentication Failed, Server-Timeout
Auth Precedence : dot1x - Authenticating, mac-auth - Unauthenticated

Authorization Details
-----
Role   : voice-crtl, critical voice role
Status : Applied

```

Command History

Release	Modification
10.08	Command output updated to display multidomain mode information
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access clients

`show port-access clients [interface <INTERFACE-NAME>] [mac <MAC-ADDRESS>]`

Description

Shows summarized active port access client information. The output can be filtered by interface or MAC address.

Parameter	Description
<INTERFACE-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing information for all clients:

```
switch# show port-access clients

Port Access Clients

Status codes: d device-mode, c client-mode, m multi-domain

-----
Port      MAC Address      Onboarded      Status      Role
Method
-----
c 1/1/4      00:50:56:bd:04:c8 port-security  Success
c 1/1/5      00:50:56:bd:32:07 Success      reject-role, Reject
c 1/1/5      00:50:56:bd:32:08 Fail         critical-..., Critical
c 1/1/6      00:50:56:bd:50:43 mac-auth     Success      auth-role, Auth
c 1/1/6      00:50:56:bd:50:45 dot1x        Success      RADIUS_773420618
d 1/1/19     08:97:34:ad:e4:00 device-profile Success      ap-role
c 1/1/20     00:50:56:bd:32:08 In-Progress  preauth-role, Preauth
c 1/1/20     00:50:56:bd:32:06 In-Progress
c 1/1/20     00:50:56:bd:32:09 Fail
c 1/1/212    00:60:56:bd:50:43 mac-auth     Success      fallback-role, Fallback
```

Showing information for clients on a particular interface:

```
switch# show port-access clients interface 1/1/5

Port Access Clients

Status codes: d device-mode, c client-mode, m multi-domain

-----
Port      MAC Address      Onboarded      Status      Role
Method
-----
```

```

-----
c 1/1/5      00:50:56:bd:32:07      Success      reject-role, Reject
c 1/1/5      00:50:56:bd:32:08      Fail         critical-..., Critical
-----

```

Showing information for all clients including multidomain mode clients:

```

switch# show port-access clients

Port Access Clients

Status codes: d device-mode, c client-mode, m multi-domain

-----
Port          MAC-Address      Onboarding      Status      VLAN      Role
  Device Type                Method
-----
c 1/1/4      00:50:56:bd:04:c8  port-security  Success
c 1/1/5      00:50:56:bd:32:07  Success      10      reject-role,
reject
c 1/1/5      00:50:56:bd:32:08  Fail         20      critical-...,
critical
c 1/1/6      00:50:56:bd:50:43  mac-auth      Success
c 1/1/6      00:50:56:bd:50:45  dot1x         Success      20      auth-role, auth
773420618      RADIUS_
c 1/1/19     08:97:34:ad:e4:00  device-profile Success
c 1/1/20     00:50:56:bd:32:08  In-Progress  10      preauth-role,
preauth
c 1/1/20     00:50:56:bd:32:06  In-Progress
c 1/1/20     00:50:56:bd:32:09  Fail
d 1/1/25     08:97:34:ad:f4:03  mac-auth      Success      10      RADIUS_
453420632
c 1/1/212    00:60:56:bd:50:43  mac-auth      Success
fallback
m 1/1/7      00:50:56:bd:50:45  dot1x         Success      21      RADIUS_
773420620      data
m 1/1/7      00:50:56:bd:50:c5  dot1x         Success      22      RADIUS_
773420621      voice
m 1/1/8      00:50:56:bd:50:c6  dot1x         Fail         23      test-
voice,critical voice voice

```

Command History

Release	Modification
10.08	Command output updated to display multidomain mode information
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager	Operators or Administrators or local user group members with

Platforms	Command context	Authority
6000 6100	(#)	execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access clients detail

show port-access clients [interface <INTERFACE-NAME>] [mac <MAC-ADDRESS>] detail

Description

Shows detailed active port access clients information including the VLAN group and VLAN association for each of the authenticated clients. The output can be filtered by interface or MAC address.

Parameter	Description
<INTERFACE-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing detailed information for clients on a particular interface (one client):

```
switch# show port-access clients interface 1/1/7 detail
Port Access Client Status Detail
-----

Client 2c:41:38:7f:35:c8, John Doe
=====
Session Details
-----
Port          : 1/1/8
Session Time  : 33s
IPv4 Address  :
IPv6 Address  :

VLAN Details
-----
VLAN Group Name :
VLANs Assigned  : 10,20,30
Access         :
Native Untagged : 10
Allowed Trunk   : 20,30

Authentication Details
-----
Status          : mac-auth Authenticated
Auth Precedence : dot1x - Unauthenticated, mac-auth - Authenticated
Auth History    : mac-auth - Authenticated, 5s ago
                  dot1x   - Unauthenticated, Server-Timeout, 10s ago

Authorization Details
-----
Role           : RADIUS_OVERRIDDEN_3029903100
Status         : Applied

Attributes overridden by RADIUS are prefixed by '*'.
```



```
Name       : RADIUS_Overridden_3598790787
Type       : radius
Base Role  : MixedRole_6300_LUR_1, local, Fri Jul 09 14:34:29 IST 2021
```

```
-----
Reauthentication Period      : 600 secs
Cached Reauthentication Period :
Authentication Mode          :
Session Timeout              : 800 secs
Client Inactivity Timeout    : 1000 secs
Description                   :
*Gateway Zone                 : stdn_ctrl
*UBT Gateway Role             : stdn-authenticated-vrfl_dur
  UBT Gateway Clearpass Role  :
  Access VLAN                  :
  Native VLAN                  :
*Allowed Trunk VLANs          : 5
  Access VLAN Name             :
  Native VLAN Name             :
  Allowed Trunk VLAN Names     :
  VLAN Group Name              :
*MTU                           : 9198
  QOS Trust Mode                :
  STP Administrative Edge Port :
  PoE Priority                  :
  PVLAN Port Type              :
  Captive Portal Profile       :
  Policy                        :
  GBP                          :
  Device Type                  :
```

Showing information for a particular client MAC address:

```
6300# show port-access clients mac 00:00:00:00:00:c8 detail
Port Access Client Status Details:
Client 00:00:00:00:00:c8, 00:00:00:00:00:c8
=====
Session Details
-----
Port       : 1/1/1
Session Time : 888s
IPv4 Address :
IPv6 Address :
VLAN Details
-----
VLAN Group Name : test_group
VLANs Assigned  : 22
Access          : 22
Native Untagged :
Allowed Trunk   :
Authentication Details
-----
Status           : mac-auth Authenticated
Auth Precedence  : dot1x - Unauthenticated, mac-auth - Authenticated
Auth History     : mac-auth - Authenticated, 288s ago
dot1x - Unauthenticated, Supplicant-Timeout, 703s ago
dot1x - Unauthenticated, 798s ago
mac-auth - Authenticated, 888s ago
Authorization Details
-----
Role           : RADIUS_2801090107
```

```

Status : Applied
Role Information:
Name   : RADIUS_2801090107
Type    : radius
-----
Reauthentication Period      : 600 secs
Cached Reauthentication Period :
Authentication Mode          :
Session Timeout              :
Client Inactivity Timeout    :
Description                  :
Access VLAN                  :
Native VLAN                   :
Allowed Trunk VLANs          :
Access VLAN Name              :
Native VLAN Name              :
Allowed Trunk VLAN Names     :
VLAN Group Name              : test_group
MTU                           :
QOS Trust Mode                :
STP Administrative Edge Port :
PoE Priority                   :
Policy                        :
GBP                           :
6300#

```

Command History

Release	Modification
10.08	Added RADIUS overridden role to example
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access clients onboarding-method

show port-access clients onboarding-method <METHOD>

Description

Shows active port access client information for the specified onboarding method.

Parameter	Description
<METHOD>	Selects the onboarding method. Available methods: device-profile, dot1x, mac-auth, port-security.

Examples

Showing information for clients onboarded using MAC authentication.

```
switch# show port-access clients onboarding-method mac-auth
```

Port Access Clients

Status codes: device-mode

Port	MAC-Address	Onboarding Method	Status	Role
1/1/6	00:50:56:bd:50:43	mac-auth	Success	auth-role, auth
1/1/212	00:60:56:bd:50:43	mac-auth	Success	fallback-role, fallback

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port access 802.1X and MAC authentication configuration example

Step 1: Configure the radius server group

The server order defines the priority order.

```
Switch(config)# aaa group server radius AAA-RADIUS
Switch(config-sg)# server tmeswitching1.aaa
Switch(config-sg)# server tmeswitching2.aaa
Switch(config-sg)# server tmeswitching3.aaa
```

Step 2: Configure the DNS server

If you define a FQDN (fully qualified domain name) for the RADIUS server, you must define a DNS server to resolve the name to an IP address:

```
Switch(config)# ip dns domain-name aaa
Switch(config)# ip dns server-address 10.20.10.11
Switch(config)# ip dns server-address 10.20.10.12
```

Step 3: Configure the RADIUS server secret key

```
Switch(config)# radius-server host tmeswitching1.aaa key plaintext admin123
Switch(config)# radius-server host tmeswitching2.aaa key plaintext admin@123
Switch(config)# radius-server host tmeswitching3.aaa key plaintext admin#123
```

Step 4: Configure the Downloadable User Role (DUR) using ClearPass

```
Switch(config)# Switch(config)# radius-server host tmeswitching1.aaa clearpass-
username <USER> clearpass-password plaintext <PASS> vrf <VRF>
```

Step 5: Configure RADIUS server tracking

Configure the tracking:

```
Switch(config)# Switch(config)# radius-server host tmeswitching1.aaa tracking enable
vrf <VRF>
```

Configure the tracking mode (any or dead-only):

```
Switch(config)# Switch(config)# radius-server host tmeswitching1.aaa tracking-mode
enable vrf <VRF>
```

Step 6: Configure RADIUS dynamic authorization

```
Switch(config)# radius dyn-authorization enable
Switch(config)# radius dyn-authorization client tmeswitching1.aaa secret-key
plaintext admin123
Switch(config)# radius dyn-authorization client tmeswitching2.aaa secret-key
plaintext admin@123
```

Step 7: Configure AAA authentication fail-through

```
Switch(config)# aaa authentication allow-fail-through
```

Step 8: Configure port access authentication on an access port

```
Switch(config)# interface 1/1/1
Switch(config-if)# aaa authentication port-access auth-precedence mac-auth dot1x
Switch(config-if)# aaa authentication port-access client-limit 3
Switch(config-if)# aaa authentication port-access dot1x authenticator
Switch(config-if-dot1x-auth)# cached-reauth
Switch(config-if-dot1x-auth)# cached-reauth-period 60 (default is 30sec)
Switch(config-if-dot1x-auth)# max-eapol-requests 1
Switch(config-if-dot1x-auth)# max-retries 1
Switch(config-if-dot1x-auth)# quiet-period 5
Switch(config-if-dot1x-auth)# discovery-period 10
Switch(config-if-dot1x-auth)# enable
Switch(config-if-dot1x-auth)# exit
Switch(config-if)#
Switch(config-if)# aaa authentication port-access mac-auth
Switch(config-if-macauth)# enable
Switch(config-if-macauth)# end
Switch# end
```

These commands are available for tuning 802.1X authentication:

- `aaa authentication port-access dot1x authenticator max-eapol-requests`
- `aaa authentication port-access dot1x authenticator max-retries`
- `aaa authentication port-access dot1x authenticator quiet-period`
- `aaa authentication port-access dot1x authenticator discovery-period`

See also:

- [Port access 802.1X authentication commands](#)
- [Port access MAC authentication commands](#)
- [Port access general commands](#)

Multidomain authentication

Multidomain authentication allows a combination of voice and data clients to be authenticated on a port. By default only one voice client and one data client is allowed for authentication. You can configure a maximum of five data clients for authentication. You can enable the multidomain authentication mode with the `aaa authentication port-access auth-mode` command. You can configure only the number of data clients supported with the `aaa authentication port-access client-limit multi-domain` command.

Multidomain authentication requirements

Following are the requirements for multidomain authentication:

- You must configure the multidomain authentication mode by one of the following ways:
 - In the CLI with the `aaa authentication port-access auth-mode` command at the interface level
 - Configure `Aruba-Port-Auth-Mode` and `Aruba-Device-Traffic-Class` VSAs on the RADIUS server
 - In the CLI with the `auth-mode` command at the port access role level (`config-pa-role` context)
- In case the multidomain mode is not enabled on port in the CLI or the `Aruba-Port-Auth-Mode` VSA is not configured, then the switch operates as a client mode on that port, even if the `Aruba-Device-Traffic-Class` VSA is configured.
- To identify the client as a voice client, you must configure either the `device-traffic-class` parameter in the role or the `Aruba-Device-Traffic-Class` VSA (value=1) in the RADIUS server.
 - If both are configured, then the `device-traffic-class` configuration overrides the VSA attribute configuration.
 - If both are not configured, then the switch considers the client as a data client only.
- A role `critical-voice-role` is applied when an authenticated client fails to reauthenticate because the RADIUS server is unreachable.

This role is not applied when the multidomain authentication mode is not enabled and the client fails to reauthenticate because the RADIUS server is unreachable.



The voice client must first be authenticated successfully with the RADIUS server for the `critical-voice-role` to be applied. If the client is never authenticated, then this role is not applied.

Scenarios with `Aruba-Port-Auth-Mode` and `Aruba-Device-Traffic-Class` VSAs

The following table lists the various scenarios when you configure the `Aruba-Port-Auth-Mode` and `Aruba-Device-Traffic-Class` VSAs, and the output in multidomain authentication .

Table 1: *Scenarios configuring authentication mode and traffic class VSAs*

Aruba VSA Configured	Output when Multidomain mode is disabled on port	Output when Multidomain mode is enabled on port
Only <code>Aruba-Device-Traffic-Class</code> VSA is configured	- Port will be in client mode - Client will be authenticated as data or voice client based on <code>Aruba-Device-Traffic-Class</code> VSA	- Port will be in multidomain mode - Client will be authenticated as data or voice client based on <code>Aruba-Device-Traffic-Class</code> VSA
Only <code>Aruba-Port-Auth-Mode</code> VSA configured with multidomain mode	- Port will be in multidomain mode - Client will be authenticated as data client only	
<code>Aruba-Port-Auth-Mode</code> VSA configured with multidomain mode <code>Aruba-Device-Traffic-Class</code> VSA is configured	- Port will be in multidomain mode - Client will be authenticated as data or voice client based on <code>Aruba-Device-Traffic-Class</code> VSA	
<code>Aruba-Port-Auth-Mode</code> VSA configured with client or device mode <code>Aruba-Device-Traffic-Class</code> VSA is configured	- Port will be in client or device mode based on <code>Aruba-Port-Auth-Mode</code> VSA - Client will be authenticated as data or voice client based on <code>Aruba-Device-Traffic-Class</code> VSA	
Only <code>Aruba-Port-Auth-Mode</code> VSA configured with client or device mode	Port will be in client or device mode based on <code>Aruba-Port-Auth-Mode</code> VSA	

Scenarios with device-traffic-class configuration in role

Following are some of the scenarios of configuring `device-traffic-class` in the role and the output in multidomain authentication.

- Scenario 1: When multidomain mode is enabled on port and the `auth-mode` is not configured in the role.
 - Port will be in multi-domain mode.
 - If `device-traffic-class` is configured in role, then the client will be authenticated as voice, else will be authenticated as data client.
- Scenario 2: When multidomain mode is enabled on port and the `auth-mode` is configured as client or device mode.
 - Port will be in client or device mode based on `auth-mode` configuration in role.
 - If `device-traffic-class` is configured in role, then the client will be authenticated as voice, else will be authenticated as data client.

- Scenario 3: When multidomain mode is not enabled on port and `auth-mode` is configured with multidomain mode in role.
 - Port will be in multi-domain mode.
 - If `device-traffic-class` is configured in role, then the client will be authenticated as voice, else will be authenticated as data client.
- When multidomain mode is not enabled on port and `auth-mode` is not configured in role.
 - Port will be in client mode.
 - If `device-traffic-class` is configured in role, then the client will be authenticated as voice, else will be authenticated as data client.

Port access auto-VLAN

Auto-VLAN enables automatic VLAN creation for the port access clients if the VLAN is not configured statically on the switch.

In the case of user-based tunneling, by default, administrators are required to create VLAN explicitly to onboard the clients for every user. With this feature enabled, clients can be onboarded with the VLAN derived from Local User Role, Downloadable User Role, and RADIUS VSA. Use the command `port-access auto-vlan` to enable the VLAN creation automatically for the user-based tunneling clients.



This feature is supported only on UBT 1.0.

In the case of non-UBT clients, access VLANs must be manually configured on uplink aggregation or core switches through the gateway on the respective ports. To make a VLAN as part of uplink, execute `trunk-dynamic-vlan-include` globally. This indicates whether dynamically learned VLANs from MVRP and port-access should be included or excluded on ports configured with `vlan trunk allowed all only`. By default, dynamic VLANs are not included in the trunk allowed list.

Support for voice VLAN

You can also create voice VLAN with the auto-vlan feature through one of the following methods:

- Using LUR/DUR with the `device-traffic-class voice` class attribute
- Using Radius VSA with the `Aruba-Device-Traffic-Class` class attribute

When the clients are onboarded with class attribute either from LUR or RADIUS attribute, the voice VLAN will be created.

Auto-VLAN limitations

The following limitations apply to auto-vlan:

- This feature cannot be configured on VSX topologies. If a user tries to configure `port-access auto-vlan` on a VSX topology, the following error message will be displayed:

```
VSX is enabled, disable VSX to enable auth auto VLAN
```

VSX can be configured on a switch where auto VLAN is already configured. However, the VSX configuration sync is not supported for the VLANs that are created automatically.

- This feature cannot be configured if MVRP is configured on the switch. If a user tries to configure `port-access auto-vlan` on the switch, the following error message will be displayed.

```
MVRP is enabled, disable MVRP to enable auto VLAN
```

- This feature is not supported on the IP client tracker. IP client tracker cannot track addresses of the clients that are using auto VLAN.
- When the running configuration has a dynamically created VLAN with a status of `port-access` and the running configuration has `port-access auto-vlan` configured, if a checkpoint has a static VLAN with the same VLAN ID and with a status of `default` and `port-access auto-vlan` is not configured in the checkpoint, after a checkpoint restore, the VLAN will not be present in the configuration and the checkpoint restore does not report the missing VLAN.

For example:

Running config includes dynamically-created VLAN 50 and `port-access auto-vlan` is configured.

Checkpoint has static VLAN 50 with a status of `default`.

After the checkpoint restore, VLAN 50 is not present on the switch and the checkpoint restore does not report the missing VLAN.

Port access security violation

A security violation state of a port indicates whether the port is in a state where its client limit has been violated. This state is reset in one of the following ways:

- When the port is shutdown administratively.
- When the port security or authentication method is disabled on the port.
- When the port comes up automatically because of auto recovery.
- When violation action configuration is changed on the port.

Port access security violation commands

port-access security violation action

```
port-access security violation action {notify | shutdown}
no port-access security violation action
```

Description

Configures the action that the switch must take whenever a security violation occurs at a port, such as the number of clients exceeding the configured client limit.

The `no` form of the command resets the action to the default action, `notify`.

Parameter	Description
<code>notify</code>	Specifies that the switch notifies any security violation as an event or log in the syslog server, and also sends an SNMP trap notification. This action is the default. The format of the event log that is generated for notifying the security violation is <code>Client limit exceeded on port <PORT>, caused by an unauthenticated client <MAC-ADDRESS>.</code>

Parameter	Description
shutdown	Specifies that the switch shuts down the port where the client limit has exceeded. A port that is shut down can be configured to auto-recover after a recovery period that can be configured with the <code>port-access security violation action shutdown auto-recovery</code> and <code>port-access security violation action shutdown recovery-timer</code> commands.

Examples

Configuring the shutdown security violation action for a port:

```
sswitch(config-if)# port-access security violation action shutdown
```

Resetting the security violation action to the default value:

```
switch(config-if)# no port-access security violation action
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access security violation action shutdown auto-recovery

```
port-access security violation action shutdown auto-recovery {enable | disable}
no port-access security violation action shutdown auto-recovery {enable | disable}
```

Description

Configures auto-recovery of the port when the security violation action is configured as shutdown.

This configuration allows the port, that is shut down when a security violation occurs, to be automatically enabled after the recovery timer expires.

The `no` form of the command resets auto-recovery to the default, disable.

Parameter	Description
enable	Enables auto-recovery of port when the security violation action is configured as shutdown.
disable	Disables auto-recovery of port when the security violation action is configured as shutdown.

Examples

Enabling auto-recovery of port:

```
switch(config-if)# port-access security violation action shutdown auto-recovery enable
```

Disabling auto-recovery of port:

```
switch(config-if)# no port-access security violation action shutdown auto-recovery
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

port-access security violation action shutdown recovery-timer

```
port-access security violation action shutdown recovery-timer <RECOVERY-TIME>  
no port-access security violation action shutdown recovery-timer
```

Description

Configures security violation recovery timer for the port when the security violation action is configured as shutdown.

The `no` form of the command resets the shutdown recovery timer to the default, 10.

Parameter	Description
<RECOVERY-TIME>	Specifies the recovery timer (in seconds) after which the port, which is shut down because of security violation, is automatically enabled. Default: 10. Range: 10 to 600.

Examples

Configuring the shutdown recovery-timer on a port:

```
switch(config-if)# port-access security violation action shutdown recovery-timer 60
```

Resetting the shutdown recovery-timer to the default value:

```
switch(config-if)# no port-access security violation action shutdown recovery-timer
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

show interface

```
show interface <INTERFACE-NAME>
```

Description

Displays active configurations and operational status information for interfaces including the reason for the port shutdown because of a security violation at the port.

Parameter	Description
<INTERFACE-NAME>	Specifies the interface name.

Examples

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access aaa violation interface

```
show port-access aaa violation interface {all|<INTERFACE-NAME>}
```

Description

Shows information about violations that have occurred and the count of violations for port access authentication methods at the interfaces.

Parameter	Description
all	Specifies all interfaces
<INTERFACE-NAME>	Specifies the interface name.

Examples

Showing information for violations for all interfaces:

```
switch# show port-access aaa violation interface all
```

```
Client limit exceeded violation status
```

Port	Violation	Violation-Count
1/1/1	No	0
1/1/2	Yes	10
1/1/5	No	10

Showing information for violations on interface 1/1/2:

```
switch# show port-access aaa violation interface 1/1/2
```

```
Client limit exceeded violation status
```

Port	Violation	Violation-Count
1/1/2	Yes	10

Showing information when no violation action is configured:

```
switch# show port-access aaa violation interface 1/1/1
```

```
Port-access aaa violation is not configured
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access port-security violation client-limit-exceeded interface

```
show port-access port-security violation client-limit-exceeded interface {all|<INTERFACE-NAME>}
```

Description

Shows information on the number of client-limit-exceeded security violations that have occurred. The output can be filtered by interface.

Parameter	Description
all	Specifies all interfaces
<INTERFACE-NAME>	Specifies the interface name.

Examples

Showing information for all ports:

```
switch# show port-access port-security violation client-limit-exceeded interface all

Client limit exceeded violation status

-----
Port          Violation      Violation-Count
-----
1/1/1         No             0
1/1/2         Yes            10
1/1/5         No             10
```

Showing information for a particular port:

```
switch# show port-access port-security violation client-limit-exceeded interface 1/1/1

Client limit exceeded violation status

-----
Port          Violation      Violation-Count
-----
1/1/1         No             10
```

Command History

Release	Modification
10.08	Syntax modified from <code>show port-access security violation client-limit-exceeded interface {all <INTERFACE-NAME>}</code> to <code>show port-access port-security violation client-limit-exceeded interface {all <INTERFACE-NAME>}</code>
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port access policy

Port access policy allows network administrators to define a set of rules. These rules are used to restrict or alter the passage of traffic for clients onboarding to a switch that has port security (802.1X, MAC authentication) enabled.

Unlike classifier policies, which are associated with individual front plane port, Link Aggregation Group (LAG), and VLAN or tunnel interface, port-access policies are associated with roles. Based on the role associated with a user after authentication, the policy is applied to the user.

The switch can obtain policies from any of the following sources:

- Local: Policies configured locally on the switch.
- RADIUS: Policies configured using the NAS-Filter-Rule or Aruba-NAS-Filter-Rule RADIUS attributes.



Both local and downloaded type of policies do not have any standards associated with them. Policies that are obtained from the RADIUS server must support all criteria that can be defined using the NAS-Filter-Rule attribute.

Classes and actions supported by port access policies

Port access policies support IPv4- and IPv6-based classes, and the following actions.

- `cir`: Set the bandwidth limit for guaranteed traffic.
- `drop`: Drop the packet.
- `dscp`: Remark the 6-bit field in the IP header for packet classification.
- `ip-precedence`: Remark the 3-bit field in the IP header which denotes the priority of the datagram.
- `local-priority`: Change the internal priority that is used to queue the packets for transmission.

Port access policy commands

port-access policy

```
port-access policy <POLICY-NAME>
  [<SEQUENCE-NUMBER>]
  class {ip|ipv6} <CLASS-NAME>
    action {<REMARK-ACTIONS> | <POLICE-ACTIONS> | <OTHER-ACTIONS>}
  [<SEQUENCE-NUMBER>]
  comment ...
```

Description

Creates or modifies policy and policy entries. A policy is made up of one or more policy entries ordered and prioritized by sequence numbers. Each entry has an IPv4/IPv6 class and one or more policy actions associated with it.

A policy must be applied to a role using the `associate policy` command.

The `no` form of the command can be used to delete either a policy (use `no` with the policy command) or an individual policy entry (use `no` with the sequence number).

Parameter	Description
<code><POLICY-NAME></code>	Specifies the policy name.
<code><SEQUENCE-NUMBER></code>	Specifies the policy entry sequence number. Range: 1 to 4294967295.
<code>class {ip ipv6} <CLASS-NAME></code>	Specifies the class type and name.
<code><REMARK-ACTIONS></code>	These remark actions are available: <code>ip-precedence <IP-PRECEDENCE-VALUE></code> Specifies the numeric IP precedence value. Range: 0 to 7. <code>dscp <DSCP-VALUE></code> Specifies a Differentiated Services Code Point (DSCP) value. Enter either a keyword or numeric value (0 to 63). See <i>DSCP keywords and corresponding values</i> below. <code>local-priority <LOCAL-PRIORITY-VALUE></code> Specifies a local priority value. Range: 0 to 7.
<code><POLICE-ACTIONS></code>	These police actions are available: <code>cir kbps <RATE-KBPS></code> Specifies a Committed Information Rate (CIR) value in kbps. Range: 1 to 4294967295. <code>exceed</code> Specifies the action to take on packets that exceed the rate limit.
<code><OTHER-ACTIONS></code>	These other actions are available: <code>drop</code> Selects drop of all traffic.
<code>comment</code>	Specifies a policy entry comment.

DSCP keywords and corresponding values

Keyword	Value	Description
AF11	10	DSCP 10 (Assured Forwarding Class 1, low drop probability)
AF12	12	DSCP 12 (Assured Forwarding Class 1, medium drop probability)
AF13	14	DSCP 14 (Assured Forwarding Class 1, high drop probability)
AF21	18	DSCP 18 (Assured Forwarding Class 2, low drop probability)
AF22	20	DSCP 20 (Assured Forwarding Class 2, medium drop probability)
AF23	22	DSCP 22 (Assured Forwarding Class 2, high drop probability)
AF31	26	DSCP 26 (Assured Forwarding Class 3, low drop probability)
AF32	28	DSCP 28 (Assured Forwarding Class 3, medium drop probability)

Keyword	Value	Description
AF33	30	DSCP 30 (Assured Forwarding Class 3, high drop probability)
AF41	34	DSCP 34 (Assured Forwarding Class 4, low drop probability)
AF42	36	DSCP 36 (Assured Forwarding Class 4, medium drop probability)
AF43	38	DSCP 38 (Assured Forwarding Class 4, high drop probability)
CS0	0	DSCP 0 (Class Selector 0: Default)
CS1	8	DSCP 8 (Class Selector 1: Scavenger)
CS2	16	DSCP 16 (Class Selector 2: OAM)
CS3	24	DSCP 24 (Class Selector 3: Signaling)
CS4	32	DSCP 32 (Class Selector 4: Real time)
CS5	40	DSCP 40 (Class Selector 5: Broadcast video)
CS6	48	DSCP 48 (Class Selector 6: Network control)
CS7	56	DSCP 56 (Class Selector 7)
EF	46	DSCP 46 (Expedited Forwarding)

Usage

- An applied policy processes the packet sequentially against policy and class entries in the list, until either the last policy entry in the list has been evaluated or the packet matches an entry. If there is no match, the packet will be dropped by one of the implicit `deny all` IPv4 and IPv6 entries.
- Entering an existing `<POLICY-NAME>` value will cause the existing policy to be modified, with any new `<SEQUENCE-NUMBER>` value creating an additional policy entry, and any existing `<SEQUENCE-NUMBER>` value replacing the existing policy entry with the same sequence number.
- If no sequence number is specified, a new policy entry will be appended to the end of the entry list with a sequence number equal to the highest policy entry currently in the list plus 10. The sequence numbers may be reordered with the `port-access policy <POLICY-NAME> resequence <STARTING-SEQ-NUM> <INCREMENT>` command.
- If a policy is configured without any action, the default action, `permit`, is applied for that policy.

Examples

Creating a policy with several class entries:

```
switch(config)# port-access policy POL1
switch(config-pa-policy)# 10 class ip dns
switch(config-pa-policy)# 20 class ip dhcp
switch(config-pa-policy)# 30 class ip test action cir kbps 1024 exceed drop
switch(config-pa-policy)# exit
switch(config)# show port-access policy POL1
```


Access Policy Details:
=====

Policy Name : POL1
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE ACTION
10	dns	ipv4 permit
20	dhcp	ipv4 permit
30	test	ipv4 cir kbps 1024 exceed drop

Adding a comment to an existing class entry:

```
switch(config)# port-access policy POL1
switch(config-pa-policy)# 20 comment DHCP-PERMIT
switch(config-pa-policy)# exit
switch(config)# show run port-access policy POL1

port-access policy POL1
  10 class ip dns
  20 class ip dhcp
  20 comment DHCP-PERMIT
  30 class ip test action cir kbps 1024 exceed drop
```

Removing a comment from an existing class entry:

```
switch(config)# port-access policy POL1
switch(config-pa-policy)# no 20 comment
switch(config-pa-policy)# exit
switch(config)# show run port-access policy POL1

port-access policy POL1
  10 class ip dns
  20 class ip dhcp
  30 class ip test action cir kbps 1024 exceed drop
```

Modifying a policy by replacing one class with another at the same sequence number:

```
switch(config)# port-access policy POL1
switch(config-pa-policy)# 10 class ip mds action dscp af21
switch(config-pa-policy)# exit
switch(config)# show port-access policy POL1
```

Access Policy Details:
=====

Policy Name : POL1
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE ACTION
10	mds	ipv4 dscp AF21

```
20          dhcp          ipv4 permit
30          test          ipv4 cir kbps 1024 exceed drop
```

Removing a class:

```
switch(config)# port-access policy POL1
switch(config-pa-policy)# no 10
switch(config-pa-policy)# exit
switch(config)# show port-access policy POL1
```

Access Policy Details:
=====

Policy Name : POL1
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	clearpass-web	ipv4	cir kbps 1024 exceed drop

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config The <code>policy</code> command takes you into the <code>config-pa-policy</code> context where you enter the policy entries.	Administrators or local user group members with execution rights for this command.

port-access policy copy

`port-access policy <POLICY-NAME> copy <DESTINATION-POLICY>`

Description

Copies an existing policy to a new policy.

Parameter	Description
<code><POLICY-NAME></code>	Specifies the existing policy name.
<code><DESTINATION-POLICY></code>	Specifies the destination policy name.

Examples

Copying a policy:

```
switch(config)# port-access policy POL1 copy POL1_copy
switch(config)# show port-access policy
```

Access Policy Details:
=====

Policy Name : POL1
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	test	ipv4	cir kbps 1024 exceed drop

Policy Name : POL1_copy
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	test	ipv4	cir kbps 1024 exceed drop

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

port-access policy resequence

port-access policy <POLICY-NAME> resequence <STARTING-SEQ-NUM> <INCREMENT>

Description

Resequences numbering in a policy.

Parameter	Description
<POLICY-NAME>	Specifies the policy to be resequenced.
<STARTING-SEQ-NUM>	Specifies the starting sequence number. Range: 1 to 4294967295.
<INCREMENT>	Specifies the sequence number increment.

Examples

Resequencing a policy starting at 5 with an increment of 10:

```
switch(config)# port-access policy POL1 resequence 5 10
switch(config)# show port-access policy POL1
```

Access Policy Details:
=====

Policy Name : POL1
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
5	dhcp	ipv4	permit
15	test	ipv4	cir kbps 1024 exceed drop

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

port-access policy reset

port-access policy <POLICY-NAME> reset

Description

Resets the policy configuration to match the current hardware configuration of the policy.

Parameter	Description
<POLICY-NAME>	Specifies the name of the policy to be reset.

Examples

Resetting a policy:

```
switch(config)# port-access policy POL2
switch(config-pa-policy)# 20 class ip dhcp
switch(config-pa-policy)# 40 class test2 action cir kbps 1024 exceed drop
switch(config-pa-policy)# exit
switch(config)# show port-access policy POL1-V2
```

Access Policy Details:
=====

Policy Name : POL2
Policy Type : Local

Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
40	test2	ipv4	cir kbps 1024 exceed drop

```
switch(config)# port-access policy POLV2
switch(config-pa-policy)# 50 class ip test3 action cir kbps 1024 exceed drop
switch(config-pa-policy)# no 20
switch(config-pa-policy)# exit
switch(config)# show port-access policy POL2
```

Access Policy Details:
=====

Policy Name : POL2
Policy Type : Local
Policy Status : Rejected

SEQUENCE	CLASS	TYPE	ACTION
40	test2	ipv4	cir kbps 1024 exceed drop
50	test3	ipv4	cir kbps 1024 exceed drop

```
switch(config)# port-access policy POL2 reset
Following policy entries will be removed:
class ip test3 action cir kbps 1024 exceed drop
```

Following policy entries will be added:
20 class ip dhcp

Do you want to continue (y/n)? **y**
switch(config)# show port-access policy POL2

Access Policy Details:
=====

Policy Name : POL1-V2
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
40	test2	ipv4	cir kbps 1024 exceed drop

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights

Platforms	Command context	Authority
6000 6100		for this command.

clear port-access policy hitcounts

clear port-access policy <POLICY-NAME> hitcounts {port | client}

Description

Clears statistics and conform rate of a policy applied on a port or client.

Parameter	Description
<POLICY-NAME>	Specifies the policy name.
port	Selects port mode.
client	Selects client mode.

Examples

Clearing policy hit counts:

```
switch# show port-access policy POL6 hitcounts port

Port Access Policy Hit-Counts Details:
=====

Policy Name      : POL4
Policy Type      : Local
Policy Status    : Applied

SEQUENCE CLASS          TYPE ACTION                                CUR-RATE (kbps)
-----
3      test8            ipv4 cir kbps 1024 exceed drop          512

Class Name : dhcp
Class Type : ipv4

SEQUENCE CLASS-ENTRY          HIT-COUNT
-----
10      match icmp any any count          0

Class Name : clearpass-web
Class Type : ipv4

SEQUENCE CLASS-ENTRY          HIT-COUNT
-----
15      match udp any any count          15101830

Class Name : web-traffic
Class Type : ipv4

SEQUENCE CLASS-ENTRY          HIT-COUNT
-----
10      match any any any count          241
20      match any 10.1.1.1 10.1.1.2 dscp AF11 count          50
```

Class Name : class6
Class Type : ipv6

SEQUENCE	CLASS-ENTRY	HIT-COUNT
10	match any any any count	173
20	match icmpv6 2001:db8:a::123 2001:db8:a::125 dscp AF11 count	32

```
switch#  
switch# clear port-access policy POL6 hitcounts port  
switch#  
switch# show port-access policy POL6 hitcounts port
```

Port Access Policy Hit-Counts Details:
=====

Policy Name : POL4
Policy Type : Local
Policy Status : Applied

SEQUENCE	CLASS	TYPE	ACTION	CUR-RATE (kbps)
3	test8	ipv4	cir kbps 1024 exceed drop	512

Class Name : dhcp
Class Type : ipv4

SEQUENCE	CLASS-ENTRY	HIT-COUNT
10	match icmp any any count	0

Class Name : clearpass-web
Class Type : ipv4

SEQUENCE	CLASS-ENTRY	HIT-COUNT
15	match udp any any count	0

Class Name : web-traffic
Class Type : ipv4

SEQUENCE	CLASS-ENTRY	HIT-COUNT
10	match any any any count	0
20	match any 10.1.1.1 10.1.1.2 dscp AF11 count	0

Class Name : class6
Class Type : ipv6

SEQUENCE	CLASS-ENTRY	HIT-COUNT
10	match any any any count	0
20	match icmpv6 2001:db8:a::123 2001:db8:a::125 dscp AF11 count	0

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access policy

show port-access policy [<POLICY-NAME>]

Description

Shows various aspects of policies and their current usage. Details of a policy including the content of a specific policy is shown.

Policy type values:

- **Local**—User configured policy
- **Downloaded**—Downloaded user policy
- **RADIUS**—Policy obtained from the RADIUS server

Policy status values:

- **Applied**—Policy is successfully applied in the hardware.
- **Rejected**—Policy is not supported in the hardware.
- **In-Progress**—Policy is being processed in the hardware.
- **Failed**—Displayed when the switch fails to apply the policy configuration because the TCAM resources are unavailable or full.



If a policy is configured without any action, the `show` command will represent such an entry with the `permit` action.

Parameter	Description
<POLICY-NAME>	Specifies the policy name.

Examples

Showing information for all policies:

```
switch(config)# show port-access policy
```

```
Access Policy Details:
=====
```

```
Policy Name   : POL1
Policy Type   : Local
Policy Status : Applied
```

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	test	ipv4	cir kbps 1024 exceed drop


```
Policy Name   : POL1_copy
Policy Type   : Local
Policy Status : Applied
```

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	test	ipv4	cir kbps 1024 exceed drop

Showing information for a particular policy:

```
switch(config)# show port-access policy POL1
```

```
Access Policy Details:
=====
```

```
Policy Name   : POL1
Policy Type   : Local
Policy Status : Applied
```

SEQUENCE	CLASS	TYPE	ACTION
20	dhcp	ipv4	permit
30	test	ipv4	cir kbps 1024 exceed drop

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access policy hitcounts

```
show port-access policy <POLICY-NAME> hitcounts {port | client}
```

Description

Shows port access hit count statistics.

Parameter	Description
<POLICY-NAME>	Specifies the policy name.
port	Selects port mode.
client	Selects client mode.

Examples

Showing policy hit counts (statistics) with current rate:

```
switch# show port-access policy POL6 hitcounts port

Port Access Policy Hit-Counts Details:
=====

Policy Name      : POL1
Policy Type      : Local
Policy Status    : Applied

SEQUENCE CLASS          TYPE ACTION                                CUR-RATE (kbps)
-----
30      test8           ipv4 cir kbps 1024 exceed drop          512

Class Name : dhcp
Class Type : ipv4

SEQUENCE CLASS-ENTRY                                HIT-COUNT
-----
10      match icmp any any count                    982150

Class Name : clearpass-web
Class Type : ipv4

SEQUENCE CLASS-ENTRY                                HIT-COUNT
-----
70      match udp any any count                      15101830

Class Name : web-traffic
Class Type : ipv4

SEQUENCE CLASS-ENTRY                                HIT-COUNT
-----
4      match any any any count                        3194
5      match any 10.1.1.1 10.1.1.2 dscp AF11 count    1716

Class Name : class6
Class Type : ipv6

SEQUENCE CLASS-ENTRY                                HIT-COUNT
-----
10      match any any any count                        0
20      match icmpv6 2001:db8:a::123 2001:db8:a::125 dscp AF11
        count                                          0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port access role

Every device that connects to a port is associated with a role. Roles are associated with all clients, both authenticated and unauthenticated, and applied to each user session. By default, roles are enabled on a switch.

Following are a few examples of user role names and the access privileges that can be configured:

- Employee—Provide complete access to network resources.
- Contractor—Provide limited access to network resources.
- Guest—Provide only Internet browsing access.

Each user role determines the client network privileges, frequency of reauthentication, applicable bandwidth contracts, and other permissions.



Active user roles applied on clients are created only on Ternary Content-Addressable Memory (TCAM) resource availability of the switch.

A user role consists of the following optional parameters:

- *Ingress user policy*
L3 (IPv4 and/or IPv6) ordered list of classes with actions.
- *inactivity-timeout*
The inactivity timeout period in seconds with a range of 300 to 4294967295 for the authenticated client for an implicit logoff.
- *reauth-period*
Sets the reauthentication period in seconds or 0 to disable.
- *vlan access*
Sets the untagged VLAN ID.
- *vlan trunk*
Sets the tagged VLAN ID.
- *auth-mode*
Sets the configuration in user role to either device-mode or port-mode. The following are the attributes:
 - *poe-priority*
Specifies the PoE priority for the interface.
 - *mtu*
Configures the MTU support for the client.
 - *vlan trunk allowed*
Specifies the list of tagged VLANs configured for the interface.
 - *trust-mode*
Configures the QoS trust mode for the client.

Operational notes

Following are some of the operational notes to be considered for port access roles:

- On the 6000 and 6100 Switch Series, a maximum of 1024 authenticated clients are supported.
- When roles are enabled, they are applied to all devices connected to ports where authentication is configured.

- Special roles, such as, critical, reject, pre-auth, and auth are applied depending on the authentication state of the device.
- Roles can be applied in one of the following two ways:
 - Vendor-Specific Attribute (VSA)-Derived Role

Type: RADIUS: Aruba

Name: Aruba-User-Role

ID: 25

Value: <myUserRole>

See [Vendor-Specific Attributes supported in session authorization](#).

The RADIUS server (ClearPass Policy Manager server) determines how the VSA-Derived Role is applied to the user. The role is sent to the switch through a RADIUS VSA. The VSA derived role will have the same precedence order as the authentication type (802.1x, MAC authentication).

- User Derived Role (UDR)

The UDR is applied when the roles are enabled.

UDR will have the same precedence order as the authentication type (802.1x, MAC authentication).

Mixed roles

Mixed roles enable users to create a new RADIUS overridden role by overriding client-role attributes such as VLANs, captive portal URL, and downloadable gateway role in one of the following scenarios:

- Combination of LUR (Local User Role) and RADIUS attributes received from the RADIUS server.
- Combination of DUR (Downloadable User Role) and RADIUS attributes received from the RADIUS server.

The new RADIUS overridden role contains the attributes present in both LUR/DUR and RADIUS attributes. If any of the attributes are present in both the RADIUS attributes list, and Local User Role or Downloadable User Role, the RADIUS attributes will take precedence and applied to the clients.

You can use the `aaa authentication port-access radius-override enable` command at the interface context to enable the mixed role feature. With this feature enabled, users can have basic configurations that are common to most of the clients as a LUR/DUR and specify only the client-specific attribute as RADIUS attributes from the server as part of the access response.

If this feature is disabled, when a combination of LUR/DUR along with RADIUS attributes is received from the server, the user roles such as LUR or DUR take precedence and are applied to the clients. The RADIUS attributes in the list are not considered.

Important points to note

- Any changes made to LUR after the creation of a mixed role will not affect the mixed roles. Also, the mixed roles will not be affected even on LUR deletion.
- If LUR/DUR contains VLAN ID and RADIUS attribute contains VLAN name or VLAN group, then the final role will contain both VLAN ID and VLAN name or VLAN group. In this case, VLAN ID takes precedence. If both VLAN ID and VLAN name or group are present, VLAN ID takes precedence.
- The description of the LUR will not be copied to the mixed role during an override.

Limitations

Mixed roles cannot be used in the following scenarios:

- A group-based policy (GBP) is present along with LUR or DUR.
- LUR or DUR with more than 128 policy entries.
- LUR or DUR with more than 128 class entries.
- DURs with radius-overridden policy. For example: Aruba-Clearpass-User-Role + (NAS-Filter-Rule/Filter-ID) is not supported.

Supported RADIUS attributes in mixed roles

Following are the RADIUS attributes supported in mixed roles:



The RADIUS attributes that are not supported in mixed roles can be still used for testing purposes.

Supported Radius Attributes in mixed roles	Local User Role	Downloadable User Role
Egress-VLAN-ID	Yes	Yes
Aruba-Captive-Portal-URL	Yes	Yes
Aruba-UBT-Gateway-Role	Yes	Yes
Aruba-Gateway-Zone	Yes	Yes
Aruba-UBT-Gateway-CPPM-Role	No	Yes

Special roles

Special roles are always local roles that are created to support instances when the deployments are not yet complete. They are also helpful when any network issues occur during authentication of devices. Special roles are always purpose-based, that is, they are applied only in instances such as the RADIUS server is not reachable for authentication or when a single role has to be applied across all switches.

The following special roles are available:

- Critical role
- Reject role
- Pre-authentication role
- Auth-role
- Fallback role

Critical role

The critical role is applied to devices when the RADIUS server is unreachable during the first authentication process or during reauthentication. This role helps ensure that the devices have limited access to the network even though the authentication is not completed. Once the RADIUS server is available for authentication, the devices are authenticated and the ultimate role is applied.

Reject role

The reject role is applied when the RADIUS server rejects a device during authentication. The reject role gives restricted access to the device compared to a full access role.

Pre-authentication role

The pre-authentication (pre-auth) role allows a device, such as an IP phone, to have network access before the device is authenticated. The pre-auth role is triggered when a MAC-based client is connected to a switch before being authenticated by the RADIUS server. Devices must be assigned a VLAN to provide network connectivity. Two new VLANs are created for pre-auth role functionality, one for voice traffic and one for data traffic. Pre-auth role VLANs can be configured on the switch individually or within a user-role. Devices that can be connected to the switch without authentication are divided into two categories:

- Devices that send voice traffic.
- Devices that send data traffic.



Either one of pre-auth role VLANs (voice and/or data) or a pre-auth role can be configured for a port. However, both a VLAN and role cannot coexist for an interface. Initial traffic on the port is restricted only by Access Control Lists (ACLs) configured for the port or for VLANs or ACLs in the role.

Impact of pre-auth role on existing features

Unauthenticated devices

Configuring pre-auth role VLAN will change the behavior of unauthenticated devices. Normally, authentication-enabled ports will not provide unauthenticated client any network access until the device is authenticated by the RADIUS server. With pre-auth role VLAN configured, the client will be assigned to the pre-auth role VLAN until the RADIUS server authenticates the device.

Unauthenticated clients will be placed into the VLAN specified in the pre-auth role. After authenticated by the RADIUS server, the client will be placed into the VLAN specified in the RADIUS authentication command string or as specified in the RADIUS authentication accept string.

LLDP-bypass

When LLDP-bypass is enabled on the switch, Aruba APs are not authenticated. Therefore pre-auth role VLAN is not applicable.

Bypass using device-identity

Pre-auth role VLAN is not applicable to VoIP devices because they do not need authentication. It is applicable to PCs that need authentication.

ACLs applied on an interface

If an ACL rule is applied on an interface, which is part of a pre-auth role VLAN, traffic coming through that interface will be affected. Traffic will be affected based on the rule in the ACL.

ACLs applied on a VLAN

If an ACL rule is applied on a pre-auth role VLAN, traffic entering that VLAN will be affected. Traffic will be affected based on the rule in the ACL.

Rate-limiting on an interface

If the traffic is rate-limited on an interface as part of a pre-auth role VLAN, the traffic will be impacted. The traffic will be affected based on the rule in the rate-limiting configuration command.

Authenticated or rejected clients

Clients that are authenticated or rejected by the RADIUS server are given different VLANs. These clients are moved from pre-auth role to new VLANs based on the authentication by the RADIUS server.

MAC pinning

Clients whose MAC addresses are pinned and have undergone authentication will always be treated as authenticated. Pre-auth role VLAN is not applicable in this scenario.

Effect of RADIUS tracking on pre-auth role

If RADIUS tracking is enabled and no RADIUS server is available for authentication, the port will be changed from a pre-auth role VLAN to a critical VLAN. The time taken to move from pre-auth role VLAN to critical VLAN depends on the time it takes for RADIUS tracker to inform the subsystem.

Restrictions

The pre-auth role restrictions are as follows:

- It will not support more than one tagged or untagged VLAN membership either through direct VLAN configuration or through user-roles.
- It is not applicable for authentication methods other than MAC-based.
- It is not available to be configured from WebUI, Menu, or REST.

Auth-role

After the RADIUS server authenticates a device, if no role is configured on the server, it sends an empty access accept packet to the switch. The switch translates this empty packet to assign an auth-role to the device. The switch then checks if an auth-role is configured on that port and assigns this role to the device.

Fallback role

The fallback role is applied to onboarding devices when there is no derived role available for the devices. Following are the conditions for the fallback role to be applied on onboarding devices:

- The device profile local MAC match feature with block-until-profile-applied mode is configured.
- Device profile along with AAA is configured but no match was found for the device profile client.
- AAA method with no reject or critical role is configured, and the connection to RADIUS server failed.
- 802.1X authentication is enabled on the port, but the supplicant of the device timed out to respond to the authentication request.

Port access role commands

associate policy

```
associate policy <POLICY-NAME>
no associate policy <POLICY-NAME>
```

Description

Associates the policy with the current role.

The `no` form of this command dissociates the policy from the role.

Parameter	Description
<POLICY-NAME>	Specifies the policy name to associate with the current role. Range: Up to 64 characters. NOTE: Only those policies created by using the <code>port-access policy</code> command are allowed to be associated with a role. Policies created using the <code>policy</code> command are not allowed to be associated with a role. Policies that are of the downloaded type are not allowed to be associated with a role.

Examples

Associating a policy with a role:

```
switch(config)# port-access role role01
switch(config-pa-role)# associate policy policy01
```

Dissociating a policy from the role:

```
switch(config-pa-role)# no associate policy policy01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

auth-mode

```
auth-mode {client-mode | device-mode | multi-domain}
```

Description

Configures the authentication mode for the clients that are associated with the current role.

Parameter	Description
client-mode	Selects client mode. In this mode, all clients connecting to the port are sent for authentication.
device-mode	Selects device mode. In this mode, only the first client connecting to the port is sent for authentication. Once this client is authenticated, the port is considered as open and all subsequent clients trying to connect on that port are not sent for authentication.
multi-domain	Selects multidomain mode. In this mode only one voice device is allowed to be authenticated in addition to the configured data devices on a port. By default only one data device is allowed to be authenticated on the multidomain mode along with one voice device. You can configure the maximum number of data devices allowed with the <code>aaa authentication port-access client-limit multi-domain</code> command. If a second voice device or a data device greater than the configured data client limit onboards, a violation is triggered. You must configure a voice VLAN for IP phones to onboard a voice

Parameter	Description
	device in the multidomain authentication mode. To authorize a voice device, you must perform one of the following: ■ Configure the AAA server to send the <code>Aruba-Device-Traffic-Class</code> Aruba VSA with value 1. ■ Configure the <code>device-traffic-class</code> parameter in the role to be applied to indicate a voice device. Without this VSA value or the device type in the role, the switch considers the voice device as a data device.

Examples

Configuring the client authentication mode:

```
switch(config-pa-role)# auth-mode client-mode
```

Command History

Release	Modification
10.08	Added <code>multi-domain</code> parameter
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	<code>config-pa-role</code> The <code>port-access role</code> command takes you into the <code>config-pa-role</code> context.	Administrators or local user group members with execution rights for this command.

cached-reauth-period

`cached-reauth-period [<PERIOD>]`
`no cached-reauth-period`

Description

Enables cached reauthentication, setting the period after which clients that associated with the current role must be reauthenticated.

The `no` form of this command disables cached authentication.

Parameter	Description
<PERIOD>	Specifies the cached reauthentication period (in seconds) for clients associated with the role. Default: 30. Range: 30 to 86400.

Examples

Enabling cached reauthentication and setting its period to 200 seconds:

```
switch(config-pa-role)# cached-reauth-period 200
```

Disabling cached reauthentication:

```
switch(config-pa-role)# no cached-reauth-period
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

client-inactivity timeout

```
client-inactivity timeout {<CLIENT-INACTIVITY-PERIOD> | none}  
no client-inactivity timeout
```

Description

Configures the period that the switch waits for a response from a client after which it removes the client from the role.

The **no** form of the command resets the timeout period to the default.

Parameter	Description
<CLIENT-INACTIVITY-PERIOD>	Specifies the client inactivity time (in seconds). Default: 300. Range: 300 to 4294967295
none	Selects no client deletion due to inactivity.

Examples

Configuring client inactivity timer for a role:

```
switch(config-pa-role)# client-inactivity timeout 3600
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

device-traffic-class

device-traffic-class voice
no device-traffic-class [voice]

Description

Configures the voice class of client to associate with the role.



This attribute is applicable only to `critical-voice-role` role. It is not applicable to other special roles such as, `preauth-role`, `reject-role`, and `fallback-role`.

The `no` form of the command resets the class of client to the default, data.

Usage

Traffic class of a client will not be considered as voice unless `device-traffic-class` is set to `voice` the role. In the multidomain mode, clients with a role that do not have the value of the `device-traffic-class` attribute set to `voice` will be considered as data device.

Examples

Configuring voice device traffic class for role **role01**:

```
switch(config)# port-access role role01  
switch(config-pa-role)# device-traffic-class voice
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

description

description <ROLE-DESCRIPTION>

Description

Configures the role description.

Parameter	Description
<ROLE-DESCRIPTION>	Specifies the role description. Range: Up to 255 characters.

Examples

Configuring the role description:

```
switch(config-pa-role)# description student role
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

mtu

mtu <MTU-SIZE>

Description

Configures the MTU (maximum transmission unit) size of a client for a role.

Parameter	Description
<MTU-SIZE>	Specifies the MTU size in bytes. Range: 68 to 9198.

Examples

Configuring client MTU size:

```
switch(config-pa-role)# mtu 9198
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

poe-priority

poe-priority {critical | high | low}
no poe-priority

Description

Configures the power distribution priority for the port access roles. High power consumption can be prevented using the poe-priority control mechanism.

The no form of this command restores the power distribution to its default priority.

Parameter	Description
critical	Selects critical priority.
high	Selects high priority.
low	Selects low priority.

Examples

Configuring PoE priority for a new role:

```
switch(config)# port-access role role01
switch(config-pa-role)# poe-priority critical
```

Resetting PoE priority for the role to its default:

```
switch(config)# port-access role role01
switch(config-pa-role)# no poe-priority
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

port-access role

```
port-access role <ROLE-NAME>
no port-access role <ROLE-NAME>
```

Description

Creates a new port access role or modifies an existing role. This command takes you into the `config-pa-role` context. A maximum of 32 port access roles can be created.

The `no` form of this command deletes a role.

Parameter	Description
<ROLE-NAME>	Specifies the role name. Range: Up to 64 characters.

Examples

Creating a new role:

```
switch(config)# port-access role basic01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

reauth-period

```
reauth-period <PERIOD>
no reauth-period
```

Description

Configures the period after which clients that associated with the current role must be reauthenticated.



The reauthentication period configured here takes precedence over the reauthentication period configured at the port level.

Parameter	Description
<code><PERIOD></code>	Specifies the reauthentication period (in seconds) for clients associated with the role. Default: None. Range: 1 to 86400. A reauthentication period of less than 60 seconds is not recommended.

Examples

Configuring reauthentication period:

```
switch(config-pa-role) # reauth-period 3000
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

session timeout

```
session-timeout <SESSION-TIMEOUT>  
no session-timeout
```

Description

Configures the session timeout for the role. After the timeout period, the session is disconnected.

Parameter	Description
<code><SESSION-TIMEOUT></code>	Specifies the session timeout (in seconds). Range: 1 to 4294967295. A timeout of less than 60 seconds is not recommended.

Examples

Configuring session timeout for a role:

```
switch(config-pa-role) # session timeout 3600
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

show aaa authentication port-access interface client-status

```
show aaa authentication port-access interface {all | <IF-NAME>}  
client-status [mac <MAC-ADDRESS>]
```

Description

Shows information about the status of the role applied on ports.

Parameter	Description
all	Specifies all interfaces.
<IF-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing information about a client:

```
switch# show aaa authentication port-access interface all client-status mac  
00:00:00:00:00:01
```

```
Port Access Client Status Details
```

```
Client 00:00:00:00:00:01
```

```
=====
```

```
Session Details
```

```
-----
```

```
Port          : 1/7/24  
Session Time  : 151s
```

```
Authentication Details
```

```
-----
```

```
Status          : mac-auth Authenticated  
Auth Precedence : mac-auth - Authenticated, dot1x - Not attempted
```

```
Authorization Details
```

```
-----
```



```
Role   : UserRole_1
Status : Applied
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access role

```
show port-access role {local | radius | name <ROLE-NAME>}
```

Description

Shows information about roles configured locally, or downloaded from the RADIUS server.

Parameter	Description
local	Shows information about locally configured roles.
radius	Shows information about roles downloaded from the RADIUS server.
<ROLE-NAME>	Specifies the role name.

Examples

Showing locally configured role information:

```
switch# show port-access role local

Role Information

Name   : local_role_01
Type   : local
-----
Reauthentication Period      : 333 secs
Authentication Mode          :
Session Timeout              :
Client Inactivity Timeout    :
Tunneled Node Server Zone    :
Tunneled Node Server Secondary Role :
Access VLAN                  :
Native VLAN                   :
Allowed Trunk VLANs          :
MTU                           :
```

```

QoS Trust Mode           :
PoE Priority              : low

Policy                    :

```

Showing information for roles downloaded from a RADIUS server:

```
switch# show port-access role radius
```

Role Information:

Attributes overridden by RADIUS are prefixed by '*'.

```

Name       : RADIUS_Overridden_3598790787
Type       : radius
Base Role  : MixedRole_6300_LUR_1, local, Fri Jul 09 14:34:29 IST 2021
-----

```

```

Reauthentication Period      : 600 secs
Cached Reauthentication Period :
Authentication Mode         :
Session Timeout              : 800 secs
Client Inactivity Timeout    : 1000 secs
Description                  :
*Gateway Zone                : stdn_ctrl
*UBT Gateway Role            : stdn-authenticated-vrfl_dur
  UBT Gateway Clearpass Role :
Access VLAN                  :
Native VLAN                  :
*Allowed Trunk VLANs         : 5
Access VLAN Name             :
Native VLAN Name             :
Allowed Trunk VLAN Names     :
VLAN Group Name              :
*MTU                          : 9198
QOS Trust Mode               :
STP Administrative Edge Port :
PoE Priority                  :
PVLAN Port Type              :
Captive Portal Profile       :
Policy                        :
GBP                           :
Device Type                  :

```

Command History

Release	Modification
10.08	Updated RADIUS role example with radius-overridden attributes
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

stp-admin-edge-port

```
stp-admin-edge-port
no stp-admin-edge-port
```

Description

Configures the port as a spanning tree administrative edge port for the role. This configuration removes the port participation from STP interactions when onboarding devices. This in turn helps in faster onboarding of devices.

The `no` form of the command disables STP edge port functionality.



If the port receives STP BPDU on the STP administrative edge configured port, the port will move to the STP state. You must configure the port as an STP administrative edge port only if you are sure that the connected device will not participate in STP interactions.

Example

Configuring STP edge port for a role:

```
switch(config)# port-access role role01
switch(config-pa-role)# stp-admin-edge-port
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The <code>port-access role</code> command takes you into the <code>config-pa-role</code> context.	Administrators or local user group members with execution rights for this command.

trust-mode

```
trust-mode [dscp | cos | none]
no trust-mode
```

Description

Configures QoS trust mode for the role.

The `no` form of this command configures the default trust mode for the role.

Parameter	Description
dscp	Selects trust DSCP and retain 802.1p priority.

Parameter	Description
cos	Selects trust 802.1p and retain DSCP or IP-ToS.
none	Selects no trusting of priority fields.

Examples

Configuring DSCP trust mode for a role:

```
switch(config)# port-access role role01
switch(config-pa-role)# trust-mode dscp
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

vlan

```
vlan {access | trunk native | trunk allowed} <VLAN-ID>
no vlan {access | trunk native | trunk allowed} <VLAN-ID>
```

```
vlan {access name | trunk native name | trunk allowed name} <VLAN-NAME>
no vlan {access name | trunk native name | trunk allowed name} [<VLAN-NAME>]
```

Description

Configures VLAN IDs or VLAN names, and VLAN modes for a port access role. You can configure either VLAN IDs or VLAN names, or a combination of both for a role.

The **no** form of the command deletes the VLAN configuration from the role. For trunk allowed VLAN names, you can delete the VLAN names individually or all names at once.

Parameter	Description
access <VLAN-ID>	Specifies the VLAN ID for the access VLAN. Supports a single VLAN ID in the range 1 to 4094.
trunk native <VLAN-ID>	Specifies the native VLAN ID on the trunk interface. Supports a single VLAN ID. Range: 1 to 4094.
trunk allowed <VLAN-ID>	Specifies the list of tagged or allowed VLANs on the trunk

Parameter	Description
	interface. Supports a list of VLAN IDs. Range: 1 to 4094. The 4100i Switch Series supports a maximum of 256 trunk allowed VLAN IDs. The 6000 and 6100 Switch Series supports a maximum of 256 trunk allowed VLAN IDs.
access name <VLAN-NAME>	Specifies the VLAN name for the access VLAN. Supports a single VLAN name. Range: Up to 32 characters.
trunk native name <VLAN-NAME>	Specifies the native VLAN name on the trunk interface. Supports a single VLAN name. Range: Up to 32 characters
trunk allowed name <VLAN-NAME>	Specifies the tagged or allowed VLAN name on the trunk interface. Supports a single VLAN name. Range: Up to 32 characters. The switch supports a maximum of 50 trunk allowed VLAN names.

Usage

Note the following points when configuring the VLAN IDs and names for a role:

- For VLAN access and VLAN trunk native respectively, it is recommended to configure only one of either VLAN ID or name for a role. In case both VLAN ID and name are configured, then VLAN ID takes precedence and is applied with the role.
- For VLAN trunk allowed, you can collectively configure a maximum of 50 names and 1024 VLAN IDs on the 6300, 6400 Switch Series, or 256 VLAN IDs on the 6200 Switch Series. In case this limit is exceeded in the role, then that role is rejected when applying it to an onboarding device.

Examples

Configuring VLAN modes and VLAN IDs for a new role:

```
switch(config)# port-access role role01
switch(config-pa-role)# vlan trunk native 10
switch(config-pa-role)# vlan trunk allowed 11-15
switch(config-pa-role)# vlan access 50
```

Configuring VLAN modes and VLAN names for a new role:

```
switch(config)# port-access role role10
switch(config-pa-role)# vlan trunk native name hpe01
switch(config-pa-role)# vlan trunk allowed name data
switch(config-pa-role)# vlan trunk allowed name voice
switch(config-pa-role)# vlan trunk allowed name video
```

Deleting VLAN configuration from a role:

```
switch(config-pa-role)# no vlan trunk native 10
switch(config-pa-role)# no vlan trunk allowed 10-15
switch(config-pa-role)# no vlan access 50
```

Deleting trunk allowed VLAN names from a role individually:

```
switch(config-pa-role)# no vlan trunk native name hpe01
switch(config-pa-role)# no vlan trunk allowed name data
switch(config-pa-role)# no vlan trunk allowed name voice
switch(config-pa-role)# no vlan trunk allowed name video
```

Deleting trunk allowed VLAN names from a role all at once:

```
switch(config-pa-role)# no vlan trunk native name hpe01
switch(config-pa-role)# no vlan trunk allowed name
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-role The port-access role command takes you into the config-pa-role context.	Administrators or local user group members with execution rights for this command.

Port access VLAN groups

VLAN grouping enables user distribution across VLANs in a VLAN group to reduce the size of broadcast domains. This supports dynamic load balancing of users across VLANs by onboarding new users on the least populated VLAN in the group.

A VLAN group is a configuration construct, which contains multiple VLANs allocated to that group. VLAN group leverages the existing standard attribute Tunnel-Group-Private-ID(81). This standard attribute is overloaded to be interpreted as the VLAN group name, if the VLAN name does not exist on the switch with that name. VLAN group is supported only through RADIUS attributes; there is no support available through local roles or downloadable user roles.

VLAN grouping limitations

The following limitations apply to VLAN grouping:

- VLANs must be created to be allocated. Any VLAN that does not exist on the switch is ignored from allocation.
- When a VLAN is allocated from a VLAN group, and is subsequently removed from the VLAN group, no change is performed on the client, until the client expires or a role change is performed. Re-authentication has no effect.
- Deleting a VLAN group after a VLAN from that group is allocated to a client, does not affect the client.
- It is not recommended to use reserved VLANs in the pool. Any VLAN that is reserved for another purpose, such as UBT, is allocated, but fails authorization.

- When the VLAN group and VLAN name are configured with the same name on the switch; upon authentication, the VLAN name takes precedence and clients are applied to the VLAN name.

VLAN group load balancing

VLAN grouping provides distribution of clients across the VLANs in the switch to reduce the broadcast domain of secure clients. This feature enables allocating a VLAN from a preconfigured list of pool, thus reducing the need for the administrator to load balance the network.

Load balancing between VLANs adheres to the following rules:

- A global port access per VLAN client count is maintained.
- For a newly authenticated client with the attribute of a VLAN group, the switch iterates through all VLANs in the VLAN group and assigns the VLAN with the lowest number of clients.
- In cases where more than one VLAN has the same least client count, the switch assigns the VLAN with the lowest VLAN ID to the authenticated client.
- VLAN group load-balancing can be viewed with the *show port-access clients detail* command output, which shows the VLAN association and VLAN group name for each authenticated client.
- The following example configuration shows a VLAN group and 4 VLANs associated with it:

```
port-access vlan-group vgp1
associate-vlan 10,20,30,40
```

For eight newly authenticated clients, the VLAN assignment order is as follows:

Client	VLAN Assignment
Client 1	VLAN 10
Client 2	VLAN 20
Client 3	VLAN 30
Client 4	VLAN 40
Client 5	VLAN 10
Client 6	VLAN 20
Client 7	VLAN 30
Client 8	VLAN 40

- The VLAN client count is across multiple VLAN groups and multiple interfaces.
 - **Example 1:** Client 1 authenticates with group vgp1 containing VLANs 10, 20 where both VLANs have a client count of zero. Client 1 is assigned VLAN 10 since both VLANs have the same client count of zero, and VLAN 10 has the lower VLAN ID. Next, client 2 authenticates with group vgp2 and is assigned VLAN 20 since VLAN 20 has the lower client count, even though it lies within a different VLAN group.
 - **Example 2:** Client 1 authenticates on interface 1/1/1 with group vgp1 containing VLANs 10, 20. Next, client 2 authenticates on interface 1/1/2 on the same or different VLAN group. The order of VLAN assignment for client 1 and client 2 is VLAN 10 and VLAN 20, respectively.

Port access VLAN group commands

associate-vlan

```
associate-vlan <VLAN-ID>
no associate-vlan <VLAN-ID>
```

Description

Associates VLANs with an existing VLAN group.

The `no` form of this command removes the association of the VLAN with the specified VLAN group.

Parameter	Description
<VLAN-ID>	Specifies the VLAN or a specific set of VLANs. Range 1 to 4094.

Examples

Associating VLANs with **group1**:

```
switch(config)# port-access vlan-group group1
switch(config-pa-vlan-group)# associate-vlan 5,10-15,20,21
```

Associating additional VLANs with **group1**:

```
switch(config)# port-access vlan-group group1
switch(config-pa-vlan-group)# associate-vlan 30-40
```

Dissociating VLANs 10-15 from VLAN **group1**:

```
switch(config-pa-vlan-group)# no associate-vlan 10-15
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-pa-vlan-group	Administrators or local user group members with execution rights for this command.

port-access vlan-group

```
port-access vlan-group <NAME>
no port-access vlan-group <NAME>
```

Description

Creates the specified VLAN group (if it does not already exist) and then enters its context `config-pa-vlan-group`. For an existing VLAN group, this command enters the context of the specified VLAN group.

The `no` form of this command removes the specified VLAN group.

In order for the group to be applied to a client, VLANs associated to the group should be configured on the switch. If not, the role displays an error.

Parameter	Description
<code><NAME></code>	Specifies the name of the VLAN group. Range 2 to 32 characters.

Examples

Creating VLAN **group1** and associating VLANs with it:

```
switch(config)# port-access vlan-group group1
switch(config-pa-vlan-group)# associate-vlan 5,10-15,20,21
```

Dissociating VLANs 10-15 from VLAN **group1**:

```
switch(config-pa-vlan-group)# no associate-vlan 10-15
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	<code>config</code>	Administrators or local user group members with execution rights for this command.

show running-config port-access vlan-group

```
show running-config port-access vlan-group
```

Description

Shows information for all configured VLAN groups.

Example

Showing the port access VLAN group configuration:

```
switch# show running-config port-access vlan-group
...
port-access vlan-group group1
    associate-vlan 5,20,21,30-40
```

```
port-access vlan-group group2
    associate-vlan 50-60,75-85
...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

RADIUS access request and accounting request packets are sent to a RADIUS server during authentication and accounting of port access clients respectively. These access request packets contain various AVPs (Attribute Value Pairs) that carry the information about the RADIUS server and the client. For example, these AVPs include items such as username and RADIUS server identifier (host name). Similar kinds of details are included in accounting request packets which are sent to accounting servers. Including these attributes in access request packets helps administrators assign appropriate access policies to the clients.

Several commands are provided for configuring RADIUS attributes per RADIUS server group for use with port access client authentication by RADIUS.

Configurable RADIUS attribute commands

aaa radius-attribute group

```
aaa radius-attribute group <GROUP-NAME>
no aaa radius-attribute group <GROUP-NAME>
```

Description

Configures an existing RADIUS server group for which the configured RADIUS attributes will be included in request packets. Enters the `config-radius-attr` context.

The `no` form of this command unconfigures the RADIUS server group for the configured RADIUS attributes.

Parameter	Description
<GROUP-NAME>	Specifies an existing RADIUS server group name.

Examples

Configuring various RADIUS attributes for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# nas-id value ARUBA_NAS-01
switch(config-radius-attr)# nas-id request-type authentication
switch(config-radius-attr)# tunnel-private-group-id value static
switch(config-radius-attr)# tunnel-private-group-id request-type authentication
```

Unconfiguring RADIUS attributes for **rad_group1**:

```
switch(config)# no aaa radius-attribute group rad_group1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

nas-id request-type

```
nas-id request-type {authentication | accounting | both}
no nas-id request-type {authentication | accounting | both}
```

Description

For the selected (by context) RADIUS server group, configures the Network Access Server (NAS) ID request type for which the attribute configured with command `nas-id` value will be included.

The no form of this command unconfigures the specified request type.

Parameter	Description
authentication	Selects the authentication request type.
accounting	Selects the accounting request type.
both	Selects both the authentication and accounting request types.

Examples

Configuring the authentication request type for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# nas-id request-type authentication
```

Configuring both the authentication and accounting request types for **rad_group2**:

```
switch(config)# aaa radius-attribute group rad_group2
switch(config-radius-attr)# nas-id request-type both
```

Unconfiguring the authentication request type for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# no nas-id request-type authentication
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-radius-attr	Administrators or local user group members with execution rights for this command.

nas-id value

```
nas-id value <NAS-ID>
no nas-id [value <NAS-ID>]
```

Description

For the selected (by context) RADIUS server group, configures the Network Access Server Identifier (NAS ID) (type 32, RFC 2865). The NAS ID is sent in the RADIUS access request and accounting packets to notify the source of the RADIUS access request.

The `no` form of this command unconfigures the specified NAS ID.

Parameter	Description
<NAS-ID>	Specifies the FQDN or other unique identifying name of the Network Access Server (NAS). Range 1 to 253 characters.

Examples

Configuring the Network Access Server (NAS) ID for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# nas-id value ARUBA_NAS-01
```

Unconfiguring the NAS ID for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# no nas-id value ARUBA_NAS-01
```

Unconfiguring both the NAS-ID value and the request type for **rad_group2**:

```
switch(config)# aaa radius-attribute group rad_group2
switch(config-radius-attr)# no nas-id
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-radius-attr	Administrators or local user group members with execution rights for this command.

tunnel-private-group-id request-type

```
tunnel-private-group-id request-type {authentication | accounting | both}  
no tunnel-private-group-id request-type {authentication | accounting | both}
```

Description

For the selected (by context) RADIUS server group, configures the request type for which the attribute configured with command `tunnel-private-group-id` value will be included.

The no form of this command unconfigures the specified request type.

Parameter	Description
authentication	Selects the authentication request type.
accounting	Selects the accounting request type.
both	Selects both the authentication and accounting request types.

Examples

Configuring the authentication request type for **rad_group1**:

```
switch(config)# aaa radius-attribute group rad_group1  
switch(config-radius-attr)# tunnel-private-group-id request-type authentication
```

Configuring both the authentication and accounting request types for **rad_group2**:

```
switch(config)# aaa radius-attribute group rad_group2  
switch(config-radius-attr)# tunnel-private-group-id request-type both
```

Unconfiguring the authentication request type for **rad_group2**:

```
switch(config)# aaa radius-attribute group rad_group2  
switch(config-radius-attr)# no tunnel-private-group-id request-type authentication
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-radius-attr	Administrators or local user group members with execution rights for this command.

tunnel-private-group-id value

```
tunnel-private-group-id value {static | dynamic}
no tunnel-private-group-id value {static | dynamic}
```

Description

For the selected (by context) RADIUS server group, configures the `tunnel-private-group-id` value (type 81, RFC 2868) that will be sent in RADIUS access-request packets. This is used for VLAN identification.

The `no` form of this command unconfigures specified `tunnel-private-group-id` value.

Parameter	Description
static	Causes the switch to send (as an attribute value) the native VLAN of the client port.
dynamic	Causes the switch to send (as an attribute value) the client VLAN assigned by server. This is applicable during re-authentication scenarios.

Examples

Configuring **rad_group1** for the RADIUS attribute to identify the native VLAN of the client port:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# tunnel-private-group-id value static
```

Configuring **rad_group2** for the RADIUS attribute to identify the client VLAN assigned by the server:

```
switch(config)# aaa radius-attribute group rad_group2
switch(config-radius-attr)# tunnel-private-group-id value dynamic
```

Unconfiguring (for **rad_group1**) the RADIUS attribute to identify the native VLAN of the client port:

```
switch(config)# aaa radius-attribute group rad_group1
switch(config-radius-attr)# no tunnel-private-group-id value static
```

Unconfiguring (for **rad_group3**) both the group-ID value and request type:

```
switch(config)# aaa radius-attribute group rad_group3
switch(config-radius-attr)# no tunnel-private-group-id
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-radius-attr	Administrators or local user group members with execution rights for this command.

ArubaOS-CX supports various RADIUS server attributes to be applied during authentication of clients. This section lists the attributes supported in the following features:

- 802.1X authentication
- MAC authentication
- Dynamic authorization
- Session authorization in 802.1X and MAC authentication, and CoA
- RADIUS server tracking
- RADIUS network accounting



The following terms are used in the list of attributes:

- **Tx**: Attribute added in the request packets that are sent to the RADIUS server.
- **Rx**: Attribute processed in the response packets received from the RADIUS server.

Attributes supported in 802.1X authentication

Following are the RADIUS attributes supported in 802.1X authentication:

Attribute name	Tx	Rx	Notes
User-name	Y	N	RFC2865
Calling-station-id	Y	N	RFC2865/3580
Called-station-id	Y	N	RFC2865/3580
NAS-port-id	Y	N	RFC2869
NAS-port	Y	N	RFC2865
Service-Type	Y	N	RFC2865
EAP-Message	Y	N	RFC2869
State	Y	Y	RFC2865
Session-Timeout	N	Y	RFC2865 - Used as EAP timeout in Challenge packet
NAS-IP-Address	Y	N	RFC2865
NAS-Identifier	Y	N	RFC2865
NAS-Ipv6-Address	Y	N	RFC3162
Message-Authenticator	Y	Y	RFC2869

Attributes supported in MAC authentication

Following are the RADIUS attributes supported in MAC authentication:

Attribute name	Tx	Rx	Notes
User-name	Y	N	RFC2865
Calling-station-id	Y	N	RFC2865/3580
Called-station-id	Y	N	RFC2865/3580
NAS-port-id	Y	N	RFC2869
NAS-port	Y	N	RFC2865
Service-Type	Y	N	RFC2865
State	Y	Y	RFC2865
NAS-IP-Address	Y	N	RFC2865

NAS-Identifier	Y	N	RFC2865	
NAS-Ipv6-Address	Y	N	RFC3162	
Message-Authenticator	Y	Y	RFC2869	
Chap-Challenge	Y	N	RFC2865	
Chap-Password	Y	N	RFC2865	
User-Password	Y	N	RFC2865	

Attributes supported in dynamic authorization

Following are the RADIUS attributes supported in dynamic authorization:

Attribute name	Tx	Rx	Notes
-----	----	----	-----
User-name	N	Y	RFC2865
Calling-station-id	N	Y	RFC2865/3580
Called-station-id	N	Y	RFC2865/3580
NAS-port-id	N	Y	RFC2869
NAS-port	N	Y	RFC2865
NAS-IP-Address	N	Y	RFC2865
NAS-Identifier	N	Y	RFC2865
NAS-Ipv6-Address	N	Y	RFC3162
Error-cause	Y	N	RFC5176
Acct-Terminate-Cause	Y	Y	RFC2866
Acct-Session-Id	N	Y	RFC2866
Message-Authenticator	N	Y	RFC2869
Event-Timestamp	N	Y	RFC2869

- One or more of the following attributes, `NAS-IP-Address`, `NAS-Identifier`, `NAS-IPv6-Address`, is mandatory for processing Change of Authorization (CoA) requests from dynamic authorization clients.
- Either `Acct-Session-Id` attribute, or one or both of `NAS-port` and `NAS-port-id` attributes and the `Calling-station-id` attribute is mandatory to identify the user session for processing CoA requests from dynamic authorization clients.
- The `User-name` attribute is mandatory for processing all CoA requests.
- The `Acct-Terminate-Cause` attribute is used in the CoA disconnect request and response messages.
- All session authorization attributes (both VSA and standard) are supported in the CoA message only, including `Aruba-Port-Bounce`.



Session authorization attributes supported in 802.1X and MAC authentication, and CoA

Standard session attributes supported

Following are the standard session attributes supported in 802.1X and MAC authentication, and CoA:

Attribute name	ID	Type	Notes
-----	----	-----	-----
Filter-Id	11	String	RFC3580
Egress-VLANID	56	Octet	RFC4675
Egress-VLAN-Name	58	String	RFC4675
Tunnel-Type	64	Octet	RFC2868
Tunnel-Medium-Type	65	Octet	RFC2868
Tunnel-Private-Group-ID	81	String	RFC2868
NAS-Filter-Rule	92	String	RFC4849
Framed-MTU	12	Octet	RFC2865
Session-Timeout	27	Octet	RFC2865
Terminate-Action	29	Octet	RFC2865
Idle-Timeout	28	Octet	RFC2865



When multiple clients request a different MTU value using the Framed-MTU attribute, the highest MTU value requested among the clients will be programmed on the port.

Vendor-Specific Attributes supported in session authorization

Following are the Vendor-Specific Attributes (VSAs) supported in session authorization:

Attribute Name	Length	Type	Aruba Vendor ID	Aruba Attribute Type
Aruba-PoE-Priority	4	integer	14823	49
Aruba-Port-Auth-Mode	4	integer	14823	50
Aruba-NAS-Filter-Rule	<=247	string	14823	51
Aruba-QoS-Trust-Mode	4	integer	14823	52
Aruba-User-Role	<=63	string	14823	1
Aruba-Port-Bounce	4	Integer	14823	40
Aruba-STP-Admin-Edge-Port	4	Integer	14823	55



- Change of Authorization of specific attributes in the user role is not supported. Only entire role can be changed.
- Similarly if the session is using RADIUS attributes, CoA can change only the RADIUS session attributes.
- Change of Authorization to user role for a session using RADIUS attributes is not supported either. If this action is attempted, a NAK message is sent.

Description of VSAs

Aruba-PoE-Priority

Specifies the PoE priority of onboarding devices post authentication. Following are the supported values:

- 0: Critical
- 1: Medium
- 2: Low

This attribute overrides the PoE priority configured on the port where the device onboards. This attribute is typically used for infrastructure devices. When multiple clients request different priorities, the critical priority takes precedence over medium priority and the medium priority takes precedence over low priority setting.

Aruba-Port-Auth-Mode

Specifies the authentication mode of the port post authentication. Following are the supported values:

- 1: Device mode—In this mode, an infrastructure device, for example, switch or access point, is authenticated first, and all devices connecting to this authenticated device are allowed access. Here, the policy and VLAN attributes are applied at the port-level. In device mode, it is expected that only one device is active and authenticated at any instant. Untagged VLAN will override the port VLAN ID and the tagged VLANs will override the tagged VLANs that are configured on the port using the CLI.
- 2: Client mode—In this mode, all devices trying to onboard on that port are authenticated. Here, the policy and VLAN attributes are applied per client. Untagged VLAN is configured using MAC-based VLAN. Tagged VLANs are arbitrated among all clients and the result is applied to the port.

Aruba-NAS-Filter-Rule

This attribute is similar to the NAS-Filter-Rule RFC attribute but with additional functionality to support vendor-specific actions in the rule. This attribute can be used to perform actions such as count and rate-

limiting. Multiple instances of this attribute are supported, however, the maximum number of filter rules (including this VSA and `NAS-Filter-Rule`) supported per client is 128. A single `NAS-Filter-Rule` attribute split across multiple VSAs is not supported as servers such as FreeRadius and ClearPass Policy Manager do not terminate filter rule with '\0' value. Most policy servers use one filter rule per VSA.

Aruba-QoS-Trust-Mode

Specifies how the switch assigns local priority values to ingress packets. Following are the supported values:

- 0: Trust mode DSCP
- 1: Trust mode QoS
- 2: No trust mode configuration

This attribute overrides the trust mode configured on the port where the device onboards. This attribute is typically used for infrastructure devices. When multiple clients request different trust modes, the DSCP trust mode takes precedence over QoS trust mode and the QoS trust mode takes precedence over no trust mode configuration setting.

Aruba-User-Role

Specifies the role that must be applied for the devices post authentication. The role must be defined on the switch. All the session attributes can be defined in the role. Session authorization attributes (both standard and VSAs) sent with this attribute are ignored.

Aruba-Port-Bounce

Used in the CoA message to signal the switch to shut down the port for the duration specified.

Aruba-STP-Admin-Edge-Port

When enabled, the port will be treated as STP edge port. Even if STP is configured on the port, it will not be executed. Traffic forwarding will occur immediately when a device connects to the port and completes authentication. Following are the supported values:

- 0: Disable STP admin edge port.
- 1: Enable STP admin edge port.

Attributes supported in RADIUS network accounting

Following are the attributes supported in RADIUS network accounting:

Attribute name	Tx	Rx	Notes
User-name	N	N	RFC2865
Calling-station-id	Y	N	RFC2865
Calling-station-id	Y	N	RFC2865
NAS-port-id	Y	N	RFC2869
NAS-port	Y	N	RFC2865
NAS-port-Type	Y	N	RFC2865
Service-Type	Y	N	RFC2865
NAS-IP-Address	Y	N	RFC2865
NAS-Identifier	Y	N	RFC2865
NAS-Ipv6-Address	Y	N	RFC3162
Acct-Authentic	Y	N	RFC2866
Acct-Session-Id	Y	N	RFC2866
Acct-Status-Type	Y	N	RFC2866
Acct-Input-Octets	Y	N	RFC2866 - In Interim and Stop packets
Acct-Output-Octets	Y	N	RFC2866 - In Interim and Stop packets
Acct-Input-Packets	Y	N	RFC2866 - In Interim and Stop packets
Acct-Output-Packets	Y	N	RFC2866 - In Interim and Stop packets
Acct-Input-Gigawords	Y	N	RFC2869 - In Interim and Stop packets
Acct-Output-Gigawords	Y	N	RFC2869 - In Interim and Stop packets
Acct-Session-Time	Y	N	RFC2866 - In Interim and Stop packets
Acct-Terminate-Cause	Y	N	RFC2866 - in Stop packet
Class	Y	N	RFC2865

Attributes supported in RADIUS server tracking

Following are the attributes supported in RADIUS server tracking:

Attribute name	Tx	Rx	Notes
-----	---	---	-----
User-name	Y	N	RFC2865
NAS-IP-Address	Y	N	RFC2865
NAS-Identifier	Y	N	RFC2865
NAS-Ipv6-Address	Y	N	RFC3162
Chap-Challenge	Y	N	RFC2865
Chap-Password	Y	N	RFC2865
User-Password	Y	N	RFC2865

Port security enables you to configure each switch port with a unique list of the MAC addresses of devices that are authorized to access the network through that port. This security enables individual ports to detect, prevent, and log attempts by unauthorized devices to communicate through the switch.

MAC Lockdown, also known as Static Addressing, is used to prevent station movement and MAC address hijacking, by allowing a given MAC address to use only an assigned port on the switch. MAC Lockdown also restricts the client device to a specific VLAN.

MAC Lockout enables blocking a specific MAC address so that the switch drops all traffic to or from the specified address.



Port security does not prevent intruders from receiving broadcast and multicast traffic. MAC Lockdown has a higher priority over port security.

Port-security sticky MAC

Sticky MAC is a port security feature that learns MAC addresses on an interface and retains the MAC information. When sticky learning is enabled on a port, all non-static MAC addresses are considered as sticky MACs. Also, all newly on-boarded clients are considered as sticky MACs. The sticky authorized clients are not affected by a switch reboot or link-flap once the MAC addresses are learnt. When disabled, all sticky MACs on the port are made as dynamic clients.

Sticky MACs can be configured statically (sticky-static) and also be learned dynamically (sticky-dynamic) on a sticky-learn enabled port.

-
- If the same MAC address is configured as sticky-static and static on a sticky learning port, sticky MAC configuration takes precedence.
 - Static non-sticky MAC addition is supported on a sticky learning enabled port.
 - Existing static port-security MACs on a port are not changed to sticky MAC on enabling the sticky MAC feature.
 - Moving sticky MAC clients from one port to another is a violation. You can view the violation information using the `show port-access security violation sticky-mac-client-move interface` command. Also, the following event log message will be displayed: `Port security sticky client move violation triggered on port {port} for client with MAC address {mac_addr}`.
 - Downgrading AOS-CX from 10.07 or later versions to earlier versions after learning port-security sticky MACs and upgrading it back to 10.07 or later versions might cause unstable behavior of sticky MACs. So, it is recommended to disable port-security configuration at the global context during migration of software image back to 10.07 or later versions in such scenarios.
-



Basic operation

Default port security operation

The default port security setting for each port is dynamic mode in which the switch learns addresses from inbound traffic from any connected device.

Intruder protection

A port that detects an intruder blocks the intruding device from transmitting to the network through that port.

General operation for port security

On a per-port basis, you can configure security measures to block unauthorized devices, and to send notice of security violations. Once port security is configured, you can then monitor the network for security violations through one or more of the following:

- Alert flags captured by network management tools.
- Alert Log entries in the WebAgent
- Event Log entries in the console interface


For any port, you can configure the following:

- Action—Used when a port detects an intruder. Specifies whether to send an SNMP trap to a network management station and whether to disable the port.
- Address limit—Sets the number of authorized MAC addresses allowed on the port.
- Address learn mode—Specify how the port acquires authorized MAC addresses. After configuring the maximum secure MAC address limit, the MAC address can be learned by one of the following ways:
 - Configure all MAC addresses by using the `mac-address` command.
 - Allow the port to dynamically learn all MAC addresses.
 - Configure some MAC addresses and allow the rest to be learned dynamically.
- Static—Enables you to set a fixed limit on the number of MAC addresses authorized for the port and to specify some or all the authorized addresses. (If you specify only some of the authorized addresses, the port learns the remaining authorized addresses from the traffic it receives from connected devices.)
- Configured—Requires that you specify all MAC addresses authorized for the port. The port is not allowed to learn addresses from inbound traffic.
- Authorized (MAC) Addresses—Specify up to eight devices (MAC addresses) that are allowed to send inbound traffic through the port. This feature:
 - Closes the port to inbound traffic from any unauthorized devices that are connected to the port.
 - Provides the option for sending an SNMP trap notifying of an attempted security violation to a network management station and, optionally, disables the port.
- Port Access—Allows only the MAC address of a device authenticated through the switch 802.1X Port-Based access control.

Blocking unauthorized traffic

Unless you configure the switch to disable a port on which a security violation is detected, the switch security measures block unauthorized traffic without disabling the port. This implementation enables you to apply the security configuration to ports on which hubs, switches, or other devices are connected, and to maintain security while also maintaining network access to authorized users.

Figure 1 *How port security controls access*

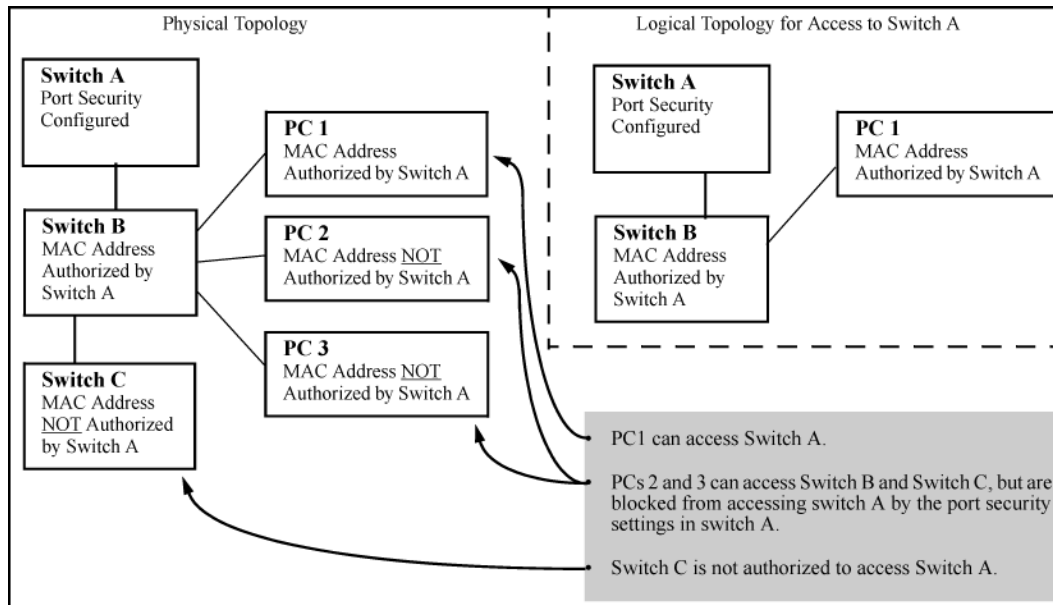

Broadcast and Multicast traffic is always allowed, and can be read by intruders connected to a port on which you have configured port security.

Trunk group exclusion

Port security does not operate on either a static or dynamic trunk group. If you configure port security on one or more ports that are later added to a trunk group, the switch resets the port security parameters for those ports to the factory default configuration. Ports configured for either Active or Passive LACP, and which are not members of a trunk, can be configured for port security.

Port security commands

port-access port-security

```
port-access port-security {enable | disable}
no port-access port-security {enable | disable}
```

Description

Enables or disables port security globally or at the port level.

Examples

Enabling port security globally:

```
switch(config)# port-access port-security enable
```

Disabling port security globally:

```
switch(config)# port-access port-security disable
```

Enabling port security on a port:


```
switch(config-if)# port-access port-security enable
```

Disabling port security on a port:

```
switch(config-if)# port-access port-security disable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config config-if	Administrators or local user group members with execution rights for this command.

port-access port-security client-limit

```
port-access port-security client-limit <CLIENTS>  
no port-access port-security client-limit
```

Description

Configures the maximum number of clients that are allowed on a port. After configuring the maximum clients limit, the MAC addresses of the clients can be learned by one of the following methods:

- User can manually configure all MAC addresses by using the `mac-address` command.
- User can allow the port to dynamically learn all MAC addresses.
- User can configure a fixed number of MAC addresses and allow the switch to learn the remaining addresses dynamically.

The `no` form of the command resets the number of clients to the default, 1.

Parameter	Description
<CLIENTS>	Specifies the maximum number of clients. Default: 1. Range: 1 to 32 (4100i, 6000, 6100).

Examples

Configuring client limit on a port:

```
switch(config-if)# port-access port-security enable  
switch(config-if-port-security)# client-limit 24
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if-port-security	Administrators or local user group members with execution rights for this command.

port-access port-security mac-address

port-access port-security mac-address <MAC-ADDRESS>
no port-access port-security mac-address <MAC-ADDRESS>

Description

Configures a static client (current interface (port) context) MAC address.

The `no` form of this command removes an authorized static client from the port.

Parameter	Description
<MAC-ADDRESS>	Specifies the static client MAC address.

Examples

Configuring a static client on a port:

```
switch(config-if)# port-access port-security
switch(config-if-port-security)# mac-address aa:bb:cc:dd:ee:ff
```

Deleting a static client on a port:

```
switch(config-if)# port-access port-security
switch(config-if-port-security)# no mac-address aa:bb:cc:dd:ee:ff
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if-port-security	Administrators or local user group members with execution rights for this command.

show port-access port-security interface client-status

```
show port-access port-security interface {all|<IF-NAME>}  
    client-status [mac <MAC-ADDRESS>]
```

Description

Shows port security clients status information for the ports. The output can be filtered by interface or MAC address.

Parameter	Description
all	Selects all interfaces.
<IF-NAME>	Specifies the interface name.
<MAC-ADDRESS>	Specifies the client MAC address.

Examples

Showing client status information for all ports:

```
switch# show port-access port-security interface all client-status
```

Port Security Client Status Details

Authorized-Clients	Type	Port
AB:CD:DE:FF:AA:BB	static	1/1/1
DD:CD:AB:CD:EE:01	dynamic	1/1/2
00:50:56:96:7e:fc	sticky-dynamic	1/3/2

Showing client status information with sticky-learning enabled for all ports:

```
switch# show port-access port-security interface all client-status
```

Port Security Client Status Details

Authorized-Clients	Type	Port
AB:CD:DE:FF:AA:BB	sticky-static	1/1/1
DD:CD:AB:CD:EE:01	sticky-dynamic	1/1/2
DE:CD:AB:BB:EE:02	sticky-dynamic	1/1/2

Showing client status information for a client:

```
switch# show port-access port-security interface 1/3/2 client-status mac  
00:50:56:96:7e:fc
```

Port Security Client Status Details

Authorized-Clients	Type	Port
00:50:56:96:7e:fc	sticky-dynamic	1/3/2

Showing client status information for a port:

```
switch# show port-access port-security interface 1/3/2 client-status
```

Port Security Client Status Details

Authorized-Clients	Type	Port
00:50:56:96:7e:fc	sticky-dynamic	1/3/2

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show port-access port-security interface port-statistics

```
show port-access port-security interface {all|<IF-NAME>} port-statistics
```

Description

Shows port security statistics for the ports in a switch. The output can be filtered by interface.

Parameter	Description
all	Selects all interfaces.
<IF-NAME>	Specifies the interface name.

Examples

Showing information for all ports.

```
switch# show port-access port-security interface all port-statistics
```

```
Port 1/1/1
=====
```

Client Details

Number of authorized clients	: 0
Number of sticky authorized clients	: 2

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

sticky-learn enable

```
sticky-learn enable
no sticky-learn enable
```

Description

Enables sticky learning on the port. All the existing and new MACs learned on the port are made sticky. The `no` form of this command disables the sticky learning on the port.

Examples

Enabling sticky learning on the port:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access port-security
switch(config-if-port-security)# sticky-learn enable
```

Disabling sticky learning on the port:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access port-security
switch(config-if-port-security)# no sticky-learn enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if-port-security	Administrators or local user group members with execution rights for this command.

show port-access security violation sticky-mac-client-move interface

```
show port-access security violation sticky-mac-client-move interface {all|<IF-NAME>}
```

Description

Shows information about the sticky-mac client move violation. The output can be filtered by interface.

Parameter	Description
all	Selects all interfaces.
<IF-NAME>	Specifies the interface name.

Examples

Showing information for all ports.

```
switch# show port-access port-security violation sticky-mac-client-move
interface all
```

Sticky MAC Client Move Violation Status Details

Port	Violation	Violation-Count
1/1/1	No	0
1/1/2	Yes	10
1/1/5	No	10

Showing information for a particular port.

```
switch# show port-access port-security violation sticky-mac-client-move
interface 1/1/1
```

Sticky MAC Client Move Violation Status Details

Port	Violation	Violation-Count
1/1/1	No	10

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

AOS-CX switches include automatic detection and control for certain link errors and excessive traffic conditions. Fault monitor can be used to log an event or send SNMP traps for these conditions and temporarily disable the port to protect the network. Monitoring can be enabled for all recognized faults or for individual faults, and actions and thresholds for each fault can be configured.

Fault monitor applies only to physical ports and not to LAGs, tunnels, VSF links, or other types of interfaces. Fault monitoring can be applied to the individual members of a LAG.

Fault monitoring conditions

The following fault conditions are monitored:

Excessive jabbers

An excessive jabbers fault is reported when the number of ingress jabber frames per 10,000 received frames exceeds the configured threshold value in a twenty second interval. In jabbers fault, the packets size is more than the configured MTU on the interface with bad CRC.

Excessive CRC errors

An excessive CRC error fault is reported when the number of ingress `crc-error` frames per 10,000 received frames exceeds the configured threshold value in a twenty second interval.

Excessive oversize packets

An excessive oversized packet fault is reported when the number of ingress oversized frames per 10,000 received frames exceeds the configured threshold value in a twenty second interval. In oversize packet fault, the packets size is more than the configured MTU on the interface with good cyclic redundancy check (CRC).

Excessive fragments

An excessive fragment fault is reported when the number of ingress fragment frames per 10,000 received frames exceeds the configured threshold value in a twenty second interval. In fragments fault, the packet size is lesser than the configured MTU on the interface with bad CRC.

Excessive TX drops

Excessive TX drops fault is an example of over bandwidth. It is reported when egress dropped packets per 10,000 transmitted frames exceeds the configured threshold value in a twenty second interval.

Excessive collisions

An excessive collision fault is an example of over bandwidth, it gets reported when egress `collision` frames per 10,000 transmitted frames exceeds the configured threshold value in a 20 second interval.

Excessive Late Collisions

An excessive late collision fault is reported when ingress `late-collision` frames per 10,000 received frames exceeds the configured threshold value in a 300 second interval.

Excessive alignment errors

A full duplex mismatch fault is reported when ingress `alignment-error` frames per 10,000 received frames exceeds the configured threshold value in a 20 second interval.

Excessive link flaps

A link flap fault is reported when the count of transitions between link-up and link-down state exceeds the configured threshold in a ten second interval.

Excessive broadcasts

A broadcast storm fault is reported when the average ingress traffic rate of broadcast packets exceeds the configured threshold in a twenty second interval.

The default threshold level is configured as a percentage of the bandwidth of the port. Larger the frame size, smaller the converted threshold value in PPS. Hence larger frames require lower threshold percent configurations to hit the fault.

Excessive multicasts

A multicast storm fault is reported when the average ingress traffic rate of multicast packets exceeds the configured threshold in a twenty second interval.

Fault monitor commands

(enabling, disabling faults)

```
{all | <FAULT>}  
no {all | <FAULT>}
```

Description

Within the selected fault monitor profile context, enables all faults or specific faults for monitoring.



Faults enabled with this command use default actions and thresholds unless the actions and thresholds are configured with respective commands `action` and `threshold`.

By default, all faults are disabled in a profile and remain disabled until enabled as described here. Configuring the action and threshold does not enable the fault.

The `no` form of this command disables faults for monitoring.

Parameter	Description
<code>all</code>	Selects all faults.
<code><FAULT></code>	Selects a specific fault. Available fault names: <code>excessive-jabbers</code> <code>excessive-crc-errors</code> <code>excessive-oversize-packets</code>

Parameter	Description
	excessive-fragments excessive-tx-drops excessive-collisions excessive-late-collisions excessive-alignment-errors excessive-link-flaps excessive-broadcasts excessive-multicasts

Examples

Enabling faults:

```
switch(config-fault-monitor-profile) # all
switch(config-fault-monitor-profile) # excessive-oversize-packets
switch(config-fault-monitor-profile) # excessive-jabbers
switch(config-fault-monitor-profile) # excessive-fragments
switch(config-fault-monitor-profile) # excessive-crc-errors
switch(config-fault-monitor-profile) # excessive-tx-drops
switch(config-fault-monitor-profile) # excessive-link-flaps
switch(config-fault-monitor-profile) # excessive-broadcasts
switch(config-fault-monitor-profile) # excessive-multicasts
switch(config-fault-monitor-profile) # excessive-collisions
switch(config-fault-monitor-profile) # excessive-late-collisions
switch(config-fault-monitor-profile) # excessive-alignment-errors
```

Disabling faults:

```
switch(config-fault-monitor-profile) # no all
switch(config-fault-monitor-profile) # no excessive-oversize-packets
switch(config-fault-monitor-profile) # no excessive-jabbers
switch(config-fault-monitor-profile) # no excessive-fragments
switch(config-fault-monitor-profile) # no excessive-crc-errors
switch(config-fault-monitor-profile) # no excessive-tx-drops
switch(config-fault-monitor-profile) # no excessive-link-flaps
switch(config-fault-monitor-profile) # no excessive-broadcasts
switch(config-fault-monitor-profile) # no excessive-multicasts
switch(config-fault-monitor-profile) # no excessive-collisions
switch(config-fault-monitor-profile) # no excessive-late-collisions
switch(config-fault-monitor-profile) # no excessive-alignment-errors
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i	config-fault-monitor-profile	Administrators or local user group members with

Platforms	Command context	Authority
6000 6100		execution rights for this command.

action

```
{all | <FAULT>} action {notify | notify-and-disable [auto-enable <TIMEOUT>]}
```

```
no {all | <FAULT>} action {notify | notify-and-disable [auto-enable <TIMEOUT>]}
```

Description

Within the selected fault monitor profile context, configures the fault monitoring action for the specified fault. Default action: `notify` with `auto-enable` disabled.

The `no` form of this command removes the action and disables `auto-enable`.

Parameter	Description
<code>all</code>	Selects all faults.
<code><FAULT></code>	Selects a specific fault. Available fault names: <code>excessive-jabbers</code> <code>excessive-crc-errors</code> <code>excessive-oversize-packets</code> <code>excessive-fragments</code> <code>excessive-tx-drops</code> <code>excessive-collisions</code> <code>excessive-late-collisions</code> <code>excessive-link-flaps</code> <code>excessive-broadcasts</code> <code>excessive-multicasts</code>
<code>notify</code>	Selects the <code>notify</code> action. Notifies through events, DLOGs, and SNMP trap. This action is enabled by default.
<code>notify-and-disable</code>	Selects the action as <code>notify-and-disable</code> . Notifies through events, DLOGs, and SNMP trap, and then disables the port.
<code>auto-enable <TIMEOUT></code>	Sets the number of seconds after which a port disabled by the <code>notify-and-disable</code> action is automatically re-enabled. Range: 1 to 604800 seconds.



The fault parameter values are saved even after a fault is disabled in the profile. The saved values will be used if the fault is later re-enabled in the profile again.

Examples

Configuring the `notify` fault action:

```
switch(config-fault-monitor-profile)# all action notify
switch(config-fault-monitor-profile)# excessive-oversize-packets action notify
switch(config-fault-monitor-profile)# excessive-jabbers action notify
switch(config-fault-monitor-profile)# excessive-collisions action notify
```

Configuring the notify-and-disable fault action:

```
switch(config-fault-monitor-profile)# all action notify-and-disable
switch(config-fault-monitor-profile)# excessive-oversize-packets action notify-and-disable
switch(config-fault-monitor-profile)# excessive-jabbers action notify-and-disable
switch(config-fault-monitor-profile)# excessive-late-collisions action notify-and-disable
switch(config-fault-monitor-profile)# excessive-alignment-errors action notify-and-disable
```

Configuring the notify-and-disable action with auto-enable:

```
switch(config-fault-monitor-profile)# excessive-oversize-packets action notify-and-disable auto-enable 80
switch(config-fault-monitor-profile)# excessive-jabbers action notify-and-disable auto-enable 100
switch(config-fault-monitor-profile)# excessive-collisions action notify-and-disable auto-enable 70
```

Resetting the fault action to default:

```
switch(config-fault-monitor-profile)# no excessive-oversize-packets action
switch(config-fault-monitor-profile)# no excessive-jabbers action
switch(config-fault-monitor-profile)# no excessive-alignment-errors action
```

Disabling auto-enable:

```
switch(config-fault-monitor-profile)# no all action notify-and-disable auto-enable
switch(config-fault-monitor-profile)# no excessive-jabbers action notify-and-disable auto-enable
switch(config-fault-monitor-profile)# no excessive-alignment-errors action notify-and-disable auto-enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-fault-monitor-profile	Administrators or local user group members with execution rights for this command.

apply fault-monitor profile

```
apply fault-monitor profile <PROFILE-NAME>
no apply fault-monitor profile [<PROFILE-NAME>]
```

Description

Applies a fault monitoring profile to the selected interface or interface range.

The `no` form of this command removes the fault monitoring profile from the selected interface or interface range.

Parameter	Description
<code><PROFILE-NAME></code>	Specifies the fault monitor profile name. Range: Up to 64 alphanumeric and special characters.

Examples

Applying the fault monitoring profile to a interface:

```
switch(config)# interface 1/1/1
switch(config-if)# apply fault-monitor profile noisy-ports
```

Applying the fault monitoring profile to a interface range:

```
switch(config)# interface 1/1/2-1/1/24
switch(config-if)# apply fault-monitor profile quiet-ports
```

Command History

Release	Modification
10.08	Made the <code><PROFILE-NAME></code> parameter optional in the <code>no</code> form of the command.
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

fault-monitor profile

```
fault-monitor profile <PROFILE-NAME>
no fault-monitor profile <PROFILE-NAME>
```

Description

Creates a fault monitoring profile and enters its context. If the profile already exists, this command enters the profile context. A maximum of 16 fault monitoring profiles are supported.

The `no` form of this command deletes the fault monitoring profile.

Parameter	Description
<code><PROFILE-NAME></code>	Specifies the fault monitor profile name. Range: Up to 64 alphanumeric and special characters.

Examples

Creating a fault monitor profile:

```
switch(config)# fault-monitor profile noisy-ports
switch(config-fault-monitor-profile)#
```

Deleting a fault monitor profile:

```
switch(config)# no fault-monitor profile noisy-ports
switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

show fault-monitor profile

`show fault-monitor profile <PROFILE-NAME>`

Description

Shows fault monitoring profile information for all profiles or a specific profile.

Parameter	Description
<code><PROFILE-NAME></code>	Specifies the fault monitor profile name. Range: Up to 64 alphanumeric and special characters.

Example

Showing information for all fault monitoring profiles:

```
switch# show fault-monitor profile
-----
Fault monitor profile: 'noisy-ports'
-----
```

Fault	Enabled	Threshold	Action	Auto Enable
excessive-broadcasts	yes	400000 pps	notify	--
excessive-multicasts	yes	10 percent	notify	--
excessive-link-flaps	yes	10	notify	--
excessive-oversize-packets	yes	40	notify-and-disable	80
excessive-jabbers	yes	30	notify-and-disable	100
excessive-fragments	yes	50	notify	--
excessive-crc-errors	yes	35	notify	--
excessive-tx-drops	yes	20	notify	--
excessive-collisions	yes	40	notify	70
excessive-late-collisions	yes	30	notify-and-disable	--

Fault monitor profile: 'quiet-ports'

Fault	Enabled	Threshold	Action	Auto Enable
excessive-broadcasts	yes	300000 pps	notify	--
excessive-multicasts	yes	100000 pps	notify	--
excessive-link-flaps	yes	20	notify-and-disable	45
excessive-oversize-packets	yes	25	notify-and-disable	20
excessive-jabbers	yes	30	notify	--
excessive-fragments	yes	60	notify	--
excessive-crc-errors	yes	25	notify-and-disable	30
excessive-tx-drops	yes	30	notify	--

Showing information for a particular fault monitoring profile:

switch# **show fault-monitor profile noisy-ports**

Fault monitor profile: 'noisy-ports'

Fault	Enabled	Threshold	Action	Auto Enable
excessive-broadcasts	yes	400000 pps	notify	--
excessive-multicasts	yes	10 percent	notify	--
excessive-link-flaps	yes	10	notify	--
excessive-oversize-packets	yes	40	notify-and-disable	80
excessive-jabbers	yes	30	notify-and-disable	100
excessive-fragments	yes	50	notify	--
excessive-crc-errors	yes	35	notify	--
excessive-tx-drops	yes	20	notify	--
excessive-collisions	yes	40	notify	70
excessive-late-collisions	yes	30	notify-and-disable	--

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show interface fault-monitor profile

show interface [<INTERFACE>|<IF-RANGE>] fault-monitor profile

Description

Shows fault monitoring profile configuration information for all or specific interfaces.

Parameter	Description
<INTERFACE>	Specifies a single interface.
<IF-RANGE>	Specifies a interface range,

Example

Showing all interfaces with applied fault monitoring profiles:

```
switch# show interface fault-monitor profile
```

```
-----
Port      Fault Monitor Profile
-----
```

```
1/1/1     noisy-ports
1/1/2     quiet-ports
1/1/4     quiet-ports
1/1/5     noisy-ports
1/1/6     noisy-ports
1/1/7     quiet-ports
```

Showing a range of interfaces with applied fault monitoring profiles:

```
switch# show interface 1/1/1-1/1/2,1/1/6 fault-monitor profile
```

```
-----
Port      Fault Monitor Profile
-----
```

```
1/1/1     noisy-ports
1/1/2     quiet-ports
1/1/6     noisy-ports
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show interface fault-monitor status

show interface [<INTERFACE>|<IF-RANGE>] fault-monitor status

Description

Shows active fault information for all or specific interfaces.

Parameter	Description
<INTERFACE>	Specifies a single interface.
<IF-RANGE>	Specifies a interface range,

Example

Showing active fault information for all interfaces with applied fault monitoring profiles:

```
switch# show interface fault-monitor status
```

Port	Fault	Fault Elapsed Time	Port State	Time Left
1/1/1	excessive-broadcasts	Tue Apr 14 14:29:09 UTC 2020	down	60
	excessive-jabbers	Tue Apr 15 14:29:09 UTC 2020	--	--
1/1/2	excessive-oversize-packets	Tue Apr 16 14:29:09 UTC 2020	down	--

Showing active fault information for a range of interfaces with applied fault monitoring profiles:

```
switch# show interface 1/3/1,1/3/3 fault-monitor status
```

Port	Fault	Occurring Since	Port State	Time Left
1/1/4	excessive-broadcasts	Tue Apr 14 14:29:09 UTC 2020	down	60
	excessive-jabbers	Tue Apr 15 14:29:09 UTC 2020	--	100

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show running-config

show running-config

Description

Shows the running configuration for the fault monitoring profile.

Example

Showing the running configuration for the fault monitoring profiles:

```
switch# show running-config
fault-monitor profile noisy-ports
  excessive-broadcasts
  excessive-broadcasts threshold pps 10000
  excessive-multicasts
  excessive-multicasts threshold pps 10000
  excessive-link-flaps
  excessive-link-flaps threshold count 7
  excessive-oversize-packets
  excessive-oversize-packets threshold value 40
  excessive-jabbers
  excessive-jabbers threshold value 30
  excessive-fragments
  excessive-fragments threshold value 50
  excessive-crc-errors
  excessive-crc-errors threshold value 35
  excessive-tx-drops
  excessive-tx-drops threshold value 20
  excessive-collisions
  excessive-collisions threshold value 40
  excessive-late-collisions
  excessive-late-collisions threshold value 30
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

show running-config all

show running-config all

Description

Shows the running configuration with all fault monitoring profile options.

Example

Showing the running configuration with all fault monitoring profile options:

```

switch# show running-config all
fault-monitor profile noisy-ports
    excessive-broadcasts
    excessive-broadcasts threshold pps 10000
    excessive-broadcasts action notify-and-disable auto-enable 2000
    excessive-multicasts
    excessive-multicasts threshold pps 10000
    excessive-multicasts action notify
    excessive-link-flaps
    excessive-link-flaps threshold count 7
    excessive-link-flaps action notify-and-disable auto-enable 2000
    no excessive-oversize-packets
    excessive-oversize-packets threshold value 40
    excessive-oversize-packets action notify
    no excessive-jabbers
    excessive-jabbers threshold value 30
    excessive-jabbers action notify
    no excessive-fragments
    excessive-fragments threshold value 50
    excessive-fragments action notify
    no excessive-crc-errors
    excessive-crc-errors threshold value 35
    excessive-crc-errors action notify
    no excessive-late-collisions
    excessive-late-collisions threshold value 30
    excessive-late-collisions action notify
    no excessive-collisions
    excessive-collisions threshold value 40
    excessive-collisions action notify
    no excessive-tx-drops
    excessive-tx-drops threshold value 20
    excessive-tx-drops action notify

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

threshold

<FAULT> threshold value <VALUE>
no <FAULT> threshold

excessive-link-flaps threshold count <COUNT>
no excessive-link-flaps threshold

{excessive-broadcasts | excessive-multicasts}
threshold {percent <BW-PERCENT> | pps <PPS>}
no {excessive-broadcasts | excessive-multicasts} threshold

Description

Within the selected fault monitor profile context, configures the fault threshold value for the profile. The `no` form of this command sets the threshold to its default value.

Parameter	Description
<FAULT>	Available fault names: excessive-jabbers excessive-crc-errors excessive-oversize-packets excessive-fragments excessive-tx-drops excessive-collisions excessive-late-collisions excessive-alignment-errors
threshold value <VALUE>	Specifies the fault threshold value. Default: 25.
threshold count <COUNT>	Specifies the fault threshold count. Default threshold count: 7.
threshold percent <BW-PERCENT>	Specifies the fault threshold bandwidth percentage. Range: 1 to 100. Default: 5.
threshold pps <PPS>	Specifies the fault threshold PPS (packets per second). Range: 1 to 195312500.

If excessive-broadcast or excessive-multicast faults are configured with the threshold higher than the `rate-limit` threshold, the following occurs:



- Fault reporting still happens as the port has actually received packets at a rate that violated its threshold.
- Traffic gets shaped as per `rate-limit` configuration and any packet exceeding the `rate-limit` threshold gets dropped.

Examples

Configuring with threshold values:

```
switch(config-fault-monitor-profile)# excessive-jabbers threshold value 30
switch(config-fault-monitor-profile)# excessive-oversize-packets threshold value 40
switch(config-fault-monitor-profile)# excessive-crc-errors threshold value 35
switch(config-fault-monitor-profile)# excessive-fragments threshold value 50
switch(config-fault-monitor-profile)# excessive-tx-drops threshold value 20
switch(config-fault-monitor-profile)# excessive-collisions threshold value 40
switch(config-fault-monitor-profile)# excessive-late-collisions threshold value 30
switch(config-fault-monitor-profile)# excessive-alignment-errors threshold value 50
```

Configuring with a threshold count:

```
switch(config-fault-monitor-profile)# excessive-link-flaps threshold count 10
```

Configuring with threshold percents and PPS:

```
switch(config-fault-monitor-profile) # excessive-broadcasts threshold percent 40
switch(config-fault-monitor-profile) # excessive-multicasts threshold pps 10000
```

Removing the configured threshold value for the faults:

```
switch(config-fault-monitor-profile) # no excessive-jabbers threshold
switch(config-fault-monitor-profile) # no excessive-oversize-packets threshold
switch(config-fault-monitor-profile) # no excessive-crc-errors threshold
switch(config-fault-monitor-profile) # no excessive-fragments threshold
switch(config-fault-monitor-profile) # no excessive-tx-drops threshold
switch(config-fault-monitor-profile) # no excessive-collisions threshold
switch(config-fault-monitor-profile) # no excessive-late-collisions threshold
switch(config-fault-monitor-profile) # no excessive-alignment-errors threshold
switch(config-fault-monitor-profile) # no excessive-link-flaps threshold
switch(config-fault-monitor-profile) # no excessive-broadcasts threshold
switch(config-fault-monitor-profile) # no excessive-multicasts threshold
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-fault-monitor-profile	Administrators or local user group members with execution rights for this command.

vsx-sync (fault monitor)

```
vsx-sync
no vsx-sync
```

Description

Within the selected fault monitor profile context, configures VSX synchronization for the selected fault monitoring profile.

The **no** form of this command removes the VSX synchronization for a fault monitoring profile.

Example

Configuring VSX synchronization for a fault monitoring profile:

```
switch(config-fault-monitor-profile) # vsx-sync
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-fault-monitor-profile	Administrators or local user group members with execution rights for this command.

The `auditors` group enables administrators to create users that can perform auditing tasks without allowing those users the authority to view or change the switch configuration.

As is the case for other users, auditors can access the switch using the Web UI, REST API, or the CLI.

Auditing tasks (CLI)

When you log on to the switch CLI as a user with auditor rights, you have access to the auditor command context only.

```
auditor>
```

The tasks that can be performed by auditors are as follows. The commands listed are the only commands auditors can execute other than session commands like `print`, `list`, and `exit`. However, auditors can use all command options except as noted. See the command description for each command for complete information about the command.

Task	Command name	Example
Show event log contents	<code>show events</code>	<code>show events -a -r</code>
Show local accounting log contents	<code>show accounting log</code>	<code>show accounting log last 10</code>
Copy command output to a remote server or to a local USB drive.	<code>copy command-output</code>	<code>copy command-output "show events -a -r" tftp://10.100.0.12/file</code>

When using the `copy command-output` command, users with auditor rights can specify the following commands only:

```
show accounting log  
show events
```

Auditing tasks (Web UI)

Auditors have access to the Log page only. When you log on to the switch Web UI as a user with auditor rights, the Log page is displayed.

From the Log page, you can view and export event log entries.

The Web UI does not provide access to the accounting logs.

REST requests and accounting logs

All REST requests—including GET requests—are logged to the accounting (audit) log.

The URI of the REST API resource for accounting logs is the following:

```
/rest/v10.04/logs/audit
```

In an accounting log entry for a REST request:

- `service=https-server` indicates that the log entry is a result of a REST API request or a Web UI action.
- The string value of `data` identifies the REST API request that was executed.

For more information about accounting log entries, see the description of the `show accounting log` CLI command.

Accessing Aruba Support

Aruba Support Services	https://www.arubanetworks.com/support-services/
Aruba Support Portal	https://asp.arubanetworks.com/
North America telephone	1-800-943-4526 (US & Canada Toll-Free Number) +1-408-754-1200 (Primary - Toll Number) +1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working)
International telephone	https://www.arubanetworks.com/support-services/contact-support/

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

Other useful sites

Other websites that can be used to find information:

Airheads social forums and Knowledge Base	https://community.arubanetworks.com/
Software licensing	https://lms.arubanetworks.com/
End-of-Life information	https://www.arubanetworks.com/support-services/end-of-life/
Aruba software and documentation	https://asp.arubanetworks.com/downloads

Accessing Updates

You can access updates from the Aruba Support Portal or the HPE My Networking Website.

Aruba Support Portal

<https://asp.arubanetworks.com/downloads>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found:

My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>

Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

Warranty Information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

Regulatory Information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

Documentation Feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback-switching@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.