

AOS-CX 10.07 IP Services Guide

6200 Switch Series



a Hewlett Packard
Enterprise company

Part Number: 5200-7861a
Published: June 2021
Edition: 2

Copyright Information

© Copyright 2021 Hewlett Packard Enterprise Development LP.

Open Source Code

This product includes code licensed under the GNU General Public License, the GNU Lesser General Public License, and/or certain other open source licenses. A complete machine-readable copy of the source code corresponding to such code is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company
6280 America Center Drive
San Jose, CA 95002
USA

Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Acknowledgments

Intel®, Itanium®, Optane™, Pentium®, Xeon®, Intel Inside®, and the Intel Inside logo are trademarks of Intel Corporation in the U.S. and other countries.

Microsoft® and Windows® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

Java® and Oracle® are registered trademarks of Oracle and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

All third-party marks are property of their respective owners.

Contents	3
About this document	7
Applicable products	7
Latest version available online	7
Command syntax notation conventions	7
About the examples	8
Identifying switch ports and interfaces	8
IRDP	10
Configuring IRDP	11
IRDP commands	12
diag-dump irdp basic	12
ip irdp	12
ip irdp holdtime	13
ip irdp maxadvertinterval	14
ip irdp minadvertinterval	14
ip irdp preference	15
show ip irdp	15
IPv6 Router Advertisement	17
Configuring IPv6 RA	17
IPv6 RA scenario	19
IPv6 RA commands	19
ipv6 address <global-unicast-address>	20
ipv6 address autoconfig	20
ipv6 address link-local	21
ipv6 nd cache-limit	22
ipv6 nd dad attempts	22
ipv6 nd hop-limit	23
ipv6 nd mtu	23
ipv6 nd ns-interval	24
ipv6 nd prefix	25
ipv6 nd ra dns search-list	26
ipv6 nd ra dns server	27
ipv6 nd ra lifetime	27
ipv6 nd ra managed-config-flag	28
ipv6 nd ra max-interval	29
ipv6 nd ra min-interval	30
ipv6 nd ra other-config-flag	30
ipv6 nd ra reachable-time	31
ipv6 nd ra retrans-timer	31
ipv6 nd router-preference	32
ipv6 nd suppress-ra	33
show ipv6 nd global traffic	33
show ipv6 nd interface	34
show ipv6 nd interface prefix	37
show ipv6 nd ra dns search-list	38

show ipv6 nd ra dns server	38
sFlow	39
sFlow agent	39
Configuring the sFlow agent	40
sFlow scenario	41
sFlow scenario 2	42
sFlow agent commands	45
clear sflow statistics	45
sflow	45
sflow agent-ip	47
sflow collector	47
sflow disable	48
sflow header-size	49
sflow max-datagram-size	49
sflow mode	50
sflow polling	51
sflow sampling	51
show sflow	52
DHCP	54
DHCP client	54
DHCP client commands	54
ip dhcp	54
DHCP relay agent	54
DHCPv4 relay agent	55
Configuring the DHCPv4 relay agent	56
DHCPv4 relay scenario 1	57
DHCPv4 relay scenario 2	58
DHCPv4 relay scenario 3	59
DHCPv4 relay commands	60
DHCPv6 relay agent	66
Configuring the DHCPv6 relay agent	66
DHCPv6 relay scenario 1	67
DHCPv6 relay scenario 2	68
DHCP relay (IPv6) commands	69
http proxy	72
DHCP snooping	74
DHCPv4 snooping commands	75
clear dhcpv4-snooping binding	75
clear dhcpv4-snooping statistics	76
dhcpv4-snooping	76
dhcpv4-snooping (in config-vlan context)	77
dhcpv4-snooping allow-overwrite-binding	77
dhcpv4-snooping authorized-server	78
dhcpv4-snooping external-storage	79
dhcpv4-snooping max-bindings	80
dhcpv4-snooping option 82	80
dhcpv4-snooping trust	82
dhcpv4-snooping verify mac	82
show dhcpv4-snooping	83
show dhcpv4-snooping binding	84
show dhcpv4-snooping statistics	84
DHCPv6 snooping commands	85
clear dhcpv6-snooping binding	85

clear dhcpv6-snooping statistics	86
dhcpv6-snooping	86
dhcpv6-snooping (in config-vlan context)	87
dhcpv6-snooping authorized-server	87
dhcpv6-snooping external-storage	88
dhcpv6-snooping max-bindings	89
dhcpv6-snooping trust	90
show dhcpv6-snooping	91
show dhcpv6-snooping binding	92
show dhcpv6-snooping statistics	92
ND snooping	94
Overview	94
ND snooping commands	94
clear nd-snooping binding	94
clear nd-snooping statistics	95
nd-snooping	96
nd-snooping (in config-vlan context)	96
nd-snooping mac-check	97
nd-snooping prefix-list	98
nd-snooping max-bindings	98
nd-snooping nd-guard	99
nd-snooping ra-guard	100
nd-snooping ra-drop	101
nd-snooping trust	102
show nd-snooping	102
show nd-snooping binding	103
show nd-snooping prefix-list	104
show nd-snooping statistics	104
IP Tunnels	106
Configuring an IP tunnel	106
Creating an IPv6 in IPv4 tunnel for traversing a public network	107
Creating an IPv6 in IPv6 tunnel for traversing a public network	108
IP tunnels commands	109
description	109
destination ip	110
destination ipv6	111
interface tunnel	112
ip address	113
ipv6 address	113
ip mtu	114
show interface tunnel	115
show running-config interface tunnel	116
shutdown	117
source ip	117
source ipv6	118
ttl	119
Internet Control Message Protocol (ICMP)	120
ICMP message types	120
When ICMP messages are sent	120
ICMP redirect messages	121
When ICMP redirect messages are sent	121
ICMP commands	121
ip icmp redirect	121

ip icmp throttle	122
ip icmp unreachable	122
DNS	124
DNS client	124
Configuring the DNS client	124
DNS client commands	125
ip dns domain-list	125
ip dns domain-name	126
ip dns host	126
ip dns server address	127
show ip dns	128
ARP	130
Configuring proxy ARP	131
Configuring local proxy ARP	131
Dynamic ARP Inspection	132
ARP commands	132
arp cache-limit	132
arp inspection	133
arp inspection trust	133
arp ipv4 mac	134
clear arp	135
ip local-proxy-arp	135
ipv6 neighbor mac	136
ip proxy-arp	137
show arp	137
show arp inspection interface	138
show arp inspection statistics	139
show arp state	140
show arp summary	141
show arp timeout	142
show arp vrf	142
show ipv6 neighbors	143
show ipv6 neighbors state	144
Support and other resources	146
Accessing Aruba Support	146
Accessing updates	146
Aruba Support Portal	146
My Networking	147
Warranty information	147
Regulatory information	147
Documentation feedback	147

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing Aruba switches on a network.

Applicable products

This document applies to the following products:

- Aruba 6200 Switch Series (JL724A, JL725A, JL726A, JL727A, JL728A)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in [Support and other resources](#).

Command syntax notation conventions

Convention	Usage
example-text	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example-text	In code and screen examples, indicates text entered by a user.
Any of the following: ■ <i><example-text></i> ■ <code><example-text></code> ■ <i>example-text</i> ■ example-text	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: ■ For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. ■ For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.
{ }	Braces. Indicates that at least one of the enclosed items is required.
[]	Brackets. Indicates that the enclosed item or items are optional.

Convention	Usage
... or ...	Ellipsis: ■ In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. ■ In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment. The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term `switch`, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch (CONTEXT-NAME)#
```

Indicates the configuration context for a feature. For example:

```
switch(config-if) #
```

Identifies the `interface` context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch(config-vlan-100) #
```

When referring to this context, this document uses the syntax:

```
switch(config-vlan-<VLAN-ID>) #
```

Where `<VLAN-ID>` is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format:

```
member/slot/port
```

On the 6200 Switch Series

- **member:** Member number of the switch in a Virtual Switching Framework (VSF) stack. Range: 1 to 8. The primary switch is always member 1. If the switch is not a member of a VSF stack, then member is 1.

- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface $1/1/4$ in software is associated with physical port 4 in slot 1 on member 1.

ICMP Router Discovery Protocol (IRDP), an extension of the ICMP, is independent of any routing protocol. It allows hosts to discover the IP addresses of neighboring routers that can act as default gateways to reach devices on other IP networks.



On the switches covered by this guide, IRDP is configured on a VLAN interface.

IRDP operation

IRDP uses the following types of ICMP messages:

- Router advertisement (RA): Sent by a router to advertise IP addresses (including the primary and secondary IP addresses) and preference.
- Router solicitation (RS): Sent by a host to request the IP addresses of routers on the subnet.

An interface with IRDP enabled periodically broadcasts or multicasts an RA message to advertise its IP addresses. A receiving host adds the IP addresses to its routing table, and selects the IP address with the highest preference as the default gateway.

When a host attached to the subnet starts up, the host multicasts an RS message to request immediate advertisements. If the host does not receive any advertisements, it retransmits the RS several times. If the host does not discover the IP addresses of neighboring routers because of network problems, the host can still discover them from periodic RAs.

IRDP allows hosts to discover neighboring routers, but it does not suggest the best route to a destination. If a host sends a packet to a router that is not the best next hop, the host will receive an ICMP redirect message from the router.

IP address preference

Every IP address advertised in RAs has a preference value. A larger preference value represents a higher preference. The IP address with the highest preference is selected as the default gateway address.

You can specify the preference for IP addresses to be advertised on a router interface.

An address with the minimum preference value (-2147483648) will not be used as a default gateway address.

Lifetime of an IP address

An RA contains a lifetime field that specifies the lifetime of advertised IP addresses. If the host does not receive a new RA for an IP address within the address lifetime, the host removes the route entry.

All the IP addresses advertised by an interface have the same lifetime.

Advertising interval

A router interface with IRDP enabled sends out RAs randomly between the minimum and maximum advertising intervals. This mechanism prevents the local link from being overloaded by a large number of RAs sent simultaneously from routers.

As a best practice, shorten the advertising interval on a link that suffers high packet loss rates

Destination address of RA

An RA uses either of the following destination IP addresses:

- Broadcast address 255.255.255.255.
- Multicast address 224.0.0.1, which identifies all hosts on the local link.

By default, the destination IP address of an RA is the multicast address. If all listening hosts in a local area network support IP multicast, specify 224.0.0.1 as the destination IP address.

Proxy-advertised IP addresses

By default, an interface advertises its primary and secondary IP addresses. You can specify IP addresses of other gateways for an interface to proxy-advertise.

VRF support

In IP-based computer networks, virtual routing and forwarding (VRF) is a technology that allows multiple instances of a routing table to co-exist within the same router at the same time. Because the routing instances are independent, the same or overlapping IP addresses can be used without conflicting with each other.

IRDP is VRF aware. As the router advertisements and solicit processing occurs on the interface, packet is through the interface and corresponding VRF.

VSX synchronization

IRDP supports VSX synchronization. For more information on using VSX, see the *Virtual Switching Extension (VSX) Guide* for your switch and software version

Configuring IRDP

Prerequisites

A layer 3 interface.

Procedure

1. Enable IRDP on an interface with the command `ip irdp`.
2. Set the maximum hold time with the command `ip irdp holdtime`.
3. Set the maximum router advertisement interval with the command `ip irdp maxadvertinterval`.
4. Set the minimum router advertisement interval with the command `ip irdp minadvertinterval`.
5. Set the IRDP preference level with the command `ip irdp preference`.
6. Review IRDP configuration settings with the command `show ip irdp`.

Example

This example creates the following configuration:

- Enables IRDP on the layer 3 VLAN interface 2 with packet type set to broadcast.
- Sets the hold time to 5000 seconds.
- Sets the advertisement interval to 30 seconds.
- Sets the minimum advertisement interval to 25 seconds.
- Sets the IRDP preference level to 25.

```

switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp broadcast
switch(config-if-vlan)# ip irdp holdtime 5000
switch(config-if-vlan)# ip irdp maxadvertinterval 30
switch(config-if-vlan)# ip irdp minadvertinterval 25
switch(config-if-vlan)# ip irdp preference 25

```

IRDP commands

diag-dump irdp basic

Syntax

```
diag-dump irdp basic
```

Description

Displays diagnostic information for IRDP.

Command context

Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

```

switch# diag-dump irdp basic
=====
[Start] Feature irdp Time : Thu Jan  7 04:46:25 2021
=====
-----
[Start] Daemon hpe-rdiscd
-----
Interface: vlan2 (state : Down)
rdisc ipv4 (enabled: 1, max:600, min:450, hold:1800, pref:0, isBcast:0)
No advertisable IPv4 addresses on the interface
Interface: vlan1 (state : Down)
rdisc ipv4 (enabled: 0, max:600, min:450, hold:1800, pref:0, isBcast:0)
No advertisable IPv4 addresses on the interface

-----
[End] Daemon hpe-rdiscd
-----
=====
[End] Feature irdp
=====
Diagnostic-dump captured for feature irdp

```

ip irdp

Syntax

```

ip irdp [broadcast | multicast]
no ip irdp

```

Description

Enables IRDP on an interface and specifies the packet type that is used to send advertisements. By default, the packet type is set to `multicast`. IRDP is only supported on layer 3 interfaces.

The `no` form of this command disables IRDP on an interface.

Command context

`config-if-vlan`

Parameters

`broadcast`

Advertisements are sent as broadcast packets to IP address 255.255.255.255.

`multicast`

Advertisements are sent as multicast packets to the multicast group with IP address 24.0.0.1. Default.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling IRDP on interface vlan 2 with packet type set to the default value (multicast).

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp
```

Enabling IRDP on interface 1/1/1 with packet type set to broadcast.

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp broadcast
```

Disabling IRDP.

```
switch(config)# interface vlan 2
switch(config-if-vlan)# no ip irdp
```

ip irdp holdtime

Syntax

```
ip irdp holdtime <TIME>
```

Description

Specifies the maximum amount of time the host will consider an advertisement to be valid until a newer advertisement arrives. When a new advertisement arrives, hold time is reset. Hold time must be greater than or equal to the maximum advertisement interval. Therefore, if the hold time for an advertisement expires, the host can reasonably conclude that the router interface that sent the advertisement is no longer available. The default hold time is three times the maximum advertisement interval.

Command context

`config-if-vlan`

Parameters

<TIME>

Specifies the lifetime of router advertisements sent from this interface. Range: 4 to 9000 seconds.
Default: 1800 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the hold time for VLAN interface 2 to 5000 seconds:

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp holdtime 5000
```

ip irdp maxadvertinterval

Syntax

```
ip irdp maxadvertinterval <TIME>
```

Description

Specifies the maximum router advertisement interval.

Command context

config-if-vlan

Parameters

<TIME>

Specifies the maximum time allowed between the sending of unsolicited router advertisements. Range: 4 to 1800 seconds. Default: 600 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the advertisement interval for VLAN interface 2 to 30 seconds:

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp maxadvertinterval 30
```

ip irdp minadvertinterval

Syntax

```
ip irdp minadvertinterval <TIME>
```

Description

Specifies the minimum amount of time the switch waits between sending router advertisements. By default, this value is automatically set by the switch to be 75% of the value configured for maximum router advertisement interval. Use this command to override the automatically configured value.

Command context

config-if-vlan

Parameters

<TIME>

Specifies the minimum time allowed between the sending of unsolicited router advertisements. Range: 3 to 1800 seconds. Default: 450 seconds (75% of the default value for maximum router advertisement interval).

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the minimum advertisement interval for VLAN interface 2 to 25 seconds:

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp minadvertinterval 25
```

ip irdp preference

Syntax

ip irdp preference <LEVEL>

Description

Specifies the IRDP preference level. If a host receives multiple router advertisement messages from different routers, the host selects the router that sent the message with the highest preference as the default gateway.

Command context

config-if-vlan

Parameters

<LEVEL>

Specifies the IRDP preference level. Range: -2147483648 to 2147483647. Default: 0.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the IRDP preference level for VLAN interface 2 to 25.

```
switch(config)# interface vlan 2
switch(config-if-vlan)# ip irdp preference 25
```

show ip irdp

Syntax

show ip irdp

Description

Displays IRDP configuration settings.

Command context

Manager (#)

Authority

Administrators or local user group members with execution rights for this command.

Example

```
switch# sh ip irdp
```

ICMP Router Discovery Protocol

Interface	Status	Advertising Address	Minimum Interval	Maximum Interval	Holdtime	Preference
vlan1	Disabled	multicast	450	600	1800	0
bridge_normal	Disabled	multicast	450	600	1800	0

IPv6 RA provides a method for local IPv6 hosts to automatically configure their own IP address (and other settings such as a preferred DNS server) based on information advertised by switches/routers operating on the network.

IPv6 flags

Behavior of IPv6 hosts to IPv6 RA messages is controlled by the managed address configuration flag (M flag), and other stateful configuration flag (O flag).

M flag	O flag	Description
0	0	Indicates that no information is available via DHCPv6.
0	1	Indicates that other configuration information is available via DHCPv6. Examples of such information are DNS-related information or information on other servers within the network.
1	0	Indicates that addresses are available via Dynamic Host Configuration Protocol (DHCPv6).
1	1	If the M flag is set, the O flag is redundant and can be ignored because DHCPv6 will return all available configuration information.

Configuring IPv6 RA

Procedure

1. Enable transmission of IPv6 router advertisements with the command `no ipv6 nd suppress-ra`.
2. Optionally, configure IPv6 unicast address prefixes with the command `ipv6 nd prefix`.
3. Optionally, configure support for DNS name resolution with the commands `ipv6 nd ra dns server` and `ipv6 nd ra dns search-list`.
4. For most deployments, the default values for the following features do not need to be changed. If your deployment requires different settings, change the default values with the indicated command:

IPv6 RA setting	Default value	Command to change it
Number of neighbor solicitations to be sent when performing DAD.	1	<code>ipv6 nd dad attempts</code>
Number of neighbor entries in the ND cache.	131072	<code>ipv6 nd cache-limit</code>
Hop limit to be sent in the RA messages.	64	<code>ipv6 nd hop-limit</code>

IPv6 RA setting	Default value	Command to change it
MTU value to be sent in the RA messages.	1500 bytes	<code>ipv6 nd mtu</code>
Neighbor solicitation interval	1000 milliseconds	<code>ipv6 nd ns-interval</code>
Lifetime of a default router.	1800 seconds	<code>ipv6 nd ra lifetime</code>
Retrieval of an IPv6 address by devices.	Disabled	<code>ipv6 nd ra managed-config-flag</code>
Maximum interval between transmissions of IPv6 RAs.	600 seconds	<code>ipv6 nd ra max-interval</code>
Minimum interval between transmissions of IPv6 RAs.	200 seconds	<code>ipv6 nd ra min-interval</code>
Time that an interface considers a device to be reachable.	0 milliseconds (no limit)	<code>ipv6 nd ra reachable-time</code>
Retry period between ND solicitations.	0 (Use locally configured NS-interval)	<code>ipv6 nd ra retrans-timer</code>
Default routing preference for an interface.	Medium	<code>ipv6 nd router-preference</code>

5. Review IPv6 RA configuration settings with the commands `show ipv6 nd interface`, `show ipv6 nd interface prefix`, `show ipv6 nd ra dns server`, and `show ipv6 nd ra dns search-list`.

Example

This example creates the following configuration:

- Enables IPV6 RA on interface 1/1/3.
- Sets the recursive DNS server address to 4001::1 with a lifetime of 400 seconds.
- Sets the minimum interval between transmissions to 3 seconds.
- Sets the maximum interval between transmissions to 13 seconds.
- Sets the lifetime of a default router to 1900 seconds.

```
switch(config)# interface 1/1/3
switch(config-if)# no ipv6 nd suppress-ra
switch(config-if)# ipv6 nd ra dns server 4001::1 lifetime 400
switch(config-if)# ipv6 nd ra min-interval 3
switch(config-if)# ipv6 nd ra max-interval 13
switch(config-if)# ipv6 nd ra lifetime 1900
switch(config-if)# end
switch# show ipv6 nd interface 1/1/3
Interface 1/1/3 is up
Admin state is up
IPv6 address:
  2006::1/64 [VALID]
IPv6 link-local address: fe80::98f2:b321:368:6dc6/64 [VALID]
ICMPv6 active timers:
  Last Router-Advertisement sent: 0 Secs
  Next Router-Advertisement sent in: 13 Secs
```


```

Router-Advertisement parameters:
  Periodic interval: 3 to 13 secs
  Router Preference: medium
  Send "Managed Address Configuration" flag: false
  Send "Other Stateful Configuration" flag: false
  Send "Current Hop Limit" field: 64
  Send "MTU" option value: 1500
  Send "Router Lifetime" field: 1900
  Send "Reachable Time" field: 0
  Send "Retrans Timer" field: 0
  Suppress RA: false
  Suppress MTU in RA: true
ICMPv6 error message parameters:
  Send redirects: false
ICMPv6 DAD parameters:
  Current DAD attempt: 1
switch# show ipv6 nd ra dns server
Recursive DNS Server List on: 1/1/3
  Suppress DNS Server List: No
  DNS Server 1: 2001::1    lifetime 400

```

IPv6 RA scenario

In this scenario, two host computers are auto-configured with IP addresses using IPv6 RA. In addition, the switch provides the hosts with an address of a recursive DNS server. The physical topology of the network looks like this:

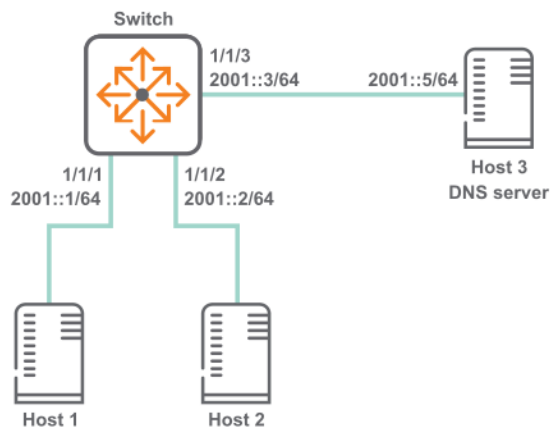

Procedure

1. Configure the interfaces with IPv6 addresses.

```

switch# config
switch(config)# interface 1/1/1
switch(config-if)# ipv6 address 2001::1/64
switch(config)# interface 1/1/2
switch(config-if)# ipv6 address 3001::1/64
switch(config)# interface 1/1/3
switch(config-if)# ipv6 address 4001::1/64

```

2. Enable transmission of all IPv6 RA messages.

```

switch(config-if)# no ipv6 nd suppress-ra

```

IPv6 RA commands

ipv6 address <global-unicast-address>

Syntax

```
ipv6 address <global-unicast-address>  
no ipv6 address <global-unicast-address>
```

Description

Sets a global unicast address on the interface.

The `no` form of this command removes the global unicast address on the interface.



This command automatically creates an IPv6 link-local address on the interface. However, it does not add the `ipv6 address link-local` command to the running configuration. If you remove the IPv6 address, the link-local address is also removed. To maintain the link-local address, you must manually execute the `ipv6 address link-local` command.

Command context

config-if

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Enabling a global unicast address:

```
switch(config)# interface 1/1/1  
switch(config-if)# ipv6 address 3731:54:65fe:2::a7
```

Disabling a global unicast address:

```
switch(config)# interface 1/1/1  
switch(config-if)# no ipv6 address 3731:54:65fe:2::a7
```

ipv6 address autoconfig

Syntax

```
ipv6 address autoconfig  
no ipv6 address autoconfig
```

Description

Enables the interface to automatically obtain an IPv6 address using router advertisement information and the EUI-64 identifier.

The `no` form of this command disables address auto-configuration.



- A maximum of 15 autoconfigured addresses are supported.
- This command automatically creates an IPv6 link-local address on the interface. However, it does not add the `ipv6 address link-local` command to the running configuration. If you remove the IPv6 address, the link-local address is also removed. To maintain the link-local address, you must manually execute the `ipv6 address link-local` command.

Command context

config-if

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

The IPv6 SLAAC feature lets the router obtain the IPv6 address for the interface it is configured through the SLAAC method. This feature is not available on the `mgmt` VRF.

Example

Enabling unicast autoconfiguring:

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 address autoconfig
```

Disabling unicast autoconfiguring:

```
switch(config)# interface 1/1/1
switch(config-if)# no ipv6 address autoconfig
```

ipv6 address link-local

Syntax

```
ipv6 address link-local [<IPv6-ADDR>/<MASK>]
```

Description

Enables IPv6 on the current interface. If no address is specified, an IPv6 link-local address is auto-generated for the interface. If an address is specified, auto-configuration is disabled and the specified address/mask is assigned to the interface.

To disable IPv6 link-local on the interface, remove `ipv6 address link-local`, `ipv6 address <global-ipv6-address>`, and `ipv6 address autoconfig` from the interface.



This feature is not available on the management VRF.

Command context

config-if

Parameters

<IPV6-ADDR>

Specifies the IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F. You can use two colons (::) to represent consecutive zeros (but only once), remove leading zeros, and collapse a hextet of four zeros to a single 0. For example, this address 2222:0000:3333:0000:0000:0000:4444:0055 becomes 2222:0:3333::4444:55.

<MASK>

Specifies the number of bits in the address mask in CIDR format (x), where x is a decimal number from 0 to 128.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Example

Enabling IPv6 link-local on the interface:

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 address link-local
```

ipv6 nd cache-limit

Syntax

```
ipv6 nd cache-limit <CACHELIMIT>
no ipv6 nd cache-limit [<CACHELIMIT>]
```

Description

Configures the limit on the number of neighbor entries in the ND cache.
The no form of this command sets the cache limit to the default value.

Command context

config

Parameters

<CACHELIMIT>

Specifies the neighbor cache entries limit. Range: 1-131072. Default: 131072.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the cache limit to 20.

```
switch(config)# ipv6 nd cache-limit 20
```

ipv6 nd dad attempts

Syntax

```
ipv6 nd dad attempts <NUM-ATTEMPTS>
no ipv6 nd dad attempts [<NUM-ATTEMPTS>]
```

Description

Configures the number of neighbor solicitations to be sent when performing duplicate address detection (DAD) for a unicast address configured on an interface.

The `no` form of this command sets the number of attempts to the default value.

Command context

`config-if`

Parameters

`dad attempts <NUM-ATTEMPTS>`

Specifies the number of neighbor solicitations to send. Range: 0-15. Default: 1.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd dad attempts 5
```

ipv6 nd hop-limit

Syntax

```
ipv6 nd hop-limit <HOPLIMIT>
no ipv6 nd hop-limit [<HOPLIMIT>]
```

Description

Configures the hop limit to be sent in RAs.

The `no` form of this command resets the hop limit to 0. This reset eliminates the hop limit from the RAs that originate on the interface, so the host determines the hop limit.

Command context

`config-if`

Parameters

`hop-limit <HOPLIMIT>`

Specifies the hop limit. Range: 0-255. Default: 64.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd hop-limit 64
```

ipv6 nd mtu

Syntax

```
ipv6 nd mtu <MTU-VALUE>
no ipv6 nd mtu [<MTU-VALUE>]
```

Description

Configures the MTU size to be sent in the RA messages.

The `no` form of this command sets hop limit to the default value.

Command context

config-if

Parameters

<MTU-VALUE>

Specifies the MTU size. Range: 1280-65535 bytes. Default: 1500 bytes.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd mtu 1300
```

ipv6 nd ns-interval

Syntax

```
ipv6 nd ns-interval <TIME>
no ipv6 nd ns-interval [<TIME>]
```

Description

Configures the ND time between DAD neighbor solicitations sent for an unresolved destination, or between duplicate address detection neighbor solicitation requests. Increase this setting when neighbor solicitation retries or failures are occurring, or in a slow (WAN) network.

The `no` form of this command sets the ns-interval to the default value.

Command context

config-if

Parameters

<TIME>

Specifies the neighbor solicitation interval. Range: 1000-3600000 milliseconds. Default: 1000 milliseconds.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ns-interval 1200
```


ipv6 nd prefix

Syntax

```
ipv6 nd prefix <IPV6-ADDR>/<PREFIX-LEN>
    [no-advertise | [valid <LIFETIME-VALUE> preferred
    <LIFETIME-VALUE>] | no-autoconfig | no-onlink]

no ipv6 nd prefix <IPV6-ADDR>/<PREFIX-LEN> [no-advertise
    | [valid <LIFETIME-VALUE> preferred <LIFETIME-VALUE>
    ] | no-autoconfig | no-onlink]

ipv6 nd prefix default [no-advertise | [valid <LIFETIME-VALUE>
    preferred <LIFETIME-VALUE>] | no-autoconfig | no-onlink]}

no ipv6 nd prefix default [no-advertise | [valid <LIFETIME-VALUE>
    preferred <LIFETIME-VALUE>] | no-autoconfig | no-onlink]}
```

Description

Specifies prefixes for the routing switch to include in RAs transmitted on the interface. IPv6 hosts use the prefixes in RAs to autoconfigure themselves with global unicast addresses. The autoconfigured address of a host is composed of the advertised prefix and the interface identifier in the current link-local address of the host.

By default, advertise, autoconfig, and onlink are set.

The `no` form of this command removes the configuration on the interface.

Command context

config-if

Parameters

<IPV6-ADDR>/<PREFIX-LEN>

Specifies the IPv6 prefix to advertise in RA. Format: X:X::X/M

default

Specifies apply configuration to all on-link prefixes that are not individually set by the `ipv6 ra prefix <IPV6-ADDR>/<PREFIX-LEN>` command. It applies the same valid and preferred lifetimes, link state, autoconfiguration state, and advertise options to the advertisements sent for all on-link prefixes that are not individually configured with a unique lifetime. This also applies to the prefixes for any global unicast addresses configured later on the same interface.

Using default once, and then using it again with any new parameter values results in the new values replacing the former values in advertisements. If default is used without the `no-advertise`, `no-autoconfig`, or `no-onlink` parameter, the advertisement setting for the absent parameter is returned to its default setting.

no-advertise

Specifies do not advertise prefix in RA.

valid <LIFETIME-VALUE>

Specifies the total time, in seconds, the prefix remains available before becoming unusable. After preferred-lifetime expiration, any autoconfigured address is deprecated and used only for transactions only before preferred-lifetime expires. If the valid lifetime expires, the address becomes invalid.

You can enter a value in seconds or enter `valid infinite` which sets infinite lifetime. Default: 2,592,000 seconds which is 30 days. Range: 0-4294967294 seconds.

preferred <LIFETIME-VALUE>

Specifies the span of time during which the address can be freely used as a source and destination for traffic. This setting must be less than or equal to the corresponding valid-lifetime setting.

You can enter a value in seconds or enter `preferred infinite` which sets infinite lifetime. Default: 604,800 seconds which is seven days. Range: 0–4294967294 seconds.

`no-autoconfig`

Specifies do not use prefix for autoconfiguration.

`no-onlink`

Specifies do not use prefix for onlink determination.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd prefix 4001::1/64 valid 30 preferred 10 no-autoconfig no-onlink
```

ipv6 nd ra dns search-list

Syntax

```
ipv6 nd ra dns search-list <DOMAIN-NAME> [lifetime <TIME>]
no ipv6 nd ra dns search-list <DOMAIN-NAME>
```

Description

Configures the DNS Search List (DNSSL) to include in Router Advertisements (RAs) transmitted on the interface.

The `no` form of this command removes the DNS Search List from the RAs transmitted on the interface.

Command context

`config-if`

Parameters

`<DOMAIN-NAME>`

Specifies the domain names for DNS queries.

`lifetime <TIME>`

Specifies lifetime in seconds. Range: 4-4294967295 seconds. Default: 1800 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- DNSSL contains the domain names of DNS suffixes or IPv6 hosts to append to short, unqualified domain names for DNS queries.
- Multiple DNS domain names can be added to the DNSSL by using the command repeatedly.
- A maximum of eight server addresses are allowed.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra dns search-list test.com lifetime 500
```

ipv6 nd ra dns server

Syntax

```
ipv6 nd ra dns server <IPV6-ADDR> [lifetime <TIME>]
no ipv6 nd ra dns server <IPV6-ADDR>
```

Description

Configures the IPv6 address of a preferred Recursive DNS Server (RDNSS) to be included in Router Advertisements (RAs) transmitted on the interface.

The `no` form of this command removes the configured DNS server from the RAs transmitted on the interface.

Command context

config-if

Parameters

<IPV6-ADDR>

Specifies the RDNSS address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F. You can use two colons (::) to represent consecutive zeros (but only once), remove leading zeros, and collapse a hextet of four zeros to a single 0. For example, this address 2222:0000:3333:0000:0000:4444:0055 becomes 2222:0:3333::4444:55.

lifetime <TIME>

Specifies IPv6 DNS server lifetime in seconds. Range: 4-4294967295 seconds. Default: 1800 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- Including RDNSS information in RAs provides DNS server configuration for connected IPv6 hosts without requiring DHCPv6.
- Multiple servers can be configured on the interface by using the command repeatedly.
- A maximum of eight server addresses are allowed.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra dns server 2001::1 lifetime 400
```

ipv6 nd ra lifetime

Syntax

```
ipv6 nd ra lifetime <TIME>
no ipv6 nd ra lifetime [<TIME>]
```

Description

Configures the lifetime, in seconds, for the routing switch to be used as a default router by hosts on the current interface.

The `no` form of this command sets lifetime to the default of 1800 seconds.

Command context

`config-if`

Parameters

`<TIME>`

Specifies lifetime in seconds of a default router. A setting of 0 for default router lifetime in an RA indicates that the routing switch is not a default router on the interface. Range: 0-9000 seconds. Default: 1800 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- A given host on an interface refreshes the default router lifetime for a specific router each time the host receives an RA from that router.
- A specific router ceases to be a default router candidate for a given host if the default router lifetime expires before the host is updated with a new RA from the router.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra lifetime 1200
```

ipv6 nd ra managed-config-flag

Syntax

```
ipv6 nd ra managed-config-flag
no ipv6 nd ra managed-config-flag
```

Description

Controls the M flag setting in RAs the router transmits on the current interface. Enable the M flag to indicate that hosts can obtain IP address through DHCPv6. The M flag is disabled by default.

The `no` form of this command turns off (disables) the M flag.

Command context

`config-if`

Authority

Administrators or local user group members with execution rights for this command.

Usage

- Enabling the M flag directs hosts to acquire their IPv6 addressing for the current interface from a DHCPv6 server.

- When the M-bit is enabled, receiving hosts ignore the O flag setting, which is configured using the command `ipv6 nd ra other-config-flag`.
- When the M-bit is disabled (the default), receiving hosts expect to receive their IPv6 addresses from RA.

M flag	O flag	Description
0	0	Indicates that no information is available via DHCPv6.
0	1	Indicates that other configuration information is available via DHCPv6. Examples of such information are DNS-related information or information on other servers within the network.
1	0	Indicates that addresses are available via Dynamic Host Configuration Protocol (DHCPv6).
1	1	If the M flag is set, the O flag is redundant and can be ignored because DHCPv6 will return all available configuration information.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra managed-config-flag
```

ipv6 nd ra max-interval

Syntax

```
ipv6 nd ra max-interval <TIME>
no ipv6 nd ra max-interval [<TIME>]
```

Description

Configures the maximum interval between transmissions of IPv6 RAs on the interface. The interval between RA transmissions on an interface is a random value that changes every time an RA is sent. The interval is calculated to be a value between the current max-interval and min-interval settings.

The `no` form of this command returns the setting to its default, provided the default value is less than the default lifetime value.

Command context

config-if

Parameters

<TIME>

Specifies the maximum advertisement time in seconds. Range: 4-1800. Default: 600 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- This value has one setting per interface. The setting does not apply to RAs sent in response to a router solicitation received from another device.

- Attempting to set max-interval to a value that is not sufficiently larger than the current min-interval also results in an error message.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra max-interval 30
```

ipv6 nd ra min-interval

Syntax

```
ipv6 nd ra min-interval <TIME>
no ipv6 nd ra min-interval [<TIME>]
```

Description

Configures the minimum interval between transmissions of IPv6 RAs on the interface. The interval between RA transmissions on an interface is a random value that changes every time an RA is sent. The interval is calculated to be a value between the current max-interval and min-interval settings.

The `no` form of this command returns the setting to its default, provided the default value is less than the current max-interval setting.

Command context

config-if

Parameters

<TIME>

Specifies a minimum advertisement time in seconds. Range: 3-1350. Default: 200 seconds.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- This value has one setting per interface and does not apply to RAs sent in response to a router solicitation received from another device.
- The min-interval must be less than the max-interval. Attempting to set min-interval to a higher value results in an error message.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra min-interval 25
```

ipv6 nd ra other-config-flag

Syntax

```
ipv6 nd ra other-config-flag
no ipv6 nd ra other-config-flag
```

Description

Controls the O-bit in RAs the router transmits on the current interface; but is ignored unless the M-bit is disabled in RAs. Configure to set the O-bit in RA messages for host to obtain network parameters through DHCPv6. The other-config-flag is disabled by default.

For more information on configuring the M-bit, see `ipv6 nd ra managed-config-flag`.

The `no` form of this command turns off (disables) the setting for this command in RAs.

Command context

config-if

Authority

Administrators or local user group members with execution rights for this command.

Usage

Enabling the O-bit while the M-bit is disabled directs hosts on the interface to acquire their other configuration information from DHCPv6. Examples of such information are DNS-related information or information on other servers within the network.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra other-config-flag
```

ipv6 nd ra reachable-time

Syntax

```
ipv6 nd ra reachable-time <TIME>
no ipv6 nd ra reachable-time [<TIME>]
```

Description

Sets the amount of time that the interface considers a device to be reachable after receiving a reachability confirmation from the device.

The `no` form of this command sets the reachable time to the default value of 0. (no limit).

Command context

config-if

Parameters

<TIME>

Specifies the reachable time in milliseconds. Range: 1000-3600000. Default: 0 (no limit).

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra reachable-time 2000
```

ipv6 nd ra retrans-timer

Syntax

```
ipv6 nd ra retrans-timer <TIME>
no ipv6 nd ra retrans-timer [<TIME>]
```

Description

Configures the period (retransmit timer) between ND solicitations sent by a host for an unresolved destination, or between DAD neighbor solicitation requests. By default, hosts on the interface use their own locally configured NS-interval settings instead of using the value received in the RAs.

Increase this timer when neighbor solicitation retries or failures are occur, or in a "slow" (WAN) network.

The `no` form of this command sets the value to the default of 0.

Command context

config-if

Parameters

<TIME>

Specifies the retransmit timer value in milliseconds. Range: 0 - 4294967295 milliseconds. Default: 0 (Use locally configured NS-interval).

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra retrans-timer 400
```

ipv6 nd router-preference

Syntax

```
ipv6 nd router-preference {high | medium | low}
no ipv6 nd router-preference [high | medium | low]
```

Description

Specifies the value that is set in the Default Router Preference (DRP) field of Router Advertisements (RAs) that the switch sends from an interface. An interface with a DRP value of high will be preferred by other devices on the network over interfaces with an RA value of medium or low.

The `no` form of this command set the value to the default of medium.

Command context

config-if

Parameters

high

Sets DRP to high.

medium

Sets DRP to medium. Default.

low

Sets DRP to low.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd router-preference high
```

ipv6 nd suppress-ra

Syntax

```
ipv6 nd suppress-ra [<SUPPRESS-OPTION>]
no ipv6 nd ra supress-ra [<SUPPRESS-OPTION>]
```

Description

Configures suppression of IPv6 Router Advertisement transmissions on an interface.

The `no` form of this command restores transmission of IPv6 Router Advertisement and options.

Command context

config-if

Parameters

suppress-ra [<SUPPRESS-OPTION>]

Specifies suppressing RA transmissions. Entering `suppress-ra` without any options, suppresses all RA messages (default). Or you can enter one of the following options.

dnssl

Specifies suppressing DNSSL options in RA messages.

mtu

Specifies suppressing MTU options in RA messages.

rdnss

Specifies suppressing RDNSS options in RA messages.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd suppress-ra mtu dnssl rdnss
switch(config-if)# no ipv6 nd suppress-ra mtu dnssl rdnss
```

show ipv6 nd global traffic

Syntax

```
show ipv6 nd global traffic
```

Description

Displays IPV6 Neighbor Discovery traffic details on a device.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

```
switch# show ipv6 nd global traffic
ICMPv6 packet Statistics (sent/received)
  Total Messages           :      18/0
  Error Messages           :        0/0
  Destination Unreachables :        0/0
  Time Exceeded            :        0/0
  Parameter Problems       :        0/0
  Echo Request             :        0/0
  Echo Replies             :        0/0
  Redirects                :        0/0
  Packet Too Big           :        0/0
  Router Advertisements    :        4/0
  Router Solicitations     :        0/0
  Neighbor Advertisements  :        0/0
  Neighbor Solicitations   :        3/0
  Duplicate router RA received :      0/0
ICMPv6 MLD Statistics (sent/received)
  V1 Queries :      0/0
  V2 Queries :      0/0
  V1 Reports  :      0/0
  V2 Reports  :     11/0
  V1 Leaves  :      0/0
```

show ipv6 nd interface

Syntax

```
show ipv6 nd interface [<IF-NAME> | all-vrfs | vrf <VRF-NAME>]
```

Description

Displays neighbor discovery information for an interface. If no options are specified, displays information for the default VRF.

Command context

Operator (>) or Manager (#)

Parameters

<IF-NAME>

Displays information about the specified IPv6 enabled interface.

all-vrfs

Displays information about interfaces in all VRFs.

vrf <VRF-NAME>

Displays information about interfaces in a particular VRF. Or, if <VRF-NAME> is not specified, information for the default VRF is displayed.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing information for all VRFs:

```
switch# show ipv6 nd interface all-vrfs

List of IPv6 Interfaces for VRF default
Interface 1/1/1 is up
  Admin state is up
  IPv6 address:
  IPv6 link-local address: fe80::7272:cfff:fee7:a8b9/64 [VALID]
  ICMPv6 active timers:
    Last Router-Advertisement sent:
    Next Router-Advertisement sent in:
  Router-Advertisement parameters:
    Periodic interval: 200 to 600 secs
    Router Preference: medium
    Send "Managed Address Configuration" flag: false
    Send "Other Stateful Configuration" flag: false
    Send "Current Hop Limit" field: 64
    Send "MTU" option value: 1500
    Send "Router Lifetime" field: 1800
    Send "Reachable Time" field: 0
    Send "Retrans Timer" field: 0
    Suppress RA: true
    Suppress MTU in RA: true
  ICMPv6 error message parameters:
    Send redirects: false
  ICMPv6 DAD parameters:
    Current DAD attempt: 1

List of IPv6 Interfaces for VRF red
Interface 1/1/2 is up
  Admin state is up
  IPv6 address:
    2001::1/64 [VALID]
  IPv6 link-local address: fe80::7272:cfff:fee7:a8b9/64 [VALID]
  ICMPv6 active timers:
    Last Router-Advertisement sent:
    Next Router-Advertisement sent in:
  Router-Advertisement parameters:
    Periodic interval: 200 to 600 secs
    Router Preference: medium
    Send "Managed Address Configuration" flag: false
    Send "Other Stateful Configuration" flag: false
    Send "Current Hop Limit" field: 64
    Send "MTU" option value: 1500
    Send "Router Lifetime" field: 1800
    Send "Reachable Time" field: 0
    Send "Retrans Timer" field: 0
    Suppress RA: true
    Suppress MTU in RA: true
```

```
ICMPv6 error message parameters:
  Send redirects: false
ICMPv6 DAD parameters:
  Current DAD attempt: 1
```

Showing information for interface 1/1/1:

```
switch# show ipv6 nd interface 1/1/1
Interface 1/1/1 is up
  Admin state is up
  IPv6 address:
  IPv6 link-local address: fe80::7272:cfff:fee7:a8b9/64 [VALID]
  ICMPv6 active timers:
    Last Router-Advertisement sent:
    Next Router-Advertisement sent in:
  Router-Advertisement parameters:
    Periodic interval: 200 to 600 secs
    Router Preference: high
    Send "Managed Address Configuration" flag: false
    Send "Other Stateful Configuration" flag: false
    Send "Current Hop Limit" field: 64
    Send "MTU" option value: 1500
    Send "Router Lifetime" field: 1800
    Send "Reachable Time" field: 0
    Send "Retrans Timer" field: 0
    Suppress RA: true
    Suppress MTU in RA: true
  ICMPv6 error message parameters:
    Send redirects: false
  ICMPv6 DAD parameters:
    Current DAD attempt: 1
```

Showing information for the default VRF:

```
switch# show ipv6 nd interface

List of IPv6 Interfaces for VRF default
Interface 1/1/1 is up
  Admin state is up
  IPv6 address:
    2001::1/64 [VALID]
  IPv6 link-local address: fe80::7272:cfff:fee7:a8b9/64 [VALID]
  ICMPv6 active timers:
    Last Router-Advertisement sent: 6 Secs
    Next Router-Advertisement sent in: 7 Secs
  Router-Advertisement parameters:
    Periodic interval: 3 to 13 secs
    Router Preference: medium
    Send "Managed Address Configuration" flag: false
    Send "Other Stateful Configuration" flag: false
    Send "Current Hop Limit" field: 64
    Send "MTU" option value: 1500
    Send "Router Lifetime" field: 1900
    Send "Reachable Time" field: 0
    Send "Retrans Timer" field: 0
    Suppress RA: true
    Suppress MTU in RA: true
  ICMPv6 error message parameters:
    Send redirects: false
```

```
ICMPv6 DAD parameters:
  Current DAD attempt: 1
```

show ipv6 nd interface prefix

Syntax

```
show ipv6 nd interface prefix [all-vrfs | vrf <VRF-NAME>]
```

Description

Shows IPv6 prefix information for all VRFs or a specific VRF. If no options are specified, shows information for the default VRF.

Command context

Operator (>) or Manager (#)

Parameters

all-vrfs

Shows prefix information for all VRFs.

vrf <VRF-NAME>

Name of a VRF.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Showing prefix information for the default VRF:

```
switch# show ipv6 nd interface prefix

List of IPv6 Interfaces for VRF default
List of IPv6 Prefix advertised on 1/1/1
  Prefix : 4545::/65
  Enabled : Yes
  Validlife time : 2592000
  Preferred lifetime : 604800
  On-link : Yes
  Autonomous : Yes
```

Showing information for VRF red:

```
switch# show ipv6 nd interface prefix vrf red

List of IPv6 Interfaces for VRF red
List of IPv6 Prefix advertised on 1/1/2
  Prefix : 2001::/64
  Enabled : Yes
  Validlife time : 2592000
  Preferred lifetime : 604800
  On-link : Yes
  Autonomous : Yes
```

show ipv6 nd ra dns search-list

Syntax

```
show ipv6 nd ra dns search-list
```

Description

Displays domain name information on all interfaces.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra dns search-list test.com
switch# show ipv6 nd ra dns search-list
Recursive DNS Search List on: 1
  Suppress DNS Search List: Yes
  DNS Search 1: test.com      lifetime 1800
```

show ipv6 nd ra dns server

Syntax

```
show ipv6 nd ra dns server
```

Description

Displays DNS server information on all interfaces.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 nd ra dns server 2001::1
switch# show ipv6 nd ra dns server
Recursive DNS Server List on: 1
  Suppress DNS Server List: Yes
  DNS Server 1: 2001::1      lifetime 1800
```

sFlow is a technology for monitoring traffic in switched or routed networks. The sFlow monitoring system is comprised of:

- An sFlow Agent that runs on a network device, such as a switch. The agent uses sampling techniques to capture information about the data traffic flowing through the device and forwards this information to an sFlow collector.
- An sFlow Collector that receives monitoring information from sFlow agents. The collector stores this information so that a network administrator can analyze it to understand network data flow patterns. One sFlow collector can receive the data from many sFlow agents.



The sFlow UDP datagrams sent to a collector are not encrypted, therefore any sensitive information contained in an sFlow sample is exposed.

sFlow agent

The sFlow agent on the switch provides ingress sampling of all forwarded layer 2 and layer 3 traffic on LAG and Ethernet ports. High-availability is supported (packet sampling continues to work after switch-over).

The sFlow agent can communicate with up to three sFlow collectors at the same time. The agent communicates with collectors only on the default VRF.

Although you can configure very high sampling rates, the switch may drop samples if it cannot handle the rate of sampled packets. High sampling rates may also cause high CPU usage resulting in control plane performance issues.

A single sFlow datagram sent to a collector contains multiple flow and counter samples. The total number of samples an sFlow datagram can contain varies depending on the settings for header size and maximum datagram size.

Default settings

- sFlow is disabled on all interfaces.
- Collector port: UDP port 6343.
- Sampling rate: 4096.
- Polling interval: 30 seconds.
- Header size: 128 bytes.
- Max datagram size: 1400 bytes.

Supported features

- Global sampling rate
- Interface counters polling
- Agent IP configuration for IPv4 and IPv6
- Header size configuration

- Max datagram size configuration
- Ingress sampling for all forwarded traffic (L2, L3)
- Enable/Disable sFlow per interface
- Support for three remote collectors
- An out-of-band collector can be defined on the management VRF
- A collector can be defined on the non-default VRF
- Sampling on Ethernet and LAG interfaces
- High availability support (sampling continues to work after switch-over)
- Source IP support (setting source IP for sFlow datagrams sent to a remote collector)

Limitations

- No sampling of egress traffic
- Sampling rate cannot be set per interface (global only)
- sFlow is not configurable via SNMP

Configuring the sFlow agent

Procedure

1. Configure one or more sFlow collectors with the command `sflow collector`. This determines where the sFlow agent sends sFlow information.
2. Enable the sFlow agent on all interfaces, or on a specific interface, with the command `sflow`.
3. Define the address of the sFlow agent with the command `sflow agent-ip`.
4. By default, the source IP address for sFlow datagrams is set to the IP address of the outgoing switch interface on which the sFlow client is communicating with a collector. Since the switch can have multiple routing interfaces, datagrams can potentially be sent on different paths at different times, resulting in different source IP addresses for the same client. To resolve this issue, define a single source IP address. For details, see *Single source IP address* in the *Fundamentals Guide*.
5. For most deployments, the default values for the following settings do not need to be changed. If your deployment requires different settings, change the default values with the indicated commands:

sFlow setting	Default value	Command to change it
Rate at which packets are sampled.	1 in every 4096 packets	<code>sflow sampling</code>
Rate at which the switch sends data to an sFlow collector.	30 seconds	<code>sflow polling</code>
Size of the sFlow header.	128 bytes	<code>sflow header-size</code>
Maximum size of an sFlow datagram.	1400 bytes	<code>sflow max-datagram-size</code>

6. Review sFlow configuration settings with the command `show sflow`.

Example


This example creates the following configuration:

- Configures an sFlow collector with the IP address **10.10.20.209**.
- Enables the sFlow agent on all interfaces.
- Defines the sFlow agent IP address to be **10.10.1.5**.

```
switch(config)# sflow collector 10.10.20.209
switch(config)# sflow
switch(config)# sflow agent-ip 10.0.0.1
```

sFlow scenario

In this scenario, two hosts send sFlow traffic through a switch to an sFlow collector. The physical topology of the network looks like this:

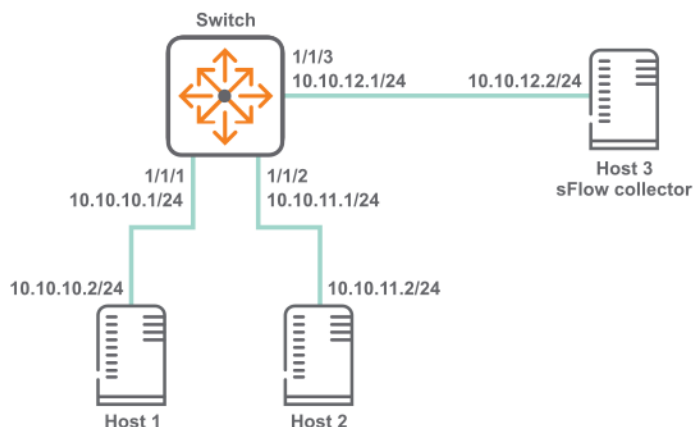

Procedure

1. Enable sFlow globally.

```
switch# config
switch(config)# sflow
```
2. Set the sFlow agent IP address to **10.10.12.1**.

```
switch(config)# sflow agent-ip 10.10.12.1
```
3. Set the sFlow collector IP address to **10.10.12.2**.

```
switch(config)# sflow collector 18.2.2.2
```
4. Configure sFlow sampling rate and polling interval.

```
switch(config)# sflow sampling 5000
switch(config)# sflow polling 20
```
5. Configure interface **1/1/1** with IP address **10.10.10.1/24**.

```
switch(config)# interface 1/1/1
switch(config-if)# no shutdown
switch(config-if)# ip address 10.10.10.1/24
switch(config)# quit
```
6. Configure interface **1/1/2** with IP address **10.10.11.1/24**.

```
switch(config)# interface 1/1/2
switch(config-if)# no shutdown
switch(config-if)# ip address 10.10.11.1/24
switch(config)# quit
```
7. Configure interface **1/1/3** with IP address **10.10.12.1/24**.

```
switch(config)# interface 1/1/3
switch(config-if)# no shutdown
```

```
switch(config-if)# ip address 10.10.12.1/24
switch(config)# quit
```

8. Verify sFlow configuration

```
switch# show sflow
sFlow Global Configuration
-----
sFlow                               enabled
Collector IP/Port/Vrf              10.10.10.2/6343/default
Agent Address                      10.0.0.1
Sampling Rate                      1024
Polling Interval                   30
Header Size                        128
Max Datagram Size                  1400
Sampling Mode                      both


sFlow Status
-----
Running - Yes

sFlow enabled on Interfaces:
-----
lag100

sFlow Statistics
-----
Number of Ingress Samples          200
Number of Egress Samples           0
```

sFlow scenario 2

In this scenario, two hosts connected to different switches send sFlow traffic to a collector. A LAG is used to connect the two switches. The physical topology of the network looks like this:

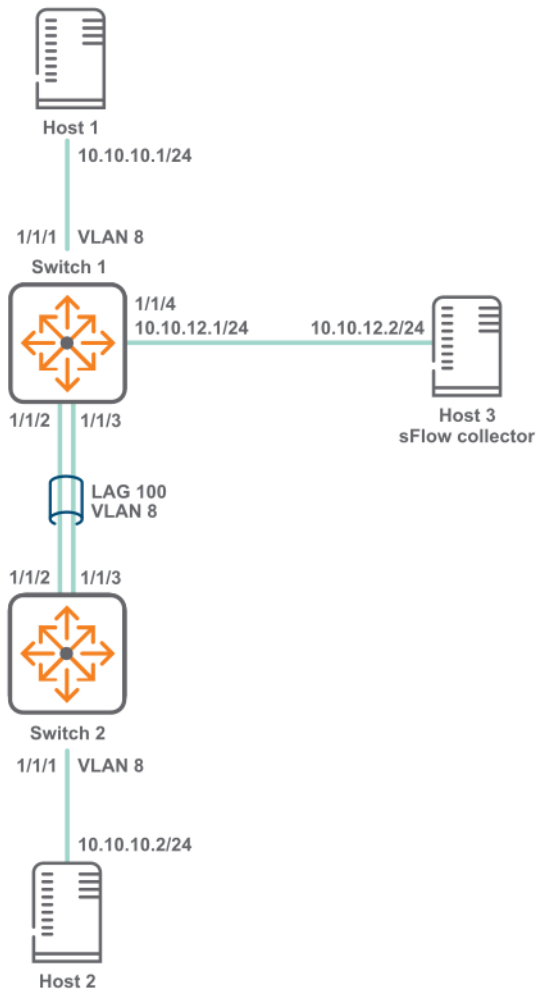

Procedure

1. Configure switch 1.
 - a. Enable sFlow globally.

```
switch# config
switch(config)# sflow
```
 - b. Set the sFlow agent IP address to **10.10.12.1**.

```
switch(config)# sflow agent-ip 10.10.12.1
```
 - c. Set the sFlow collector IP address to **10.10.12.2**.

```
switch(config)# sflow collector 10.10.12.2
```
 - d. Configure sFlow sampling rate and polling interval.

```
switch(config)# sflow sampling 5000
switch(config)# sflow polling 10
```
 - e. Create VLAN **8**.

```
switch(config)# vlan 8
switch(config-vlan-8)# no shutdown
switch(config)# exit
```
 - f. Define LAG **100** and assign VLAN **vlan 8** to it.

```
switch(config)# interface lag 100
switch(config-lag-if)# no shutdown
switch(config-lag-if)# vlan access 8
switch(config-lag-if)# lacp mode active
```

- g. Configure interface **1/1/1**.


```
switch(config)# interface 1/1/1
switch(config-if)# no shutdown
switch(config-lag-if)# no routing
switch(config-if)# vlan access 8
```
- h. Configure interface **1/1/2** and **1/1/3** as members of LAG **100**.


```
switch# (config)#interface 1/1/2
switch(config-if)# no shutdown
switch(config-if)# lag 100
switch(config-if)# exit
switch(config)# interface 1/1/3
switch(config-if)# no shutdown
switch(config-if)# lag 100
switch(config-if)# exit
```
- i. Configure interface **1/1/4** with IP address **10.10.12.1/24**.


```
switch# (config)#interface 1/1/4
switch(config-if)# no shutdown
switch(config-if)# ip address 10.10.12.1/24
switch(config-if)# quit
```
- j. Verify sFlow configuration.

```
switch# show sflow
sFlow Global Configuration
-----
sFlow                enabled
Collector IP/Port/Vrf 10.10.10.2/6343/default
Agent Address         10.0.0.1
Sampling Rate         1024
Polling Interval      30
Header Size           128
Max Datagram Size     1400
Sampling Mode         both

sFlow Status
-----
Running - Yes

sFlow enabled on Interfaces:
-----
lag100

sFlow Statistics
-----
Number of Ingress Samples 200
Number of Egress Samples  0
```

2. Configure switch 2.
 - a. Create VLAN **8**.


```
switch(config)# vlan 8
switch(config-vlan-8)# no shutdown
switch(config)# exit
```
 - b. Define LAG **100** and assign VLAN **vlan 8** to it.


```
switch(config)# interface lag 100
switch(config-lag-if)# no shutdown
switch(config-lag-if)# vlan access 8
switch(config-lag-if)# lacp mode active
```
 - c. Configure interface **1/1/1**.


```
switch(config)# interface 1/1/1
```

```

switch(config-if)# no shutdown
switch(config-if)# vlan access 8
d. Configure interface 1/1/2 and 1/1/3 as members of LAG 100.
switch# (config)#interface 1/1/2
switch(config-if)# no shutdown
switch(config-if)# lag 100
switch(config-if)# exit
switch(config)-if# interface 1/1/3
switch(config-if)# no shutdown
switch(config-if)# lag 100
switch(config-if)# exit

```

sFlow agent commands

clear sflow statistics

Syntax

```
clear sflow statistics {global | interface <INTERFACE-NAME>}
```

Description

This command clears the sFlow sample statistics counter to 0 either globally or for a specific interface.

Command context

```
config
```

Parameters

```
global
```

Specifies all interfaces on the switch.

```
interface <INTERFACE-NAME>
```

Specifies the name of an interface on the switch.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Clearing the global sFlow sample statistics counter to 0 globally:

```
switch(config)# clear sflow statistics global
```

Clearing the global sFlow sample statistics counter to 0 for interface 1/1/1:

```
switch(config)# clear sflow statistics interface 1/1/1
```

sflow

Syntax

```
sflow
no sflow
```

Description

Enables the sFlow agent.

- In the `config` context, this command enables the sFlow agent globally on all interfaces.
- In an `config-if` context, this command enables the sFlow agent on a specific interface. sFlow cannot be enabled on a member of a LAG, only on the LAG.

The sFlow agent is disabled by default.

The `no` form of this command disables the sFlow agent and deletes all sFlow configuration settings, either globally, or for a specific interface.

Command context

`config`
`config-if`

Parameters

None.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling sFlow globally on all interfaces:

```
switch(config)# sflow
```

Disabling sFlow globally on all interfaces:

```
switch(config)# no sflow
```

Enabling sFlow on interface **1/1/1**:

```
switch(config)# interface 1/1/1  
switch(config-if)# sflow
```

Disabling sFlow on interface **1/1/1**:

```
switch(config)# interface 1/1/1  
switch(config-if)# no sflow
```

Enabling sFlow on interface **lag100**:

```
switch(config)# interface lag100  
switch(config-if)# sflow
```

Disabling sFlow on interface **lag100**:

```
switch(config)# interface lag100  
switch(config-if)# no sflow
```

sflow agent-ip

Syntax

```
sflow agent-ip <IP-ADDR>  
no sflow agent-ip [<IP-ADDR>]
```

Description

Defines the IP address of the sFlow agent to use in sFlow datagrams. This address must be defined for sFlow to function. HPE recommends that the address:

- can uniquely identify the switch
- is reachable by the sFlow collector
- does not change with time

The `no` form of this command deletes the IP address of the sFlow agent. This causes sFlow to stop working and no datagrams will be sent to the sFlow collector.

Command context

config

Parameters

<IP-ADDR>

Specifies an IP address in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255, or IPv6 format (`xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx`), where `x` is a hexadecimal number from 0 to F. The agent address is used to identify the switch in all sFlow datagrams sent to sFlow collectors. It is usually set to an IP address on the switch that is reachable from an sFlow collector.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the agent address to **10.10.10.100**:

```
switch(config)# sflow agent-ip 10.0.0.100
```

Setting the agent address to **2001:0db8:85a3:0000:0000:8a2e:0370:7334**:

```
switch(config)# sflow agent-ip 2001:0db8:85a3:0000:0000:8a2e:0370:7334
```

Removing the address configuration from the switch, which results in sFlow being disabled:

```
switch(config)# no sflow agent-ip
```

sflow collector

Syntax

```
sflow collector <IP-ADDR> [port <PORT>] [vrf <VRF>]  
no sflow collector <IP-ADDR> [port <PORT>] [vrf <VRF>]
```

Description

Defines a collector to which the sFlow agent sends data. Up to three collectors can be defined. At least one collector should be defined, and it must be reachable from the switch for sFlow to work.

Command context

config

Parameters

collector <IP-ADDR>

Specifies the IP address of a collector in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255, or IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F.

port <PORT>

Specifies the UDP port on which to send information to the sFlow collector. Range: 0 to 65536. Default: 6343.

vrf <VRF>

Specifies the VRF on which to send information to the sFlow collector. The VRF must be defined on the switch. If no VRF is specified, the default VRF (default) is used.

Authority

Administrators or local user group members with execution rights for this command.

Example

Defining a collector with IP address **10.10.10.100** on UDP port **6400**:

```
switch(config)# sflow collector 10.0.0.1 port 6400
```

sflow disable

Syntax

sflow disable

Description

Disables the sFlow agent, but retains any existing sFlow configuration settings. The settings become active if the sFlow agent is re-enabled.

Command context

config

Parameters

None.

Authority

Administrators or local user group members with execution rights for this command.

Example

Disabling sFlow support:


```
switch(config)# sflow disable
```

sflow header-size

Syntax

```
sflow header-size <SIZE>  
no sflow header-size [<SIZE>]
```

Description

Sets the sFlow header size in bytes.

The `no` form of this command sets the header size to the default value of 128.

Command context

config

Parameters

header-size <SIZE>

Specifies the sFlow header size in bytes. Range: 64 to 256. Default: 128.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the header size to **64** bytes:

```
switch(config)# sflow header-size 64
```

Setting the header size to the default value of **128** bytes:

```
switch(config)# no sflow header-size
```

sflow max-datagram-size

Syntax

```
sflow max-datagram-size <SIZE>  
no sflow max-datagram-size [<SIZE>]
```

Description

Sets the maximum number of bytes that are sent in one sFlow datagram.

The `no` form of this command sets maximum number of bytes to the default value of 1400.

Command context

config

Parameters

max-datagram-size <SIZE>

Specifies the maximum datagram size in bytes. Range: 1 to 9000. Default: 1400.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the datagram size to **1000** bytes:

```
switch(config)# sflow max-datagram-size 1000
```

Setting the header size to the default value of **1400** bytes:

```
switch(config)# no sflow max-datagram-size
```

sflow mode

Syntax

```
sflow mode {ingress | egress | both}
no sflow mode {ingress | egress | both}
```

Description

Sets the sFlow sampling mode. The default mode is ingress.

The no form of the command sets the sampling mode to ingress. Executing the no form of the command with the ingress option will have no impact as ingress is the default mode.

Command context

config

Parameters

ingress

Samples only ingress traffic.

egress

Samples only egress traffic.

both

Samples both ingress and egress traffic.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the sFlow mode to only sample egress traffic:

```
switch# configure terminal
switch(config)# sflow mode egress
```

Resetting the sFlow sampling mode to the default of ingress from previously configured mode of egress:

```
switch# configure terminal  
switch(config)# no sflow mode egress
```

sflow polling

Syntax

```
sflow polling <INTERVAL>  
no sflow polling [<INTERVAL>]
```

Description

Defines the global polling interval for sFlow in seconds.

The `no` form of this command sets the polling interval to the default value of 30 seconds.

Command context

config

Parameters

<INTERVAL>

Specifies the polling interval in seconds. Range: 10 to 3600. Default: 30.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the polling interval to 10:

```
switch(config)# sflow polling 10
```

Setting the polling interval to the default value.

```
switch(config)# no sflow polling
```

sflow sampling

Syntax

```
sflow sampling <RATE>  
no sflow sampling [<RATE>]
```

Description

Defines the global sampling rate for sFlow in number of packets. The default sampling rate is 4096, which means that one in every 4096 packets is sampled. A warning message is displayed when the sampling rate is set to less than 4096 and proceeds only after user confirmation.

The `no` form of this command sets the sampling rate to the default value of 4096.

Command context

config

Parameters

sampling <RATE>

Specifies the sampling rate. Range: 1 to 1000000000. Default: 4096.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the sampling rate to **5000**:

```
switch(config)# sflow sampling 5000
```

Setting the sampling rate to the default:

```
switch(config)# no sflow sampling
```

Setting the sampling rate to **1000**:

```
switch(config)# sflow sampling 1000
Setting the sFlow sampling rate lower than 4096 is not recommended and might
affect system performance.
Do you want to continue [y/n]? y
switch(config)#
```

show sflow

Syntax

show sflow [interface <INTERFACE-NAME>]

Description

Shows sFlow configuration settings and statistics for all interfaces, or for a specific interface

Command context

Manager (#)

Parameters

interface <INTERFACE-NAME>

Specifies the name of an interface on the switch.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch# show sflow
sFlow Global Configuration
-----
sFlow                enabled
Collector IP/Port/Vrf 10.10.10.2/6343/default
Agent Address         10.0.0.1
```

```
Sampling Rate          1024
Polling Interval       30
Header Size            128
Max Datagram Size      1400
Sampling Mode          both
```

sFlow Status

Running - Yes

sFlow enabled on Interfaces:

lag100

sFlow Statistics

Number of Ingress Samples 200
Number of Egress Samples 0

Showing sFlow information for interface **1/1/1**:

```
switch# show sflow interface 1/1/1
sFlow configuration - Interface 1/1/1
-----
sFlow                enabled
Sampling Rate        1024
Sampling Mode        both
Number of Ingress Samples  81
Number of Egress Samples  20
sFlow Sampling Status  success
```

The Dynamic Host Configuration Protocol (DHCP) enables the automatic assignment of IP addresses and other configuration settings to network devices.

The DHCP relay agent acts as an intermediary, forwarding DHCP requests/response between DHCP clients/servers on different networks. This enables DHCP clients to use the services of DHCP servers that are not on the same subnet on which they are located.

DHCP client

By default, the switch operates as a DHCP client on VLAN 1 or the management interface allowing it to automatically obtain an IP address from a DHCP server on the network to which it is connected.

DHCP client commands

ip dhcp

Syntax

```
ip dhcp
```

Description

Enables the DHCP client on the management interface enabling the interface to automatically obtain an IP address from a DHCP server on the network. By default, the DHCP client is enabled.

Command context

```
config-if-vlan
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

This example enables the DHCP client on the management interface.

```
switch(config)# interface vlan 1
switch(config-if-vlan)# ip dhcp
switch(config-if-vlan)# no shutdown
```

If the interface is not enabled, you can enable it by entering the `no shutdown` command.

DHCP relay agent

The function of the DHCP relay agent is to forward the DHCP messages to other subnets so that the DHCP server does not have to be on the same subnet as the DHCP clients. The DHCP relay agent transfers DHCP

messages from the DHCP clients located on a subnet without a DHCP server, to other subnets. It also relays answers from DHCP servers to DHCP clients.

Supported interfaces

The DHCP relay agent is supported on layer 3 interfaces, layer 3 VLAN interfaces, and LAG interfaces. DHCP relay is not supported on the management interface.

VRF support

The DHCP relay agent is VRF aware and behaves as follows when VRFs are defined on the switch:

- DHCP client requests received on an interface are forwarded to the configured servers via the VRF that the interface is part of.
- DHCP server responses received on an interface are forwarded to the client that is reachable via the VRF that the interface is part of.

DHCPv4 relay agent

Hop count in DHCP requests

When a DHCP client broadcasts request, the DHCP relay agent in the switch receives the packets and forwards them to the DHCP server as unicast requests. During this process, the DHCP relay agent increments the hop count before forwarding DHCP packets to the server. The DHCP server, in turn, includes the hop count in the DHCP header in the response sent back to a DHCP client.

DHCP relay option 82

Option 82 is called the relay agent information option. When a DHCP relay agent forwards client-originated DHCP packets to a DHCP server, the option 82 field is inserted/replaced, or the packet with this option is dropped. Servers recognizing the relay agent information option may use the information to implement policies for the assignment of IP addresses and other parameters. The relay agent relays the server-to-client replies to the client.

If a second relay agent is configured to add its own option 82 information, it can encapsulate option 82 information in messages from a first relay agent. The DHCP server uses the option 82 information from both relay agents to decide the IP address for the client.

Inter-VRF DHCP relay

The DHCP relay agent supports anycast gateway using option 82 sub-option 5 (RFC 3527). The DHCP relay discovery packet is filled with the client's gateway IP address in sub-option 5 (discovery packet). The DHCP server uses this information to offer an IP address from the right pool. Pool selection occurs by matching the default gateway configuration settings on the DHCP server with the requested gateway IP address in sub-option 5 in the discovery packet.

The switch uses DHCP relay sub-option 151 to enable DHCP relay to forward discovery and reply packets between VXLAN DHCP clients and DHCP servers even when they are on different overlay or underlay VRFs and the DHCP-server is reachable on the default VRF or one of the overlay VRFs.

In general deployments, a renewal of a DHCP client's IP occurs when the client sends a request to the DHCP server directly. In the case of EVPN VXLAN clients, the DHCP server is not directly reachable. Instead, the renewal request is sent to the DHCP relay. DHCP relay agent fills the option 82 sub-option 11 field in the DHCP discovery packet with the client's gateway IP on the VTEP (which is the relay interface IP address of the VTEP) and the DHCP server returns a DHCP offer reply packet with option 54 set to the DHCP server Identifier. When the reply packet is received by the client, the client uses the IP in option 54 to sent

subsequent renewal requests to this IP (VTEP's Relay Interface IP) using sub-option 11 (also known as the Server ID Override Sub-option). Refer to RFC 5107 for more details.

Sub-options 5,11,151,152 are filled in the discover packet, only if a source IP address is defined (using the command `ip source-address`) for the given DHCP server's source VRF. If the server does not understand sub-option 151, then the server will add sub-option 152 in offer packet.

In an inter-VRF situation, when both DHCP relay and DHCP snooping are enabled on the switch with option 82, DHCPv4 clients will not receive an IP address.

Configuring a BOOTP/DHCP relay gateway

The DHCP relay agent selects the lowest-numbered IP address on the interface to use for DHCP messages. The DHCP server then uses this IP address when it assigns client addresses. However, this IP address may not be the same subnet as the one on which the client needs the DHCP service. This feature provides a way to configure a gateway address for the DHCP relay agent to use for relayed DHCP requests, rather than the DHCP relay agent automatically assigning the lowest-numbered IP address.

Configuring the DHCPv4 relay agent

Prerequisites

- An enabled layer 3 interface.

Procedure

1. The DHCPv4 relay agent is enabled by default. If it was previously disabled, enable it with the command `dhcp-relay`.
2. Configure one or more IP helper addresses with the command `ip helper-address`. This determines where the DHCPv4 agent forwards DHCP requests. IP helper addresses can be configured on layer 3 interfaces, layer 3 VLAN interfaces, and LAG interfaces.
3. If you want to modify the content of forwarded DHCP packets or drop DHCP packets, configure option 82 support with the command `dhcp-relay option 82`.
4. Define the gateway address that the DHCPv4 agent will use with the command [ip bootp-gateway](#).
5. If required, enable the hop count increment feature with the command `dhcp-relay hop-count-increment`.
6. Review DHCPv4 relay agent configuration settings with the commands `show dhcp-relay`, `show ip helper-address`, and `show dhcp-relay bootp-gateway`.

Example

This example creates the following configuration:

- Enables the DHCPv4 relay agent.
- Enables interface **1/1/1** and assigns an IPv4 address to it. (By default, all interfaces are layer 3 and disabled.)
- Defines an IP helper address of **10.10.20.209** on the interface.
- Enables DHCP option 82 support and replaces all option 82 information with the values from the switch with the switch MAC address as the remote ID.

```
switch(config)# dhcp-relay
switch(config)# interface 1/1/1
switch(config-if)# no shutdown
```



```

switch(config-if)# ip address 198.51.100.1/24
switch(config-if)# ip helper-address 10.10.20.209
switch(config-if)# exit
switch(config)# dhcp-relay option 82 replace mac
switch# show dhcp-relay
DHCP Relay Agent           : Enabled
DHCP Request Hop Count Increment : Enabled
Option 82                   : Disabled
Response Validation         : Disabled
Option 82 Handle Policy     : replace
Remote ID                   : mac

DHCP Relay Statistics:

Valid Requests  Dropped Requests  Valid Responses  Dropped Responses
-----
60              10                60              10


DHCP Relay Option 82 Statistics:

Valid Requests  Dropped Requests  Valid Responses  Dropped Responses
-----
50              8                50              8

```

DHCPv4 relay scenario 1

In this scenario, DHCP relay on the server enables two hosts to obtain their IP addresses from a DHCP server on a different subnet. The physical topology of the network looks like this:

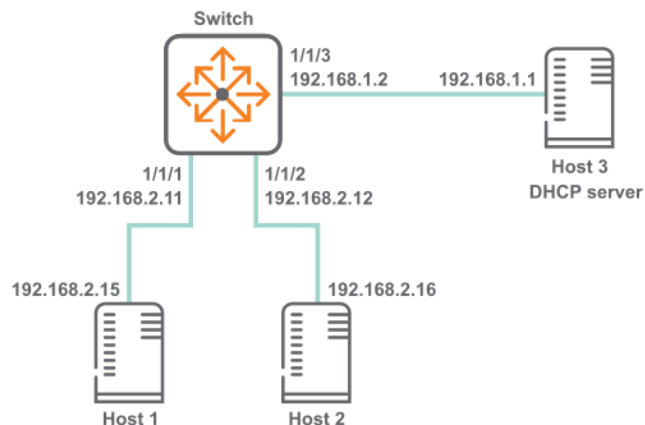

Procedure

1. DHCP relay is enabled by default. If it was previously disabled, enable it.

```

switch# config
switch(config)# dhcp-relay

```

2. Define an IPv4 helper address on interfaces 1/1/1 and 1/1/2 .

```

switch(config)# interface 1/1/1
switch(config-if)# ip address 192.168.2.11/24
switch(config-if)# ip helper-address 192.168.1.1
switch(config-if)# interface 1/1/2
switch(config-if)# ip address 192.168.2.12/24
switch(config-if)# ip helper-address 192.168.1.1
switch(config-if)# quit

```

3. Verify DHCP relay configuration.

```
switch# show dhcp-relay

DHCP Relay Agent           : Enabled
DHCP Request Hop Count Increment : Enabled
L2VPN Clients              : Disabled
Option 82                  : Disabled
Source-Interface           : Disabled
Response Validation        : Disabled
Option 82 Handle Policy    : replace
Remote ID                  : mac

DHCP Relay Statistics:

Valid Requests Dropped Requests Valid Responses Dropped Responses
-----
60             10                60             10

DHCP Relay Option 82 Statistics:

Valid Requests Dropped Requests Valid Responses Dropped Responses
-----
50             8                 50             8
```

```
switch# show ip helper-address
IP Helper Addresses


Interface: 1/1/1
IP Helper Address      VRF
-----
192.168.1.1           default

Interface: 1/1/2
IP Helper Address      VRF
-----
192.168.1.1           default
```

DHCPv4 relay scenario 2

(This scenario is not supported on the 6200 Switch Series.)

In this scenario, the two host computers communicate with two different DHCP servers. Each server is reached on a different VRF. The physical topology of the network looks like this:

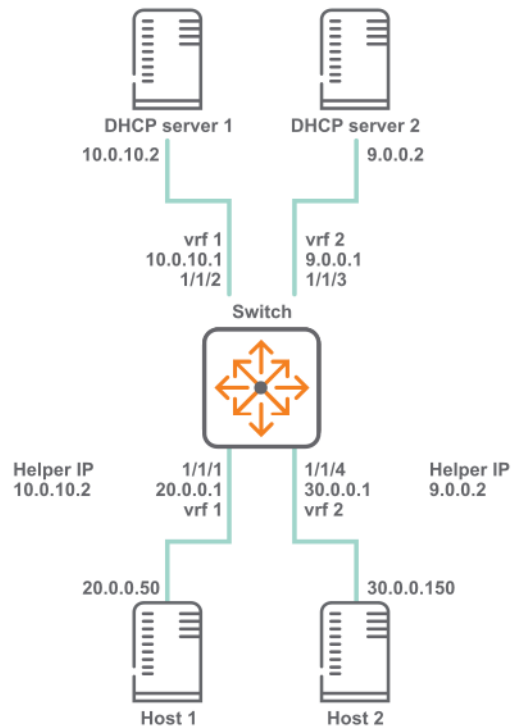

Procedure

1. Create the two VRFs.


```
switch# config
switch(config)# vrf vrf 1
switch(config)# vrf vrf 2
```
2. Configure interface **1/1/1**. Set its IP address, associate it with VRF 1, and define the helper IP address to reach DHCP server 1.


```
switch(configif)# interface 1/1/1
switch(configif)# vrf attach vrf1
switch(configif)# ip address 20.0.0.1/8
switch(configif)# ip helper-address 10.0.10.2
```
3. Configure interface **1/1/2**. Set its IP address and associate it with VRF 1.



```
switch(configif)# interface 1/1/2
switch(configif)# vrf attach vrf1
switch(configif)# ip address 10.0.10.1/24
```
4. Configure interface **1/1/3**. Set its IP address and associate it with VRF 1.


```
switch(configif)# interface 1/1/3
switch(configif)# vrf attach vrf2
switch(configif)# ip address 9.0.0.1/24
```
5. Configure interface **1/1/4**. Set its IP address, associate it with VRF 2, and define the helper IP address to reach DHCP server 2.


```
switch(configif)# interface 1/1/4
switch(configif)# vrf attach vrf2
switch(configif)# ip address 30.0.0.1/8
switch(configif)# ip helper-address 9.0.0.2
```

DHCPv4 relay scenario 3

In this scenario, host on switch 1 reaches the DHCP server on switch two via a LAG. The physical topology of the network looks like this:

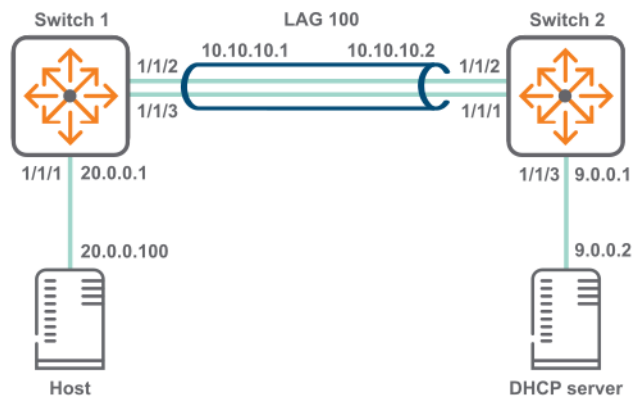

Procedure

1. On switch 1:
 - a. Create LAG **100** and assign an IP address to it.


```
switch# config
switch(config)# interface lag 100
switch(config-lag-if)# ip address 10.0.10.1/24
switch(config-lag-if)# lacp mode active
switch(config-lag-if)# exit
switch(config)#
```
 - b. Assign an IP address to interface **1/1/1** and a an IP helper address to reach the DHCP server.


```
switch(config)# interface 1/1/1
switch(config-if)# ip address 20.0.0.1/8
switch(config-if)# ip helper-address 9.0.0.2
```
 - c. Assign interfaces **1/1/2** and **1/1/3** to LAG **100**

```
switch(config-if)# interface 1/1/2
switch(config-if)# lag 100
switch(config-if)# interface 1/1/3
switch(config-if)# lag 100
switch(config-if)# exit
switch(config)#
```
 - d. Create a route between **10.0.10.2** and **9.0.0.0**.


```
switch(config)# ip route 9.0.0.0/24 10.0.10.2
```
2. On switch 2:
 - a. Create LAG **100** and assign an IP address to it.


```
switch# config
switch(config)# interface lag 100
switch(config-lag-if)# ip address 10.0.10.2/24
switch(config-lag-if)# lacp mode active
switch(config-lag-if)# exit
switch(config)#
```
 - b. Assign interfaces **1/1/1** and **1/1/2** to LAG **100**

```
switch(config-if)# interface 1/1/2
switch(config-if)# lag 100
switch(config-if)# interface 1/1/3
switch(config-if)# lag 100
switch(config-if)# exit
switch(config)#
```
 - c. Assign an IP address to interface **1/1/3**.


```
switch(config)# interface 1/1/3
switch(config-if)# ip address 9.0.0.1/24
```
 - d. Create a route between **20.0.0.0** and **10.0.10.1**.


```
switch(config)# ip route 20.0.0.0/8 10.0.10.1
```

DHCPv4 relay commands

dhcp-relay

Syntax

```
dhcp-relay  
no dhcp-relay
```

Description

Enables DHCP relay support. DHCP relay is enabled by default. DHCP relay is not supported on the management interface.

The `no` form of this command disables DHCP relay support.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

This example enables DHCP relay support.

```
switch(config)# dhcp-relay
```

This example removes DHCP relay support.

```
switch(config)# no dhcp-relay
```

dhcp-relay hop-count-increment

Syntax

```
dhcp-relay hop-count-increment  
no dhcp-relay hop-count-increment
```

Description

Enables the DHCP relay hop count increment feature, which causes the DHCP relay agent to increment the hop count in all relayed DHCP packets. Hop count is enabled by default.

The `no` form of this command disables the hop count increment feature.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling the hop count increment feature.

```
switch(config)# dhcp-relay hop-count-increment
```

Disabling the hop count increment feature.

```
switch(config)# no dhcp-relay hop-count-increment
```

dhcp-relay option 82

Syntax

```
dhcp-relay option 82 {replace [validate] | drop [validate] | keep | source-interface |  
validate [replace | drop]} [ip | mac]  
no dhcp-relay option 82 source-interface
```

Description

Configures the behavior of DHCP relay option 82. A DHCP relay agent can receive a message from another DHCP relay agent having option 82. The relay information from the previous relay agent is replaced by default.

The `no` form of this command disables support for DHCP relay option 82.

Command context

config

Parameters

replace

Replace the existing option 82 field in an inbound client DHCP packet with the information from the switch. The remote ID and circuit ID information from the first relay agent is lost. Default.

validate

Validate option 82 information in DHCP server responses and drop invalid responses.

drop

Drop any inbound client DHCP packet that contains option 82 information.

keep

Keep the existing option 82 field in an inbound client DHCP packet. The remote ID and circuit ID information from the first relay agent is preserved.

source-interface

Configures the DHCP relay to use a configured source IP address for inter-VRF server reachability. Set the source IP address with the command `ip source-interface`.

ip

Use the IP address of the interface on which the client DHCP packet entered the switch as the option 82 remote ID.

mac

Use the MAC address of the switch as the option 82 remote ID. Default.

Authority

Administrators or local user group members with execution rights for this command.

Example

This example enables DHCP option 82 support and replaces all option 82 information with the values from the switch, with the switch MAC address as the remote ID.

```
switch(config)# dhcp-relay option 82 replace mac
```

ip bootp-gateway

Syntax

```
ip bootp-gateway <IPV4-ADDR>
no ip bootp-gateway <IPV4-ADDR>
```

Description

Configures a gateway address for the DHCP relay agent to use for DHCP requests. By default DHCP relay agent picks the lowest-numbered IP address on the interface.

The `no` form of this command removes the gateway address.

Command context

config-if

Parameters

<IPV4-ADDR>

Specifies the IP address of the gateway in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Sets the IP address of the gateway for interface **1/1/1** to **10.10.10.10**.

```
switch(config)# interface 1/1/1
switch(config-if)# ip bootp-gateway 10.10.10.10
```

ip helper-address

Syntax

```
ip helper-address <IPV4-ADDR> [vrf <VRF-NAME>]
no ip helper-address <IPV4-ADDR> [vrf <VRF-NAME>]
```

Description

Defines the address of a remote DHCP server or DHCP relay agent. Up to eight addresses can be defined. The DHCP agent forwards DHCP client requests to all defined servers.

This command requires that you define a source IP address for DHCP relay with the command `ip source-interface`. The configured source IP on the VRF is used to forward DHCP packets to the server.

A helper address cannot be defined on the OOBM interface.

The `no` form of this command removes an IP helper address.

Command context

config-if

Parameters

helper-address <IPV4-ADDR>

Specifies the helper IP address in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255.

vrf <VRF-NAME>

Specifies the name of a VRF. Default: `default`.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Defining the IP helper address **10.10.10.209** on interface **1/1/1**.

```
switch(config)# interface 1/1/1
switch(config-if)# ip helper-address 10.10.10.209
```

Removing the IP helper address **10.10.10.209** on interface **1/1/1**.

```
switch(config-if)# no ip helper-address 10.10.10.209
```

show dhcp-relay

Syntax

show dhcp-relay

Description

Shows DHCP relay configuration settings.

Command context

Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Example

```
switch# show dhcp-relay

DHCP Relay Agent           : Enabled
DHCP Request Hop Count Increment : Enabled
L2VPN Clients              : Disabled
Option 82                  : Disabled
Source-Interface           : Disabled
Response Validation        : Disabled
Option 82 Handle Policy    : replace
Remote ID                  : mac

DHCP Relay Statistics:

Valid Requests  Dropped Requests  Valid Responses  Dropped Responses
-----
60              10                60              10

DHCP Relay Option 82 Statistics:

Valid Requests  Dropped Requests  Valid Responses  Dropped Responses
-----
50              8                50              8
```

show dhcp-relay bootp-gateway

Syntax

show dhcp-relay bootp-gateway [interface <INTERFACE-NAME>]

Description

Shows the bootp gateway defined for all interfaces or a specific interface.

Command context

Manager (#)

Parameters

<INTERFACE-NAME>

Specifies an interface. Format: member/slot/port.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

```
switch# show dhcp-relay bootp-gateway
```

BOOTP Gateway Entries

Interface	Source IP
1/1/1	1.1.1.1
1/1/2	1.1.1.2

```
switch# show ip helper-address interface 1/1/1
```

BOOTP Gateway Entries

Interface	Source IP
1/1/1	1.1.1.1

show ip helper-address

Syntax

```
show ip helper-address [interface <INTERFACE-ID>]
```

Description

Shows the helper IP addresses defined for all interfaces or a specific interface.

Command context

Manager (#)

Parameters

interface <INTERFACE-ID>

Specifies an interface. Format: member/slot/port.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Example

```
switch#  
IP Helper Addresses
```

```
Interface: 1/1/1  
IP Helper Address      VRF  
-----  
192.168.20.1          default  
192.168.10.1          default
```

```
Interface: 1/1/2  
IP Helper Address      VRF  
-----  
192.168.30.1          RED
```

```
switch# show ip helper-address interface 1/1/1  
IP Helper Addresses
```

```
Interface: 1/1/1  
IP Helper Address      VRF  
-----  
192.168.20.1          default  
192.168.10.1          default
```

DHCPv6 relay agent

Supporting VXLAN topologies or inter-VRF deployment

When deploying EVPN VXLAN or inter-VRF topologies where the source VRFs for the DHCP and DHCP client are different, it is recommended that you install the DHCPv6 server in the underlay so that there is only one instance of the DHCPv6 server serving overlay clients.

Configuring the DHCPv6 relay agent

Prerequisites

- An enabled layer 3 interface.

Procedure

1. Enable the DHCPv6 agent with the command `dhcpv6-relay`.
2. Configure one or more IP helper addresses with the command `ipv6 helper-address`. This determines where the DHCPv6 agent forward DHCP requests.
3. If you want to enable DHCP option 79 support to forward client link-layer addresses, use the command `dhcpv6-relay option 79`.
4. Review DHCPv6 relay agent configuration settings with the commands `show dhcpv6-relay` and `show ipv6 helper-address`.

Example


This example creates the following configuration:

- Enables the DHCPv6 relay agent.
- Enables interface **1/1/2** and assigns an IPv6 address to it. (By default, all interfaces are layer 3 and disabled.)
- Defines an IP helper address of **FF01::1:1000** on interface **1/1/2**.
- Enables DHCP option 79.

```
switch(config)# dhcpv6-relay
switch(config)# interface 1/1/2
switch(config-if)# no shutdown
switch(config-if)# ipv6 address 2001:0db8:85a3::8a2e:0370:7334/24
switch(config-if)# ip helper-address FF01::1:1000
switch(config-if)# exit
switch(config)# dhcpv6-relay option 79
```

DHCPv6 relay scenario 1

In this scenario, DHCP relay on the server enables two hosts to obtain their IP addresses from a DHCP server on a different subnet. The physical topology of the network looks like this:

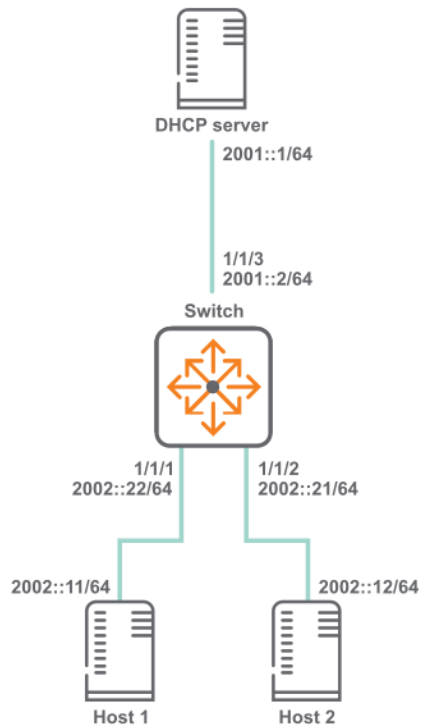

Procedure

1. Enable DHCP relay.

```
switch# config
switch(config)# dhcpv6-relay
```

2. Define an IPv6 helper address on interfaces 1/1/1 and 1/1/2 .

```
switch(config)# interface 1/1/1
switch(config-if)# ipv6 address 2002::22/64
switch(config-if)# ipv6 helper-address 2001::1
switch(config-if)# interface 1/1/2
switch(config-if)# ipv6 address 2002::21/64
switch(config-if)# ipv6 helper-address 2001::1
switch(config-if)# quit
```

3. Verify DHCP relay configuration.

```
switch# show dhcpv6-relay
DHCPv6 Relay Agent : Enabled
Option 79          : Disabled
switch# show ipv6 helper-address


Interface: 1/1/1
IPv6 Helper Address ----- Egress Port
2001::1 ----- 1/1/3

Interface: 1/1/2
IPv6 Helper Address ----- Egress Port
2001::1 ----- 1/1/3
```

DHCPv6 relay scenario 2

(This scenario is not supported on the 6200 Switch Series.)

In this scenario, the two host computers communicate with two different DHCP servers. Each server is reached on a different VRF. The physical topology of the network looks like this:

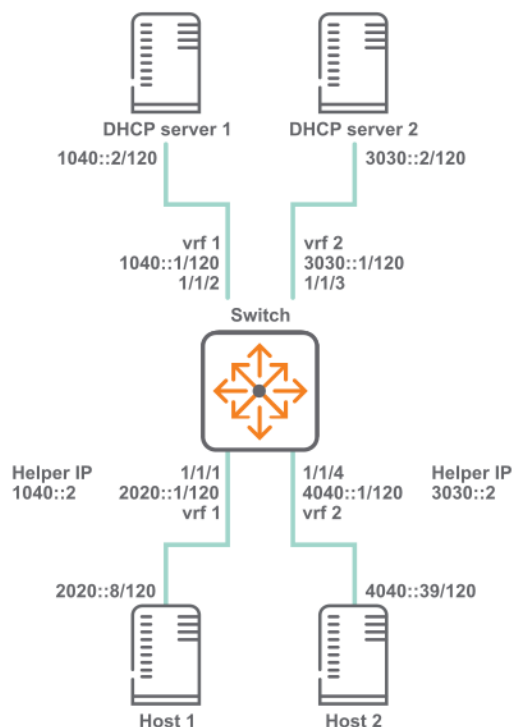

Procedure

1. Create the two VRFs.

```
switch# config
switch(config)# vrf vrf 1
switch(config)# vrf vrf 2
```

2. Configure interface 1/1/1. Set its IP address, associate it with VRF 1, and define the helper IP address to reach DHCP server 1.

```
switch(configif)# interface 1/1/1
switch(configif)# vrf attach vrf1
switch(configif)# ipv6 address 20.0.0.1/8
switch(configif)# ipv6 helper-address unicast 1040::2
```

3. Configure interface **1/1/2**. Set its IP address and associate it with VRF 1.

```
switch(configif)# interface 1/1/2  
switch(configif)# vrf attach vrf1  
switch(configif)# ipv6 address 1040::1/120
```
4. Configure interface **1/1/3**. Set its IP address and associate it with VRF 1.

```
switch(configif)# interface 1/1/3  
switch(configif)# vrf attach vrf2  
switch(configif)# ipv6 address 3030::1/120
```
5. Configure interface **1/1/4**. Set its IP address, associate it with VRF 2, and define the helper IP address to reach DHCP server 2.

```
switch(configif)# interface 1/1/4  
switch(configif)# vrf attach vrf2  
switch(configif)# ipv6 address 4040::1/120  
switch(configif)# ipv6 helper-address unicast 3030::2
```

DHCP relay (IPv6) commands

dhcpv6-relay

Syntax

```
dhcpv6-relay  
no dhcpv6-relay
```

Description

Enables DHCPv6 relay support. DHCPv6 relay is disabled by default.

DHCP relay is not supported on the management interface

The `no` form of this command disables DHCP relay support.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enables DHCPv6 relay support.

```
switch(config)# dhcpv6-relay
```

Removes DHCPv6 relay support.

```
switch(config)# no dhcpv6-relay
```

dhcpv6-relay option 79

Syntax

```
dhcpv6-relay option 79  
no dhcpv6-relay option 79
```

Description

Enables support for DHCP relay option 79. When enabled, the DHCPv6 relay agent forwards the link-layer address of the client. This option is disabled by default.

The `no` form of this command disables support for DHCP relay option 79.

Command context

`config`

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enables DHCP option 79 support.

```
switch(config)# dhcpv6-relay option 79
```

Disables DHCP option 79 support.

```
switch(config)# no dhcpv6-relay option 79
```

ipv6 helper-address

Syntax

```
ipv6 helper-address unicast <UNICAST-IPV6-ADDR>
no ipv6 helper-address unicast <UNICAST-IPV6-ADDR>
ipv6 helper-address multicast {all-dhcp-servers | <MULTICAST-IPV6-ADDR>} egress <PORT-NUM>
no ipv6 helper-address multicast {all-dhcp-servers | <MULTICAST-IPV6-ADDR>} egress <PORT-NUM>
```

Description

Defines the address of a remote DHCPv6 server or DHCPv6 relay agent. Up to eight addresses can be defined. The DHCPv6 agent forwards DHCPv6 client requests to all defined servers.

Not supported on the OOBM interface.

The `no` form of this command removes an IP helper address.

Command context

`config-if`

Parameters

`<UNICAST-IPV6-ADDR>`

Specifies the unicast helper IP address in IPv6 format (`xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx`), where `x` is a hexadecimal number from 0 to F.

`<MULTICAST-IPV6-ADDR>`

Specifies the multicast helper IP address in IPv6 format (`xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx`), where `x` is a hexadecimal number from 0 to F.

`all-dhcp-servers`

Specifies all the DHCP server IPv6 addresses for the interface.

`egress <PORT-NUM>`

Specifies the port number on which DHCPv6 service requests are relayed to a multicast destination. The egress port must be different than the one on which the multicast helper address is configured. Format: `member/slot/port`.

vrf <VRF-NAME>

Specifies the name of the VRF from which the specified protocol sets its source IP address.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Defining a multicast IPv6 helper address of **2001:DB8::1** on port **1/1/2**:

```
switch(config-if)# ipv6 helper-address multicast 2001:DB8:0:0:0:0:1 egress 1/1/2
```

Removing the IP helper address of **2001:DB8::1** on port **1/1/2**:

```
switch(config-if)# no ipv6 helper-address multicast 2001:DB8:0:0:0:0:1 egress 1/1/2
```

show dhcpv6-relay

Syntax

show dhcpv6-relay

Description

Shows DHCP relay configuration settings.

Command context

Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

```
switch# show dhcpv6-relay
DHCPv6 Relay Agent : Enabled
Option 79          : Enabled
```

show ipv6 helper-address

Syntax

show ipv6 helper-address [interface <INTERFACE-ID>]

Description

Shows the helper IP addresses defined for all interfaces or a specific interface.

Command context

Manager (#)

Parameters

interface <INTERFACE-ID>

Specifies an interface. Format: member/slot/port.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

```
switch# show ipv6 helper-address

Interface: 1/1/1
IPv6 Helper Address          Egress Port
-----
2001:db8:0:1::              -
FF01::1:1000                 1/1/2

Interface: 1/1/2
IPv6 Helper Address          Egress Port
-----
2001:db8:0:1::              -

switch# show ipv6 helper-address interface 1/1/1

Interface: 1/1/1
IPv6 Helper Address          Egress Port
-----
2001:db8:0:1::              -
FF01::1:1000                 1/1/2
```

```
switch# show ipv6 helper-address interface 1/1/1

Interface: 1/1/1
IPv6 Helper Address          Egress Port
-----
2001:db8:0:1::              -
FF01::1:1000                 1/1/2
```

http proxy

Syntax

```
http-proxy {<FQDN | IPV4-ADDR>} [vrf <VRF-NAME>]
no http-proxy
```

Description

Specifies HTTP proxy location and VRF.

The `no` form of this command removes a specified HTTP proxy location.

Command context

config

Parameters

<FQDN>

Specifies FQDN for HTTP proxy location.

<IPV4-ADDR>

Specifies IPV4 address for HTTP proxy location.

<VRF-NAME>

Specifies VRF for HTTP proxy.

Authority

Administrators or local user group members with execution rights for this command.

Usage

- HTTP proxy location can be configured using the CLI/REST interface or auto-configured through the DHCP server connected to the switch.
- There are three sources for HTTP proxy location:
 - User configured HTTP proxy via CLI or REST interface.
 - DHCP options received via management/OOBM port.
 - DHCP options received via VLAN 1 on supported switch platforms.
- Operational configuration for HTTP proxy location is determined by the source with the highest priority.
Source priority:
 1. User configured.
 2. DHCP options received via management/OOBM port.
 3. DHCP options received via VLAN 1.



-
- HTTP proxy location can only be a FQDN or an IPV4 address.
 - When HTTP proxy location and VRF are configured, they override any existing HTTP proxy location and VRF.
 - If this command is executed without the VRF parameter, the default VRF will be used.
 - Port number may need to be specified at the end of the IP address for FQDN to connect via HTTP proxy.
 - For example, 8088 is the TCP port number: `http-proxy 192.168.248.248:8088`
-

Examples

Specifying a FQDN for HTTP proxy location and MGMT VRF:

```
switch(config)# http-proxy http-proxy.aruba.com vrf mgmt
```

Removing HTTP proxy location

```
switch(config)# no http-proxy
```

Overview

DHCP is a protocol used by DHCP servers in IP networks to dynamically allocate network configuration data to client devices (DHCP clients). Possible network configuration data includes user IP address, subnet mask, default gateway IP address, DNS server IP address, and lease duration. The DHCP protocol enables DHCP clients to be dynamically configured with such network configuration data without any manual setup process.

DHCP snooping is a security feature that helps avoid problems caused by an unauthorized DHCP server on the network that provides invalid configuration data to DHCP clients. A user without malicious intent may cause this problem by unknowingly adding to the network a switch or other device that includes a DHCP server enabled by default. In some cases, a user with malicious intent adds a DHCP server to the network as part of their Denial of Service or Man in the Middle attack.

DHCP snooping helps prevent such problems by distinguishing between trusted ports connected to legitimate DHCP servers, and untrusted ports connected to general users. DHCP packets are forwarded between trusted ports without inspection. DHCP packets received on other switch ports are inspected before being forwarded. DHCP Packets from untrusted sources are dropped.

In addition, in support of the separate IP source lockdown feature, DHCP snooping also dynamically collects client information (VLAN, IPv4 address, MAC address, interface), adding the information to the switch IP binding database. Alternatively, also in support of IP lockdown, the IP binding database can be statically updated using the `ipv4 source-binding` or `ipv6 source-binding` commands. Statically configured IP binding information supersedes any dynamically collected information for the same client.



In an inter-VRF situation, when both DHCP relay and DHCP snooping are enabled on the switch with option 82, DHCPv4 clients will not receive an IP address.

DHCPv4 snooping conditions for dropping DHCPv4 packets

Applies only to DHCPv4 snooping.

Packet types that are dropped	Conditions for dropping the packets
DHCPOFFER, DHCPACK, DHCPNACK	■ A packet from a DHCP server is received on an untrusted port. ■ The switch is configured with a list of authorized DHCP server addresses and a packet is received from a DHCP server on a trusted port with a source IP address that is not in the list of authorized DHCP server addresses.
DHCPRELEASE, DHCPDECLINE	A broadcast packet that has a MAC address in the DHCP binding database, but the port in the DHCP binding database does not match the port on which the packet is received.

Packet types that are dropped	Conditions for dropping the packets
All DHCP packet types	■ When enabled (the default) a DHCP packet received on an untrusted port in which the DHCP client hardware MAC address does not match the source MAC address in the packet. ■ When enabled (the default), a DHCP packet containing DHCP relay information (option 82) is received from an untrusted port.

DHCPv4 snooping commands

clear dhcpv4-snooping binding

Syntax

```
clear dhcpv4-snooping binding {all | ip <IPV4-ADDR> vlan <VLAN-ID> |
    port <PORT-NUM> | vlan <VLAN-ID>}
```

Description

Clears DHCPv4 snooping binding entries.

Command context

Operator (>) or Manager (#)

Parameters

all

Specifies that all DHCPv4 binding information is to be cleared.

ip <IPV4-ADDR> vlan <VLAN-ID>

Specifies the IPv4 address and VLAN for which all DHCPv4 binding information is to be cleared.

port <PORT-NUM>

Specifies the port number for which all DHCPv4 binding information is to be cleared.

vlan <VLAN-ID>

Specifies the VLAN for which all DHCPv4 binding information is to be cleared.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Clearing all DHCPv4 binding information for IP address 192.168.2.4 and VLAN 5:

```
switch(config)# clear dhcpv4-snooping binding ip 192.168.2.4 vlan 5
```

Clearing all DHCPv4 binding information for port 1/1/1:

```
switch(config)# clear dhcpv4-snooping binding port 1/1/1
```

Clearing all DHCPv4 binding information for VLAN 10:

```
switch(config)# clear dhcpv4-snooping binding vlan 10
```

Clearing all DHCPv4 binding information:

```
switch(config)# clear dhcpv4-snooping binding all
```

clear dhcpv4-snooping statistics

Syntax

```
clear dhcpv4-snooping statistics
```

Description

Clears all DHCPv4 snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Clear all DHCPv4 snooping statistics:

```
switch# clear dhcpv4-snooping statistics
```

dhcpv4-snooping

Syntax

```
dhcpv4-snooping  
no dhcpv4-snooping
```

Description

Enables DHCPv4 snooping. DHCPv4 snooping is disabled by default. DHCP snooping is not supported on the management interface.

The no form of the command disables DHCPv4 snooping, flushing all the IP bindings learned since DHCPv4 snooping was enabled.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv4 snooping:

```
switch(config)# dhcpv4-snooping
```

Disabling DHCPv4 snooping:

```
switch(config)# no dhcpv4-snooping
```

dhcpv4-snooping (in config-vlan context)

Syntax

```
dhcpv4-snooping  
no dhcpv4-snooping
```

Description

Enables DHCPv4 snooping in the `config-vlan` context. DHCPv4 snooping is disabled by default for all VLANs.

The `no` form of the command disables DHCPv4 snooping on the specified VLAN, flushing all the IP bindings learned for this VLAN since DHCPv4 snooping was enabled for this VLAN.

Command context

```
config-vlan
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv4 snooping on VLAN 100:

```
switch(config)# vlan 100  
switch(config-vlan-100)# dhcpv4-snooping  
switch(config-vlan-100)# exit  
switch(config)#
```

Disabling DHCPv4 snooping on VLAN 100:

```
switch(config)# vlan 100  
switch(config-vlan-100)# no dhcpv4-snooping  
switch(config-vlan-100)# exit  
switch(config)#
```

dhcpv4-snooping allow-overwrite-binding

Syntax

```
dhcpv4-snooping allow-overwrite-binding  
no dhcpv4-snooping allow-overwrite-binding
```

Description

Allows binding to be overwritten for the same IP address. When enabled, and a DHCP server offers a host an IP address that is already bound to an existing host in the binding table, the existing binding is

overwritten for the new host if the new host is successfully able to acquire the same IP address. This overwriting is disabled by default, causing the DHCP server offers to be dropped.

The no form of the command disables DHCPv4 snooping overwrite binding.

Command context

config

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv4 snooping overwrite binding:

```
switch(config)# dhcpv4-snooping allow-overwrite-binding
```

Disabling DHCPv4 snooping overwrite binding:

```
switch(config)# no dhcpv4-snooping allow-overwrite-binding
```

dhcpv4-snooping authorized-server

Syntax

```
dhcpv4-snooping authorized-server <IPv4-ADDR> [vrf <VRF-NAME>]  
no dhcpv4-snooping authorized-server <IPv4-ADDR> [vrf <VRF-NAME>]
```

Description

Adds an authorized (trusted) DHCP server to a list of authorized servers for use by DHCPv4 snooping. This command can be issued multiple times, adding a maximum of 20 authorized servers per VRF. By default, with an empty list of authorized servers, all DHCP servers are considered to be trusted for DHCPv4 snooping purposes.



The mgmt VRF cannot be used with this command.

The no form of this command deletes the specified DHCP server from the authorized list.

Command context

config

Parameters

<IPv4-ADDR>

Specifies the IPv4 address of the trusted DHCPv4 server.

vrf <VRF-NAME>

Specifies the VRF name. The name must be default.

Authority

Administrators or local user group members with execution rights for this command.

Usage

For authorized server lookup, the VRF is derived from the Switch Virtual Interface (SVI) configured for the incoming VLAN. If the SVI is not configured, the `default` VRF is assumed.

Examples

Adding DHCP servers 192.168.2.2, 192.168.2.3, and 192.168.2.10 to the authorized server list:

```
switch(config)# dhcpv4-snooping authorized-server 192.168.2.2
switch(config)# dhcpv4-snooping authorized-server 192.168.2.3 vrf default
switch(config)# dhcpv4-snooping authorized-server 192.168.2.10 vrf default
```

Removing DHCP server 192.168.2.3 from the authorized server list:

```
switch(config)# no dhcpv4-snooping authorized-server 192.168.2.3 vrf default
```

dhcpv4-snooping external-storage

Syntax

```
dhcpv4-snooping external-storage volume <VOL-NAME> file <FILE-NAME>
```

```
no dhcpv4-snooping external-storage
```

Description

Configures external storage to be used for backing up IP bindings (used by DHCPv4 snooping) to a file. When configured, the switch stores all the IP bindings in an external storage file so that they are retained after the switch restarts. When the switch restarts, it reads the IP bindings from the configured external storage file to populate its local cache.

The `no` form of this command disables the saving of IP bindings in an external storage file.

Command context

config

Parameters

volume <VOL-NAME>

Specifies the name of the existing external storage volume where the IP bindings file will be saved.

Before running the `dhcpv4-snooping external-storage volume` command, first create the external storage volume using command `external-storage <VOLUME-NAME>`. See *External storage commands* in the *Command-Line Interface Guide*.

file <FILE-NAME>

Specifies the file name to use for storing IP bindings. Maximum 255 characters.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Configuring IP bindings storage in file `dsnoop_ipbindings` on existing volume `dhcp_snoop`:

```
switch(config)# dhcpv4-snooping external-storage volume dhcp_snoop file dsnoop_
ipbindings
```

Disabling external storage:

```
switch(config)# no dhcpv4-snooping external-storage
```

dhcpv4-snooping max-bindings

Syntax

```
dhcpv4-snooping max-bindings <MAX-BINDINGS>  
no dhcpv4-snooping max-bindings
```

Description

Sets the maximum number of DHCP bindings allowed on the selected interface. For all interfaces on which this command is not run, the default max bindings applies.

The no form of the command reverts max bindings for the selected interface to its default.

Command context

config-if

Parameters

<MAX-BINDINGS>

Specifies the maximum number of DHCP bindings. You can use the `show capacities` command to see the maximum available for your switch model.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Set the DHCP max bindings to 512 on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# dhcpv4-snooping max-bindings 512  
switch(config-if)# exit  
switch(config)#
```

Revert DHCP max bindings to its default on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# no dhcpv4-snooping max-bindings  
switch(config-if)# exit  
switch(config)#
```

dhcpv4-snooping option 82

Syntax

```
dhcpv4-snooping option 82 [remote-id {mac | subnet-ip | mgmt-ip}]  
                           [untrusted-policy {drop | keep | replace}]
```

```
no dhcpv4-snooping option 82
```

Description

Configures the addition of option 82 DHCP relay information to DHCP client packets that are being forwarded on trusted ports. DHCP relay is enabled by default.

In the switch default state and when this command is entered without parameters (`dhcpv4-snooping option 82`), this default configuration is used:

```
dhcpv4-snooping option 82 remote-id mac untrusted-policy drop
```

When `remote-id` is omitted, its default (`mac`) is used. When `untrusted-policy` is omitted, its default (`drop`) is used.

The no form of this command disables DHCPv4 snooping option 82.

Command context

config

Parameters

`remote-id`

Specifies what address to use as the remote ID for the `replace` option of `untrusted-policy`. Specify one of these address types:

`mac`

The default. Uses the switch MAC address as the remote ID.

`subnet-ip`

Uses the IP address of the client VLAN as the remote ID.

`mgmt-ip`

Uses the management interface IP address as the remote ID.

`untrusted-policy`

Specifies what action to take for DHCP packets (with option 82) that are received on untrusted ports. Specify one of these actions:

`drop`

The default. Drop DHCP packets (with option 82) without forwarding them.

`keep`

Forward DHCP packets (with option 82).

`replace`

Replace the option 82 information in the DHCP packets with whatever is set for `remote-id` (one of: `mac`, `subnet-ip`, or `mgmt-ip`) and forward the packets.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Configuring DHCPv4 snooping option 82 with the `keep` action:

```
switch(config)# dhcpv4-snooping option 82 untrusted-policy keep
```

Configuring DHCPv4 snooping option 82 with `mgmt-ip` as the `remote-id` and the `replace` action:

```
switch(config)# dhcpv4-snooping option 82 remote-id mgmt-ip untrusted-policy replace
```

Disabling DHCPv4 snooping option 82:

```
switch(config)# no dhcpv4-snooping option 82
```

dhcpv4-snooping trust

Syntax

```
dhcpv4-snooping trust  
no dhcpv4-snooping trust
```

Description

Enables DHCPv4 snooping trust on the selected port. Only server packets received on trusted ports are forwarded. All the ports are untrusted by default.

The `no` form of the command disables DHCPv4 snooping trust on the selected port.

Command context

```
config-if
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv4 snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# dhcpv4-snooping trust  
switch(config-if)# exit  
switch(config)#
```

Disabling DHCPv4 snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# no dhcpv4-snooping trust  
switch(config-if)# exit  
switch(config)#
```

dhcpv4-snooping verify mac

Syntax

```
dhcpv4-snooping verify mac  
no dhcpv4-snooping verify mac
```

Description

This command enables verification of the hardware address field in DHCP client packets. When enabled, the DHCP client hardware address field and the source MAC address must be the same for packets received on untrusted ports or else the packet is dropped. This DHCP snooping MAC verification is enabled by default.

The `no` form of the command disables DHCPv4 snooping MAC verification.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv4 snooping MAC verification:

```
switch(config)# dhcpv4-snooping verify mac
```

Disabling DHCPv4 snooping MAC verification:

```
switch(config)# no dhcpv4-snooping verify mac
```

show dhcpv4-snooping

Syntax

```
show dhcpv4-snooping
```

Description

Shows the DHCPv4 snooping configuration.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv4 snooping configuration:

```
switch(config)# show dhcpv4-snooping

DHCPv4-Snooping Information

  DHCPv4-Snooping           : Yes          Verify MAC Address   : Yes
  Allow Overwrite Binding   : No           Enabled VLANs        : 1751-2000

Option 82 Configurations

  Untrusted Policy          : drop          Insertion             : Yes
  Option 82 Remote-id       : mac

External Storage Information

  Volume Name               :
  File Name                 :
  Inactive Since            : -
  Error                     : -

Authorized Server Configurations
```

VRF		Authorized Servers		
-----		-----		
Port Information				
Port	Trust	Max Bindings	Static Bindings	Dynamic Bindings
-----	-----	-----	-----	-----
1/1/24	No	512	1	100
lag13	Yes	0	0	0

show dhcpv4-snooping binding

Syntax

```
show dhcpv4-snooping binding
```

Description

Shows the DHCPv4 snooping binding configuration.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv4 snooping binding configuration:

```
switch(config)# show dhcpv4-snooping binding
```

MacAddress	IP	VLAN	Interface	Time-Left
-----	-----	----	-----	-----
aa:b1:c1:dd:ee:ff	10.2.3.4	1	1/1/2	582
aa:b2:c2:dd:ee:ff	10.2.3.5	1	1/1/2	584

show dhcpv4-snooping statistics

Syntax

```
show dhcpv4-snooping statistics
```

Description

Shows the DHCPv4 snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv4 snooping statistics:

```
switch(config)# show dhcpv4-snooping statistics
```

Packet-Type	Action	Reason	Count
server	forward	from trusted port	5425
client	forward	to trusted port	3895
server	drop	received on untrusted port	117
server	drop	unauthorized server	214
client	drop	destination on untrusted port	78
client	drop	untrusted option 82 field	85
client	drop	bad DHCP release request	0
client	drop	failed verify MAC check	5
client	drop	failed on max-binding limit	15

DHCPv6 snooping commands

clear dhcpv6-snooping binding

Syntax

```
clear dhcpv6-snooping binding {all | ip <IPV6-ADDR> vlan <VLAN-ID> |  
    interface <IFNAME> | vlan <VLAN-ID>}
```

Description

Clears DHCPv6 snooping binding entries.

Command context

Operator (>) or Manager (#)

Parameters

all

Specifies that all DHCPv6 binding information is to be cleared.

ip <IPV6-ADDR> vlan <VLAN-ID>

Specifies the IPv6 address and VLAN for which all DHCPv6 binding information is to be cleared.

interface <IFNAME>

Specifies the interface for which all DHCPv6 binding information is to be cleared.

vlan <VLAN-ID>

Specifies the VLAN for which all DHCPv6 binding information is to be cleared. Range: 1 to 4094.

Authority

Operators or Administrators or local user group members with execution rights for this command.

Operators can execute this command from the operator context (>) only.

Examples

Clearing all DHCPv6 binding information for 5000::1 vlan 1:

```
switch(config)# clear dhcpv6-snooping binding ip 5000::1 vlan 1
```

Clearing all DHCPv6 binding information for interface 1/1/10:

```
switch(config)# clear dhcpv6-snooping binding interface 1/1/10
```

Clearing all DHCPv6 binding information for VLAN 10:

```
switch(config)# clear dhcpv6-snooping binding vlan 10
```

Clearing all DHCPv6 binding information:

```
switch(config)# clear dhcpv6-snooping binding all
```

clear dhcpv6-snooping statistics

Syntax

```
clear dhcpv6-snooping statistics
```

Description

Clears all DHCPv6 snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Clear all DHCPv6 snooping statistics:

```
switch# clear dhcpv6-snooping statistics
```

dhcpv6-snooping

Syntax

```
dhcpv6-snooping  
no dhcpv6-snooping
```

Description

Enables DHCPv6 snooping. DHCPv6 snooping is disabled by default. DHCPv6 snooping is not supported on the management interface.

The no form of the command disables DHCPv6 snooping, flushing all the IP bindings learned since DHCPv6 snooping was enabled.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv6 snooping:

```
switch(config)# dhcpv6-snooping
```

Disabling DHCPv6 snooping:

```
switch(config)# no dhcpv6-snooping
```

dhcpv6-snooping (in config-vlan context)

Syntax

```
dhcpv6-snooping  
no dhcpv6-snooping
```

Description

Enables DHCPv6 snooping in the `config-vlan` context. DHCPv6 snooping is disabled by default for all VLANs.

The `no` form of the command disables DHCPv6 snooping on the specified VLAN, flushing all the IPv6 bindings learned for this VLAN since DHCPv6 snooping was enabled for this VLAN.

Command context

`config-vlan`

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv6 snooping on VLAN 100:

```
switch(config)# vlan 100  
switch(config-vlan-100)# dhcpv6-snooping  
switch(config-vlan-100)# exit  
switch(config)#
```

Disabling DHCPv6 snooping on VLAN 100:

```
switch(config)# vlan 100  
switch(config-vlan-100)# no dhcpv6-snooping  
switch(config-vlan-100)# exit  
switch(config)#
```

dhcpv6-snooping authorized-server

Syntax

```
dhcpv6-snooping authorized-server <IPV6-ADDR> [vrf <VRF-NAME>]  
no dhcpv6-snooping authorized-server <IPV6-ADDR> [vrf <VRF-NAME>]
```

Description

Adds an authorized (trusted) DHCPv6 server to a list of authorized servers for use by DHCPv6 snooping. This command can be issued multiple times, adding a maximum of 20 authorized servers per VRF. By default, with an empty list of authorized servers, all DHCPv6 servers are considered to be trusted for DHCPv6 snooping purposes.



The `mgmt` VRF cannot be used with this command.



Configure the link local IPv6 address instead of global IPv6 address of the DHCPv6 server as the authorized-server. For example:

```
switch(config)# dhcpv6-snooping authorized-server fe80::2ca4:fa40:d4cd:bc2f
```

The `no` form of this command deletes the specified DHCPv6 server from the authorized list.

Command context

config

Parameters

<IPV6-ADDR>

Specifies the IPv6 address of the trusted DHCPv6 server.

vrf <VRF-NAME>

Specifies the VRF name. The name must be `default`.

Authority

Administrators or local user group members with execution rights for this command.

Usage

For authorized server lookup, the VRF is derived from the Switch Virtual Interface (SVI) configured for the incoming VLAN. If the SVI is not configured, the `default` VRF is assumed.

Examples

Adding DHCP servers ABCD:5ACD::2000, and ABCD:5ACD::2010 to the authorized server list:

```
switch(config)# dhcpv6-snooping authorized-server ABCD:5ACD::2000 vrf default  
switch(config)# dhcpv6-snooping authorized-server ABCD:5ACD::2010 vrf default
```

Removing DHCP server ABCD:5ACD::2000 from the authorized server list:

```
switch(config)# no dhcpv6-snooping authorized-server ABCD:5ACD::2000 vrf default
```

dhcpv6-snooping external-storage

Syntax


```
dhcpv6-snooping external-storage volume <VOL-NAME> file <FILE-NAME>
no dhcpv6-snooping external-storage
```

Description

Configures external storage to be used for backing up IPv6 bindings (used by DHCPv6 snooping) to a file. When configured, the switch stores all the IP bindings in an external storage file so that they are retained after the switch restarts. When the switch restarts, it reads the IPv6 bindings from the configured external storage file to populate its local cache.

The no form of this command disables the saving of IPv6 bindings in an external storage file.

Command context

config

Parameters

volume <VOL-NAME>

Specifies the name of the existing external storage volume where the IPv6 bindings file will be saved.

Before running the `dhcpv6-snooping external-storage volume` command, first create the external storage volume using command `external-storage <VOLUME-NAME>`. See *External storage commands* in the *Command-Line Interface Guide*.

file <FILE-NAME>

Specifies the file name to use for storing IPv6 bindings. Maximum 255 characters.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Configuring IPv6 bindings storage in file `ipv6Bindings` on existing volume `dhcp_snoop`:

```
switch(config)# dhcpv6-snooping external-storage volume dhcp_snoop file ipv6Bindings
```

Disabling external storage:

```
switch(config)# no dhcpv6-snooping external-storage
```

dhcpv6-snooping max-bindings

Syntax

```
dhcpv6-snooping max-bindings <MAX-BINDINGS>
no dhcpv6-snooping max-bindings
```

Description

Sets the maximum number of DHCPv6 bindings allowed on the selected interface. For all interfaces on which this command is not run, the default max bindings applies.

The no form of the command reverts max bindings for the selected interface to its default.

Command context

config-if

Parameters

<MAX-BINDINGS>

Specifies the maximum number of DHCPv6 bindings. You can use the `show capacities` command to see the maximum available for your switch model.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Set the DHCPv6 max bindings to 512 on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# dhcpv6-snooping max-bindings 512
switch(config-if)# exit
switch(config)#
```

Revert DHCPv6 max bindings to its default on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# no dhcpv6-snooping max-bindings
switch(config-if)# exit
switch(config)#
```

dhcpv6-snooping trust

Syntax

```
dhcpv6-snooping trust
no dhcpv6-snooping trust
```

Description

Enables DHCPv6 snooping trust on the selected interface. Only server packets received on trusted interfaces are forwarded. All the interfaces are untrusted by default.

The no form of the command disables DHCPv6 snooping trust on the selected interface.

Command context

config-if

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling DHCPv6 snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# dhcpv6-snooping trust
switch(config-if)# exit
switch(config)#
```

Disabling DHCPv6 snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# no dhcpv6-snooping trust
switch(config-if)# exit
switch(config)#
```

show dhcpv6-snooping

Syntax

show dhcpv6-snooping

Description

Shows the DHCPv6 snooping configuration.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv6 snooping configuration:

```
switch(config)# show dhcpv6-snooping

DHCPv6-Snooping Information

  DHCPv6-Snooping      : Yes      Enabled VLANs      : 1,5,7,100-110

External Storage Information

  Volume Name          : dhcp_snoop
  File Name             : ip_binding
  Inactive Since        : 01:23:20 01/01/2019
  Error                 : Failed to write external storage

Authorized Server Configurations

VRF                      Authorized Servers
-----
default                  2001:0db8:85a3:0000:0000:8a2e:0370:7334
default                  2002::2
default                  2004::1
red                       2002::1
red                       2002::2
red                       2002::9
green                    5000::1
green                    5000::2
green                    5000::3
green                    5000::7
green                    5000::8

Port Information

                                Max      Static      Dynamic
```

Port	Trust	Bindings	Bindings	Bindings
-----	-----	-----	-----	-----
1/1/2	Yes	0	0	0
1/1/3	Yes	0	3	0
1/1/5	Yes	0	22	0
1/1/16	No	100	0	20
10/10/10	No	512	12	7
lag120	No	256	3	0

show dhcpv6-snooping binding

Syntax

```
show dhcpv6-snooping binding
```

Description

Shows the DHCPv6 snooping binding configuration.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv6 snooping binding configuration:

```
switch# show dhcpv6-snooping binding

IP Binding Information
=====
MAC-ADDRESS          IPV6-ADDRESS          VLAN  INTERFACE  TIME-
LEFT
-----
00:50:56:96:e4:cf    aaaa:bbbb:cccc:dddd:eeee:1234:5678:abcd    1      1/1/1
584
00:50:56:96:04:4d    1000::3              134     1/1/2
435
00:50:56:96:d8:3d    2000:1000::4         2002    lag123
21234
```

show dhcpv6-snooping statistics

Syntax

```
show dhcpv6-snooping statistics
```

Description

Shows the DHCPv6 snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the DHCPv6 snooping statistics:

```
switch(config)# show dhcpv6-snooping statistics
```

Packet-Type	Action	Reason	Count
-----	-----	-----	-----
server	forward	from trusted port	12
client	forward	to trusted port	20
server	drop	received on untrusted port	5
server	drop	unauthorized server	4
client	drop	destination on untrusted port	2
client	drop	bad DHCP release request	5
server	drop	relay reply on untrusted port	2
client	drop	failed on max-binding limit	5

Overview

ND (Neighbor Discovery) snooping prevents ND attacks. ND snooping drops invalid ND packets, and together with DIPLDv6 (Dynamic IP Lockdown for IPv6), blocks data traffic from invalid hosts. ND snooping is used in Layer 2 switching networks. ND snooping learns the source MAC addresses, source IPv6 addresses, input interfaces, and VLANs of incoming ND messages and data packets to build IP binding entries.



When DHCPv6 snooping and ND snooping are both enabled, and DHCPv6 clients request and IPv6 address, entries are added to the DHCP snooping table and DHCP snooping takes priority over ND snooping.

ND snooping drops ND packets as follows:

- If the Ethernet source MAC address is mismatched with the address contained in the ICMPv6 Target link layer address field of the ND packet.
- If the global IPv6 address in the source address field is mismatched with the ND snooping prefix filter table.
- If the global IPv6 address or the link-local IPv6 address in the source IP address field is mismatched with the ND snooping binding table.

ND snooping drops RA and RR packets on untrusted ports. To block only RA packets on VLANs with ND snooping enabled, use `nd-snooping ra-drop`. RA (Router Advertisement) drop is disabled by default on VLANs. When enabled (with `nd-snooping ra-drop`), ND snooping blocks RA packets on both trusted and untrusted ports. When RA drop is disabled, ND snooping allows RA packets on trusted ports and blocks them on untrusted ports.

Dynamic IPv6 lockdown is performed for ND snooping entries. Based on the DAD NS received from the hosts by the switch, ND snooping entries are programmed into the IP binding table and the hardware (as allowed). And ND Binding table entries are added when NA packets are received from hosts. Therefore, data packets from invalid hosts and transit traffic are blocked.



Statically-configured IP binding information supersedes any information collected dynamically by ND snooping for the same client.

ND snooping commands

clear nd-snooping binding

Syntax

```
clear nd-snooping binding {all | ipv6 <IPV6-ADDR> vlan <VLAN-ID> |  
    port <PORT-NUM> | vlan <VLAN-ID>}
```

Description

Clears ND snooping binding entries.

Command context

Operator (>) or Manager (#)

Parameters

all

Specifies that all ND binding information is to be cleared.

ip <IPv6-ADDR> vlan <VLAN-ID>

Specifies the IPv6 address and VLAN for which all ND binding information is to be cleared.

port <PORT-NUM>

Specifies the port for which all ND binding information is to be cleared.

vlan <VLAN-ID>

Specifies the VLAN for which all ND binding information is to be cleared. Range: 1 to 4094.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Clearing all ND binding information for 5000::1:

```
switch(config)# clear nd-snooping binding ipv6 5000::1
```

Clearing all ND binding information for 5000::1 vlan 1:

```
switch(config)# clear nd-snooping binding ipv6 5000::1 vlan 1
```

Clearing all ND binding information for port 1/1/10:

```
switch(config)# clear nd-snooping binding port 1/1/10
```

Clearing all ND binding information for VLAN 10:

```
switch(config)# clear nd-snooping binding vlan 10
```

Clearing all ND binding information:

```
switch(config)# clear nd-snooping binding all
```

clear nd-snooping statistics

Syntax

```
clear nd-snooping statistics
```

Description

Clears all ND snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Clear all ND snooping statistics:

```
switch# clear nd-snooping statistics
```

nd-snooping

Syntax

```
nd-snooping {enable|disable}  
no nd-snooping {enable|disable}
```

Description

Enables or disables ND snooping. ND snooping is disabled by default. ND snooping is not supported on the management interface.

Command context

config

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping:

```
switch(config)# nd-snooping enable
```

Disabling ND snooping:

```
switch(config)# nd-snooping disable
```

nd-snooping (in config-vlan context)

Syntax

```
nd-snooping  
no nd-snooping
```

Description

Enables ND snooping in the `config-vlan` context. ND snooping is disabled by default for all VLANs.

The no form of the command disables ND snooping on the specified VLAN, flushing all the IPv6 bindings learned for this VLAN since ND snooping was enabled for this VLAN.

Command context

config-vlan

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping on VLAN 100:

```
switch(config)# vlan 100
switch(config-vlan-100)# nd-snooping
switch(config-vlan-100)# exit
switch(config)#
```

Disabling ND snooping on VLAN 100:

```
switch(config)# vlan 100
switch(config-vlan-100)# no nd-snooping
switch(config-vlan-100)# exit
switch(config)#
```

nd-snooping mac-check

Syntax

```
nd-snooping mac-check
no nd-snooping mac-check
```

Description

This command enables verification of the hardware address field in ND snooping packets. When enabled, the ICMPv6 target link layer address field and the source MAC address must be the same for packets received on untrusted ports or else the packets are dropped. This ND snooping MAC verification is enabled by default.

The no form of the command disables ND snooping MAC verification.

Command context

config

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping MAC verification:

```
switch(config)# nd-snooping mac-check
```

Disabling ND snooping MAC verification:

```
switch(config)# no nd-snooping mac-check
```

nd-snooping prefix-list

Syntax

```
nd-snooping prefix-list <IPv6-ADDR>  
no nd-snooping prefix-list <IPv6-ADDR>
```

Description

Configures the ND snooping prefix list for the selected VLAN and the specified IPv6 address prefix. ND snooping must be enabled both globally and on this VLAN before this prefix list configuration takes effect. The no form of this command removes the prefix list configuration for the selected VLAN and IPv6 address.

Command context

config-vlan

Parameters

<IPv6-ADDR>

Specifies the IPv6 address.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Configuring ND snooping prefix-list on VLAN 1:

```
switch(config)# vlan 1  
switch(config-vlan-1)# nd-snooping prefix-list 2001::1/64  
switch(config-vlan-1)# exit  
switch(config)#
```

Remove configuration of ND snooping prefix-list on VLAN 100:

```
switch(config)# vlan 1  
switch(config-vlan-1)# no nd-snooping prefix-list 2001::1/64  
switch(config-vlan-1)# exit  
switch(config)#
```

nd-snooping max-bindings

Syntax

```
nd-snooping max-bindings <MAX-BINDINGS>  
no nd-snooping max-bindings
```

Description

Sets the maximum number of ND bindings allowed on the selected interface. For all interfaces on which this command is not run, the default max bindings applies.

The no form of the command reverts max bindings for the selected interface to its default.

Command context

config-if

Parameters

<MAX-BINDINGS>

Specifies the maximum number of ND bindings. You can use the `show capacities` command to see the maximum available for your switch model.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Set the ND max bindings to 768 on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# nd-snooping max-bindings 768
switch(config-if)# exit
switch(config)#
```

Revert ND max bindings to its default on interface 2/2/1:

```
switch(config)# interface 2/2/1
switch(config-if)# no nd-snooping max-bindings
switch(config-if)# exit
switch(config)#
```

nd-snooping nd-guard

Syntax

```
nd-snooping nd-guard
no nd-snooping nd-guard
```

Description

This command enables ND guard on the selected VLAN.

The no form of the command disables ND guard and deletes all the IPv6 bindings learned on the VLAN.



ND snooping must be enabled in both the global context and the config-vlan context before this command can be used.

Command context

config-vlan

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping ND guard on VLAN 100:

```
switch(config)# nd-snooping enable
switch(config)# vlan 100
switch(config-vlan-100)# nd-snooping nd-guard
switch(config-vlan-100)# exit
switch(config)#
```

Disabling ND snooping ND guard on VLAN 100:

```
switch(config)# vlan 100
switch(config-vlan-100)# no nd-snooping nd-guard
switch(config-vlan-100)# exit
switch(config)#
```

nd-snooping ra-guard

Syntax

```
nd-snooping ra-guard [log]
no nd-snooping ra-guard
```

Description

This command enables Routing Advertisement (RA) guard on the selected VLAN. When enabled, ingress Routing Advertisement (RA) and Routing Redirect (RR) packets on the selected VLAN are blocked on untrusted ports. The packets are forwarded when received on trusted ports.

The no form of the command disables RA guard on the VLAN.



ND snooping must be enabled in both the global context and the config-vlan context before this command can be used.

Command context

config-vlan

Parameters

[log]

Logs messages along with drop functionality.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping RA guard on VLAN 100:

```
switch(config)# nd-snooping enable
switch(config)# vlan 100
switch(config-vlan-100)# nd-snooping ra-guard
switch(config-vlan-100)# exit
switch(config)#
```

Enabling ND snooping RA guard on VLAN 100 with event logging on dropped packets:

```
switch(config)# nd-snooping enable
switch(config)# vlan 100
switch(config-vlan-100)# nd-snooping ra-guard log
switch(config-vlan-100)# exit
switch(config)#
```

Disabling ND snooping RA guard on VLAN 100:

```
switch(config)# vlan 100
switch(config-vlan-100)# no nd-snooping ra-guard
switch(config-vlan-100)# exit
switch(config)#
```

nd-snooping ra-drop

Syntax

```
nd-snooping ra-drop
no nd-snooping ra-drop
```

Description

This command enables Routing Advertisement (RA) drop on the selected VLAN. When enabled, ingress RA packets on the selected VLAN are blocked on both trusted and untrusted ports. When disabled, RA packets are forwarded on the selected VLAN with ND snooping trusted port validation. RA drop is disabled by default.



ND snooping must be enabled in both the config context and the config-vlan context before this command can be used.

The no form of the command disables ND snooping RA drop on the selected VLAN.

Command context

config-vlan

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping RA drop on VLAN 100:

```
switch(config)# nd-snooping enable vlan 100
switch(config-vlan-100)# nd-snooping ra-drop
switch(config-vlan-100)# exit
switch(config)#
```

Disabling ND snooping RA drop on VLAN 100:

```
switch(config)# vlan 100
switch(config-vlan-100)# no nd-snooping ra-drop
```

```
switch(config-vlan-100)# exit  
switch(config)#
```

nd-snooping trust

Syntax

```
nd-snooping trust  
no nd-snooping trust
```

Description

Enables ND snooping trust on the selected interface (port). Only server packets received on trusted ports are forwarded. All the ports are untrusted by default.

The no form of the command disables ND snooping trust on the selected port.

Command context

```
config-if
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling ND snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# nd-snooping trust  
switch(config-if)# exit  
switch(config)#
```

Disabling ND snooping trust on interface 2/2/1:

```
switch(config)# interface 2/2/1  
switch(config-if)# no nd-snooping trust  
switch(config-if)# exit  
switch(config)#
```

show nd-snooping

Syntax

```
show nd-snooping [vlan <VLAN-ID>]
```

Description

Shows either all ND snooping configuration or the configuration for the specified VLAN.

Command context

Operator (>) or Manager (#)

Parameters

```
vlan <VLAN-ID>
```

Specifies the VLAN for which the ND configuration is to be shown. Range: 1 to 4094.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing all ND snooping configuration:

```
switch(config)# show nd-snooping

ND Snooping Information
=====

ND Snooping                : Enabled
ND Snooping Enabled VLANs  : 1
RA Drop Enabled VLANs      : 2-3
MAC Address Check          : Disabled

PORT      TRUST    MAX-BINDINGS  CURRENT-BINDINGS
-----
1/1/1     Yes      -             -
1/1/2     Yes      -             -
1/1/3     No       100          10
1/1/4     No       200          10
1/1/5     No       300          10
```

Showing ND snooping configuration for VLAN 2:

```
switch(config)# show nd-snooping vlan 2

ND Snooping Information
=====

ND Snooping                : Enabled
MAC Address Check          : Disabled
RA Drop                    : Disabled

PORT      TRUST    MAX-BINDINGS  CURRENT-BINDINGS
-----
1/1/1     Yes      -             -
1/1/2     Yes      -             -
1/1/3     No       100          10
```

show nd-snooping binding

Syntax

```
show nd-snooping binding
```

Description

Shows the ND snooping binding configuration.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the ND snooping binding configuration:

```
switch# show nd-snooping binding
```

PORT LEFT	IPV6-ADDRESS STATE	MAC-ADDRESS	VLAN	TIME-
1/1/1	2001::1 Valid	00:00:0A:01:02:03	1	600
1/1/2	fe80::250:56ff:fe9a:143c Tentative	00:00:0B:01:02:03	2	-
1/1/3	2001:1111:2222:3333:4444:5555:6666:7777 Testing	00:00:0C:01:02:03	4094	-

show nd-snooping prefix-list

Syntax

```
show nd-snooping prefix-list
```

Description

Shows the ND snooping prefix list information.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the ND snooping prefix list information:

```
switch# show nd-snooping prefix-list
```

VLAN	IPV6-ADDRESS-PREFIX	SOURCE
1	2001::/64	Static
4094	3001::/64	Dynamic

show nd-snooping statistics

Syntax

```
show nd-snooping statistics
```

Description

Shows the global ND snooping statistics.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Examples

Showing the global ND snooping statistics:

```
switch(config)# show nd-snooping statistics
```

PACKET-TYPE	ACTION	REASON	COUNT
RA	forward	RA packets received on trusted port	20
RA	drop	RA packets received on untrusted port	45
NS	forward	NS packets received on trusted port	52
NS	forward	NS packets received on untrusted port	95
NS	drop	NS packets failed MAC check	14
NS	drop	NS packets failed Prefix check	12
NS	drop	NS packets failed on max-binding limit	0
NS	drop	NS packets failed ND snooping validation checks	20
NA	forward	NA packets received on trusted port	17
NA	forward	NA packets received on untrusted port	30
NA	drop	NA packets failed Prefix check	15
NA	drop	NA packets failed on max-binding limit	2
NA	drop	NA packets failed ND snooping validation checks	5

True point-to-point networks are not always possible in corporate networking environment. Many networks deploy nontraditional methods of connection (for example, DSL or broadband) at remote sites or branch offices. The branch office, telecommuter, or business traveler then becomes separated from the corporate network. Some method of tunneling becomes imperative to connect all the network sites together.

Virtual Private Networking (VPN) is often deployed to create private tunnels through the public network system for passing data to remote sites. While VPN is sufficient for the average business traveler, it is not a good solution for branch site connectivity. VPN configurations must include statically maintained access lists to identify traffic through the tunnel. These access lists are often tedious to configure for larger networks and are prone to errors.

VPNs do not permit multicast traffic to pass; therefore routing protocols such as Routing Information Protocol (RIP) and Open Shortest Path First (OSPF) are no longer options for dynamic routing updates. All new additions to the network topology must be manually added to the various configured access lists. Without dynamic routing from one site to another, network management is severely hampered. Network managers need their non-heterogeneous networks to function like traditional point-to-point networks so that traditional management methods (once available only on point-to-point circuits) can apply to the entire network.

The solution to these challenges is to use IP tunnels. An IP tunnel provides a virtual link between endpoints on two different networks enabling data to be exchanged as if the endpoints were directly connected on the same network. Traffic between the devices is isolated from the intervening networks that the tunnel spans.

IP tunnels supported features

- Up to 127 tunnels can be defined on a switch shared between different tunnel types.

Unsupported features

- Key support can be added for security and identification purposes when there are multiple applications.
- VPN across public IP network.

Configuring an IP tunnel

Prerequisites

An enabled layer 3 interface with an IP address assigned to it, created with the command `interface`.


Procedure

1. Create an IP tunnel with the command `interface tunnel`.
2. Set the IP address for the tunnel. For an IPv6 in IPv4 or an IPv6 in IPv6 tunnel, enter the command `ipv6 address`.
3. Set the source IP address for the tunnel. For an IPv6 in IPv4 tunnel, enter the command `source ip`. For an IPv6 in IPv6 tunnel, enter the command `source ipv6`.

4. Set the destination IP address for the tunnel. For an IPv6 in IPv4 tunnel, enter the command `destination ip`. For an IPv6 in IPv6 tunnel, enter the command `destination ipv6`.
5. Optionally, set the TTL (hop count) for the tunnel with the command `ttl`.
6. Optionally, set the MTU for the tunnel with the command `ip mtu`.
7. Optionally, add a description to the tunnel with the command `description`.
8. Enable the tunnel with the command `no shutdown`.
9. Review tunnel settings with the command `show interface tunnel`.

Creating an IPv6 in IPv4 tunnel for traversing a public network

This example creates an IPv6 in IPv4 tunnel between two switches, enabling traffic from two networks to traverse a public network.

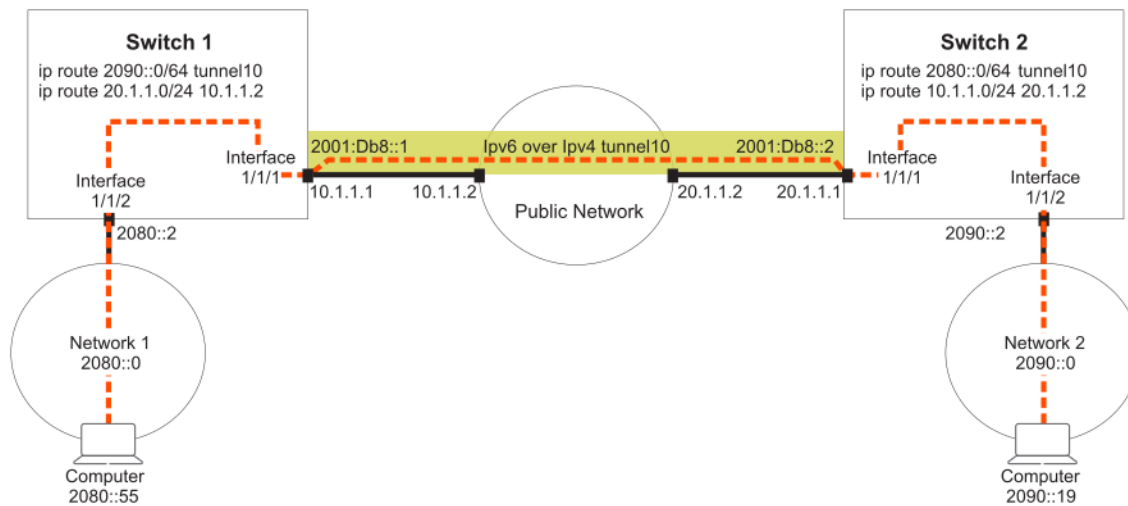

Procedure

1. On switch 1:
 - a. Enable interface **1/1/1** and assign the IP address **10.1.1.1/24** to it.


```
switch# config
switch(config)# interface 1/1/1
switch(config-if)# ip address 10.1.1.1/24
switch(config-if)# no shutdown
```
 - b. Enable interface **1/1/2** and assign the IP address **2080::2/64** to it.


```
switch# config
switch(config)# interface 1/1/2
switch(config-if)# ipv6 address 2080::2/64
switch(config-if)# no shutdown
switch(config-if)# exit
```
 - c. Create IPv6 in IPv4 tunnel **10** and assign the IP address **2001:DB8::1/32**, source address **10.1.1.1**, and destination address **20.1.1.1** to it.


```
switch(config)# interface tunnel 10 mode ip 6in4
switch(config-ip-if)# ipv6 address 2001:DB8::1/62
switch(config-ip-if)# source ip 10.1.1.1
switch(config-ip-if)# destination ip 20.1.1.1
switch(config-ip-if)# no shutdown
switch(config-ip-if)# exit
```

- d. Defines routes so that traffic from network 1 can reach network 2 through the tunnel.

```
switch(config)# ip route 20.1.1.0/24 10.1.1.2  
switch(config)# ipv6 route 290::0/64 tunnel10
```

2. On switch 2:

- a. Enable interface **1/1/1** and assign the IP address **20.1.1.1/24** to it.

```
switch# config  
switch(config)# interface 1/1/1  
switch(config-if)# ip address 20.1.1.1/24  
switch(config-if)# no shutdown
```

- b. Enable interface **1/1/2** and assign the IP address **2090::2/64** to it.

```
switch(config)# interface 1/1/2  
switch(config-if)# ipv6 address 2090::2/64  
switch(config-if)# no shutdown  
switch(config-if)# exit
```

- c. Create IPv6 in IPv4 tunnel **10** and assign the IP address **2001:DB8::2/32**, source address **10.1.1.1**, and destination address **20.1.1.1** to it.


```
switch(config)# interface tunnel 10 mode ip 6in4  
switch(config-ip-if)# ipv6 address 2001:DB8::2/62  
switch(config-ip-if)# source ip 20.1.1.1  
switch(config-ip-if)# destination ip 10.1.1.1  
switch(config-ip-if)# no shutdown  
switch(config-ip-if)# exit
```

- d. Defines routes so that traffic from network 2 can reach network 1 through the tunnel.

```
switch(config)# ip route 10.1.1.0/24 20.1.1.2  
switch(config)# ip route 2080::0/64 tunnel10
```

Creating an IPv6 in IPv6 tunnel for traversing a public network

This example creates an IPv6 in IPv6 tunnel between two switches, enabling traffic from two networks to traverse a public network.

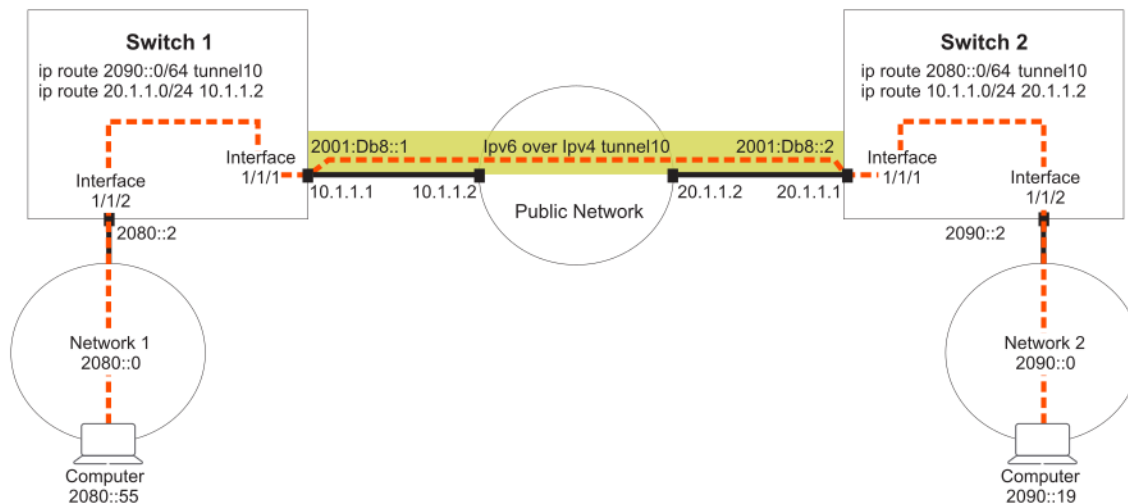

Procedure

1. On switch 1:

- a. Enable interface **1/1/1** and assign the IP address **2001:DB8:5::1/64** to it.

```
switch# config  
switch(config)# interface 1/1/1
```

- ```
switch(config-if) # ipv6 address 2001:DB8:5::1/64
switch(config-if) # no shutdown
```
- b. Enable interface **1/1/2** and assign the IP address **2080::2/64** to it.
 

```
switch# config
switch(config) # interface 1/1/2
switch(config-if) # ipv6 address 2080::2/64
switch(config-if) # no shutdown
switch(config-if) # exit
```
  - c. Create IPv6 in IPv6 tunnel **10** and assign the IP address **2001:DB8::1/32**, source address **2001:DB8:5::1**, and destination address **2001:DB8:9::1** to it. (Optional) Set the MTU and TTL parameters for this tunnel interface.
 

```
switch(config) # interface tunnel 10 mode ip 6in6
switch(config-ip-if) # ipv6 address 2001:DB8::1/62
switch(config-ip-if) # source ipv6 2001:DB8:5::1
switch(config-ip-if) # destination ipv6 2001:DB8:9::1
switch(config-ip-if) # no shutdown
switch(config-ip-if) # exit
```
  - d. Defines routes so that traffic from network 1 can reach network 2 through the tunnel.
 

```
switch(config) # ipv6 route 2001:DB8:9::0/64 2001:DB8:5::2
switch(config) # ipv6 route 2090::0/64 tunnel10
```
2. On switch 2:
    - a. Enable interface **1/1/1** and assign the IP address **2001:DB8:9::1/64** to it.
 

```
switch# config
switch(config) # interface 1/1/1
switch(config-if) # ipv6 address 2001:DB8:9::1/64
switch(config-if) # no shutdown
```
    - b. Enable interface **1/1/2** and assign the IP address **2090::2/64** to it.
 

```
switch(config) # interface 1/1/2
switch(config-if) # ipv6 address 2090::2/64
switch(config-if) # no shutdown
switch(config-if) # exit
```
    - c. Create IPv6 in IPv6 tunnel **10** and assign the IP address **2001:DB8::2/32**, source address **2001:DB8:5::1**, and destination address **2001:DB8:9::1** to it. (Optional) Set the MTU and TTL parameters for this tunnel interface.
 

```
switch(config) # interface tunnel 10 mode ip 6in6
switch(config-ip-if) # ipv6 address 2001:DB8::2/62
switch(config-ip-if) # source ipv6 2001:DB8:9::1
switch(config-ip-if) # destination ipv6 2001:DB8:5::1
switch(config-ip-if) # no shutdown
switch(config-ip-if) # exit
```
    - d. Defines routes so that traffic from network 2 can reach network 1 through the tunnel.
 

```
switch(config) # ipv6 route 2001:DB8:5::0/64 2001:DB8:9::2
switch(config) # ipv6 route 2080::0/64 tunnel10
```

## IP tunnels commands

### description

#### Syntax

```
description <DESC>
no description
```

#### Description

Associates a text description with an IP tunnel for identification purposes.

The `no` form of this command removes the description from an IP tunnel.

## Command context

config-ip-if

## Parameters

<DESC>

Specifies the descriptive text to associate with the IP tunnel. Range: 1 to 64 printable ASCII characters.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Defines a description for IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-ip-if)# description Network 3 Tunnel 27
```

Removes the description for IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27
switch(config-ip-if)# no description
```

Defines a description for IPv6 in IPv6 tunnel **8**.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-ip-if)# description Network 4 Tunnel 8
```

Removes the description for IPv6 in IPv6 tunnel **8**.

```
switch(config)# interface tunnel 8
switch(config-ip-if)# no description
```

# destination ip

## Syntax

```
destination ip <IPv4-ADDR>
no destination ip <IPv4-ADDR>
```

## Description

Sets the destination IP address for an IP tunnel. Specify the address of the interface on the remote device to which the tunnel will be established.

The `no` form of this command deletes the destination IP address from an IP tunnel.

## Command context

config-ip-if

## Parameters

<IPv4-ADDR>

Specifies the destination IP address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Defines the destination IP address to be **10.10.20.1** for IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-if)# destination ip 10.10.20.1
```

Deletes the destination IP address **10.10.20.1** from IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27
switch(config-if)# no destination ip 10.10.20.1
```

## destination ipv6

### Syntax

```
destination ipv6 <IPv6-ADDR>
no destination ipv6 <IPv6-ADDR>
```

### Description

Sets the destination IPv6 address for an IP tunnel. Specify the address of the interface on the remote device to which the tunnel will be established.

The `no` form of this command deletes the destination IPv6 address from an IP tunnel.

### Command context

config-ip-if

### Parameters

<IPv6-ADDR>

Specifies the tunnel IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Defines the destination IPv6 address to be **2001:DB8::1** for IPv6 in IPv6 tunnel

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)# destination ipv6 2001:DB8::1
```

Deletes the destination IPv6 address **2001:DB8::1** from IPv6 in IPv6 tunnel **8**.

```
switch(config)# interface tunnel 8
switch(config-ip-if)# no destination ipv6 2001:DB8::1
```

## interface tunnel

### Syntax

```
interface tunnel <TUNNEL-NUMBER> mode {gre ipv4 | ip 6in4 | ip 6in6}
interface tunnel <EXISTING-TUNNEL-NUMBER>
no interface tunnel <EXISTING-TUNNEL-NUMBER>
```

### Description

Creates or updates an IP tunnel. After you enter the command, the firmware switches to the configuration context for the tunnel.

If the specified tunnel exists, this command switches to the context for the tunnel.

By default, all tunnels are automatically assigned to the default VRF when they are created.

The `no` form of this command deletes an existing IP tunnel.

### Command context

config

### Parameters

mode {gre ipv4 | ip 6in4 | ip 6in6}

Creates an IP tunnel. Choose one of the following options:

- `ip 6in4`: Creates an IPv4 tunnel for IPv6 traffic.
- `ip 6in6`: Creates an IPv6 tunnel for IPv6 traffic.

<TUNNEL-NUMBER>

Specifies the number for a new tunnel. Range: 1 to 127. Numbering is shared between all tunnels, so the same tunnel number cannot be used for an IPv6 in IPv4 tunnel and a GRE tunnel.

<EXISTING-TUNNEL-NUMBER>

Specifies the number for an existing IP tunnel. Range: 1 to 127.

### Command context

config-ip-if

### Examples

Defines a new IPv6 in IPv4 tunnel with number **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-ip-if)#
```

Switches to the `config-ip-if` context for existing tunnel **27**.

```
switch(config)# interface tunnel 27
switch(config-ip-if)#
```



Deletes IPv6 in IPv4 tunnel **27**.

```
switch(config)# no interface tunnel 27
```

Defines a new IPv6 in IPv6 tunnel with number **8**.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)#
```

## ip address

### Syntax

```
ip address <IPv4-ADDR>/<MASK>
no ip address <IPv4-ADDR>/<MASK>
```

### Description

Sets the local IP address of a GRE tunnel. This address identifies the tunnel interface for routing. It must be on the same subnet as the tunnel address assigned on the remote device.

The `no` form of this command deletes the local IP address assigned to a GRE tunnel.

### Command context

config-gre-if

### Parameters

<IPv4-ADDR>

Specifies the tunnel IP address in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255. You can remove leading zeros. For example, the address `192.169.005.100` becomes `192.168.5.100`.

<MASK>

Specifies the number of bits in the address mask in CIDR format (`x`), where `x` is a decimal number from 0 to 32.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Defines the local IP address **10.10.10.1** for GRE tunnel **33**.

```
switch(config)# interface tunnel 33 mode gre ipv4
switch(config-gre-if)# ip address 10.10.10.1/24
```

Deletes the local IP address **10.10.10.1** for GRE tunnel 33.

```
switch(config)# interface tunnel 33
switch(config-gre-if)# no ip address 10.10.10.1/24
```

## ipv6 address

### Syntax

```
ipv6 address <IPV6-ADDR>/<MASK>
no ipv6 address <IPV6-ADDR>/<MASK>
```

## Description

Sets the local IP address of an IPv6 to IPv4 tunnel or of an IPv6 to IPv6 tunnel. This address identifies the tunnel interface for routing. It must be on the same subnet as the tunnel address assigned on the remote device.

The `no` form of this command deletes the local IP address assigned to an IPv6 to IPv4 tunnel.

## Command context

```
config-ip-if
```

```
config-if
```

## Parameters

<IPV6-ADDR>

Specifies the tunnel IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F.

<MASK>

Specifies the number of bits in the address mask in CIDR format (x), where x is a decimal number from 0 to 32.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Defines the local IP address **2001:DB8:5::1/64** for tunnel **8** for an IPv6 to IPv6 tunnel.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)# ipv6 address 2001:DB8:5::1/64
```

Deletes the local IP address **2001:DB8::1/32** for tunnel **8**.

```
switch(config)# interface tunnel 8
switch(config-if)# no ipv6 address 2001:DB8:5::1/64
```

## ip mtu

### Syntax

```
ip mtu <VALUE>
```

### Description

Sets the MTU (maximum transmission unit) for an IP interface. The default value is 1500 bytes.

The `no` form of this command sets the MTU to the default value of 1500 bytes.

### Command context

```
config-ip-if
```

### Parameters

<VALUE>

Specifies the MTU in bytes. Range: 1,280 bytes to 9,192 bytes.

## Authority

Administrators or local user group members with execution rights for this command.

## Usage

The IP MTU is the largest IP packet that can be sent or received by the interface. For a tunnel, the IP MTU is the maximum size of the IP payload. To enable jumbo packet forwarding through the tunnel, set the IP MTU of the tunnel to a value greater than 1500. Also set the MTU and the IP MTU values for the underlying physical interface that the tunnel is using to a value greater than 1,500 bytes. The IP MTU of the tunnel must also be greater than or equal to the MTU of the ingress interface on the switch. The IP MTU value of the tunnel must also be less than or equal to the IP MT of the underlying interface that the tunnel is using.

## Examples

Sets the MTU on IPv6 in IPv4 tunnel 27 to **1000** bytes.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-if)# mtu 1000
```

Sets the MTU on IPv6 in IPv4 tunnel 27 to the default value.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-if)# ip mtu
```

Sets the MTU on IPv6 in IPv6 tunnel 8 to **900** bytes.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)# ip mtu 9000
```

Sets the MTU on IPv6 in IPv6 tunnel 8 to the default value.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)# ip mtu
```

## show interface tunnel

### Syntax

```
show interface tunnel [<TUNNEL-NUMBER>]
```

### Description

Shows configuration settings for all IP tunnels, or a specific tunnel.

### Command context

Manager (#)

### Parameters

<TUNNEL-NUMBER>

Specifies the number of an IP tunnel. Range: 1 to 127.

## Authority

Operators or Administrators or local user group members with execution rights for this command.  
Operators can execute this command from the operator context (>) only.

## Examples

Shows configuration settings for tunnel **12**, which is an IPv6 in IPv6 tunnel in the following example.

```
switch# show interface tunnel12

Interface tunnel12 is up
Admin state is up
tunnel type IPv6 in IPv6
tunnel interface IPv6 address 4::1/64
tunnel source IPv6 address 2::1
tunnel destination IPv6 address 2::2
tunnel ttl 60
Description: Network2 Tunnel
```

| Statistics | RX | TX | Total |
|------------|----|----|-------|
| L3 Packets | 0  | 0  | 0     |
| L3 Bytes   | 0  | 0  | 0     |

## show running-config interface tunnel

### Syntax

```
show running-config interface tunnel<TUNNEL-NUMBER>
```

### Description

Shows the commands used to configure an IP tunnel.

### Command context

Manager (#)

### Parameters

<TUNNEL-NUMBER>

Specifies the number of an IP tunnel. Range: 1 to 127.

## Authority

Operators or Administrators or local user group members with execution rights for this command.  
Operators can execute this command from the operator context (>) only.

## Examples

Shows the configuration for IPv6 in IPv4 tunnel.

```
switch# show running-config interface tunnel5

interface tunnel5 mode ip 6in4
source ip 10.10.10.12
destination ip 22.20.20.20
ip6 address 2001:DB8:5::1/64
```

```
ttl 60
no shutdown
description Network10
```

Shows the configuration for IPv6 in IPv6 tunnel.

```
switch# show running-config interface tunnel1
interface tunnel 1 mode ip 6in6
description Network2 Tunnel
source ipv6 2::1
destination ipv6 2::2
ipv6 address 4::1/64
ttl 60
```

## shutdown

### Syntax

```
shutdown
no shutdown
```

### Description

This command disables an IP interface. IP interfaces are disabled by default when created. The `no` form of this command enables an IP interface.

### Command context

```
config-ip-if
```

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Enables IPv6 in IPv4 interface **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-ip-if)# no shutdown
```

Disables IPv6 in IPv4 interface **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-ip-if)# shutdown
```

## source ip

### Syntax

```
source ip <IPV4-ADDR>
no source ip <IPV4-ADDR>
```

### Description

Sets the source IP address for an IP tunnel. Specify the IP address of a layer 3 interface on the switch. Tunnels can have the same source IP address and different destination IP addresses.

The `no` form of this command deletes the source IP address for an IP tunnel.

## Command context

`config-ip-if`

## Parameters

`<IPv4-ADDR>`

Specifies the source IP address in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Defines the source IP address to be **10.10.10.1** for IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-ip-if)# source ip 10.10.10.1
```

Deletes the source IP address **10.1.10.1** from IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27
switch(config-ip-if)# no source ip 10.10.10.1
```

## source ipv6

### Syntax

```
source ipv6 <IPv6-ADDR>
no source ipv6
```

### Description

Sets the source IPv6 address to be used for the encapsulation.

The `no` form of this command deletes the source IPv6 address for an IP tunnel.

## Command context

`config-ip-if`

## Parameters

`<IPv6-ADDR>`

Specifies the tunnel IP address in IPv6 format (`xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx`), where `x` is a hexadecimal number from 0 to F.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Defines the source IPv6 address to be **2001:DB8::1** for IPv6 in IPv6 tunnel **8**.

```
switch(config)# interface tunnel 8 mode ip 6in6
switch(config-if)# source ipv6 2001:DB8::1
```

Deletes the source IP address **2001:DB8::1** from IPv6 in IPv6 tunnel **8**.

```
switch(config)# interface tunnel 8
switch(config-if)# no source ipv6 2001:DB8::1
```

## ttl

### Syntax

```
ttn <COUNT>
no ttn
```

### Description

Sets the TTL (time-to-live), also known as the hop count, for tunneled packets. If not configured, the default value of 64 is used for the tunnel. (The hop count of the original packets is not changed.) A maximum of four different TTL values can be used at the same time by all tunnels on the switch. For example, if tunnel-1 has TTL 10, tunnel-2 has TTL 20, tunnel-3 has TTL 30, and tunnel-4 has TTL 40, then tunnel-5 cannot have a unique TTL value, it must reuse one of the values assigned to the other tunnels (10, 20, 30, 40).

The `no` form of this command sets TTL to the default value of 64.

### Command context

config-ip-if

### Parameters

<COUNT>

Specifies the hop count. Range: 1 to 255. Default: 64.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Defines a TTL of **55** for IPv6 in IPv4 tunnel **27**.

```
switch(config)# interface tunnel 27 mode ip 6in4
switch(config-if)# ttl 55
```

Sets the TTL for IPv6 in IPv4 tunnel **27** to the default value of 64.

```
switch(config)# interface tunnel 27
switch(config-if)# no ttl
```

## Chapter 9

# Internet Control Message Protocol (ICMP)

The Internet Control Message Protocol (ICMP) is a supporting protocol in the Internet protocol suite. The protocol is used by network devices, including routers, to send error messages and operational information. For example, an ICMP message might indicate that a requested service is not available. Another example of an ICMP message might be that a host or router could not be reached.

### ICMP message types

The type field identifies the type of message sent by the host or gateway.

| Type | ICMP messages                                             |
|------|-----------------------------------------------------------|
| 0    | Echo Reply (Ping Reply, used with Type 8, Ping Request)   |
| 3    | Destination Unreachable                                   |
| 4    | Source Quench                                             |
| 5    | Redirect                                                  |
| 8    | Echo Request (Ping Request, used with Type 0, Ping Reply) |
| 9    | Router Advertisement (Used with Type 9)                   |
| 10   | Router Solicitation (Used with Type 10)                   |
| 11   | Time Exceeded                                             |
| 12   | Parameter Problem                                         |
| 13   | Timestamp Request (Used with Type 14)                     |
| 14   | Timestamp Reply (Used with Type 13)                       |
| 15   | Information Request (obsolete) (Used with Type 16)        |
| 16   | Information Reply (obsolete) (Used with Type 15)          |
| 17   | Address Mask Request (Used with Type 17)                  |
| 18   | Address Mask Reply (Used with Type 18)                    |

### When ICMP messages are sent



ICMP messages are sent when one or more of the following scenarios occur:

- A datagram cannot reach its destination.
- The gateway does not have the buffering capacity to forward a datagram.
- The gateway can direct the host to send traffic on a shorter route.

## ICMP redirect messages

ICMP redirect messages are used by routers to notify the hosts on the data link that a better route is available for a particular destination.

## When ICMP redirect messages are sent

The switch is configured to send redirects by default. ICMP redirect messages are sent when one or more of the following scenarios occur:

- The interface on which the packet comes into the router is the same interface on which the packet gets routed out.
- The subnet or network of the source IP address is on the same subnet or network of the next-hop IP address of the routed packet.
- The datagram is not source-routed.
- The destination unicast address is unreachable. In this case, the router generates the ICMP destination unreachable message to inform the source host about the situation.

## ICMP commands

### ip icmp redirect

#### Syntax

```
ip icmp redirect
no ip icmp redirect
```

#### Description

Enables the sending of ICMPv4 and ICMPv6 redirect messages to the source host. Enabled by default. ICMP redirect and active forwarding are mutually exclusive.

The `no` form of this command disables ICMPv4 and ICMPv6 redirect messages to the source host.

#### Command context

```
config
```

#### Authority

Administrators or local user group members with execution rights for this command.

#### Examples

Enabling ICMP redirect messages:

```
switch(config)# ip icmp redirect
```

Disabling ICMP redirect messages:

```
switch(config)# no ip icmp redirect
```

## ip icmp throttle

### Syntax

```
ip icmp throttle <packet-interval>
no ip icmp throttle
```

### Description

Used to configure the throttle parameter for both ICMPv4 and ICMPv6 error messages and redirect messages.

The `no` form of this command disables the throttle parameter for both ICMPv4 and ICMPv6 error messages and redirect messages.

### Command context

config

### Parameters

*<packet-interval>*

Specifies the ICMPv4/v6 packet interval in seconds. Default: 1 second. Range: 1-86400.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Enabling the throttle parameter for both ICMPv4 and ICMPv6 error messages and redirect messages:

```
switch(config)# ip icmp throttle 3000
```

Disabling the throttle parameter for both ICMPv4 and ICMPv6 error messages and redirect messages:

```
switch(config)# no ip icmp throttle
```

## ip icmp unreachable

### Syntax

```
ip icmp unreachable
no ip icmp unreachable
```

### Description

Enables the sending of ICMPv4 and ICMPv6 destination unreachable messages on the switch to a source host when a specific host is unreachable. The unreachable host address originates from the failed packet. Default setting.

The `no` form of this command disables the sending of ICMPv4 and ICMPv6 destination unreachable messages from the switch to a source host when a specific host is unreachable. This command does not prevent other hosts from sending an ICMP unreachable message.

## Command context

config

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Enabling ICMPv4 and ICMPv6 destination unreachable messages to a source host:

```
switch(config)# ip icmp unreachable
```

Disabling ICMPv4 and ICMPv6 destination unreachable messages to a source host:

```
switch(config)# no ip icmp unreachable
```

The Domain Name System (DNS) is the Internet protocol for mapping a hostname to its IP address. DNS allows users to enter more readily memorable and intuitive hostnames, rather than IP addresses, to identify devices connected to a network. It also allows a host to keep the same hostname even if it changes its IP address.

Hostname resolution can be either static or dynamic.

- In static resolution, a local table is defined on the switch that associates hostnames with their IP addresses. Static tables can be used to speed up the resolution of frequently queried hosts.
- Dynamic resolution requires that the switch query a DNS server located elsewhere on the network. Dynamic name resolution takes more time than static name resolution, but requires far less configuration and management.

## DNS client

The DNS client resolves hostnames to IP addresses for protocols that are running on the switch. When the DNS client receives a request to resolve a hostname, it can do so in one of two ways:

- Forward the request to a DNS name server for resolution.
- Reply to the request without using a DNS name server, by resolving the name using a statically defined table of hostnames and their associated IP addresses.

## Configuring the DNS client

### Procedure

1. Configure one or more DNS name servers with the command `ip dns server`.
2. To resolve DNS requests by appending a domain name to the requests, either configure a single domain name with the command `ip dns domain-name`, or configure a list of up to six domain names with the command `ip dns domain-list`.
3. To use static name resolution for certain hosts, associate an IP address to a host with the command `ip dns host`.
4. Review your DNS configuration settings with the command `show ip dns`.

### Examples

This example creates the following configuration:

- Defines the domain **switch.com** to append to all requests.
- Defines a DNS server with IPv4 address of **1.1.1.1**.
- Defines a static DNS host named **myhost1** with an IPv4 address of **3.3.3.3**.
- DNS client traffic is sent on the default VRF (named **default**).

```

switch(config)# ip dns domain-name switch.com
switch(config)# ip dns server-address 1.1.1.1
switch(config)# ip dns host myhost1 3.3.3.3
switch(config)# exit
switch# show ip dns

```

```

VRF Name : vrf_mgmt

```

| Host Name | Address |
|-----------|---------|
| -----     |         |

```

VRF Name : vrf_default
Domain Name : switch.com
DNS Domain list :
Name Server(s) : 1.1.1.1

```

| Host Name | Address |
|-----------|---------|
| -----     |         |
| myhost1   |         |

## DNS client commands

### ip dns domain-list

#### Syntax

```

ip dns domain-list <DOMAIN-NAME> [vrf <VRF-NAME>]
no ip dns domain-list <DOMAIN-NAME> [vrf <VRF-NAME>]

```

#### Description

Configures one or more domain names that are appended to the DNS request. The DNS client appends each name in succession until the DNS server replies. Domains can be either IPv4 or IPv6. By default, requests are forwarded on the default VRF.

The `no` form of this command removes a domain from the list.

#### Command context

```

config

```

#### Parameters

```

list <DOMAIN-NAME>

```

Specifies a domain name. Up to six domains can be added to the list. Length: 1 to 256 characters.

```

vrf <VRF-NAME>

```

Specifies a VRF name. Default: default.

#### Authority

Administrators or local user group members with execution rights for this command.

#### Examples

This example defines a list with two entries: **domain1.com** and **domain2.com**.

```
switch(config)# ip dns domain-list domain1.com
switch(config)# ip dns domain-list domain2.com
```

This example removes the entry **domain1.com**.

```
switch(config)# no ip dns domain-list domain1.com
```

## ip dns domain-name

### Syntax

```
ip dns domain-name <DOMAIN-NAME> [vrf <VRF-NAME>]
no ip dns domain-name <DOMAIN-NAME> [vrf <VRF-NAME>]
```

### Description

Configures a domain name that is appended to the DNS request. The domain can be either IPv4 or IPv6. By default, requests are forwarded on the default VRF. If a domain list is defined with the command `ip dns domain-list`, the domain name defined with this command is ignored.

The `no` form of this command removes the domain name.

### Command context

config

### Parameters

<DOMAIN-NAME>

Specifies the domain name to append to DNS requests. Length: 1 to 256 characters.

vrf <VRF-NAME>

Specifies a VRF name. Default: default.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Setting the default domain name to `domain.com`:

```
switch(config)# ip dns domain-name domain.com
```

Removing the default domain name `domain.com`:

```
switch(config)# no ip dns domain-name domain.com
```

## ip dns host

### Syntax

```
ip dns host <HOST-NAME> <IP-ADDR> [vrf <VRF-NAME>]
no ip dns host <HOST-NAME> <IP-ADDR> [vrf <VRF-NAME>]
```

## Description

Associates a static IP address with a hostname. The DNS client returns this IP address instead of querying a DNS server for an IP address for the hostname. Up to six hosts can be defined. If no VRF is defined, the default VRF is used.

The `no` form of this command removes a static IP address associated with a hostname.

## Command context

`config`

## Parameters

`host <HOST-NAME>`

Specifies the name of a host. Length: 1 to 256 characters.

`<IP-ADDR>`

Specifies an IP address in IPv4 format (`x.x.x.x`), where `x` is a decimal number from 0 to 255, or IPv6 format (`xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx`), where `x` is a hexadecimal number from 0 to F.

`vrf <VRF-NAME>`

Specifies a VRF name. Default: default.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

This example defines an IPv4 address of **3.3.3.3** for **host1**.

```
switch(config)# ip dns host host1 3.3.3.3
```

This example defines an IPv6 address of **b::5** for **host 1**.

```
switch(config)# ip dns host host1 b::5
```

This example defines removes the entry for **host 1** with address **b::5**.

```
switch(config)# no ip dns host host1 b::5
```

## ip dns server address

### Syntax

```
ip dns server-address <IP-ADDR> [vrf <VRF-NAME>]
no ip dns server-address <IP-ADDR> [vrf <VRF-NAME>]
```

### Description

Configures the DNS name servers that the DNS client queries to resolve DNS queries. Up to six name servers can be defined. The DNS client queries the servers in the order that they are defined. If no VRF is defined, the default VRF is used.

The `no` form of this command removes a name server from the list.

### Command context

config

## Parameters

*<IP-ADDR>*

Specifies an IP address in IPv4 format (*x.x.x.x*), where *x* is a decimal number from 0 to 255, or IPv6 format (*xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx*), where *x* is a hexadecimal number from 0 to F.

*vrf <VRF-NAME>*

Specifies a VRF name. Default: default.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

This example defines a name server at **1.1.1.1**.

```
switch(config)# ip dns server-address 1.1.1.1
```

This example defines a name server at **a::1**.

```
switch(config)# ip dns server-address a::1
```

This example removes a name server at **a::1**.

```
switch(config)# no ip dns server-address a::1
```

## show ip dns

### Syntax

```
show ip dns [vrf <VRF-NAME>]
```

### Description

Shows all DNS client configuration settings or the settings for a specific VRF.

### Command context

Manager (#)

### Parameters

*vrf <VRF-NAME>*

Specifies the VRF for which to show information. If no VRF is defined, the default VRF is used.

### Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

### Examples



```
switch(config)# ip dns domain-name domain.com
switch(config)# ip dns domain-list domain5.com
switch(config)# ip dns domain-list domain8.com
switch(config)# ip dns server-address 4.4.4.4
switch(config)# ip dns server-address 6.6.6.6
switch(config)# ip dns host host3 5.5.5.5
switch(config)# ip dns host host3 c::12
```

```
switch# show ip dns
VRF Name : default
```

```
Domain Name : domain.com
DNS Domain list : domain5.com, domain8.com
Name Server(s) : 4.4.4.4, 6.6.6.6
```

| Host Name | Address |
|-----------|---------|
| -----     | -----   |
| host3     | 5.5.5.5 |
| host3     | c::12   |

ARP (Address Resolution Protocol) is used to map the network address assigned to a device to its physical address. For example, on an Ethernet network, ARP maps layer 3 IPv4 network addresses to layer 2 MAC addresses. (ARP does not work with IPv6 addresses. Instead, the Neighbor discovery protocol is used.)

ARP operates at layer 2. ARP requests are broadcast to all devices on the local network segment and are not forwarded by routers. ARP is enabled by default and cannot be disabled.

### Proxy ARP

Proxy ARP allows a routing switch to answer ARP requests from devices on one network on behalf of devices on another network. The ARP proxy is aware of the location of the traffic destination, and offers its own MAC address as the final destination.

For example, if Proxy ARP is enabled on a routing switch connected to two subnets (10.10.10.0/24 and 20.20.20.0/24), the routing switch can respond to an ARP request from 10.10.10.69 for the MAC address of the device with IP address 20.20.20.69.

Typically, the host that sent the ARP request then sends its packets to the switch that has the ARP proxy. This switch then forwards the packets to the intended host through a mechanism such as a tunnel.

Proxy ARP is supported on L3 physical and VLAN interfaces. It is disabled by default. To enable proxy ARP, routing must be enabled on the interface.

### Local proxy ARP

Local proxy ARP is a technique by which a device on a given network answers the ARP queries for a host address that is on the same network. It is primarily used to enable layer 3 communication between hosts within a common subnet that are separated by layer 2 boundaries (Example: PVLAN). Local proxy ARP is supported on L3 physical and VLAN interfaces.

Local proxy ARP is disabled by default. Routing must be enabled on the interface to enable local proxy ARP.

### Dynamic ARP Inspection

ARP is used for resolving IP against MAC addresses on a broadcast network segment like the Ethernet and was originally defined by Internet Standard RFC 826. ARP does not support any inherent security mechanism and as such depends on simple datagram exchanges for the resolution, with many of these being broadcast.

Because it is an unreliable and non-secure protocol, ARP is vulnerable to attacks. Some attacks may be targeted toward the networks whereas other attacks may be targeted toward the switch itself. The attacks primarily intend to create denial of service (DoS) for the other entities present in the network.

Most of the attacks are carried out in one of the following three forms:

- Overwhelming the switch control plane with too many ARP packets.
- Overwhelming the switch control plane with too many unresolved data packets.
- Masquerading as a trusted gateway/server by wrongly advertising ARPs.

Several defense mechanisms can be put in place on a switch to protect against attacks:

- Limit the amount of ARP activity allowed from a host or on a port.
- Ensure that all ARP packets are consistent with one or more binding databases, which can be created through various means.
- Enforce integrity checks on the ARP packets to check against different MAC or IP addresses in the Ethernet or IP header and ARP header.

This release implements Dynamic ARP Inspection to enforce DHCP snooping binding on all ARP packets and is limited to the 8400 platform. The feature will be disabled from the code, CLI, and schema by the use of appropriate config flags for other platforms.

Only the following is supported:

- Enabling and disabling of Dynamic ARP Inspection on a VLAN level (it does not have to be SVI).
- Defining the member ports of a VLAN as either trusted or untrusted.
- Only ARP traffic on untrusted ports subjected to checks.
- Routed ports (RoPs) always treated as trusted.
- Listening to the DHCP Bindings table and check every ARP packet to match against the binding.

ARP ACLs are not supported in this release and the DHCP snooping table will be the only source of binding.

## Configuring proxy ARP

### Procedure

1. Switch to configuration context with the command `config`.
2. Switch to an interface VLAN with the command `interface vlan`.
3. Enable local proxy ARP with the command `ip proxy-arp`.

### Examples

This example configures proxy ARP on interface VLAN **30**.

```
switch# config
switch(config)# interface vlan 30
switch(config-vlan-30)# ip proxy-arp
```

## Configuring local proxy ARP

### Procedure

1. Switch to configuration context with the command `config`.
2. Switch to an interface VLAN with the command `interface vlan`.
3. Enable local proxy ARP with the command `ip local-proxy-arp`.

### Examples

This example configures local proxy ARP on interface VLAN **30**.

```
switch# config
switch(config)# interface vlan 30
switch(config-vlan-30)# ip local-proxy-arp
```

## Dynamic ARP Inspection

ARP is used for resolving IP against MAC addresses on a broadcast network segment like the Ethernet and was originally defined by Internet Standard RFC 826. ARP does not support any inherent security mechanism and as such depends on simple datagram exchanges for the resolution, with many of these being broadcast.

Because it is an unreliable and non-secure protocol, ARP is vulnerable to attacks. Some attacks may be targeted toward the networks whereas other attacks may be targeted toward the switch itself. The attacks primarily intend to create denial of service (DoS) for the other entities present in the network.

Most of the attacks are carried out in one of the following three forms:

- Overwhelming the switch control plane with too many ARP packets.
- Overwhelming the switch control plane with too many unresolved data packets.
- Masquerading as a trusted gateway/server by wrongly advertising ARPs.

Several defense mechanisms can be put in place on a switch to protect against attacks:

- Limit the amount of ARP activity allowed from a host or on a port.
- Ensure that all ARP packets are consistent with one or more binding databases, which can be created through various means.
- Enforce integrity checks on the ARP packets to check against different MAC or IP addresses in the Ethernet or IP header and ARP header.

This release implements Dynamic ARP Inspection to enforce DHCP snooping binding on all ARP packets and is supported on the 6300, 6400, and 8400 platforms. The feature will be disabled from the code, CLI, and schema by the use of appropriate config flags for other platforms.

Only the following is supported:

- Enabling and disabling of Dynamic ARP Inspection on a VLAN level (it does not have to be SVI).
- Defining the member ports of a VLAN as either trusted or untrusted.
- Only ARP traffic on untrusted ports subjected to checks.
- Routed ports (RoPs) always treated as trusted.
- Listening to the DHCP Bindings table and check every ARP packet to match against the binding.

ARP ACLs are not supported in this release and the DHCP snooping table will be the only source of binding.

## ARP commands

### arp cache-limit

#### Syntax

```
arp cache-limit <LIMIT>
```

#### Description

Specifies the maximum number of entries in the ARP (Address Resolution Protocol) cache.

## Command context

config

## Parameters

<LIMIT>

Specifies the maximum number of entries in the ARP cache. Range: 4096 to 131072. Default: 131072.

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

```
switch(config)# arp cache-limit 4097
```

# arp inspection

## Syntax

arp inspection

## Description

Enables Dynamic ARP Inspection on the current VLAN, forcing all ARP packets from untrusted ports to be subjected to a MAC-IP association check against a binding table.

The `no` form of this command disables Dynamic ARP Inspection on the VLAN.

## Command context

config-vlan-<VLAN-ID>

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Enabling dynamic ARP inspection:

```
switch# configure terminal
switch(config)# vlan 1
switch(config-vlan)# arp inspection
```

Disabling dynamic ARP inspection:

```
switch# configure terminal
switch(config)# vlan 1
switch(config-vlan)# no arp inspection
```

# arp inspection trust

## Syntax

arp inspection trust  
no arp inspection trust

## Description

Configures the interface as a trusted. All interfaces are untrusted by default.

The `no` form of this command returns the interface to the default state (untrusted).

## Command context

config-if

## Authority

Administrators or local user group members with execution rights for this command.

## Example

Setting an interface as trusted:

```
switch(config-if)# arp inspection trust
```

## arp ipv4 mac

### Syntax

```
arp ipv4 <IPV4_ADDR> mac <MAC_ADDR>
no arp ipv4 <IPV4_ADDR> mac <MAC_ADDR>
```

### Description

Specifies a permanent static neighbor entry in the ARP table (for IPv4 neighbors).

The `no` form of this command deletes a permanent static neighbor entry from the ARP table.

### Command context

config-if  
config-if-vlan

### Parameters

ipv4 <IPV4-ADDR>

Specifies the IP address of the neighbor or the virtual IP address of the cluster in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255. . Range: 4096 to 131072. Default: 131072.

mac <MAC-ADDR>

Specifies the MAC address of the neighbor or the multicast MAC address in IANA format (xx:xx:xx:xx:xx:xx), where x is a hexadecimal number from 0 to F. Range: 4096 to 131072. Default: 131072.

### Authority

Administrators or local user group members with execution rights for this command.

### Example

Configuring a static ARP entry on a interface VLAN 10:

```
switch(config)# interface vlan 10
switch(config-if-vlan)# arp ipv4 2.2.2.2 mac 01:00:5e:00:00:01
```

Removing a static ARP entry on interface VLAN10:

```
switch(config)# interface vlan 10
switch(config-if-vlan)# no arp ipv4 2.2.2.2 mac 01:00:5e:00:00:01
```

## clear arp

### Syntax

```
clear arp [port <PORT-ID> | vrf {all-vrfs | <VRF-NAME>}]
```

### Description

Clears IPv4 and IPv6 neighbor entries from the ARP table. If you do not specify any parameters, ARP table entries are cleared for the default VRF.

### Command context

Manager (#)

### Parameters

port <PORT-ID>

Specifies a physical port on the switch. Format: member/slot/port. For example: 1/1/1. .  
all-vrfs

Selects all VRFs.

<VRF-NAME>

Specifies the name of a VRF. Default: default.

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Clearing all IPv4 and IPv6 neighbor ARP entries for the default VRF:

```
switch# clear arp
```

Clearing all ARP neighbor entries for a port:

```
switch# clear arp 1/1/35
```

## ip local-proxy-arp

### Syntax

```
ip local-proxy-arp
no ip local-proxy-arp
```

### Description

Enables local proxy ARP on the specified interface. Local proxy ARP is supported on Layer 3 physical interfaces and on VLAN interfaces. To enable local proxy ARP on an interface, routing must be enabled on that interface.

The `no` form of this command disables local proxy ARP on the specified interface.

## Command context

config-if  
config-if-vlan

## Authority

Administrators or local user group members with execution rights for this command.

## Examples

Enabling local proxy ARP on interface **1/1/1**:

```
switch# interface 1/1/1
switch(config-if)# ip local proxy-arp
```

Enabling local proxy ARP on interface VLAN **3**:

```
switch# interface vlan 3
switch(config-if-vlan)# ip local-proxy-arp
```

Disabling local proxy ARP on on interface **1/1/1**.

```
switch# interface 1/1/1
switch(config-if)# no ip local-proxy-arp
```

## ipv6 neighbor mac

### Syntax

```
ipv6 neighbor <IPV6-ADDR> mac <MAC-ADDR>
no ipv6 neighbor <IPV6-ADDR> mac <MAC-ADDR>
```

### Description

Specifies a permanent static neighbor entry in the ARP table (for IPv6 neighbors).

The **no** form of this command deletes a permanent static neighbor entry from the ARP table.

## Command context

config-if

## Parameters

<IPV6-ADDR>>

Specifies an IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F. Range: 4096 to 131072. Default: 131072.

mac <MAC-ADDR>>

Specifies the MAC address of the neighbor (xx:xx:xx:xx:xx:xx), where x is a hexadecimal number from 0 to F. Range: 4096 to 131072. Default: 131072.

## Authority

Administrators or local user group members with execution rights for this command.

## Example

Creates a static ARP entry on interface **1/1/1**.



```
switch(config)# interface 1/1/1
switch(config-if)# arp ipv6 neighbor 2001:0db8:85a3::8a2e:0370:7334 mac
00:50:56:96:df:c8
```

## ip proxy-arp

### Syntax

```
ip proxy-arp
no ip proxy-arp
```

### Description

Enables proxy ARP for the specified Layer 3 interface. Proxy ARP is supported on Layer 3 physical interfaces, LAG interfaces, and VLAN interfaces. It is disabled by default. To enable proxy ARP on an interface, routing must be enabled on that interface.

The `no` form of this command disables proxy ARP for the specified interface.

### Command context

```
config-if
config-if-vlan
config-lag-vlan
```

### Authority

Administrators or local user group members with execution rights for this command.

### Examples

Enabling proxy ARP on interface **1/1/1**:

```
switch# interface 1/1/1
switch(config-if)# ip proxy-arp
```

Enabling proxy ARP on VLAN **3**:

```
switch# interface vlan 3
switch(config-if-vlan)# ip proxy-arp
```

Enabling proxy ARP on a LAG **11**:

```
switch(config)# int lag 11
switch(config-lag-if)# ip proxy-arp
```

Disabling proxy ARP on interface 1/1/1:

```
switch# interface 1/1/1
switch(config-if)# no ip proxy-arp
```

## show arp

### Syntax

```
show arp
```

## Description

Shows the entries in the ARP (Address Resolution Protocol) table.

## Command context

Manager (#)

## Authority

Administrators or local user group members with execution rights for this command.

## Usage

This command displays information about ARP entries, including the IP address, MAC address, port, and state.

When no parameters are specified, the `show arp` command shows all ARP entries for the default VRF (Virtual Router Forwarding) instance.

## Examples

```
switch# show arp

IPv4 Address MAC Port Physical Port

192.168.1.2 00:50:56:96:7b:e0 vlan10 1/1/29 stale
192.168.1.3 00:50:56:96:7b:ac vlan10 1/1/1 reachable

Total Number Of ARP Entries Listed- 2.

```

## show arp inspection interface

### Syntax

```
show arp inspection interface
```

### Description

Displays the current configuration of dynamic ARP inspection on a VLAN or interface.

### Command context

Operator (>) or Manager (#)

### Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

### Examples

```
switch# show arp inspection interface

Interface Trust-State
```

```

1/1/1 Untrusted

```

```
switch# show arp inspection interface vsx-peer
```

```

Interface Trust-State

1/1/1 Untrusted
lag100 Trusted

```

```
switch# show arp inspection interface 1/1/1
```

```

Interface Trust-State

1/1/1 Untrusted

```

## show arp inspection statistics

### Syntax

```
show arp inspection statistics
```

### Description

Displays statistics about forwarded and dropped ARP packets.

### Command context

Operator (>) or Manager (#)

### Authority

Operators or Administrators or local user group members with execution rights for this command.  
Operators can execute this command from the operator context (>) only.

### Examples

```
switch# show arp inspection statistics vlan 1-200
```

```

VLAN Name Forwarded Dropped

1 DEFAULT_VLAN_1 0 0

```

```
switch# show arp inspection statistics vlan
```

```

VLAN Name Forwarded Dropped

```

|       |                |   |   |
|-------|----------------|---|---|
| 1     | DEFAULT_VLAN_1 | 0 | 0 |
| 200   | VLAN200        | 0 | 0 |
| ----- |                |   |   |

## show arp state

### Syntax

```
show arp state {all | failed | incomplete | permanent | reachable | stale}
```

### Description

Shows ARP (Address Resolution Protocol) cache entries that are in the specified state.

### Command context

Operator (>) or Manager (#)

### Parameters

**all**

Shows the ARP cache entries for all VRF (Virtual Router Forwarding) instances.

**failed**

Shows the ARP cache entries that are in `failed` state. The neighbor might have been deleted.

**incomplete**

Shows the ARP cache entries that are in `incomplete` state.

An incomplete state means that address resolution is in progress and the link-layer address of the neighbor has not yet been determined. A solicitation request was sent, and the switch is waiting for a solicitation reply or a timeout.

**permanent**

Shows the ARP cache entries that are in `permanent` state. ARP entries that are in a permanent state can be removed by administrative action only.

**reachable**

Shows the ARP cache entries that are in `reachable` state, meaning that the neighbor is known to have been reachable recently.

**stale**

Shows ARP cache entries that are in `stale` state.

ARP cache entries are in the `stale` state if the elapsed time is in excess of the ARP timeout in seconds since the last positive confirmation that the forwarding path was functioning properly.

### Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

### Examples

```
switch# show arp state failed
```

| IPv4 Address | MAC | Port   | Physical Port | State  |
|--------------|-----|--------|---------------|--------|
| -----        |     |        |               |        |
| 192.168.1.4  |     | vlan10 |               | failed |

# show arp summary

## Syntax

```
show arp summary [all-vrfs | vrf <VRF-NAME>]
```

## Description

Shows a summary of the IPv4 and IPv6 neighbor entries on the switch for all VRFs or a specific VRF.

## Command context

Operator (>) or Manager (#)

## Parameters

**all-vrfs**

Selects all VRFs.

**vrf <VRF-NAME>**

Specifies the name of a VRF.

## Authority

Operators or Administrators or local user group members with execution rights for this command.

Operators can execute this command from the operator context (>) only.

## Examples

Showing summary ARP information for all VRFs:

```
switch# show arp summary all-vrfs
```

| ARP Entry's State                | : IPv4 | IPv6 |
|----------------------------------|--------|------|
| -----                            |        |      |
| Number of Reachable ARP entries  | : 2    | 0    |
| Number of Stale ARP entries      | : 0    | 0    |
| Number of Failed ARP entries     | : 2    | 2    |
| Number of Incomplete ARP entries | : 0    | 0    |
| Number of Permanent ARP entries  | : 0    | 0    |
| -----                            |        |      |
| Total ARP Entries: 6             | : 4    | 2    |
| -----                            |        |      |

Showing a summary of all IPv4 and IPv6 neighbor entries on the primary and secondary (peer) switches:

```
vsx-primary# show arp summary
```

| ARP Entry's State                | IPv4  | IPv6  |
|----------------------------------|-------|-------|
| -----                            |       |       |
| Number of Reachable ARP entries  | 25858 | 32231 |
| Number of Stale ARP entries      | 0     | 1     |
| Number of Failed ARP entries     | 0     | 257   |
| Number of Incomplete ARP entries | 0     | 0     |

```

Number of Permanent ARP entries 0 0

Total ARP Entries- 58347 25858 32489

vsx-primary# show arp summary vsx-peer
ARP Entry's State IPv4 IPv6

Number of Reachable ARP entries 25858 32168
Number of Stale ARP entries 0 3
Number of Failed ARP entries 0 317
Number of Incomplete ARP entries 0 0
Number of Permanent ARP entries 0 0

Total ARP Entries- 58346 25858 32488

```

## show arp timeout

### Syntax

```
show arp timeout [<INTERFACE>]
```

### Description

Shows the age-out period for each ARP (Address Resolution Protocol) entry for a port, LAG, or VLAN interface.

### Command context

Operator (>) or Manager (#)

### Parameters

<INTERFACE>

Specifies a physical port, VLAN, or LAG on the switch. For physical ports, use the format member/slot/port (for example, 1/3/1).

### Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

### Examples

Showing ARP timeout information for a port:

```

switch# show arp timeout 1/1/1
ARP Timeout:

Port VRF Timeout
1/1/1 default 600

```

## show arp vrf

### Syntax

```
show arp {all-vrfs | vrf <VRF-NAME>}
```

## Description

Shows the ARP table for all VRF instances, or for the named VRF.

## Command context

Operator (>) or Manager (#)

## Parameters

`all-vrfs`

Specifies all VRFs.

`vrf <VRF-NAME>`

Specifies the name of a VRF. Length: 1 to 32 alphanumeric characters.

## Authority

Operators or Administrators or local user group members with execution rights for this command.  
Operators can execute this command from the operator context (>) only.

## Examples

Showing ARP entries for VRF **test**.

```
switch# show arp vrf test
ARP IPv4 Entries:

IPv4 Address MAC Port Physical Port State VRF
10.20.30.40 00:50:56:bd:6a:c5 1/1/29 1/1/29 reachable test

Total Number Of ARP Entries Listed: 1.

switch# show arp all-vrfs
ARP IPv4 Entries:

IPv4 Address MAC Port Physical Port State VRF
192.168.120.10 00:50:56:bd:10:be 1/1/32 1/1/32 reachable red
10.20.30.40 00:50:56:bd:6a:c5 1/1/29 1/1/29 reachable test

Total Number Of ARP Entries Listed: 2.

```

Showing ARP entries for all VRFs.

```
switch# show arp all-vrfs
ARP IPv4 Entries:

IPv4 Address MAC Port Physical Port State VRF
192.168.120.10 00:50:56:bd:10:be 1/1/32 1/1/32 reachable red
10.20.30.40 00:50:56:bd:6a:c5 1/1/29 1/1/29 reachable test

Total Number Of ARP Entries Listed: 2.

```

## show ipv6 neighbors

### Syntax

`show ipv6 neighbors {all-vrfs | vrf <VRF-NAME>}`

## Description

Shows entries in the ARP table for all IPv6 neighbors for all VRFs or for a specific VRF.

When no parameters are specified, this command shows all ARP entries for the default VRF, and state information for `reachable` and `stale` entries only.

## Command context

Operator (>) or Manager (#)

## Authority

Administrators or local user group members with execution rights for this command.

## Parameters

`all-vrfs`

Specifies all VRFs.

`vrf <VRF-NAME>`

Specifies a VRF name. Length: 1 to 32 alphanumeric characters.

## Examples

```
switch# show ipv6 neighbors
IPv6 Entries:

IPv6 Address MAC Port Physical Port State

fe80::a21d:48ff:fe8f:2700 a0:1d:48:8f:27:00 vlan2300 1/1/31 reachable
fe80::f603:43ff:fe80:a600 f4:03:43:80:a6:00 vlan2300 1/1/30 reachable

Total Number Of IPv6 Neighbors Entries Listed: 2.

```

## show ipv6 neighbors state

### Syntax

```
show ipv6 neighbors state {all | failed | incomplete | permanent | reachable | stale}
```

### Description

Shows all IPv6 neighbor ARP (Address Resolution Protocol) cache entries, or those cache entries that are in the specified state.

### Command context

Operator (>) or Manager (#)

### Parameters

`all`

Shows all ARP cache entries.

`failed`



Shows ARP cache entries that are in `failed` state. The neighbor might have been deleted. Set the neighbor to be unreachable.

`incomplete`

Shows ARP cache entries that are in `incomplete` state.

An incomplete state means that address resolution is in progress and the link-layer address of the neighbor has not yet been determined. This means that a solicitation request was sent, and you are waiting for a solicitation reply or a timeout.

`permanent`

Shows ARP cache entries that are in `permanent` state.

`reachable`

Shows ARP cache entries that are in `reachable` state, meaning that the neighbor is known to have been reachable recently.

`stale`

Shows ARP cache entries that are in `stale` state.

ARP cache entries are in the `stale` state if the elapsed time is in excess of the ARP timeout in seconds since the last positive confirmation that the forwarding path was functioning properly.

## Authority

Operators or Administrators or local user group members with execution rights for this command.

Operators can execute this command from the operator context (>) only.

## Example

```
switch# show ipv6 neighbors state all
```

| IPv6 Address              | MAC               | Port   | Physical Port | State     |
|---------------------------|-------------------|--------|---------------|-----------|
| 100::2                    | 48:0f:cf:af:f1:cc | lag1   | lag1          | reachable |
| 300::3                    | 48:0f:cf:af:33:be | vlan3  | 1/4/20        | reachable |
| fe80::4a0f:cfff:feaf:f1cc | 48:0f:cf:af:f1:cc | lag1   | lag1          | reachable |
| 200::3                    | 48:0f:cf:af:33:be | 1/4/11 | 1/4/11        | reachable |
| fe80::4a0f:cfff:feaf:33be | 48:0f:cf:af:33:be | vlan3  | 1/4/20        | reachable |

```
Total Number Of IPv6 Neighbors Entries Listed- 5.
```

## Accessing Aruba Support

|                         |                                                                                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Aruba Support Services  | <a href="https://www.arubanetworks.com/support-services/">https://www.arubanetworks.com/support-services/</a>                                                                        |
| Aruba Support Portal    | <a href="https://asp.arubanetworks.com/">https://asp.arubanetworks.com/</a>                                                                                                          |
| North America telephone | 1-800-943-4526 (US & Canada Toll-Free Number)<br>+1-408-754-1200 (Primary - Toll Number)<br>+1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working) |
| International telephone | <a href="https://www.arubanetworks.com/support-services/contact-support/">https://www.arubanetworks.com/support-services/contact-support/</a>                                        |

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

### Other useful sites

Other websites that can be used to find information:

|                                           |                                                                                                                                       |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Airheads social forums and Knowledge Base | <a href="https://community.arubanetworks.com/">https://community.arubanetworks.com/</a>                                               |
| Software licensing                        | <a href="https://lms.arubanetworks.com/">https://lms.arubanetworks.com/</a>                                                           |
| End-of-Life information                   | <a href="https://www.arubanetworks.com/support-services/end-of-life/">https://www.arubanetworks.com/support-services/end-of-life/</a> |
| Aruba software and documentation          | <a href="https://asp.arubanetworks.com/downloads">https://asp.arubanetworks.com/downloads</a>                                         |

## Accessing updates

You can access updates from the Aruba Support Portal or the HPE My Networking Website.

## Aruba Support Portal

<https://asp.arubanetworks.com/downloads>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found:

## My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>

Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

## Warranty information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

## Regulatory information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

### Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

## Documentation feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback ([docsfeedback-switching@hpe.com](mailto:docsfeedback-switching@hpe.com)). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.