

see: R Package for Visualizing Statistical Models

Daniel Lüdecke¹, Mattan S. Ben-Shachar², Indrajeet Patil³, Brenton M. Wiernik⁴, Philip Waggoner⁵, and Dominique Makowski⁶

1 University Medical Center Hamburg-Eppendorf, Germany **2** Ben-Gurion University of the Negev, Israel **3** Center for Humans and Machines, Max Planck Institute for Human Development, Berlin, Germany **4** Department of Psychology, University of South Florida, USA **5** University of Chicago, USA **6** Nanyang Technological University, Singapore

DOI:

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Submitted:

Published:

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC-BY](#)).

Summary

The *easystats* is a collection of R packages that operate in synergy to provide a consistent and intuitive syntax to work with statistical models. Although these packages return comprehensive numeric summaries of model parameters and performance, complementing them with graphical exploration can sometimes be more informative. The *see* package provides the necessary tools (*ggplot2* geoms, themes, etc.) to visualize the analytic methods supported in this ecosystem.

Statement of Need


Features

For the sake of brevity, we will discuss only one plotting method for each package. Several other methods are available and the readers are encouraged to see more examples of the package website: <https://easystats.github.io/see/>

Visualizing parameters of a model


The *parameters* package (Lüdecke, Ben-Shachar, Patil, & Makowski, 2020) helps convert regression model objects into dataframes. The *see* package can then create dot-and-whisker plots for regression estimates in these dataframes:

```
library(parameters)
library(see)
mod <- lm(wt ~ am * cyl, mtcars)
plot(parameters(mod))
```

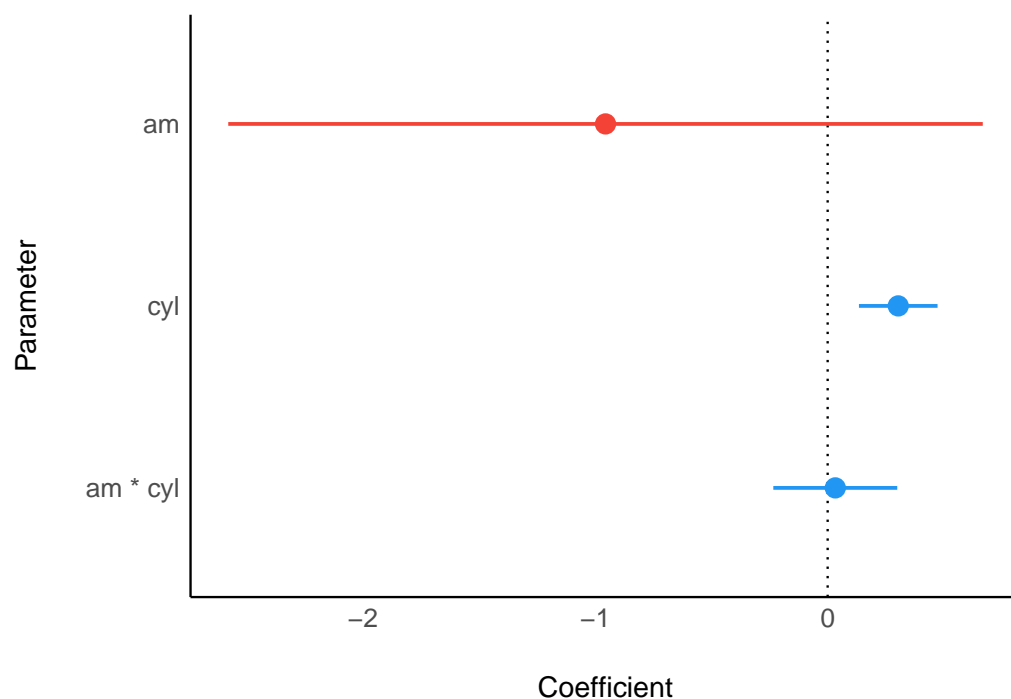

In case of a Bayesian regression model, which are handled by the *bayestestR* package (Makowski, Ben-Shachar, & Lüdtke, 2019), the *see* package also provides special plotting methods relevant only for Bayesian models (e.g., Highest Density Interval (HDI)).

```
library(bayestestR)
library(rstanarm)
mod <- stan_glm(wt ~ mpg, data = mtcars, refresh = 0)
result <- hdi(mod, ci = c(0.5, 0.75, 0.89, 0.95))
plot(result)
```

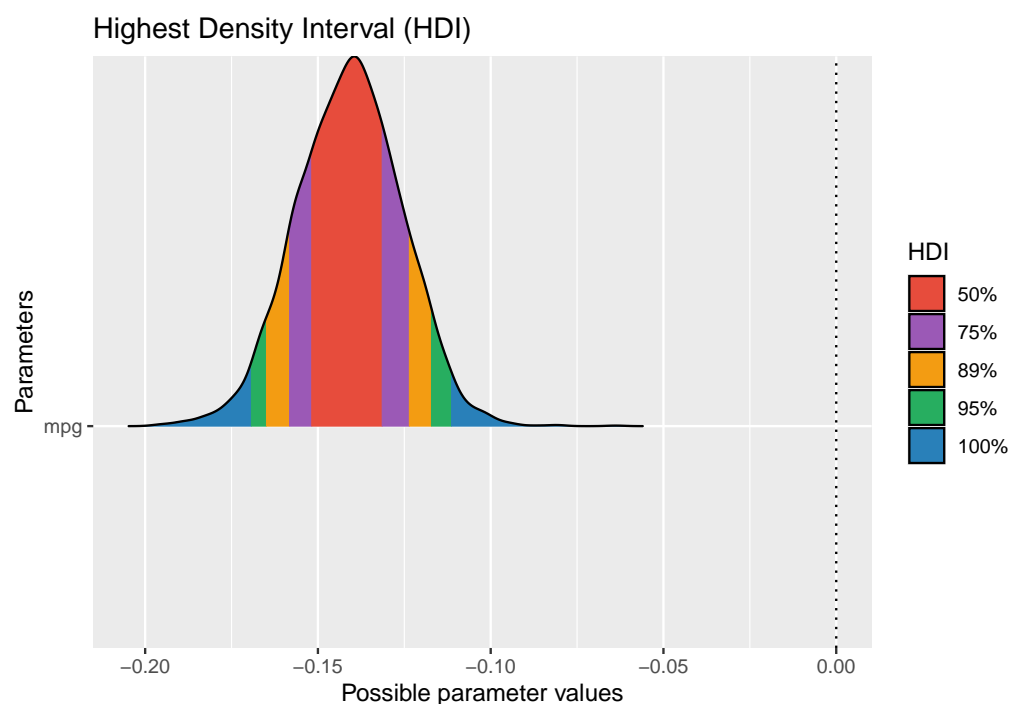


Visualizing model fit

The *performance* package (Lüdtke, Ben-Shachar, Patil, Waggoner, & Makowski, 2021) provides functions to check assumptions behind regression models and to compute performance measures for model fits. The *see* package can help visualize these assumptions checks (e.g., normality of residuals):

```
library(performance)
mod <- lm(wt ~ mpg, mtcars)
plot(check_normality(mod))
#> Warning: Non-normality of residuals detected (p = 0.016).
```

Normality of Residuals


Distribution should be close to the normal curve

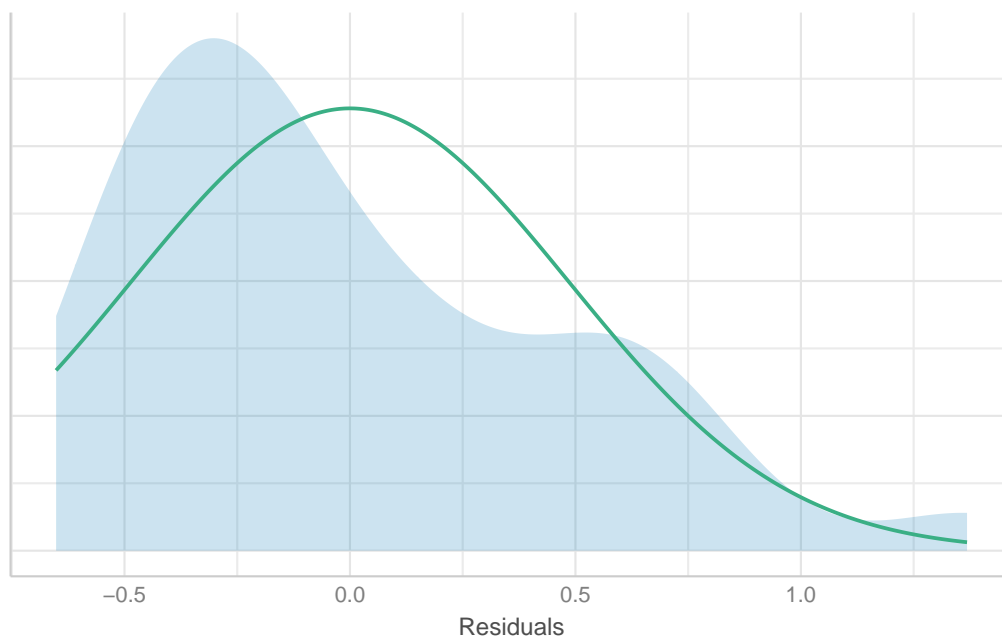

Visualizing effect sizes

In addition to providing tabular summaries of regression model objects, the *easystats* ecosystem also provides the *effectsize* package (Ben-Shachar, Lüdtke, & Makowski, 2020) to assess practical importance of these effects. The *see* package can also be used to visualize the magnitude and uncertainty of these effect sizes:

```
library(effectsize)
mod <- aov(wt ~ am * cyl, mtcars)
plot(omega_squared(mod))
```

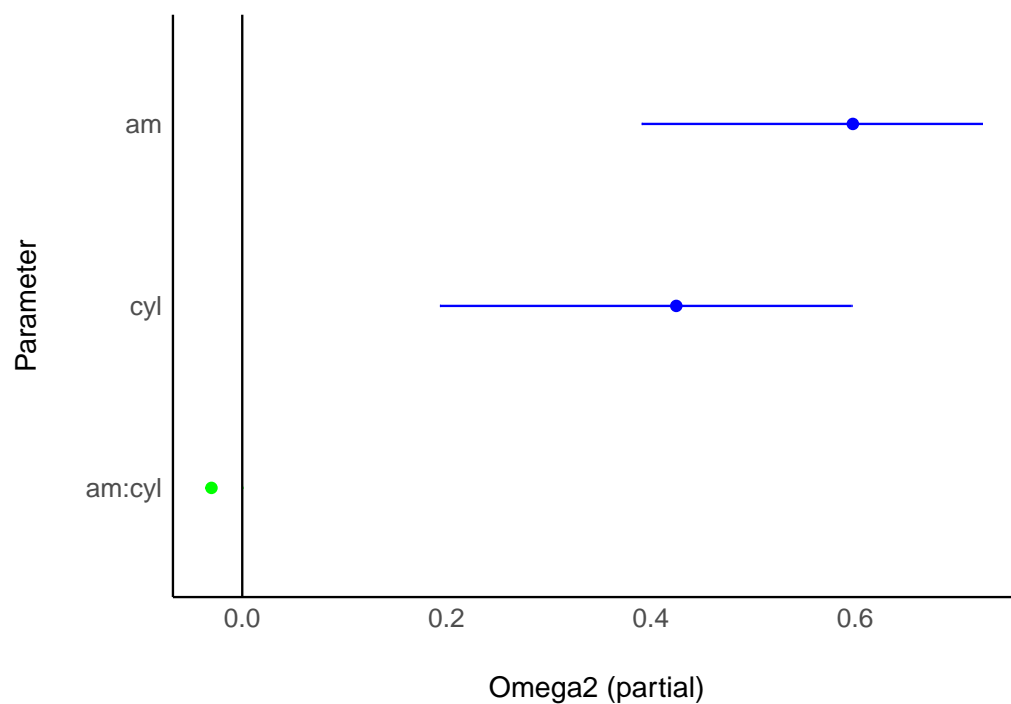


Visualizing marginal effects

The *modelbased* package (Makowski, Ben-Shachar, Patil, & Lüdtke, 2020a) can be used to compute marginal means for regression models and the *see* package provides functions to visualize these marginal effects.

```
library(modelbased)

mod <- stan_glm(wt ~ as.factor(cyl), data = mtcars, refresh = 0)
contrasts <- estimate_contrasts(mod)
means <- estimate_means(mod)


plot(contrasts, means)
```

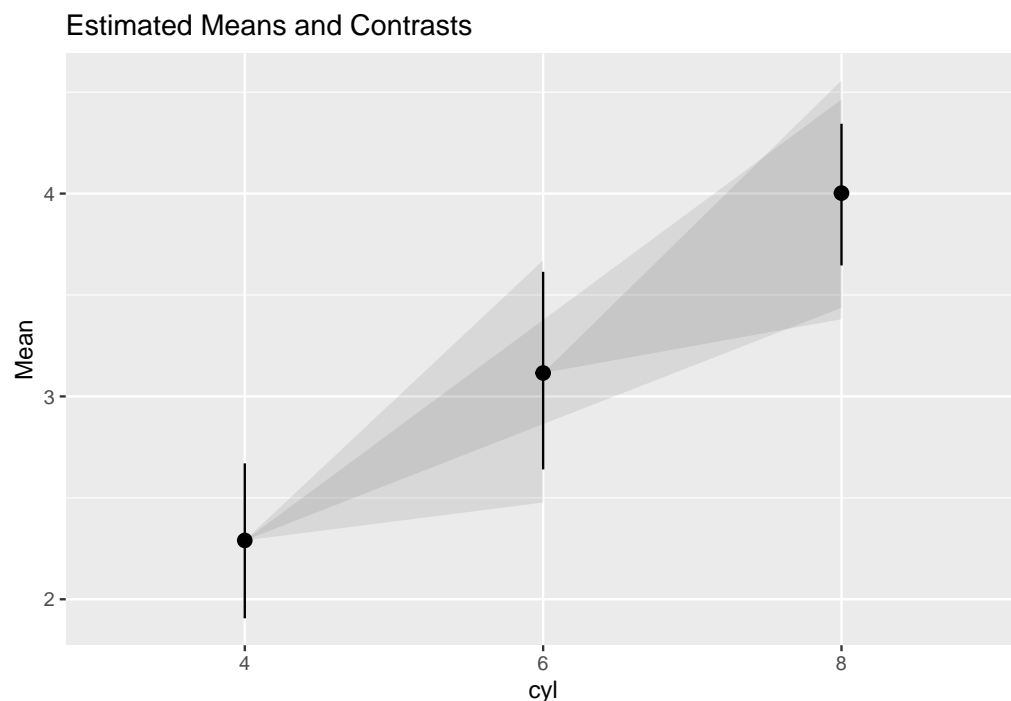

Visualizing correlation matrices

The *correlation* package (Makowski, Ben-Shachar, Patil, & Lüdtke, 2020b) provides a unified syntax to carry out various kinds of correlation analyses, and the *see* package can easily visualize these correlations in a matrix.

```
library(correlation)
result <- correlation(iris, type = "percentage")
plot(summary(result))
```

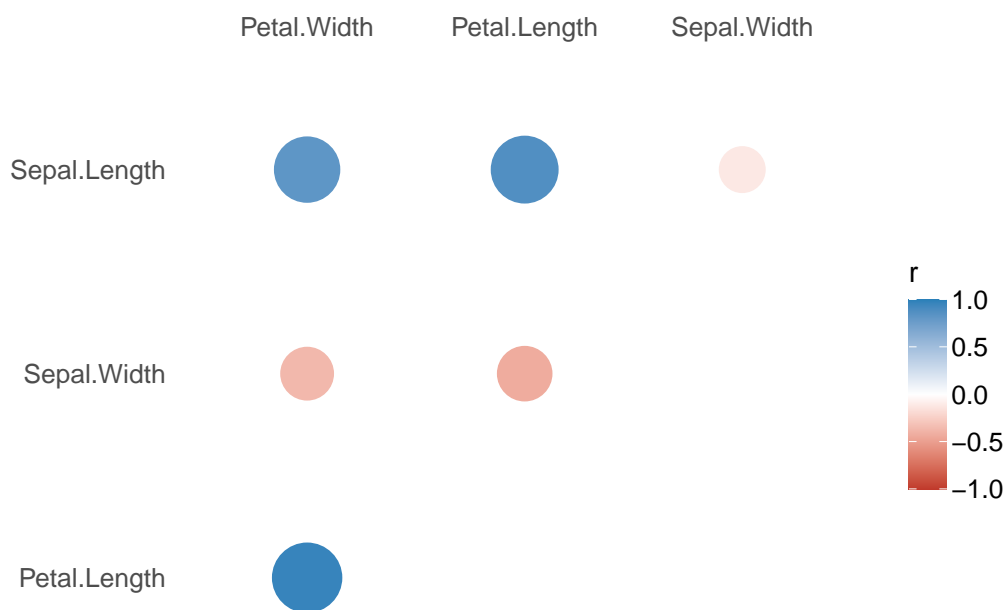

Licensing and Availability

see is licensed under the GNU General Public License (v3.0), with all source code stored at GitHub (<https://github.com/easystats/see>), and with a corresponding issue tracker for bug reporting and feature enhancements. In the spirit of honest and open science, we encourage requests, tips for fixes, feature updates, as well as general questions and concerns via direct interaction with contributors and developers.

Acknowledgments

see is part of the collaborative *easystats* ecosystem. Thus, we thank the [members of easystats](#) as well as the users.

References

- Ben-Shachar, M. S., Lüdtke, D., & Makowski, D. (2020). *effectsize*: Estimation of effect size indices and standardized parameters. *Journal of Open Source Software*, 5(56), 2815. doi:[10.21105/joss.02815](https://doi.org/10.21105/joss.02815)
- Lüdtke, D., Ben-Shachar, M. S., Patil, I., & Makowski, D. (2020). *parameters*: Extracting, computing and exploring the parameters of statistical models using R. *Journal of Open Source Software*, 5(53), 2445. doi:[10.21105/joss.02445](https://doi.org/10.21105/joss.02445)
- Lüdtke, D., Ben-Shachar, M. S., Patil, I., Waggoner, P., & Makowski, D. (2021). *performance*: An R package for assessment, comparison and testing of statistical models. *Journal of Open Source Software*, 6(60), 3139. doi:[10.21105/joss.03139](https://doi.org/10.21105/joss.03139)
- Makowski, D., Ben-Shachar, M. S., & Lüdtke, D. (2019). *bayestestR*: Describing effects and their uncertainty, existence and significance within the bayesian framework. *Journal of Open Source Software*, 4(40), 1541. doi:[10.21105/joss.01541](https://doi.org/10.21105/joss.01541)
- Makowski, D., Ben-Shachar, M. S., Patil, I., & Lüdtke, D. (2020b). Methods and algorithms for correlation analysis in r. *Journal of Open Source Software*, 5(51), 2306. doi:[10.21105/joss.02306](https://doi.org/10.21105/joss.02306)
- Makowski, D., Ben-Shachar, M. S., Patil, I., & Lüdtke, D. (2020a). Estimation of model-based predictions, contrasts and means. *CRAN*. Retrieved from <https://github.com/easystats/modelbased>