


```
v8::internal::compiler  
::anonymous_namespace  
{bytecode-analysis::cc}  
::EnsureOutLivenessIsNotAlias
```

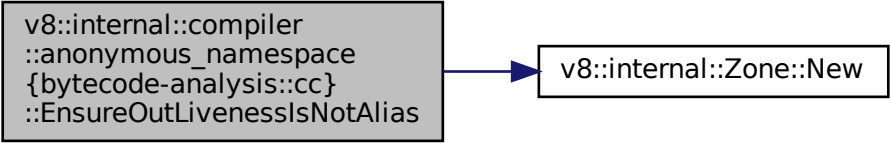

```
graph LR; A["v8::internal::compiler  
::anonymous_namespace  
{bytecode-analysis::cc}  
::EnsureOutLivenessIsNotAlias"] --> B["v8::internal::Zone::New"]
```

A diagram showing a call from a compiler namespace to a Zone::New function. The left box, which is shaded gray, contains the text: v8::internal::compiler, ::anonymous_namespace, {bytecode-analysis::cc}, and ::EnsureOutLivenessIsNotAlias. A blue arrow points from the right side of this box to the right box, which is white with a black border and contains the text: v8::internal::Zone::New.

```
v8::internal::Zone::New
```