


```
v8::internal::interpreter  
::BytecodeArrayIterator  
::current_bytecode_size  
_without_prefix
```

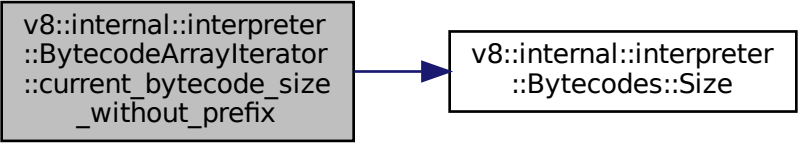

A diagram showing a pointer relationship. On the left, a gray rectangular box contains the text 'v8::internal::interpreter::BytecodeArrayIterator::current_bytecode_size_without_prefix'. A blue arrow points from the right side of this box to the left side of a white rectangular box on the right. The white box contains the text 'v8::internal::interpreter::Bytecodes::Size'.

```
v8::internal::interpreter  
::Bytecodes::Size
```