


```
v8::internal::anonymous  
_namespace{regexp-bytecode  
-peephole::cc}::RegExpBytecodePeephole  
::SetJumpDestinationFixup
```

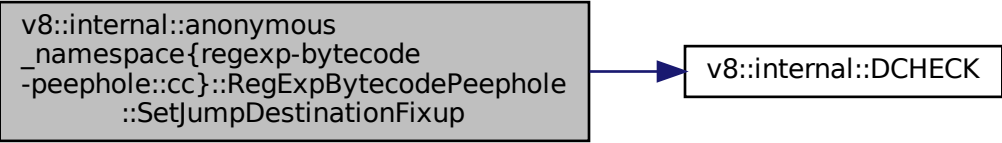

A diagram illustrating a call from a V8 internal namespace to a DCHECK macro. On the left, a large gray rectangular box contains the text: `v8::internal::anonymous`, `_namespace{regexp-bytecode`, `-peephole::cc}::RegExpBytecodePeephole`, and `::SetJumpDestinationFixup`. A blue arrow points from the right side of this box to a smaller white rectangular box on the right. This smaller box contains the text: `v8::internal::DCHECK`.

```
v8::internal::DCHECK
```