


```
v8::internal::interpreter  
::anonymous_namespace{bytecode  
-generator::cc}::AccessorTable  
::LookupOrInsert
```

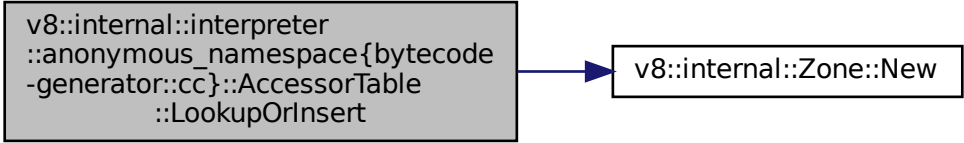

A diagram showing a call to `v8::internal::Zone::New`. On the left, a grey rectangular box contains the text `v8::internal::interpreter::anonymous_namespace{bytecode-generator::cc}::AccessorTable::LookupOrInsert`. A blue arrow points from the right side of this box to a white rectangular box on the right, which contains the text `v8::internal::Zone::New`.

```
v8::internal::Zone::New
```