


v8::internal::DEF_GETTER

v8::internal::HeapObject
::ReadCodeEntrypointViaCodePointerField

v8::internal::ReadCodeEntrypoint
ViaCodePointerField

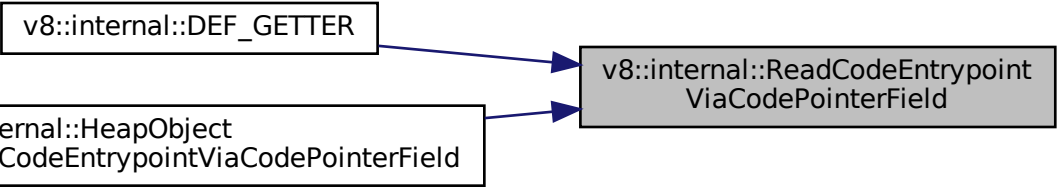

```
graph LR; A[v8::internal::DEF_GETTER] --> C[v8::internal::ReadCodeEntrypoint ViaCodePointerField]; B[v8::internal::HeapObject::ReadCodeEntrypointViaCodePointerField] --> C;
```

The diagram consists of three rectangular boxes. On the left, there are two boxes stacked vertically. The top box contains the text 'v8::internal::DEF_GETTER'. The bottom box contains the text 'v8::internal::HeapObject' followed by '::ReadCodeEntrypointViaCodePointerField' on a new line. On the right, there is a single box containing the text 'v8::internal::ReadCodeEntrypoint' followed by 'ViaCodePointerField' on a new line. Two blue arrows point from the right side of the left boxes to the left side of the right box. The right box has a light gray background, while the left boxes have a white background.