


v8::internal::RUNTIME
_FUNCTION

v8::internal::StringReplace
GlobalAtomRegExpWithString

v8::internal::FindString
IndicesDispatch

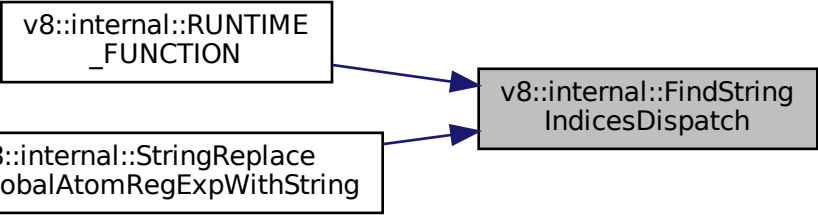

```
graph LR; A[v8::internal::RUNTIME_FUNCTION] --> C[v8::internal::FindStringIndicesDispatch]; B[v8::internal::StringReplaceGlobalAtomRegExpWithString] --> C;
```

The diagram illustrates a mapping from two source functions to a single target function. On the left, there are two white rectangular boxes. The top box contains the text 'v8::internal::RUNTIME_FUNCTION'. The bottom box contains the text 'v8::internal::StringReplaceGlobalAtomRegExpWithString'. Two blue arrows originate from the right side of these boxes and point towards a single gray rectangular box on the right. This target box contains the text 'v8::internal::FindStringIndicesDispatch'.