


```
v8::internal::anonymous  
_namespace{elements::cc}  
::SloppyArgumentsElementsAccessor  
    ::SloppyDeleteImpl
```

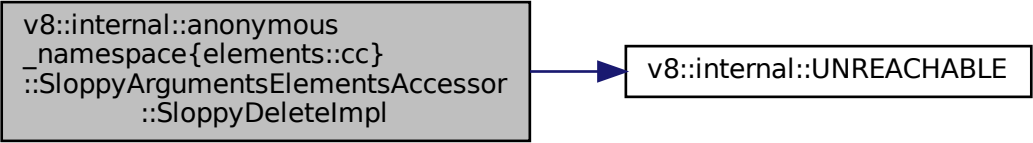

A diagram illustrating a pointer relationship in V8. On the left, a gray rectangular box contains the text 'v8::internal::anonymous _namespace{elements::cc} ::SloppyArgumentsElementsAccessor ::SloppyDeleteImpl'. A blue arrow points from the right side of this box to a white rectangular box on the right. The white box contains the text 'v8::internal::UNREACHABLE'.

```
v8::internal::UNREACHABLE
```