


```
v8::internal::anonymous  
_namespace{experimental  
_compiler::cc}::CanBeHandledVisitor  
::VisitClassSetOperand
```

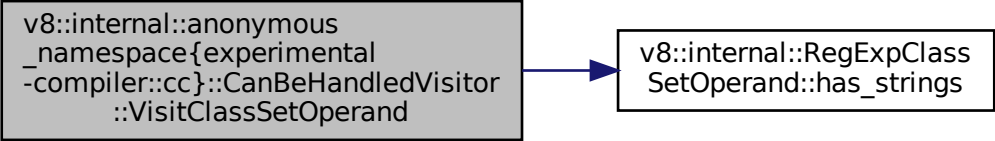

A diagram illustrating a function call. On the left, a grey rectangular box contains the text 'v8::internal::anonymous _namespace{experimental _compiler::cc}::CanBeHandledVisitor ::VisitClassSetOperand'. A blue arrow points from the right side of this box to the left side of a white rectangular box on the right. The white box contains the text 'v8::internal::RegExpClass SetOperand::has_strings'.

```
v8::internal::RegExpClass  
SetOperand::has_strings
```