



Strictly For Educational Use Only
reserved

Test Incident Report

Automated Teller Machine System
(ATMS)
Independent Verification and Validation

Project Title: ATMS Independent Verification and Validation		 ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0	

Document Control

Document Name	ATMS Test Incident Report (Iteration 1)
Reference Number	ATMS_TIR_1
Version	1.0.0
Project Code	XYZ_ATMS
Status	In-use
Date Released	12 th of May, 2013

Strictly For Educational Use Only
served

Name	Position	Signature
Prepared By: Tester 3	Test Analyst ABC Test-Co	
Reviewed By: Tester 2	Test Lead ABC Test-Co	
Verified By: Tester 1	Test Manager ABC Test-Co	

Project Title: ATMS Independent Verification and Validation			ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0		

Version History

Version	Release Date	Section	Amendments
1.0	12/05/2013	All	Original Document

Distribution List

Version	Release Date	Controlled Copy No	Recipient Name	Department	Issue Date	Return Date
1.0.0	12/05/2013	01		ABC Test-Co QA Dept.	12/05/2013	
1.0.0	12/05/2013	02		ABC Test-Co Test Team	12/05/2013	
1.0.0	12/05/2013	03		XYZ Bank	12/05/2013	

Test Incident Report

Incident report identifier (Table 1)	
Scope	The scope of this Test Incident Report is on any incident occurred based on Test Procedure executed on Automated Teller Machine System (ST_ATMS_1.1) v1.1 and Session Verification (F003) in which took place during Test Execution only.
References	ATMS_TPS_1_1.0.0 ATMS_TL_1_1.0.0
Test Incident Number:	TIR-00-001
Summary	
User can maintain a session indefinitely without performing any transaction, which causes a security issue.	
Date and Time Incident:	12/05/13
Context:	Automated Teller Machine System (ATMS_1.1)
Description of Incident	
Test Procedure:	(Incident applies to all transaction type)
Test Data:	None
Expected Result:	System displays a message to ask if user needs more time to perform current transaction after 30 seconds without response (input) from user.
Actual Result:	System continues to wait for user response for more than one minute.
Unexpected Outcome:	None (System performs as expected according to requirements specified in SRS)
Procedure to reproduce the incident	1. Insert card "1". 2. Input PIN, "123456". 3. Wait for 61 seconds.
Test Environment	Hardware Model: CINEO C2040 Manufacturer: Wincor Nixdorf Keyboard: EPP V6 (ZKA & PCI 1.x/2.x certified) Card Processor: Hybrid motorized – EMV 4.x Level 1 certified
Attempt to repeat	Procedure is repeated 3 times for 121 seconds, 181 seconds and 241 seconds respectively and same result appears.
Tester's Name	Tester 4
Observer's Name (witness)	Tester 3
Status of Incident	
☒ Open ☐ Assigned for Resolution ☐ Retested with the fix confirmed	
☐ Approved for Resolution ☐ Fixed	
Impact	
☐ Mission Critical : Application will not function or system fails	

Strictly For Educational Use Only

P

2013 by Malaysian Software Testing Board

All rights reserved

Strictly For Educational Use Only

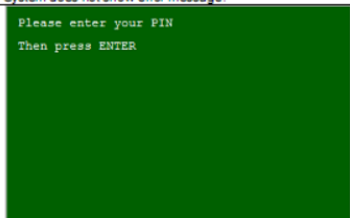


Project Title: ATMS Independent Verification and Validation			ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0		
☐ Major: Severe problems but possible to work around ☒ Minor: Does not impact the functionality or usability of the process is not according to requirements/design specifications			
Priority			
☒ Immediate: Must be fixed as soon as possible ☐ Delayed: System is unstable but incident must be fixed prior to next level of test or shipment ☐ Deferred: Defect can be left in if necessary due to time or costs			
Description of the corrective action			
Client should consider this issue from the aspect of security and decide whether to amend this issue.			

Test Incident Number:		TIR-00-002
Summary		
ATMS does not display any information for help or troubleshooting to user in case the user faces problems when operating ATM.		
Date and Time Incident:		12/05/13
Context:		Automated Teller Machine System (ATMS_1.1)
Description of Incident		
(Incident applies to all transaction type)		
Test Procedure:	None	
Test Data:	None	
Expected Result:	System displays a hotline number on welcome screen when in "Idle" status.	
Actual Result:	System only displays a message to request for input of card.	
Unexpected Outcome:	None (System performs as expected according to requirements specified in SRS)	
Procedure to reproduce the incident	1. Watch system screen during "Idle" state.	
Test Environment	Hardware Model: CINEO C2040 Manufacturer: Vincor Nixdorf Keyboard: EPP V8 (ZKA & PCI 1.x/2.x certified) Card Processor: Hybrid motorized – EMV 4.x Level 1 certified	
Attempt to repeat	None	
Tester's Name	Tester 4	
Observer's	Tester 3	

Project Title: ATMS Independent Verification and Validation			ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0		
Name (witness)			
Status of Incident			
☒ Open ☐ Assigned for Resolution ☐ Retested with the fix confirmed ☐ Approved for Resolution ☐ Fixed			
Impact			
☐ Mission Critical: Application will not function or system fails ☐ Major: Severe problems but possible to work around ☒ Minor: Does not impact the functionality or usability of the process is not according to requirements/design specifications			
Priority			
☐ Immediate: Must be fixed as soon as possible ☐ Delayed: System is unstable but incident must be fixed prior to next level of test or shipment ☒ Deferred: Defect can be left in if necessary due to time or costs			
Description of the corrective action			
Client should consider this issue from the aspect of customer service and user support. Client may then decide whether to add in the related feature.			

(Table 2)		TIR-03-001
Test Incident Number:		
Summary		
System does not react as according to the Test Case specified whereby the system should display an error message mentioned in requirement after "Enter" button is being pressed. User cannot move to the next state without conforming to session state. System does not respond after "Enter" is being pressed and it does not display error message "PIN was incorrect. Please re-enter your PIN".		
Date and Time Incident:		12/05/13
Context:		Identify the software or system item (including any version numbers), or software or system configuration item, and/or the software or system life cycle process in which the incident was observed. Identify the test items involved indicating their version/revision level. Automated Teller Machine System (ATMS_1.1)

Project Title: ATMS Independent Verification and Validation		 ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0	
Description of Incident		
Test	TP-03-001	
Procedure:		
Test Data:	Press "Enter" to input 0 digit PIN	
Expected	System displays error message "PIN was incorrect. Please re-enter your PIN".	
Result:		
Actual Result:	System does not respond to "Enter" button to proceed to next state. System does not show error message.	
Unexpected Outcome:		
Procedure to reproduce the incident	1. Insert card 3. 2. Press "Enter" to input 0 digit PIN. [TC-03-001]	
Test Environment	Hardware: NCR SelfServ 14CE Compact Interior Cash Dispenser. Windows CE 6.0 Intel Atom Processor E600 Reference: ATMS_TP_1.0	
Attempt to repeat	Procedure done 3 times continuously after incident 1 st discovered. Same result emerged.	
Tester's Name	Tester 4	
Observer's Name (witness)	Tester 3	
Status of Incident		
☒ Open ☐ Assigned for Resolution ☐ Retested with the fix confirmed ☐ Approved for Resolution ☐ Fixed		
Impact		
☒ Mission Critical : Application will not function or system fails ☐ Major: Severe problems but possible to work around		

TEST INCIDENT REPORT



4

Project Title: ATMS Independent Verification and Validation		 ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0	
☐ Minor: Does not impact the functionality or usability of the process is not according to requirements/design specifications		
Priority		
☒ Immediate : Must be fixed as soon as possible ☐ Delayed : System is unstable but incident must be fixed prior to next level of test or shipment ☐ Deferred : Defect can be left in if necessary due to time or costs		
Description of the corrective action		
To discuss with the developer on fixing the session module. Developer shall fix the system to display error message as mentioned in requirement after 0 digit PIN is input.		
(Table 2.1) Test Incident Number:		TIR-03-002
Summary		
System does not react as according to the Test Case specified whereby the system should display an error message after the user input PIN. User cannot move to the next state without conforming to session state. System froze after the PIN is being input. The system does not display error message "PIN was incorrect. Please re-enter your PIN".		
Date and Time Incident:	12/05/13	
Context:	Automated Teller Machine System (ATMS_1.1)	
Description of Incident		
Test	TP-03-003	
Procedure:		
Test Data:	PIN = 9876543210	
Expected	System displays error message "PIN was incorrect. Please re-enter your PIN".	
Result:		
Actual Result:	System froze after input PIN = 9876543210. System does not show error message.	



Project Title: ATMS Independent Verification and Validation			ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0		
Unexpected Outcome:			
Procedure to reproduce the incident			
Test Environment			
Attempt to repeat			
Tester's Name			
Observer's Name (witness)	Tester 3		
Status of Incident			
☒ Open ☐ Assigned for Resolution ☐ Retested with the fix confirmed			
☐ Approved for Resolution ☐ Fixed			
Impact			
☒ Mission Critical : Application will not function or system fails			
☐ Major : Severe problems but possible to work around			
☐ Minor : Does not impact the functionality or usability of the process is not according to requirements/design specifications			
Priority			
☒ Immediate : Must be fixed as soon as possible			
☐ Delayed : System is unstable but incident must be fixed prior to next level of test or shipment			



Project Title: ATMS Independent Verification and Validation			ABC Test-Co
Date: 12/05/2013	Test Incident Report ID: ATMS_TIR_1_1.0.0		
☐ Deferred : Defect can be left in if necessary due to time or costs			
Description of the corrective action			
To discuss with the developer on fixing the Session Verification module. Developer should fix the defect so that the system will display error message after 10 digits PIN as input.			

Conclusions and Recommendations (Table 3)		
It is recommended that this incident be fixed as soon as possible as the user need to go through this 1 st module before moving on to next module. Repeated test should be done without changing the testing procedure.		
Approvals		
Name	Job Title	Signature
Tester 2	Test Lead ABC Test-Co	
Mr. Client	Product Manager XYZ Bank	

