

Building Kafka-based Microservices with Akka Streams and Kafka Streams

Boris Lublinsky and Dean Wampler, Lightbend

boris.lublinsky@lightbend.com

dean.wampler@lightbend.com



O'REILLY®

Fast Data Architectures for Streaming Applications


Getting Answers Now from Data Sets that Never End

By Dean Wampler, Ph. D., VP of Fast Data Engineering


[Get Your Free Copy](#)


Today's focus:


- Kafka - the data backplane
- Akka Streams and Kafka Streams - streaming microservices

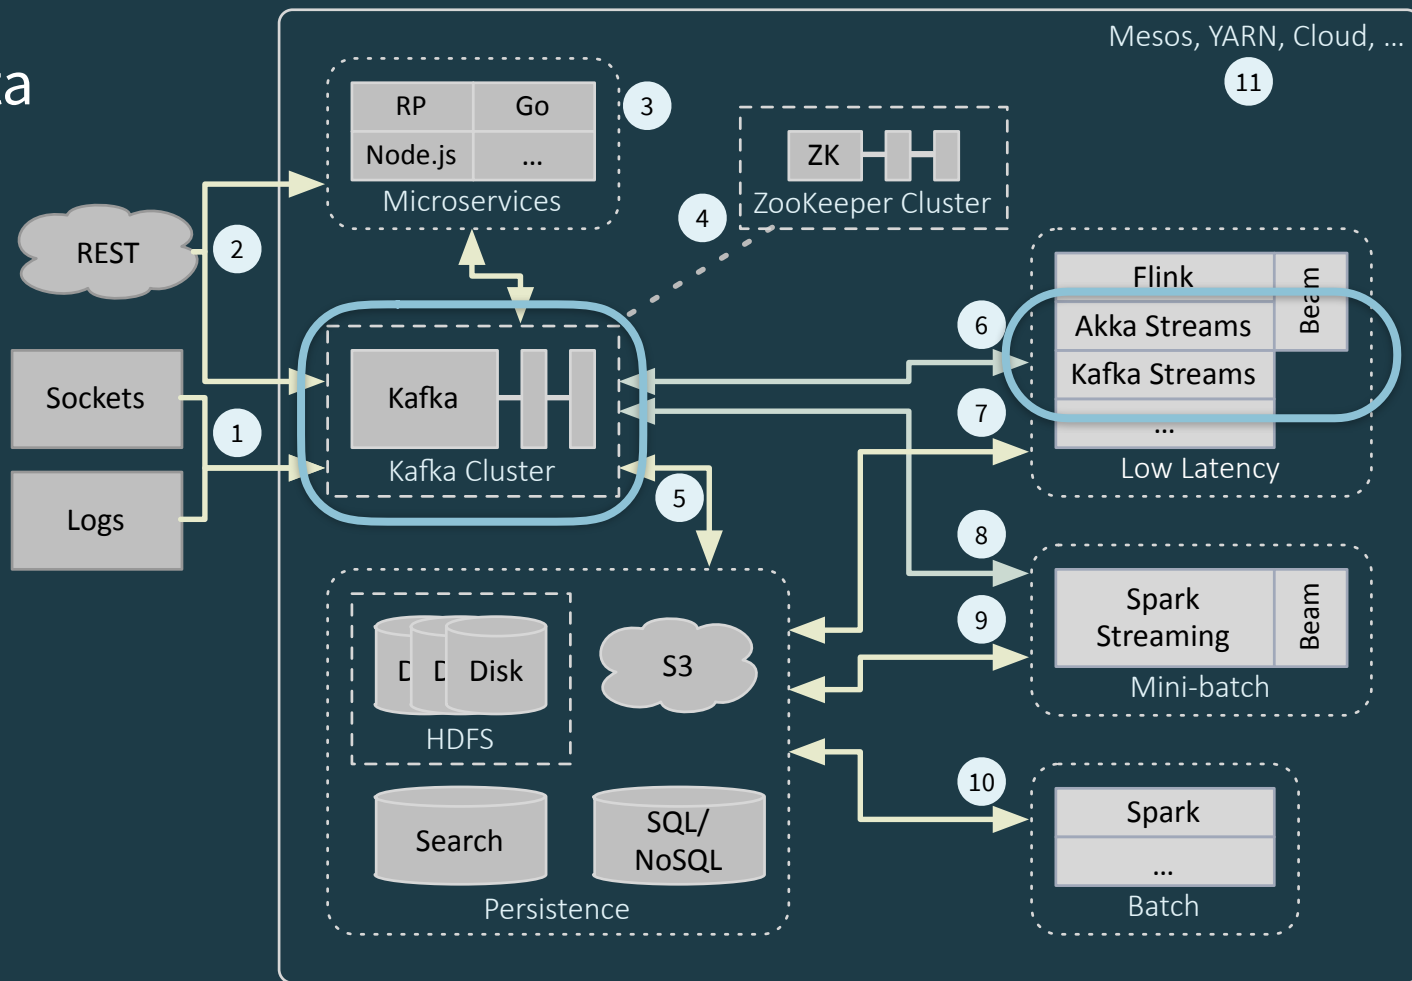

What is Kafka?

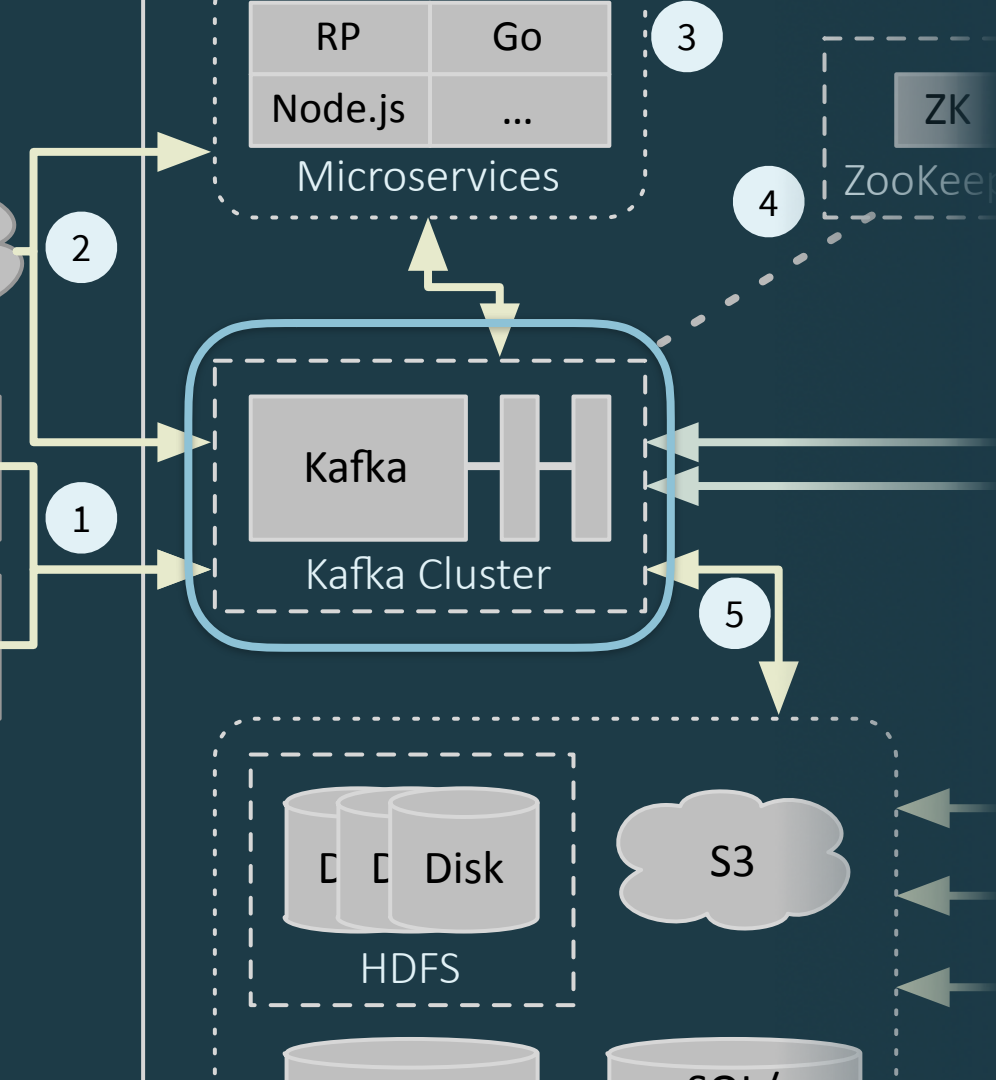


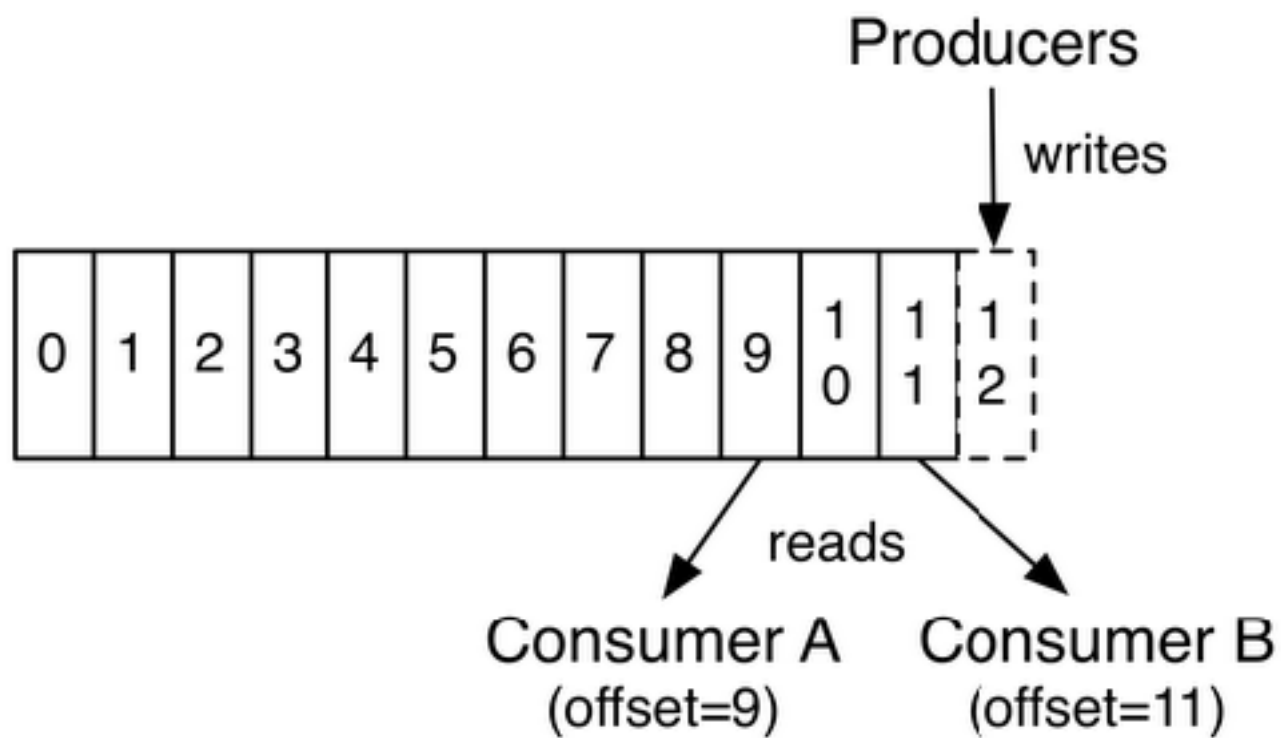

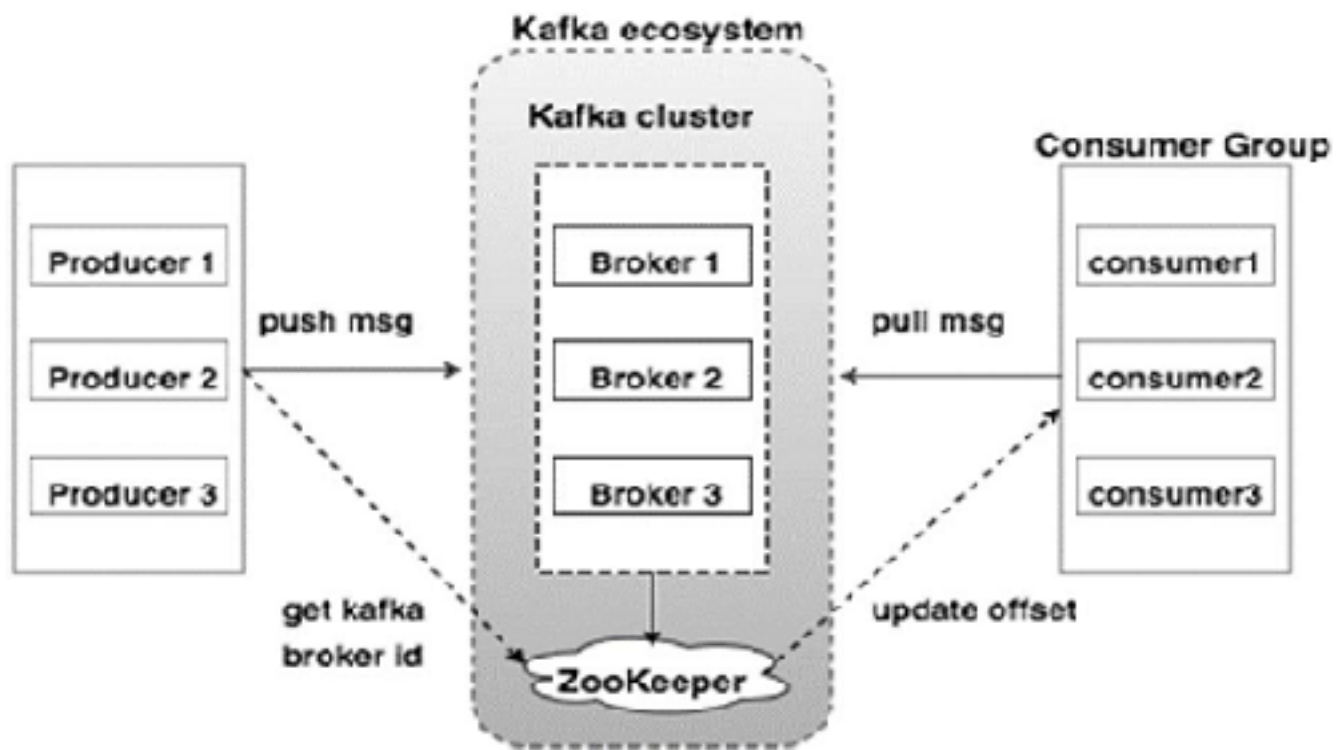


A Topic and Its Partitions

Anatomy of a Topic

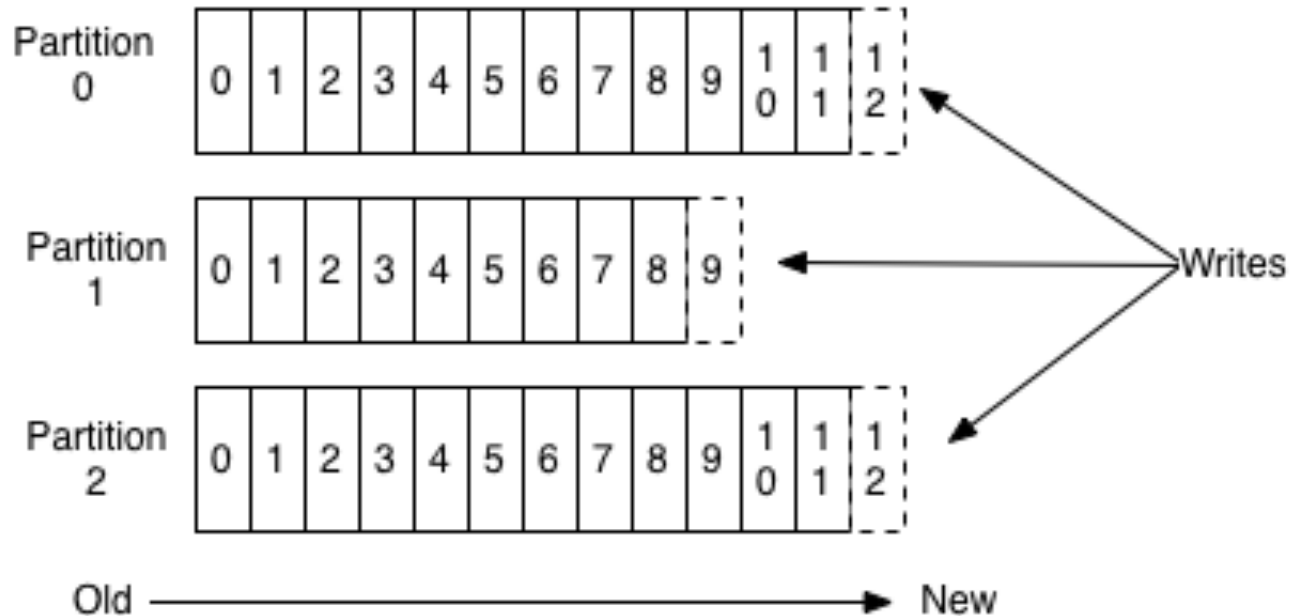

Consumer Groups

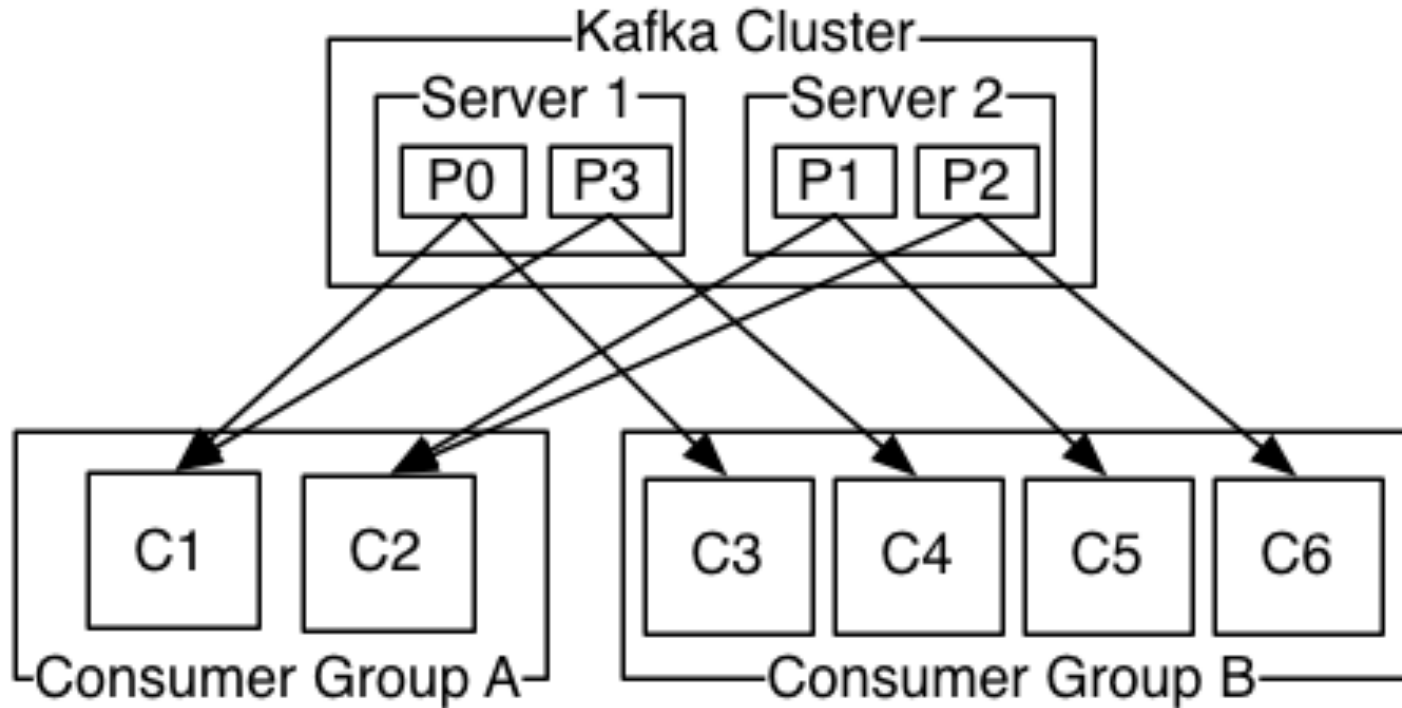

Kafka Producers and Consumers


Code time

1. Explore and run the *client* project

- Creates in-memory (“embedded”) Kafka instance and our topics
- Pumps data into them


Why Kafka for Connectivity?

Before:

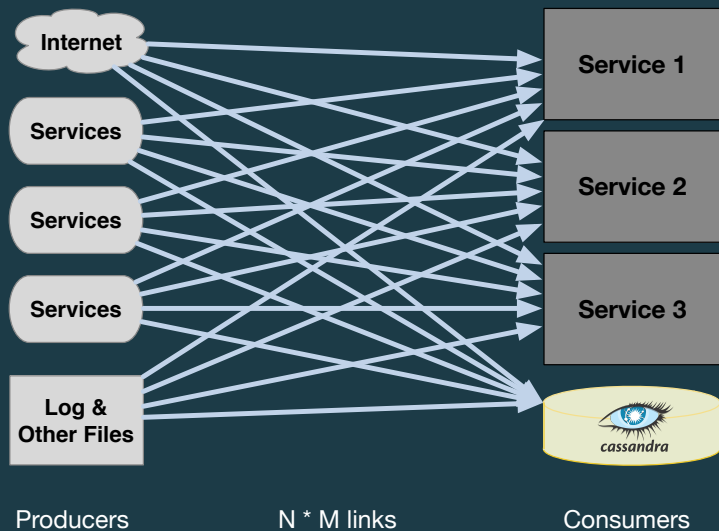


Why Kafka for Connectivity?

Before:

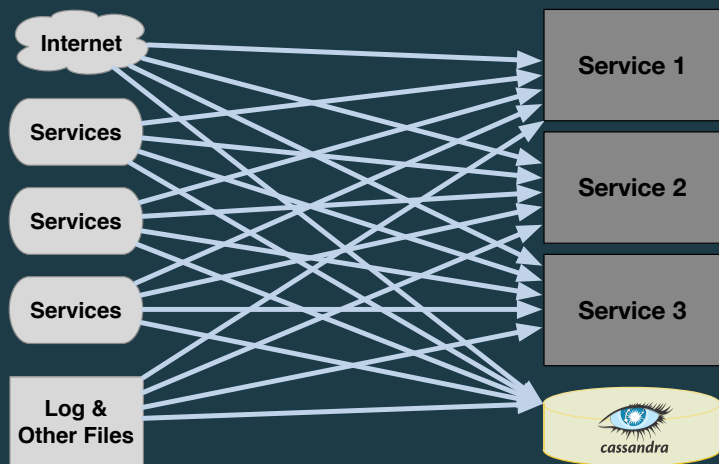

$N * M$ links

After:

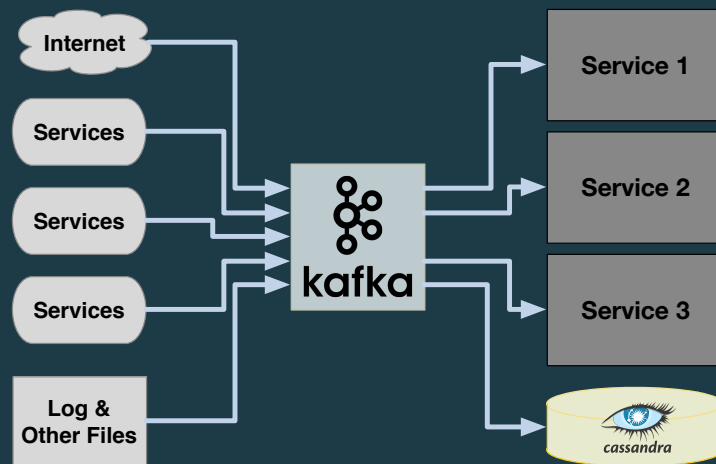


$N + M$ links

Why Kafka for Connectivity?

Kafka:


- Simplify dependencies between services
 - Improved data consistency
- Minimize data transmissions
- Reduce data loss when a service crashes

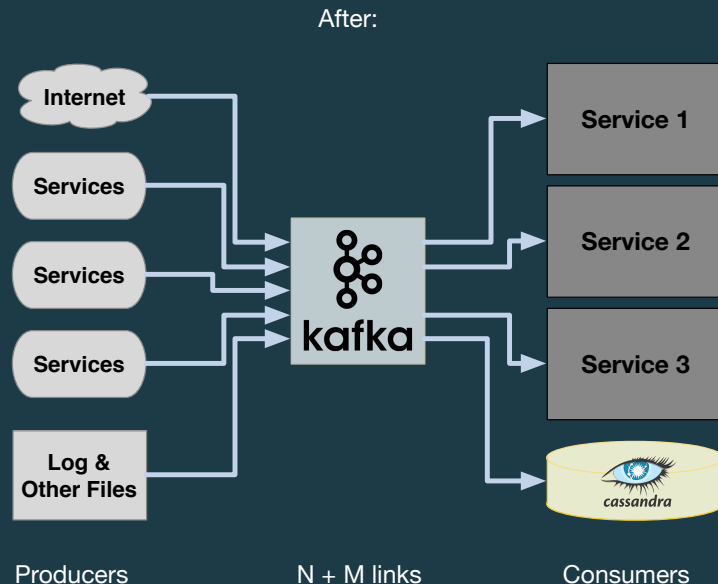

Why Kafka for Connectivity?


Kafka:

- M producers, N consumers
 - Improved extensibility
- Simplicity of one “API” for communication

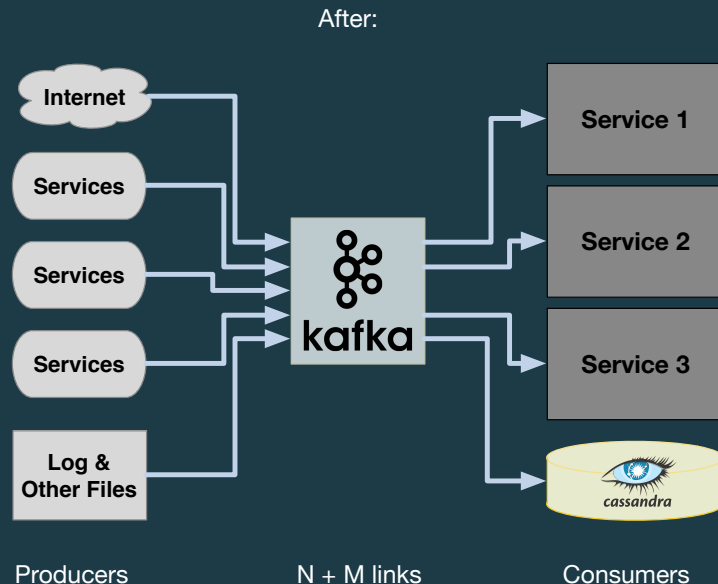


Streaming Engines:

Spark, Flink - services to which you submit work. Large scale, automatic data partitioning.

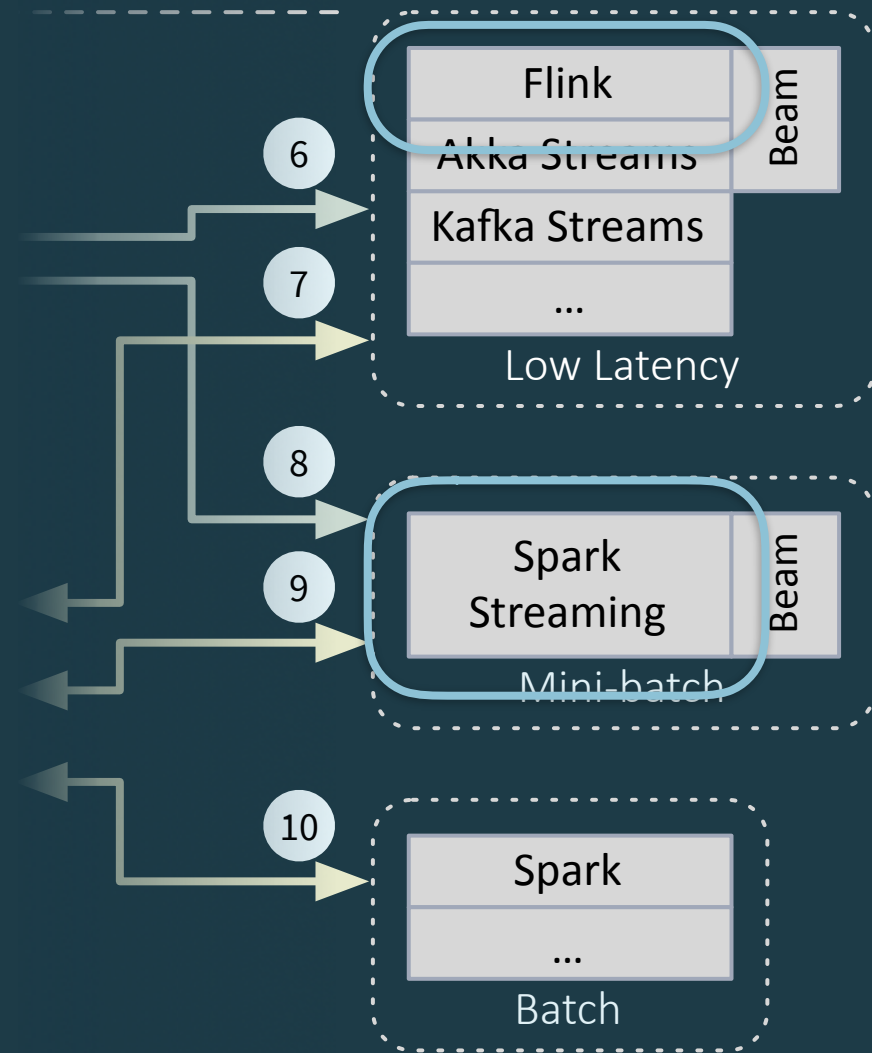


Streaming Engines:

Spark, Flink - services to which you submit work. Large scale, automatic data partitioning.

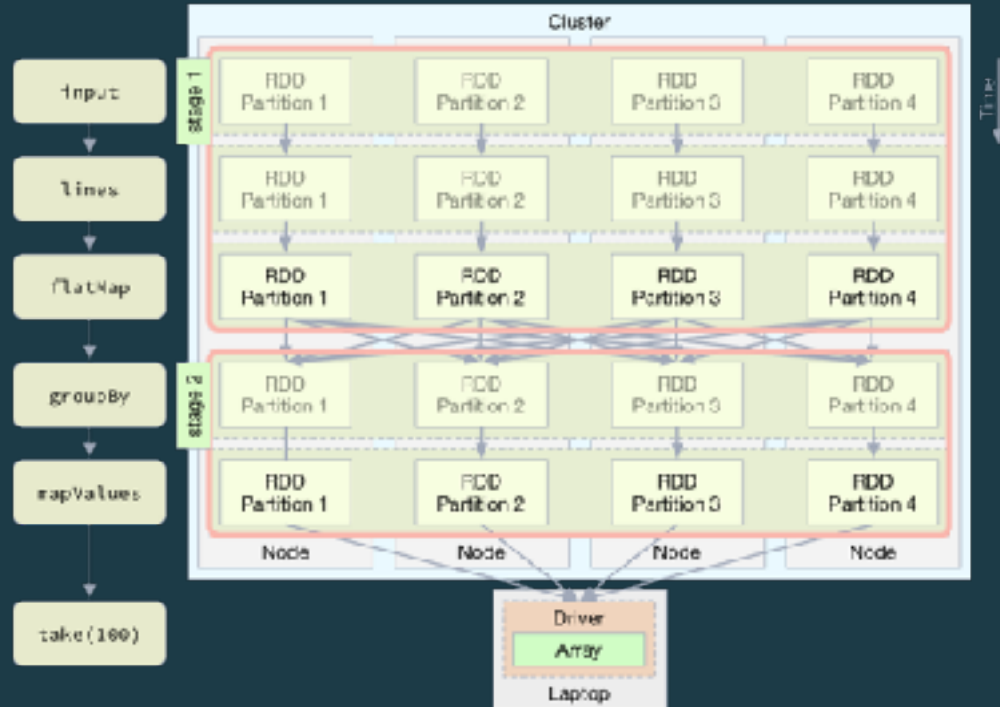

Streaming Frameworks:

Akka Streams, Kafka Streams - libraries for “data-centric micro services”. Smaller scale, but great flexibility.

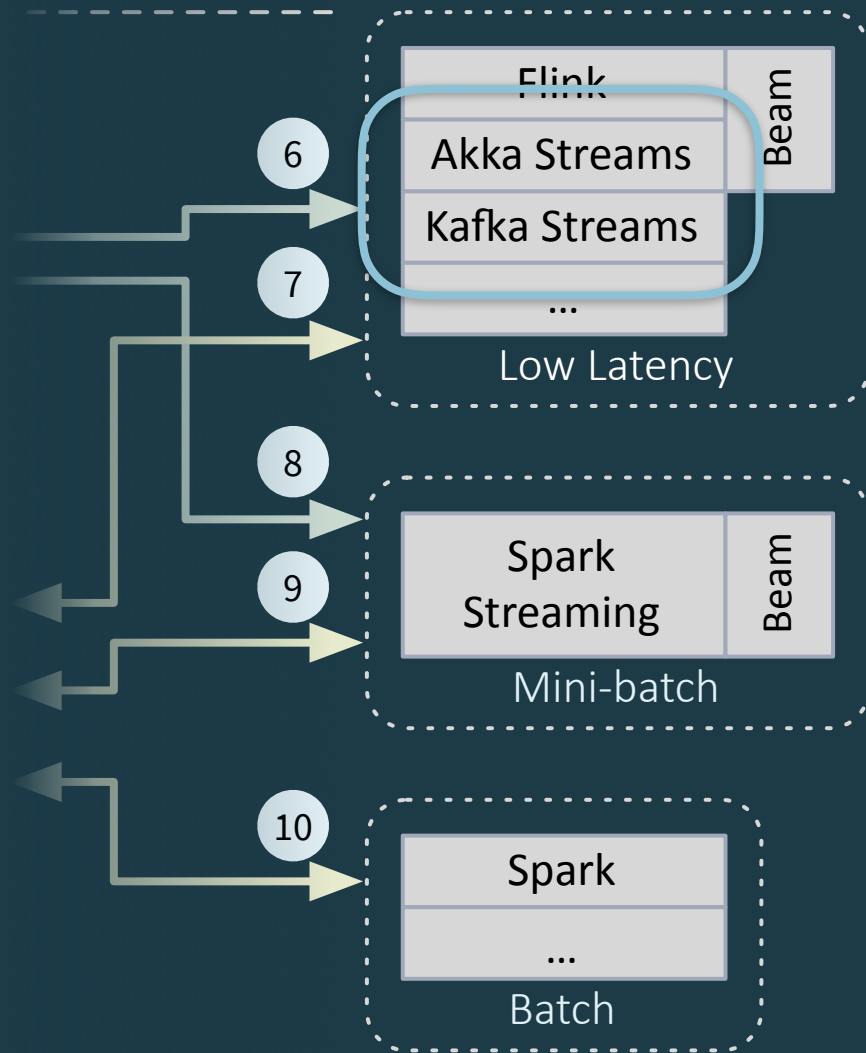

Microservice All the Things!



Scott Hanselman ✓

@shanselman

Follow



Microservices, for when your in-process methods have too little latency.

Dave Cheney @davecheney

Microservices, for when function calls are too reliable.

4:11 AM - 25 Feb 2018

207 Retweets 566 Likes



25



207




566




A Spectrum of Microservices

Event-driven μ -services

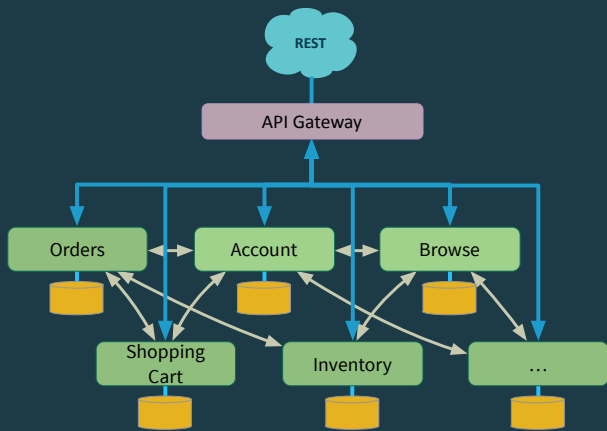

“Record-centric” μ -services

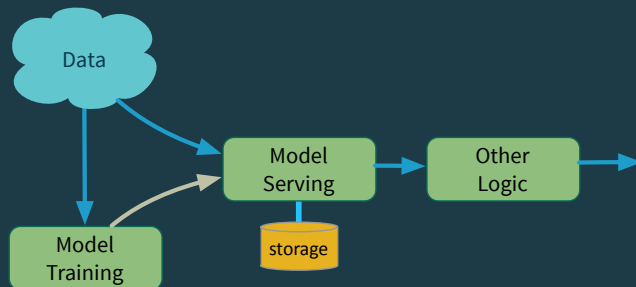

Events

Records

A Spectrum of Microservices



Event-driven μ -services



Akka emerged from the left-hand side of the spectrum, the world of highly *Reactive* microservices.

Akka Streams pushes to the right, more data-centric.

Kafka Streams pushes to the left, supporting many event-processing scenarios.

```
graph LR; Data((Data)) --> MT[Model Training]; Data --> MS[Model Serving]; MT --> MS; MS --- Storage[(storage)]; MS --> OL[Other Logic]; OL --> Exit(( ));
```

The diagram illustrates a machine learning pipeline. It starts with a cloud labeled 'Data'. An arrow points from 'Data' to a green rounded rectangle labeled 'Model Training'. Another arrow points from 'Data' to a green rounded rectangle labeled 'Model Serving'. A third arrow points from 'Model Training' to 'Model Serving'. Below 'Model Serving' is an orange cylinder labeled 'storage', connected by a vertical line. An arrow points from 'Model Serving' to a green rounded rectangle labeled 'Other Logic'. Finally, an arrow points from 'Other Logic' to the right, indicating the end of the pipeline.



Machine Learning and Model Serving: A Quick Introduction



O'REILLY®

Serving Machine Learning Models

**A Guide to Architecture, Stream Processing Engines,
and Frameworks**

By Boris Lublinsky, Fast Data Platform Architect

[Get Your Free Copy](#)

ML Is Simple



Data



Magic



Happiness


Maybe Not



Even If There Are Instructions



The Reality

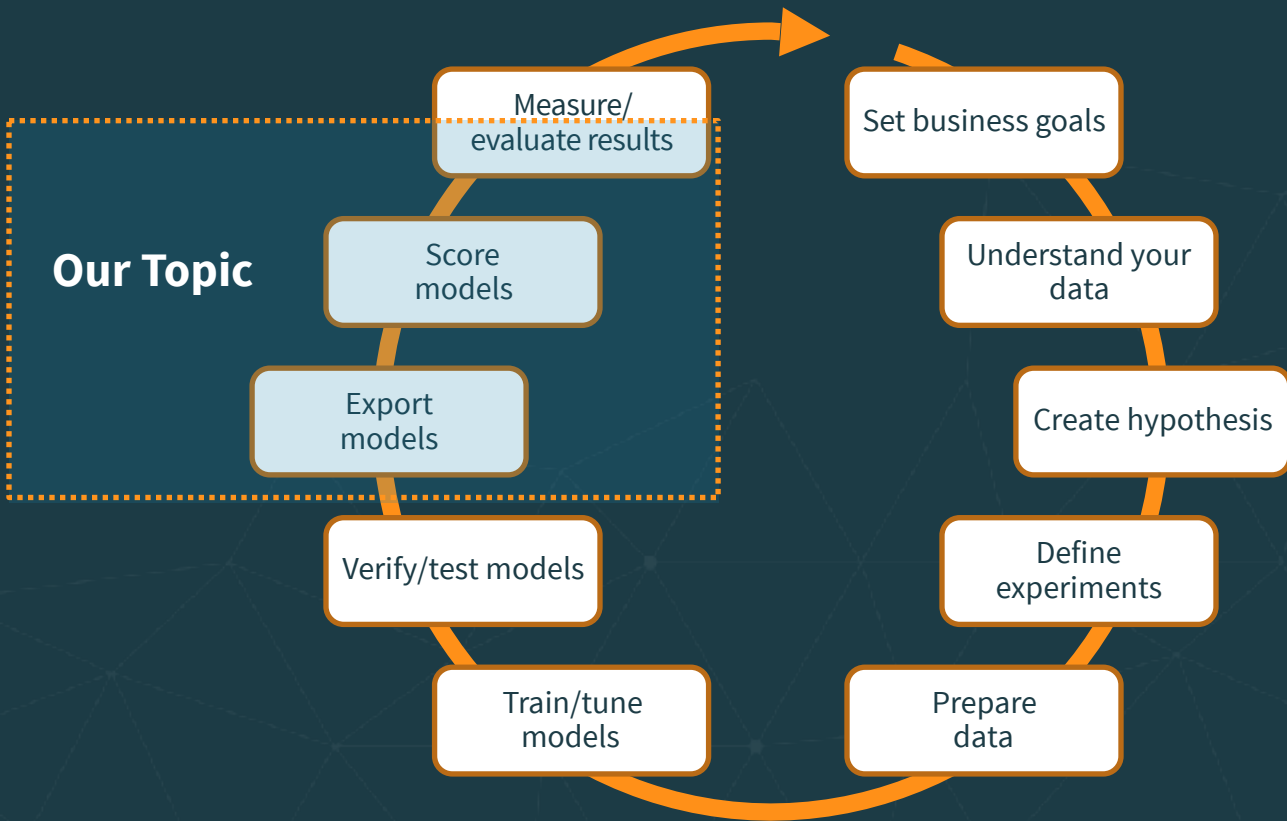

What Is The Model?

A model is a function transforming inputs to outputs - $y = f(x)$

for example:

Linear regression: $y = a_c + a_1 * x_1 + \dots + a_n * x_n$


Neural network: $f(x) = K(\sum_i w_i g_i(x))$

Such a definition of the model allows for an easy implementation of model's composition. From the implementation point of view it is just function composition



Model Learning Pipeline

UC Berkeley AMPLab introduced machine learning pipelines as a graph defining the complete chain of data transformation.

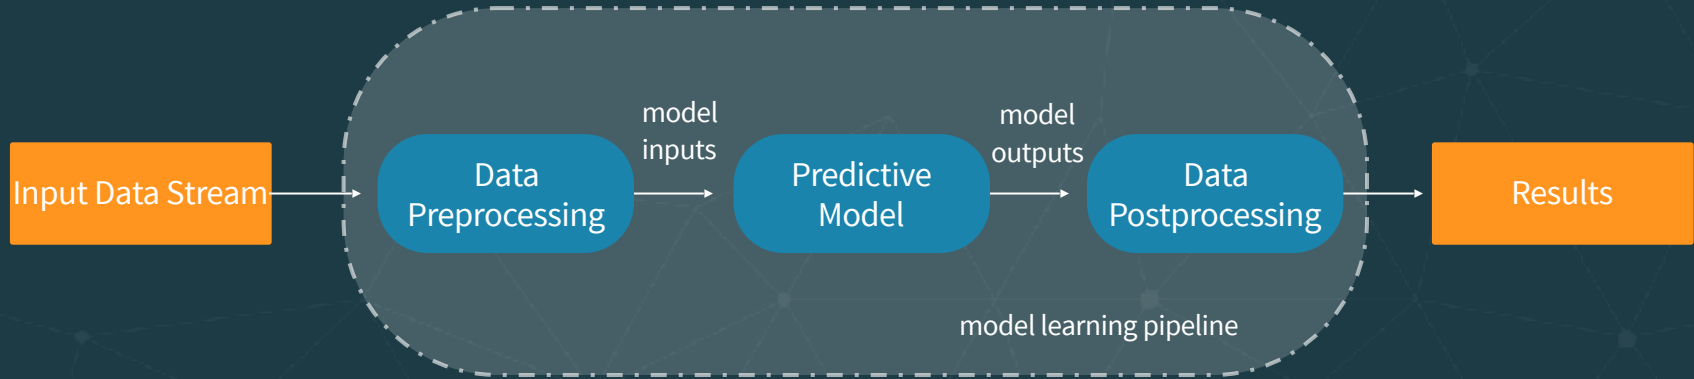


Traditional Approach to Model Serving


- Model is code
- This code has to be saved and then somehow imported into model serving

Why is this problematic?

Impedance Mismatch

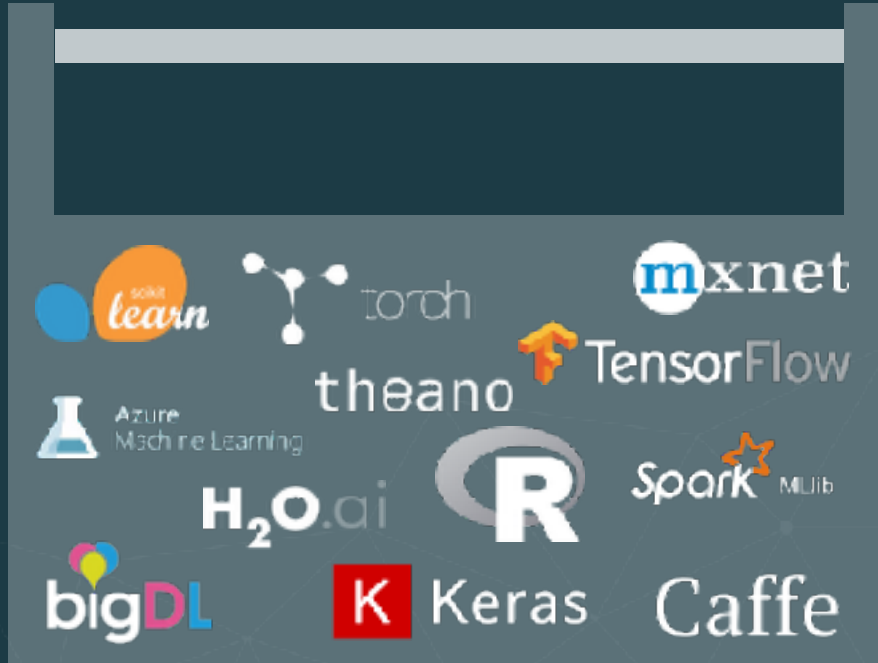


**Continually expanding
Data Scientist toolbox**

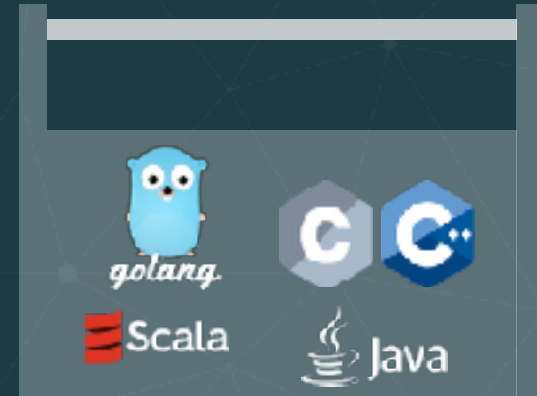

**Defined Software
Engineer toolbox**

Alternative - Model As Data

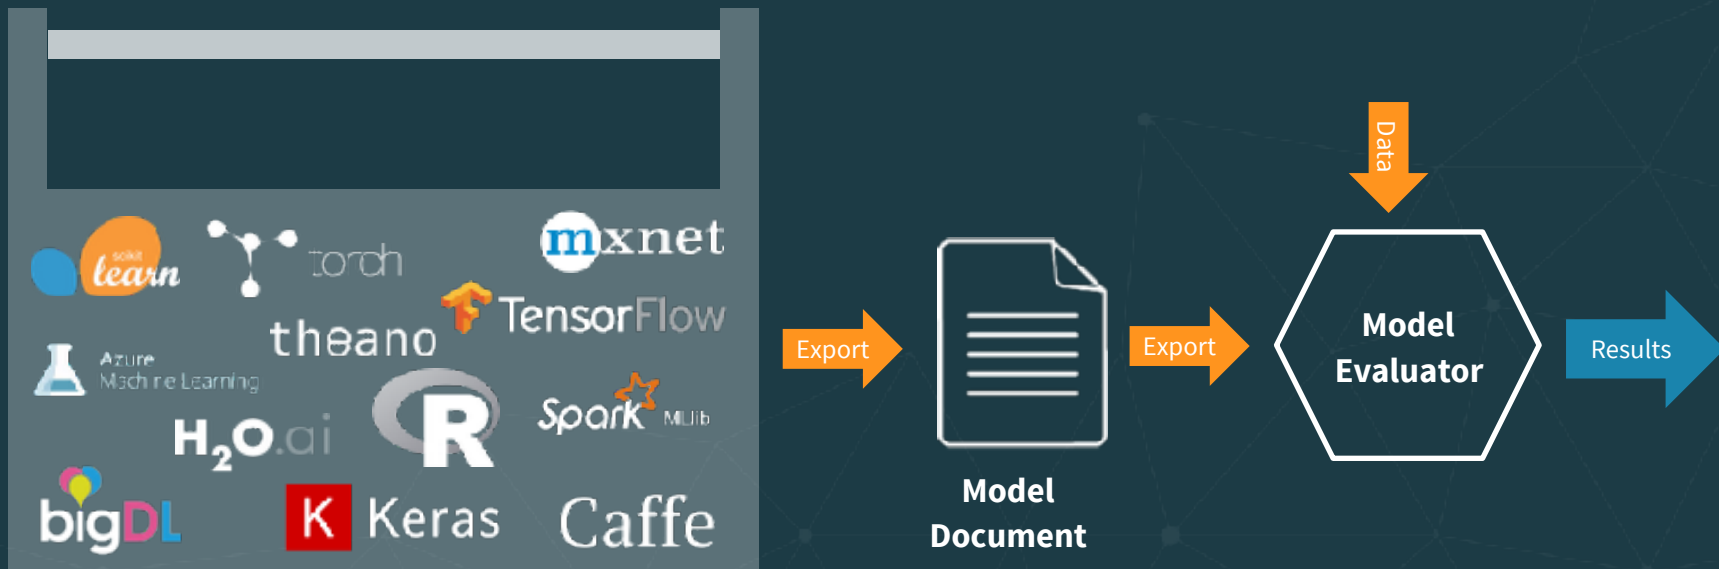

Standards



Portable
Format for
Analytics (PFA)



Exporting Model As Data With PMML

There are already a lot of export options



<https://github.com/jpmml/jpmml-sparkml>



<https://github.com/jpmml/jpmml-sklearn>



<https://github.com/jpmml/jpmml-r>



<https://github.com/jpmml/jpmml-tensorflow>




Evaluating PMML Model

There are also a few PMML evaluators



<https://github.com/jpmml/jpmml-evaluator>



<https://github.com/opendatagroup/augustus>

Exporting Model As Data With Tensorflow

- Tensorflow execution is based on Tensors and Graphs
- Tensors are defined as multilinear functions which consist of various vector variables
- A computational graph is a series of Tensorflow operations arranged into graph of nodes
- Tensorflow supports exporting graphs in the form of binary protocol buffers
- There are two different export format - optimized graph and a new format - saved model



Evaluating Tensorflow Model

- Tensorflow is implemented in C++ with a Python interface.
- In order to simplify Tensorflow usage from Java, in 2017 Google introduced Tensorflow Java API.
- Tensorflow Java API supports importing an exported model and allows to use it for scoring.




Additional Considerations – Model Lifecycle

- Models tend to change
- Update frequencies vary greatly – from hourly to quarterly/yearly
- Model version tracking
- Model release practices
- Model update process



The Solution

A streaming system allowing to update models without interruption of execution (dynamically controlled stream).

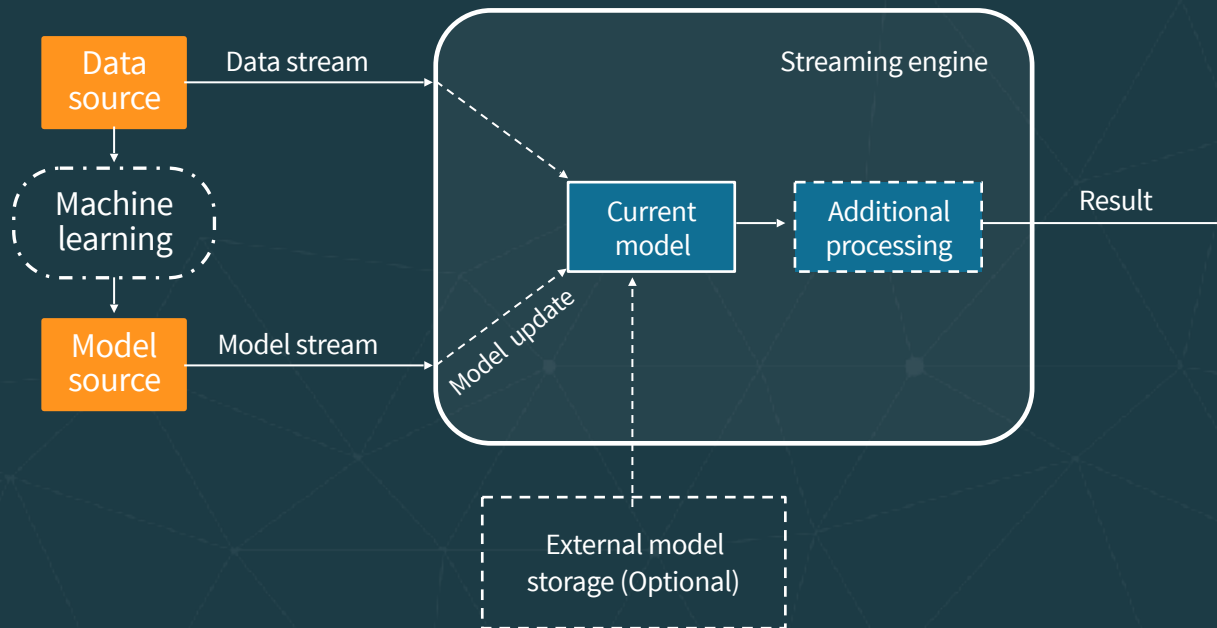

Model Representation (Protobufs)

// On the wire

syntax = "proto3";

// Description of the trained model.

message ModelDescriptor {

string name = 1; // Model name

string description = 2; // Human readable

string dataType = 3; // Data type for which this model is applied.

enum ModelType { // Model type

TENSORFLOW = 0;

TENSORFLOWSAVED = 2;

PMML = 2;

};

ModelType modeltype = 4;

oneof MessageContent {

// Byte array containing the model

bytes data = 5;

string location = 6;

}

}

Model Representation (Scala)

```
trait Model {  
  def score(input : AnyVal) : AnyVal  
  def cleanup() : Unit  
  def toBytes() : Array[Byte]  
  def getType : Long  
}  
  
def ModelFactoryl {  
  def create(input : ModelDescriptor) : Model  
  def restore(bytes : Array[Byte]) : Model  
}
```


Side Note: Monitoring


Model monitoring should provide information about usage, behavior, performance and lifecycle of the deployed models

```
case class ModelToServeStats(  
  name: String,                // Model name  
  description: String,         // Model descriptor  
  modelType: ModelDescriptor.ModelType, // Model type  
  since : Long,                // Start time of model usage  
  var usage : Long = 0,        // Number of servings  
  var duration : Double = 0.0, // Time spent on serving  
  var min : Long = Long.MaxValue, // Min serving time  
  var max : Long = Long.MinValue // Max serving time  
)
```

Queryable State

Queryable state: ad hoc query of the state in the stream. Different than the normal data flow.

Treats the stream processing layer as a lightweight embedded *database*. *Directly query the current state* of a stream processing application. No need to materialize that state to a database, etc. first.

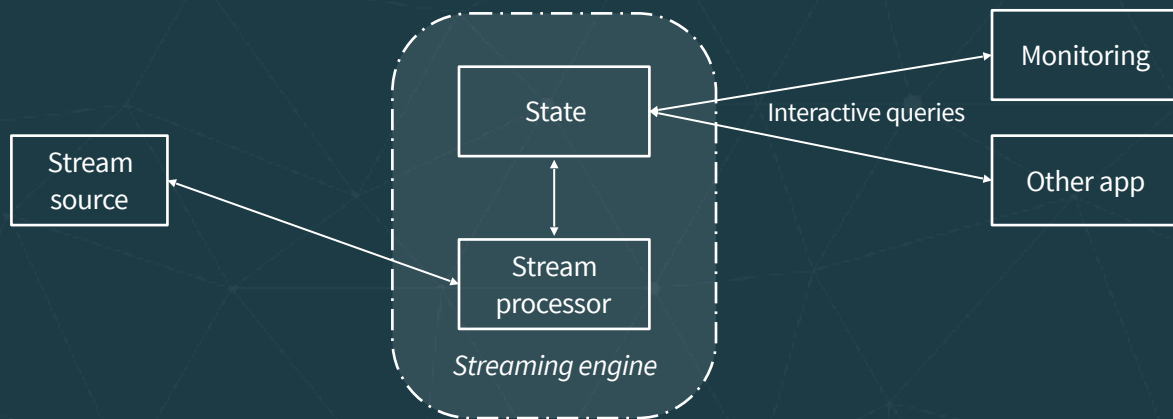





- We'll work with Akka Streams examples first



- *A library*
- Implements Reactive Streams.
 - <http://www.reactive-streams.org/>
 - *Back pressure* for flow control

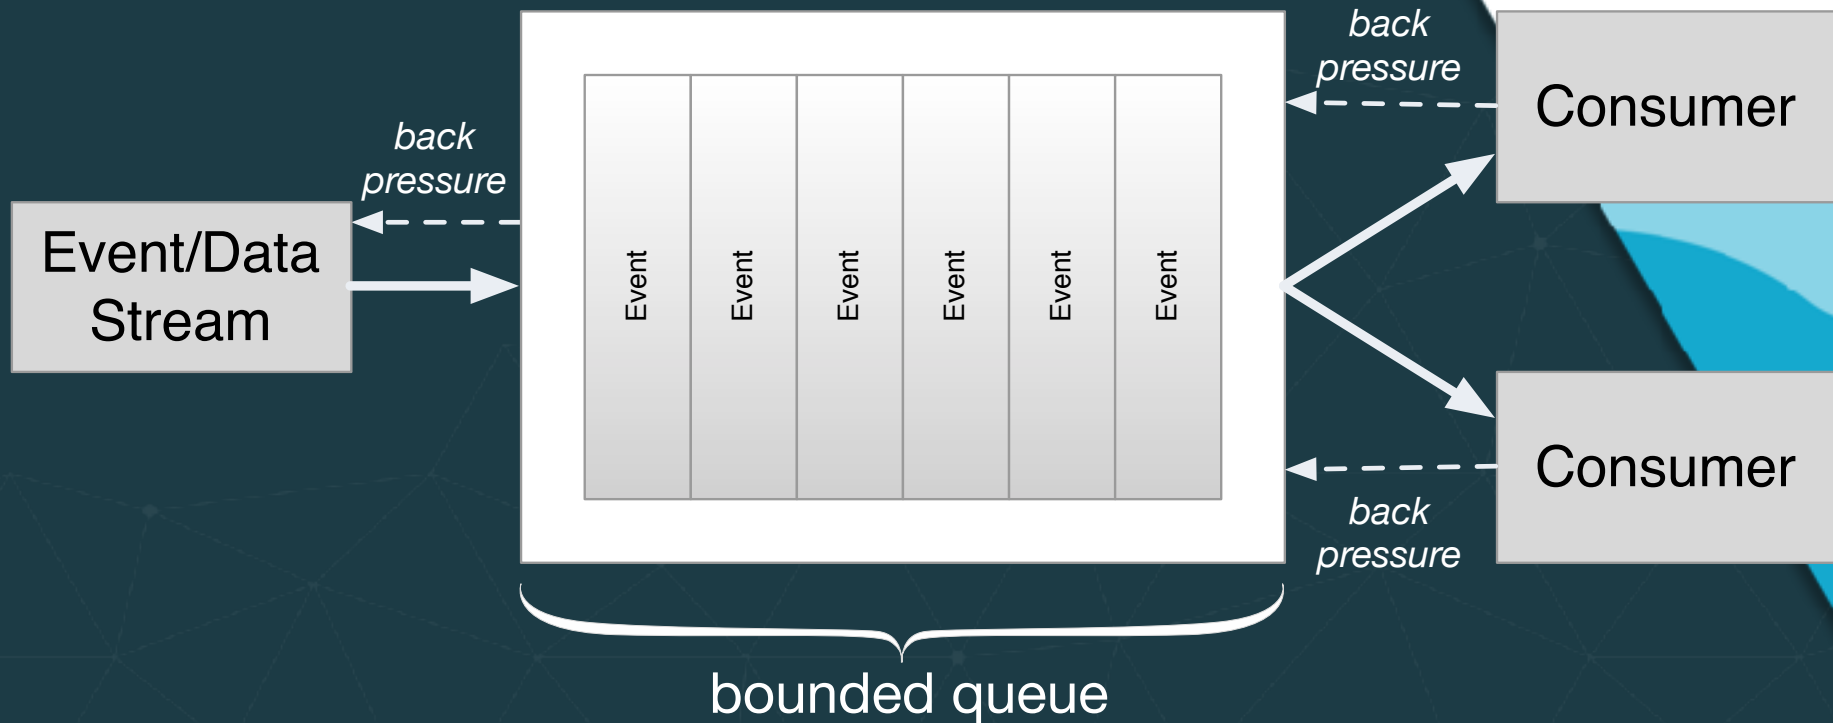

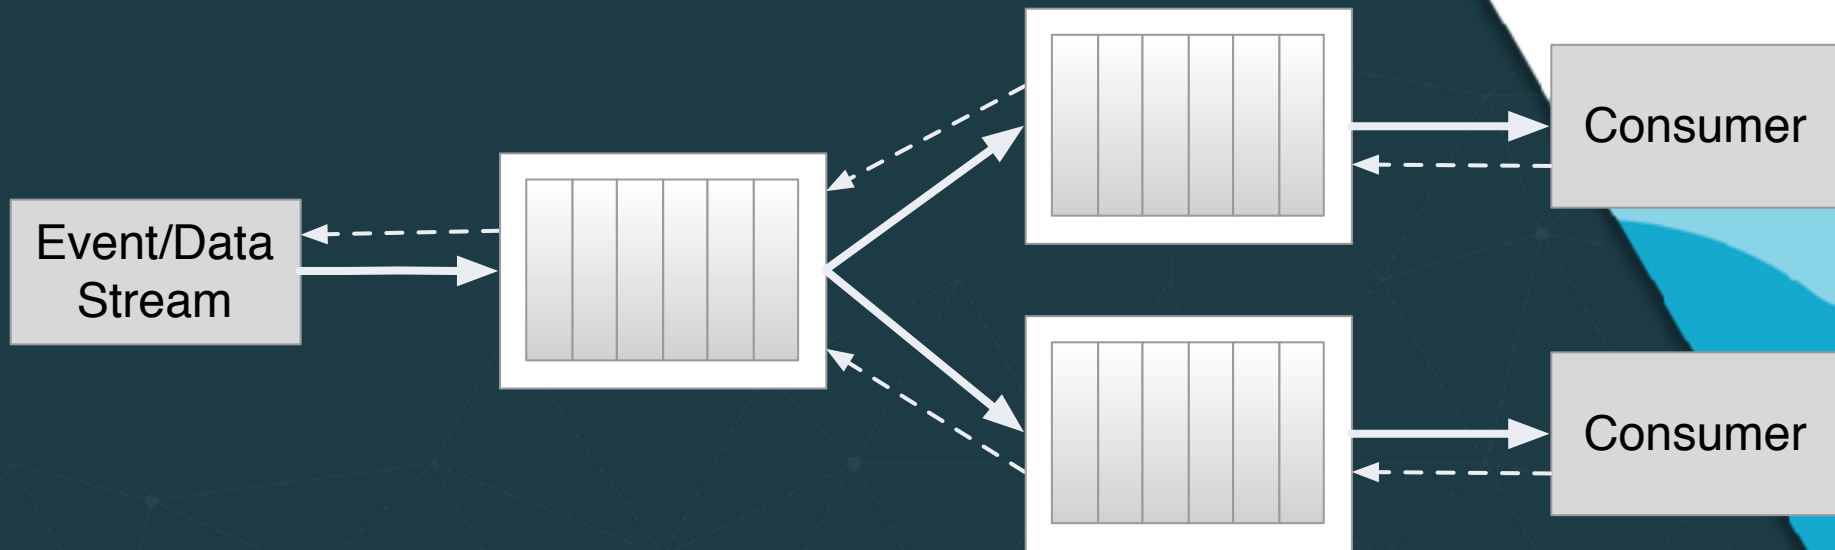



- Part of the Akka ecosystem
 - Akka Actors, Akka Cluster, Akka HTTP, Akka Persistence, ...
 - Alpakka - rich connection library
 - like Camel, but implements Reactive Streams
- Commercial support from Lightbend

- A very simple example to get the “gist”...


```
import akka.stream._  
import akka.stream.scaladsl._  
import akka.{ NotUsed, Done }  
import akka.actor.ActorSystem  
import scala.concurrent._  
import scala.concurrent.duration._
```

```
implicit val system = ActorSystem("QuickStart")  
implicit val materializer = ActorMaterializer()
```

```
val source: Source[Int, NotUsed] = Source(1 to 10)  
val factorials = source.scan(BigInt(1)) ( (acc, next) => acc * next )  
factorials.runWith(Sink.foreach(println))
```

```
import akka.stream._  
import akka.stream.scaladsl._  
import akka.{ NotUsed, Done }  
import akka.actor.ActorSystem  
import scala.concurrent._  
import scala.concurrent.duration._
```

Imports!

```
implicit val system = ActorSystem("QuickStart")  
implicit val materializer = ActorMaterializer()
```

```
val source: Source[Int, NotUsed] = Source(1 to 10)  
val factorials = source.scan(BigInt(1)) ( (acc, next) => acc * next )  
factorials.runWith(Sink.foreach(println))
```

```
import akka.stream._  
import akka.stream.scaladsl._  
import akka.{ NotUsed, Done }  
import akka.actor.ActorSystem  
import scala.concurrent._  
import scala.concurrent.duration._
```

```
implicit val system = ActorSystem("QuickStart")  
implicit val materializer = ActorMaterializer()
```

Initialize and specify
now the stream is
“materialized”

```
val source: Source[Int, NotUsed] = Source(1 to 10)  
val factorials = source.scan(BigInt(1)) ( (acc, next) => acc * next )  
factorials.runWith(Sink.foreach(println))
```

```
import akka.stream._  
import akka.stream.scaladsl._  
import akka.{ NotUsed, Done }  
import akka.actor.ActorSystem  
import scala.concurrent._  
import scala.concurrent.duration._
```

```
implicit val system = ActorSystem("QuickStart")  
implicit val materializer = ActorMaterializer()
```

Create a Source.
Scan it and compute
factorials, output to
a Sink, and run it.


```
val source: Source[Int, NotUsed] = Source(1 to 10)  
val factorials = source.scan(BigInt(1)) ( (acc, next) => acc * next )  
factorials.runWith(Sink.foreach(println))
```

```
import akka.stream._
import akka.stream.scaladsl._
import akka.{ NotUsed, Done }
import akka.actor.ActorSystem
import scala.concurrent._
import scala.concurrent.duration._
```

```
implicit val system = ActorSystem("QuickStart")
implicit val materializer = ActorMaterializer()
```

Create a Source.
Scan it and compute
factorials, output to
a Sink, and run it.

```
val source = Source[Int, NotUsed](1 to 10)
val factorialFlow = source.scan(1)((acc, n) => acc * n)
factorialFlow.run(Sink.foreach(println))
```

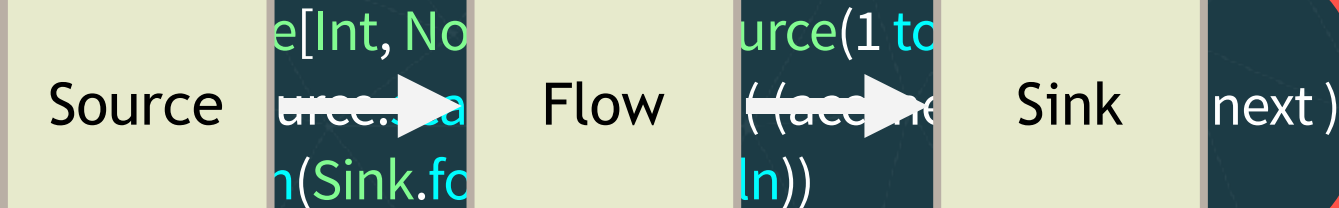

akka streams

- This example is included in the project:
 - akkaStreamsCustomStage/simple-akka-streams-example.sc
- To run it (showing the different prompt!):

```
$ sbt
```


```
sbt:akkaKafkaTutorial> project akkaStreamsCustomStage
```

```
sbt:akkaStreamsCustomStage> console
```

```
scala> :load akkaStreamsCustomStage/simple-akka-streams-example.sc
```

Using Custom Stage

Create a custom stage, a fully type-safe way to encapsulate new functionality. Like adding a new “operator”.

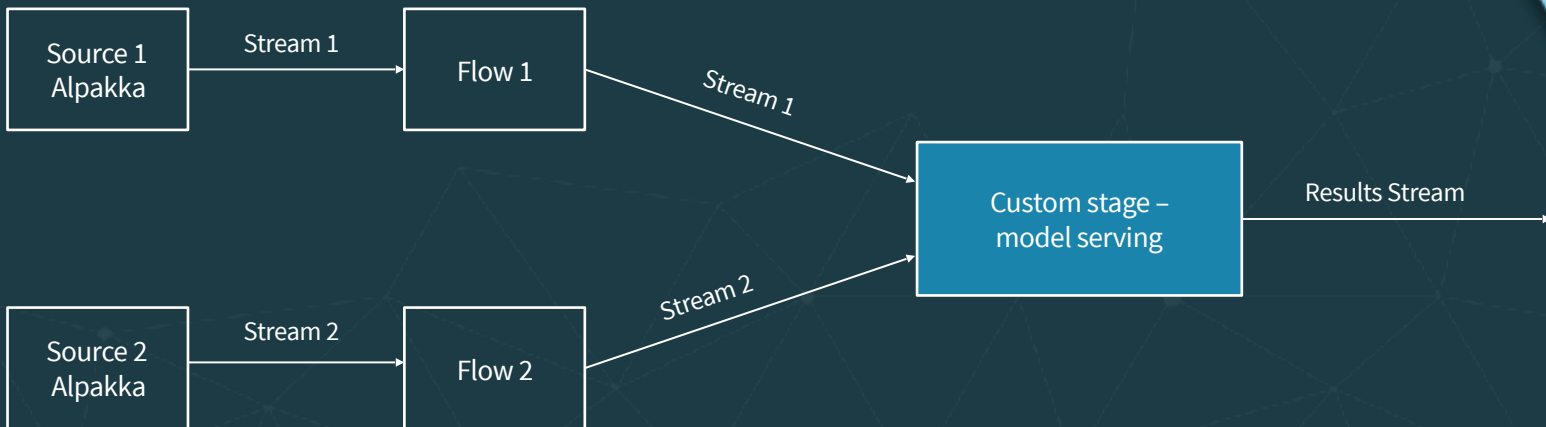

Using a Custom Stage

Code time

1. Walk through the whole tutorial project
2. Run the *client* project (if not already running)
3. Explore and run *akkaStreamsCustomStage* project


Exercises!

We've prepared some exercises. We may not have time during the course to work on them, but take a look at the *exercise* branch in the Git project (or the separate X.Y.Z_exercise download).

To find them, search for “// Exercise”. The *master* branch implements the solutions.


Other Production Concerns

- Scale scoring with workers and routers, across a cluster
- Persist actor state with Akka Persistence
- Connect to *almost* anything with Alpakka
- *Lightbend Enterprise Suite*
 - for production monitoring, etc.

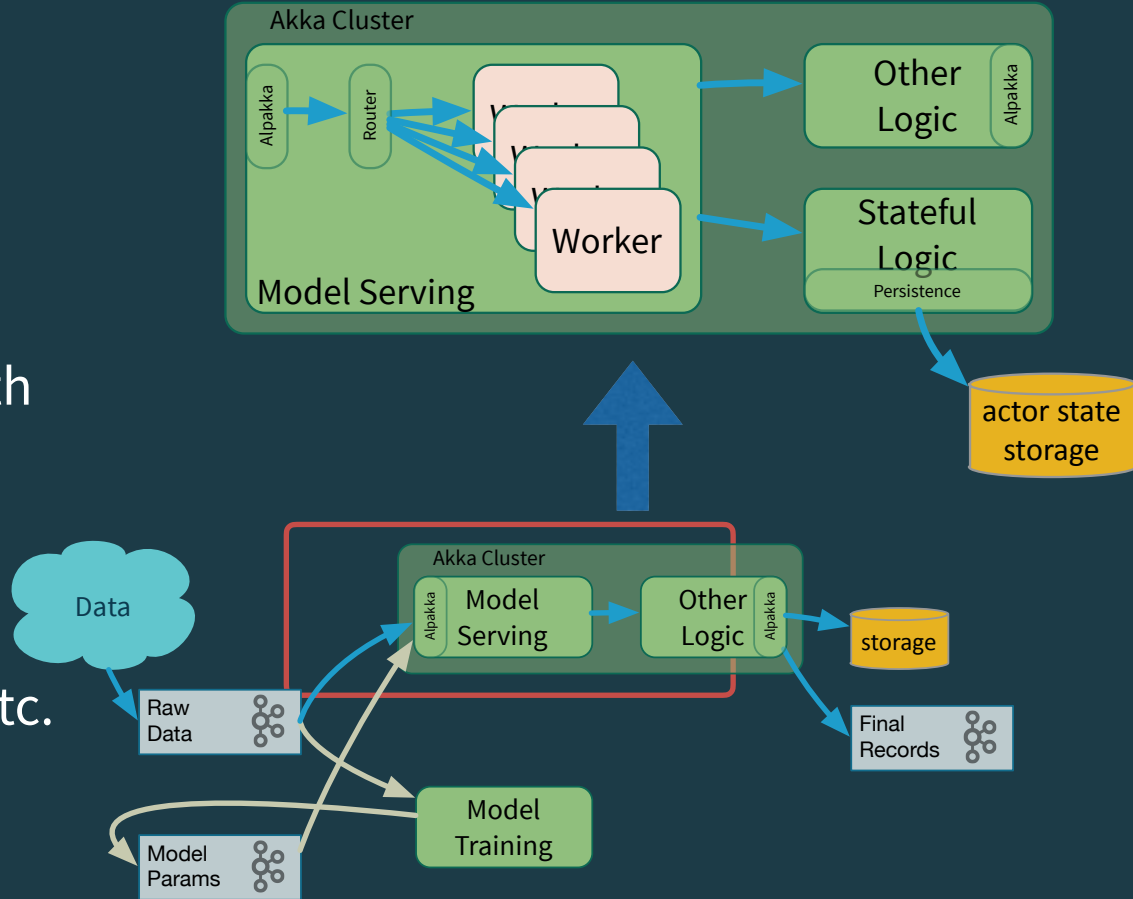

Improve Scalability for Model Serving

Use a router actor to forward requests to the actor responsible for processing requests for a specific model type.

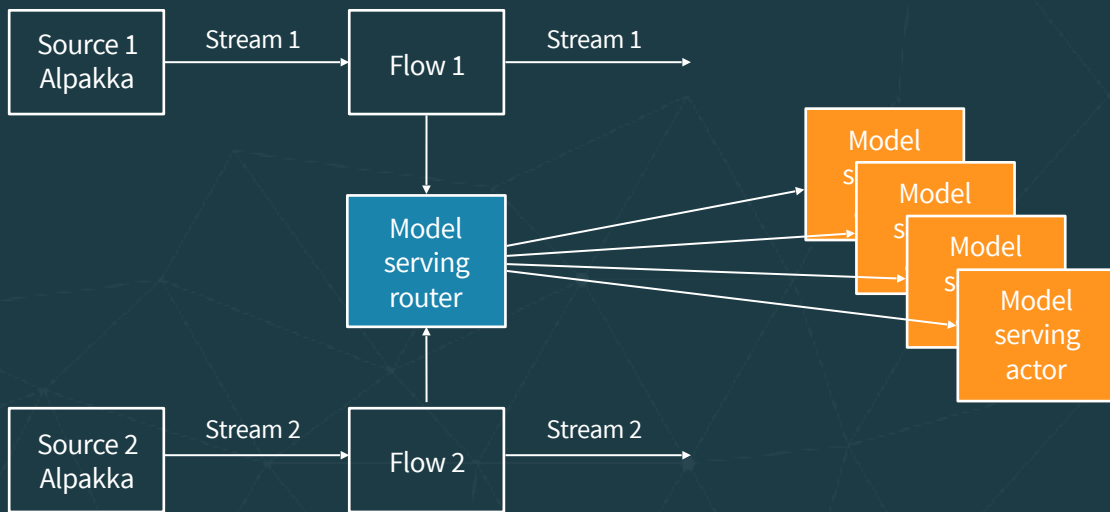

Akka Streams with Actors and Persistence

Code time


1. While still running the *client* project...
2. Explore and run *akkaActorsPersistent* project

More Production Concerns


Using Akka Cluster

Two levels of scalability:


- Kafka partitioned topic allow to scale listeners according to the amount of partitions.
- Akka cluster sharing allows to split model serving actors across clusters.

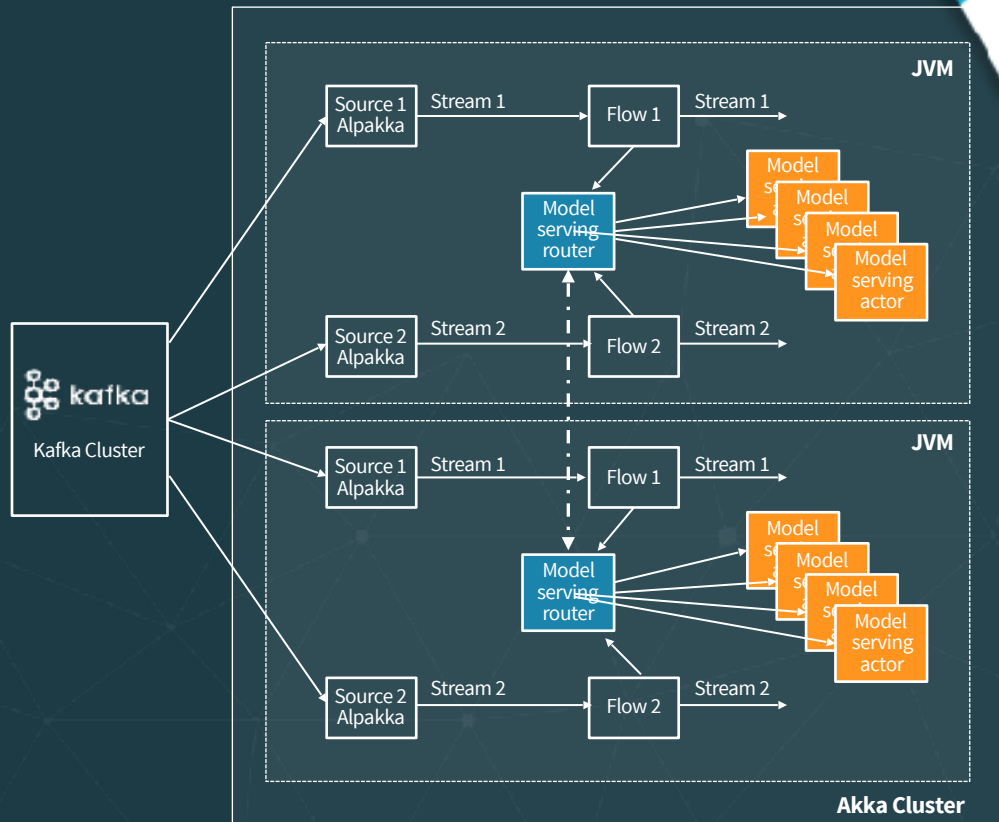

Go Direct or Through Kafka?

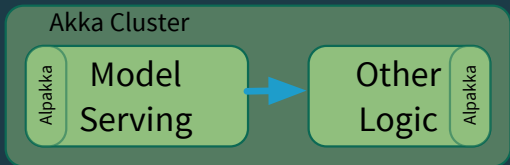


vs.

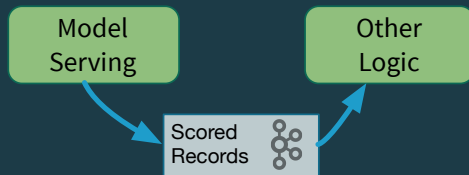


- Extremely low latency
- Minimal I/O and memory overhead
- No marshaling overhead

- Higher latency (including queue depth)
- Higher I/O and processing (marshaling) overhead
- Better potential reusability

Go Direct or Through Kafka?

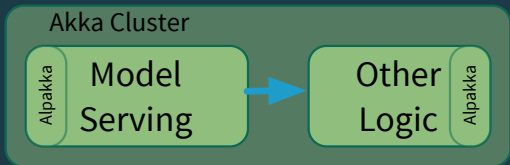

vs.

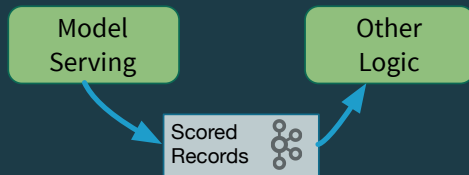

- *Reactive Streams* back pressure
- Direct coupling between sender and receiver, but indirectly through a URL

- Very deep buffer (partition limited by disk size.)
- Strong decoupling - M producers, N consumers, completely disconnected



Kafka Streams

- Same sample use case, now with Kafka Streams



Kafka Streams

- Important stream-processing concepts, e.g.,
 - Distinguish between *event time* and *processing time*
 - Windowing support.
- For more on these concepts, see
 - Dean's book ;)
 - Talks, blog posts, writing by Tyler Akidau



Kafka Streams

- KStream - per-record transformations
- KTable - last value per key ???
 - Efficient management of application state



Kafka Streams

- Low overhead
- Read from and write to Kafka topics, memory
 - Could use Kafka Connect for other sources and sinks
- Load balance and scale based on partitioning of topics
- Built-in support for Queryable State



Kafka Streams

- Two types of APIs:
 - Process Topology
 - Compare to [Apache Storm](#)
 - DSL based on collection transformations
 - Compare to Spark, Flink, Scala collections.



Kafka Streams


- Provides a Java API
- Lightbend donating a Scala API to Apache Kafka
 - <https://github.com/lightbend/kafka-streams-scala>
 - See also our convenience tools for distributed, queryable state: <https://github.com/lightbend/kafka-streams-query>
- SQL!



Kafka Streams

- Ideally suited for:
 - ETL -> KStreams
 - State -> KTable ???
 - Joins, including Stream and Table joins
 - “Effectively once” semantics
- Commercial support from Confluent, Lightbend, and others

Model Serving With Kafka Streams

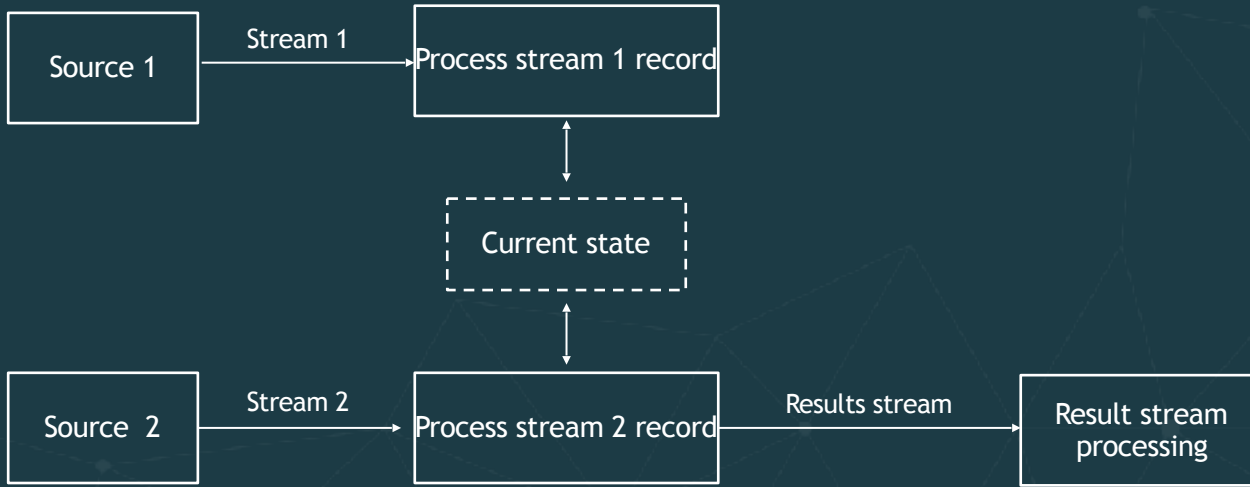

State Store Options We'll Explore

- “Naive”, in memory store
- Built-in key/value store provided by Kafka Streams
- Custom store

Model Serving With Kafka Streams

Code time

1. Still running the *client* project...
2. Explore and run:
kafkaStreamsModelServerInMemoryStore

Model Serving With Kafka Streams, KV Store

Code time (as time permits)

1. Still running the *client* project...
2. Explore and run:
kafkaStreamsModelServerKVStore

Model Serving With Kafka Streams, KV Store


Code time (as time permits)

1. Still running the *client* project...
2. Explore and run:
kafkaStreamsModelServerCustomStore


To Wrap Up



Event-driven μ -services

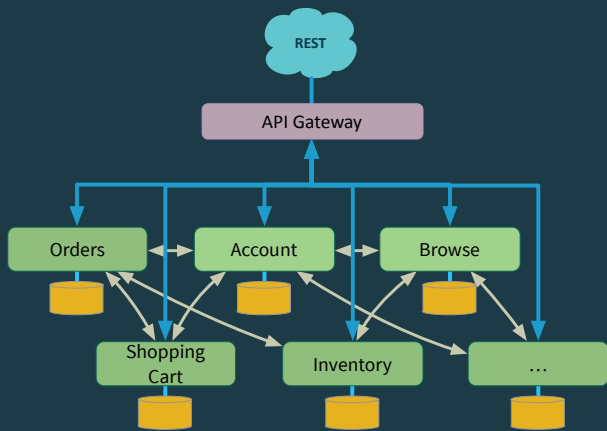

“Record-centric” μ -services

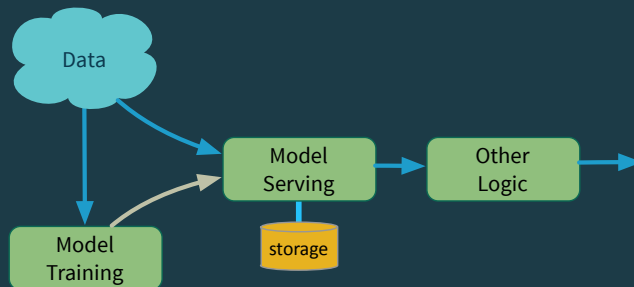

Events

Records

Thank You

- Kafka streaming applications with Akka Streams and Kafka Streams (Dean)
 - Thursday 11:00 - 11:40, Expo Hall 1
- Meet the Expert (Dean)
 - Thursday 11:50 - 12:30, O'Reilly Booth, Expo Hall
- AMA, (Boris and Dean)
 - Thursday 2:40 - 3:20, 212 A-B

Questions?

And don't miss:

- Approximation data structures in streaming data processing (Debasish Ghosh)
 - Wednesday 1:50 - 2:30, 230A
- Machine-learned model quality monitoring in fast data and streaming applications (Emre Velipasaoglu)
 - Thursday 1:50 - 2:30, LL21 C/D

<https://www.lightbend.com/products/fast-data-platform>

boris.lublinsky@lightbend.com

dean.wampler@lightbend.com