About

This project includes Google Spreadsheet and serverless API routes. On visiting, the app calls get products method, which stores the product's info . On order, the app calls /api/order to place a order on google spreadsheet.

Requirement:

Node Version: > 10.13.0
 Yarn Version: 1.22.24
 Google Account


Technology we use

- 1. React (A JavaScript library for building user interfaces)
- 2. NextJs (React SSR and SSG Framework)
- 3. Create Next App
- 4. yarn workspaces
- 5. Google Sheet (As Database) with a serverless API
- 6. API routes by NextJs

Folder Structure



within individual packages

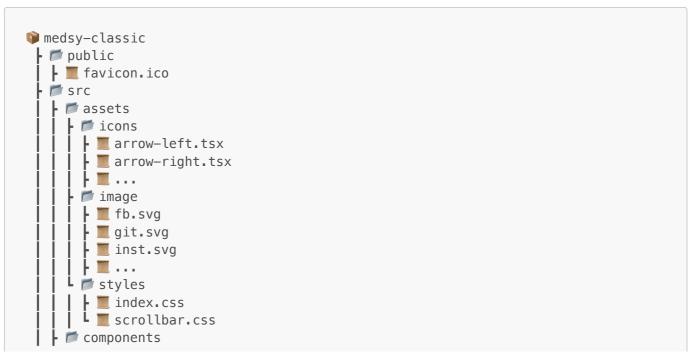

```
carousel
     - m carousel.tsx
     active-link.tsx
     button.tsx
     cart-item.tsx
     cart-modal.tsx
     counter.tsx
     customer-contact-form.tsx
     feature-block.tsx
     input.tsx
     item-card.tsx
     search.tsx
     section-title.tsx
   ■ success-modal.tsx
   containers
   - m drawer
     - m views
       - 🔳 cart.tsx
       - T checkout.tsx
       - ■ menus.tsx
       - ■ no-item.tsx
       ■ product-details.tsx
     L ■ drawer.tsx
     layout
     - ■ footer.tsx
     - ∭ header.tsx
     L ■ layout.tsx
     call-to-action.tsx
     m hero-block.tsx
     how-it-works.tsx
   Ĺ <u>≡</u> products.tsx
   contexts
   - 📂 cart
     - ■ cart.provider.tsx
     - m cart.reducer.tsx
   - 📂 drawer
     L ■ drawer.provider.tsx
   L i search
   L <u>■</u> use-search.tsx
   helpers
   - ≡ constants.tsx
   - ■ get-initials-or-option.tsx
   ▶ <u> </u>use-ref-scroll.tsx
   - ■ use-searchable.tsx
   - . . .
 L p pages
   - 📁 api
    - ≡ order.tsx
   __document.tsx
   L ■ index.tsx
- ■ .env.local.sample
- 🎹 .gitignore
- TREADME.md
- 🔳 babel.config.js
- ∭ tsconfig.json
 mext.config.js
```

```
- ■ package.json
- ■ postcss.config.js
- ■ tailwind.config.js
```

Getting Started

Go to project root like:

```
cd medsy
```

open this project with your favorite editor (recommended: Visual Studio code)

configure google sheet:

BUT FIRST -- Set up your google project & enable the sheets API 👈

- 1. Go to the Google Developers Console
- 2. Select your project or create a new one (and then select it)
- 3. Enable the Sheets API for your project: _ In the sidebar on the left, select APIs & Services > Library _ Search for "sheets" _ Click on "Google Sheets API" _ Click the blue "Enable" button

Setup Instructions

- 1. Follow steps above to set up project and enable sheets API
- 2. Create a service account for your project
 - o In the sidebar on the left, select APIs & Services > Credentials
 - Click blue "+ CREATE CREDENTIALS" and select "Service account" option
 - Enter name, description, click "CREATE"
 - You can skip permissions, click "CONTINUE"
 - Click "+ CREATE KEY" button
 - Select the "JSON" key type option
 - Click "Create" button
 - o your JSON key file is generated and downloaded to your machine (it is the only copy!)
 - Click "DONE"
 - o note your service account's email address (also available in the JSON key file)
- 3. Create two Google Spreadsheet as products and orders Give it those column headers, give it some content for products sheet:

id	name	image	description	price	manufacturer	type	quantity	dosage	substance
value	value	value	value	value	value	value	value	value	value

for orders sheet:

items	address	phone_number	email	bill_amount
value	value	value	value	value

4. Share the doc (or docs) with your service account using the email noted above.

- Click the Share link in the upper right-hand corner
- Click the very pale Advanced button
- Click Save
- Copy the Link to Share. Your URL should look something like https://docs.google.com/spreadsheets/d/1lo6W5XitNvifEXER9ECTsbHhAjXsQLq6VEz7kSPDPiQ/edit? usp=sharing. It should not have a /d/e in it.
- note your doc (or docs) key (spreadsheet key is the long id in the sheets URL as: 1lo6W5XitNvifEXER9ECTsbHhAjXsQLq6VEz7kSPDPiQ)
- 5. Copy the contents of <code>.env.local.sample</code> into a new file called <code>.env.local</code>(Which is define within every individual package like: <code>project/packages/medsy-modern/.env.local.sample</code>)
- 6. Get your account credentials from the downloaded json file, It will contain keys such as project_id, client_email and private_key. Set them as environment variables in the .env.local file at the root of your required project.

At the end your .evn.local file should be look like:

```
GOOGLE_SPREADSHEET_ID_PRODUCT=1zg-EQsksjruriY5KisfrsYdMZc8o3g4BygcAu906aHUAGOOGLE_SPREADSHEET_ID_ORDER=1CG0y7qQLCrY5ZKHVbt4nm7v5XInW9jdhdueeUrrcfGOOGLE_SERVICE_ACCOUNT_CLIENT_EMAIL=example@example.iam.gserviceaccount.comGOOGLE_SERVICE_ACCOUNT_PRIVATE_KEY= "-----BEGIN PRIVATE KEY------ENDPRIVATE KEY-----\n"
```

Second, run the development server:

step-2: within the project root run

```
yarn
# or
yarn install
```

step-3: after successful installation of required packages run you required project or package like:

```
yarn dev:medsy-classic # to run the medsy-classic package or project
# or
yarn dev:medsy-minimal # to run the medsy-minimal package or project
# or
yarn dev:medsy-modern # to run the medsy-modern package or project
```

Open http://localhost:3000 with your browser to see the result.

You can start editing the page by modifying pages/index.tsx. The page auto-updates as you edit the file.

NOTE:

please check the package. ison file for other useful scripts like clean

if you want to clean node_modules and build's folder run

```
yarn clean
```

Learn More

To learn more about Next.js, take a look at the following resources:

- Next.js Documentation learn about Next.js features and API.
- Learn Next.js an interactive Next.js tutorial.

Deployment

Deploy on Vercel(previously known as ZEIT Now)

The easiest way to deploy your Next.js app is to use the Vercel Now Platform step-1: go to your project root like:

```
cd medsy
```

step-2: run deployment command like:

```
deploy-vercel:medsy-classic
```

which is promoted for some information fill your information or just stay with the defaults as

```
$ vercel
? Set up and deploy "~/your-directory-path"? [Y/n] y
? Which scope do you want to deploy to? your-scope
? Link to existing project? [y/N] n
? What's your project's name? your-project-name
? In which directory is your code located? ./
Auto-detected project settings (Next.js):
    Build Command: `next build` or `build` from `package.json`
    Output Directory: Next.js default
    Development Command: next dev --port $PORT
? Want to override the settings? [y/N] N
```

IMPORTANT:

before deployment you need to setup your env variable on vercel go to your project root and set your env values within the vercel.json file. (you can also setup env value by others method supported by verecl for more details follow the link)

NOTE:

make sure you had the vercel-cli install and logged in your account.