
```
import seaborn as sns
df=sns.get_dataset_names()
df
     ['anagrams',
       'anscombe',
      'attention',
      'brain_networks',
      'car_crashes',
      'diamonds',
      'dots',
      'dowjones',
       'exercise',
      'flights',
       'fmri',
      'geyser',
       'glue',
      'healthexp',
       'iris',
       'mpg',
       'penguins',
       'planets',
       'seaice',
      'taxis',
       'tips',
       'titanic']
df=sns.load_dataset("car_crashes")
df.info()
     <class 'pandas.core.frame.DataFrame'>
     RangeIndex: 51 entries, 0 to 50
     Data columns (total 8 columns):
                           Non-Null Count
      #
          Column
                                            Dtype
          -----
      0
                           51 non-null
                                            float64
           total
          speeding
                           51 non-null
                                            float64
      1
      2
                                            float64
           alcohol
                           51 non-null
      3
          not_distracted 51 non-null
                                            float64
                                            float64
      4
          no_previous
                           51 non-null
      5
          ins_premium
                           51 non-null
                                            float64
          ins_losses
      6
                           51 non-null
                                            float64
           abbrev
                           51 non-null
                                            object
     dtypes: float64(7), object(1)
     memory usage: 3.3+ KB
```

smalldata=df.head()
smalldata

	total	speeding	alcohol	not_distracted	no_previous	ins_premium	ins_losse
0	18.8	7.332	5.640	18.048	15.040	784.55	145.0
1	18.1	7.421	4.525	16.290	17.014	1053.48	133.9
2	18.6	6.510	5.208	15.624	17.856	899.47	110.3
3	22.4	4.032	5.824	21.056	21.280	827.34	142.3
4	12.0	4.200	3.360	10.920	10.680	878.41	165.6

sns.lineplot(x="total",y="speeding",data=smalldata)

<Axes: xlabel='total', ylabel='speeding'>

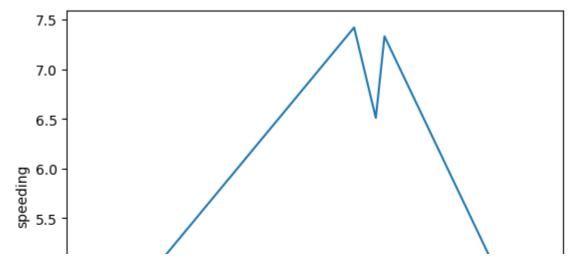

inference: The line plot of "total" vs. "speeding" likely shows the relationship between the rate of speeding incidents ("speeding") for different states or regions,

sns.scatterplot(x="not\_distracted",y="no\_previous",data=smalldata)


<Axes: xlabel='not\_distracted', ylabel='no\_previous'>



inference: he scatter plot of "not\_distracted" vs. "no\_previous" likely explores the rela non-distracted driving and the absence of previous offenses, possibly indicati

sns.barplot(x="total",y="speeding",data=smalldata,color="blue")

<Axes: xlabel='total', ylabel='speeding'>

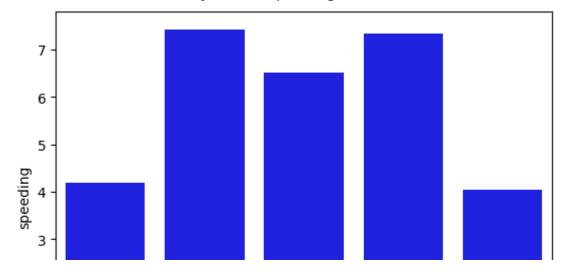


## inference:

The bar plot of "total" vs. "speeding" likely displays the average or total speeding incidents for different categories represented by "total," sugges

sns.jointplot(x="total",y="speeding",data=smalldata)

<seaborn.axisgrid.JointGrid at 0x7d6b541c5f00>

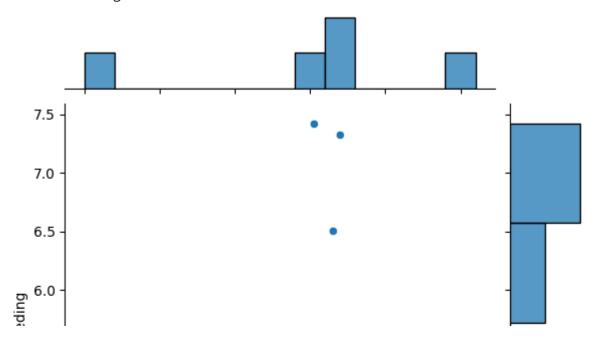

## inference:

The joint plot of "total" vs. "speeding" likely provides a visual representat if there's any correlation or clustering between the total metric and the rat

sns.distplot(smalldata["total"])


<ipython-input-35-dc78ed30bf49>:1: UserWarning:

'distplot' is a deprecated function and will be removed in seaborn v0.14.0.

Please adapt your code to use either `displot` (a figure-level function with similar flexibility) or `histplot` (an axes-level function for histograms).

For a guide to updating your code to use the new functions, please see <a href="https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751">https://gist.github.com/mwaskom/de44147ed2974457ad6372750bbe5751</a>

```
sns.distplot(smalldata["total"])
<Axes: xlabel='total', ylabel='Density'>
```

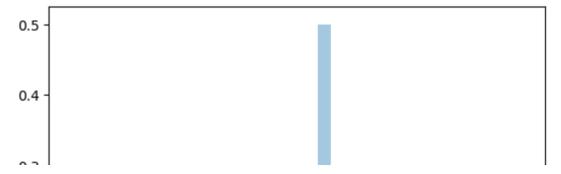


inference: The distribution plot of "total" in the "smalldata" likely illustrates the fre allowing us to observe its underlying data distribution, which can be useful f

sns.relplot(x="total",y="speeding",data=smalldata)

<seaborn.axisgrid.FacetGrid at 0x7d6b53b3e8f0>

inference: The relational plot (relplot) of "total" vs. "speeding" likely displays the in or trends in the data, such as correlations or clusters between the two vari


sns.countplot(x="total",data=smalldata)





inference: The count plot of "total" in the "smalldata" dataset likely shows the frequenc the "total" variable, providing insight into the distribution of these values

sns.boxplot(smalldata.speeding)

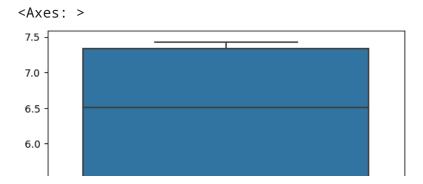

inference: The box plot of the "speeding" variable in the "smalldata" likely displays the showing key statistics such as the median, quartiles, and any potential outlie