




CHAPTER 6

微分方程式 (ODE)
(t 的函數)

取 $\mathcal{L}$
變成
(step 1)

代數方程式
(s 的函數)
(僅需加減乘除運算, 可簡
化求解的程序)

(step 2)

求解

Laplace Transforms

取 $\mathcal{L}^{-1}$ 變成 ODE 的解 (step 3)

曹冲秤象的典故：
直接秤重 (ODE)：困難
間接秤重 ($\mathcal{L}$ 與 $\mathcal{L}^{-1}$)：較容易

$$\begin{aligned} y'' + y &= 4 \quad y(0) = 0 \quad y'(0) = 0 \\ \downarrow \mathcal{L} \\ s^2 Y + Y &= \frac{4}{s} \\ Y(s^2 + 1) &= \frac{4}{s} \\ Y &= \frac{4}{s(s^2 + 1)} = \frac{4}{s} - \frac{4s}{s^2 + 1} \\ \downarrow \mathcal{L}^{-1} \\ y &= 4 - 4 \cos t \end{aligned}$$

Laplace transforms are invaluable for any engineer's mathematical toolbox as they make solving linear ODEs and related initial value problems, as well as systems of linear ODEs, much easier. Applications abound: electrical networks, springs, mixing problems, signal processing, and other areas of engineering and physics.

The process of solving an ODE using the Laplace transform method consists of three steps, shown schematically in Fig. 113:

輔助方程式

Step 1. The given ODE is transformed into an algebraic equation, called the **subsidiary equation**.

Step 2. The subsidiary equation is solved by purely algebraic manipulations.

Step 3. The solution in Step 2 is transformed back, resulting in the solution of the given problem.

注意解題程序

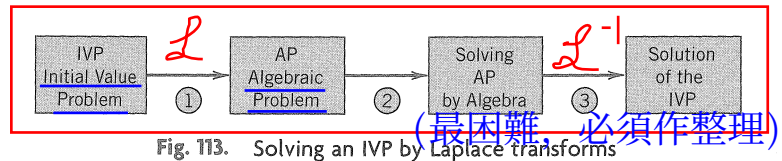


Fig. 113. Solving an IVP by Laplace transforms

The key motivation for learning about Laplace transforms is that the process of solving an ODE is simplified to an algebraic problem (and transformations). This type of mathematics that converts problems of calculus to algebraic problems is known as **operational calculus**. The Laplace transform method has two main advantages over the methods discussed in Chaps. 1–4:

拉氏轉換
的優點！

I. Problems are solved more directly: Initial value problems are solved without first determining a general solution. Nonhomogeneous ODEs are solved without first solving the corresponding homogeneous ODE.

II. More importantly, the use of the **unit step function** (Heaviside function in Sec. 6.3) and **Dirac's delta** (in Sec. 6.4) make the method particularly powerful for problems with inputs (driving forces) that have discontinuities or represent short impulses or complicated periodic functions.

III. 拉氏轉換可將時域 (t -domain) 問題, 轉換成頻域 (frequency-domain) 問題, $t \rightarrow s = \sigma + i\omega$, 在控制、振動、訊號處理領域相當重要。

The following chart shows where to find information on the Laplace transform in this book.

Topic	Where to find it
ODEs, engineering applications and Laplace transforms	Chapter 6
PDEs, engineering applications and Laplace transforms	Section 12.11
List of general formulas of Laplace transforms	Section 6.8
List of Laplace transforms and inverses	Section 6.9
Note: Your CAS can handle most Laplace transforms.	

學習重點：

1. 認識與運算拉式轉換
2. 以拉式轉換運算的優點何在？
3. 拉式轉換的線性關係及其應用
4. 認識第一平移定理(s-平移)

Chap. 2

may be omitted in a shorter course: 6.5, 6.7

and Answers to Problems: App. 1 Part A, App. 2.

6.1 Laplace Transform. Linearity. First Shifting Theorem (s-Shifting)

In this section, we learn about Laplace transforms and some of their properties. Because Laplace transforms are of basic importance to the engineer, the student should pay close attention to the material. Applications to ODEs follow in the next section.

Roughly speaking, the Laplace transform, when applied to a function, changes that function into a new function by using a process that involves integration. Details are as follows.

If $f(t)$ is a function defined for all $t \geq 0$, its **Laplace transform**¹ is the integral of $f(t)$ times e^{-st} from $t = 0$ to ∞ . It is a function of s , say, $F(s)$, and is denoted by $\mathcal{L}(f)$; thus

$$f(t) \xrightarrow{\mathcal{L}} F(s) \quad (1)$$

$$\xleftarrow{\mathcal{L}^{-1}}$$

$$F(s) = \mathcal{L}(f) = \int_0^{\infty} e^{-st} f(t) dt.$$

拉氏轉換的
基本定義

Here we must assume that $f(t)$ is such that the integral exists (that is, has some finite value). This assumption is usually satisfied in applications—we shall discuss this near the end of the section.

¹ PIERRE SIMON MARQUIS DE LAPLACE (1749–1827), great French mathematician, was a professor in Paris. He developed the foundation of potential theory and made important contributions to celestial mechanics, astronomy in general, special functions, and probability theory. Napoléon Bonaparte was his student for a year. For Laplace's interesting political involvements, see Ref. [GenRef2], listed in App. 1.

The powerful practical Laplace transform techniques were developed over a century later by the English electrical engineer OLIVER HEAVISIDE (1850–1925) and were often called “Heaviside calculus.”

We shall drop variables when this simplifies formulas without causing confusion. For instance, in (1) we wrote $\mathcal{L}(f)$ instead of $\mathcal{L}(f)(s)$ and in (1*) $\mathcal{L}^{-1}(F)$ instead of $\mathcal{L}^{-1}(F)(t)$.

Not only is the result $F(s)$ called the Laplace transform, but the operation just described, which yields $F(s)$ from a given $f(t)$, is also called the **Laplace transform**. It is an “integral transform”

$$F(s) = \int_0^{\infty} k(s, t) f(t) dt$$

with “kernel” $k(s, t) = e^{-st}$.

Note that the Laplace transform is called an integral transform because it transforms (changes) a function in one space to a function in another space by a *process of integration* that involves a kernel. The kernel or kernel function is a function of the variables in the two spaces and defines the integral transform.

Furthermore, the given function $f(t)$ in (1) is called the inverse transform of $F(s)$ and is denoted by $\mathcal{L}^{-1}(F)$; that is, we shall write

(1*)

$$f(t) = \mathcal{L}^{-1}(F).$$

Note that (1) and (1*) together imply $\mathcal{L}^{-1}(\mathcal{L}(f)) = f$ and $\mathcal{L}(\mathcal{L}^{-1}(F)) = F$.

Notation

區分大小寫的表示法

Original functions depend on t and their transforms on s —keep this in mind! Original functions are denoted by lowercase letters and their transforms by the same letters in capital, so that $F(s)$ denotes the transform of $f(t)$, and $Y(s)$ denotes the transform of $y(t)$, and so on.

EXAMPLE 1

Laplace Transform

Let $f(t) = 1$ when $t \geq 0$. Find $F(s)$.

Solution. From (1) we obtain by integration

$$(e^{ax})' = a e^{ax}$$

$$\mathcal{L}(f) = \mathcal{L}(1) = \int_0^{\infty} e^{-st} dt = -\frac{1}{s} e^{-st} \Big|_0^{\infty} = \frac{1}{s} \quad (s > 0).$$

Such an integral is called an **improper integral** and, by definition, is evaluated according to the rule

$$\int_0^{\infty} e^{-st} f(t) dt = \lim_{T \rightarrow \infty} \int_0^T e^{-st} f(t) dt.$$

Hence our convenient notation means

$$\int_0^{\infty} e^{-st} dt = \lim_{T \rightarrow \infty} \left[-\frac{1}{s} e^{-st} \right]_0^T = \lim_{T \rightarrow \infty} \left[-\frac{1}{s} e^{-sT} + \frac{1}{s} e^0 \right] = \frac{1}{s} \quad (s > 0).$$

We shall use this notation throughout this chapter.

EXAMPLE 2

Laplace Transform $\mathcal{L}(e^{at})$ of the Exponential Function e^{at}

Let $f(t) = e^{at}$ when $t \geq 0$, where a is a constant. Find $\mathcal{L}(f)$.

Solution. Again by (1),

$$\mathcal{L}(e^{at}) = \int_0^{\infty} e^{-st} e^{at} dt = \int_0^{\infty} \frac{1}{a-s} e^{-(s-a)t} dt;$$

hence, when $s - a > 0$,

$$\mathcal{L}(e^{at}) = \frac{1}{s-a}.$$

歸納獲得之公式！

$$\mathcal{L}(e^{-at}) = \frac{1}{s+a}$$

$$\mathcal{L}(e^{3t}) = \frac{1}{s-3}$$

$$\mathcal{L}(e^{3t}) = \frac{1}{s-3}$$

Must we go on in this fashion and obtain the transform of one function after another directly from the definition? No! We can obtain new transforms from known ones by the use of the many general properties of the Laplace transform. Above all, the Laplace transform is a "linear operation," just as are differentiation and integration. By this we mean the following.

THEOREM 1**Linearity of the Laplace Transform**

The Laplace transform is a linear operation; that is, for any functions $f(t)$ and $g(t)$ whose transforms exist and any constants a and b the transform of $af(t) + bg(t)$ exists, and

$$\mathcal{L}\{af(t) + bg(t)\} = \underbrace{a\mathcal{L}\{f(t)\}}_{= \mathcal{L}[af]} + \underbrace{b\mathcal{L}\{g(t)\}}_{= \mathcal{L}[bg]} = \mathbf{aF(s) + bG(s)}$$

PROOF This is true because integration is a linear operation so that (1) gives

$$\begin{aligned} \mathcal{L}\{af(t) + bg(t)\} &= \int_0^{\infty} e^{-st} [af(t) + bg(t)] dt = \int_0^{\infty} \underbrace{e^{-st}}_{\text{common factor}} \underbrace{af(t)}_{\text{term 1}} dt + \int_0^{\infty} \underbrace{e^{-st}}_{\text{common factor}} \underbrace{bg(t)}_{\text{term 2}} dt \\ &= a \int_0^{\infty} e^{-st} f(t) dt + b \int_0^{\infty} e^{-st} g(t) dt = a \underbrace{\mathcal{L}\{f(t)\}}_{F(s)} + b \underbrace{\mathcal{L}\{g(t)\}}_{G(s)}. \quad \blacksquare \end{aligned}$$

EXAMPLE 3**Application of Theorem 1: Hyperbolic Functions**

Find the transforms of $\cosh at$ and $\sinh at$.

雙曲函數

Solution. Since $\cosh at = \frac{1}{2}(e^{at} + e^{-at})$ and $\sinh at = \frac{1}{2}(e^{at} - e^{-at})$, we obtain from Example 2 and Theorem 1

利用linear operation得到新的公式，並不需要每次都將 $f(t)$ 代入Eq(1)，才能求得 $F(s)$

$$\begin{aligned} \mathcal{L}(\cosh at) &= \frac{1}{2} (\mathcal{L}(e^{at}) + \mathcal{L}(e^{-at})) = \frac{1}{2} \left(\frac{1}{s-a} + \frac{1}{s+a} \right) = \frac{s}{s^2 - a^2} \quad \text{公式!} \\ \mathcal{L}(\sinh at) &= \frac{1}{2} (\mathcal{L}(e^{at}) - \mathcal{L}(e^{-at})) = \frac{1}{2} \left(\frac{1}{s-a} - \frac{1}{s+a} \right) = \frac{a}{s^2 - a^2}. \quad \blacksquare \end{aligned}$$

EXAMPLE 4**Cosine and Sine**

Derive the formulas

公式!

$$\mathcal{L}(\cos \omega t) = \frac{s}{s^2 + \omega^2}, \quad \mathcal{L}(\sin \omega t) = \frac{\omega}{s^2 + \omega^2}.$$

檢視比較

Solution. We write $L_c = \mathcal{L}(\cos \omega t)$ and $L_s = \mathcal{L}(\sin \omega t)$. Integrating by parts and noting that the integral-free parts give no contribution from the upper limit ∞ , we obtain

分部積分

$$\begin{aligned} \int u dv &= uv - \int v du \\ u &= \cos \omega t \rightarrow du = -\omega \sin \omega t dt \\ dv &= e^{-st} dt \rightarrow v = -\frac{1}{s} e^{-st} \end{aligned}$$

$$L_c = \int_0^{\infty} e^{-st} \cos \omega t dt = \left[-\frac{e^{-st}}{s} \cos \omega t \right]_0^{\infty} - \frac{\omega}{s} \int_0^{\infty} e^{-st} \sin \omega t dt = \frac{1}{s} - \frac{\omega}{s} L_s,$$

$$L_s = \int_0^{\infty} e^{-st} \sin \omega t dt = \left[-\frac{e^{-st}}{s} \sin \omega t \right]_0^{\infty} + \frac{\omega}{s} \int_0^{\infty} e^{-st} \cos \omega t dt = \frac{\omega}{s} L_c.$$

互相替換

By substituting L_s into the formula for L_c on the right and then by substituting L_c into the formula for L_s on the right, we obtain

移項整理！

$$\begin{aligned} L_c &= \frac{1}{s} - \frac{\omega}{s} \frac{\omega}{s} L_c, & L_c \left(1 + \frac{\omega^2}{s^2}\right) &= \frac{1}{s}, & L_c &= \frac{s}{s^2 + \omega^2} = \mathcal{L}\{\cos \omega t\} \\ L_s &= \frac{\omega}{s} \left(\frac{1}{s} - \frac{\omega}{s} L_s\right), & L_s \left(1 + \frac{\omega^2}{s^2}\right) &= \frac{\omega}{s^2}, & L_s &= \frac{\omega}{s^2 + \omega^2} = \mathcal{L}\{\sin \omega t\} \end{aligned}$$

Basic transforms are listed in Table 6.1. We shall see that from these almost all the others can be obtained by the use of the general properties of the Laplace transform. Formulas 1–3 are special cases of formula 4, which is proved by induction. Indeed, it is true for $n = 0$ because of Example 1 and $0! = 1$. We make the induction hypothesis that it holds for any integer $n \geq 0$ and then get it for $n + 1$ directly from (1). Indeed, integration by parts first gives

$$\mathcal{L}(t^{n+1}) = \int_0^\infty e^{-st} t^{n+1} dt = -\frac{1}{s} e^{-st} t^{n+1} \Big|_0^\infty + \frac{n+1}{s} \int_0^\infty e^{-st} t^n dt.$$

Now the integral-free part is zero and the last part is $(n+1)/s$ times $\mathcal{L}(t^n)$. From this and the induction hypothesis,

$$\mathcal{L}(t^{n+1}) = \frac{n+1}{s} \mathcal{L}(t^n) = \frac{n+1}{s} \cdot \frac{n!}{s^{n+1}} = \frac{(n+1)!}{s^{n+2}}.$$

This proves formula 4.

非常重要！

$0! = 1$

$$\mathcal{L}\{1\} = \frac{1}{s} \rightarrow \mathcal{L}\{e^{at}\} = \frac{1}{s-a}$$

Table 6.1 Some Functions $f(t)$ and Their Laplace Transforms $\mathcal{L}\{f\}$

	$f(t)$	$\mathcal{L}\{f\}$		$f(t)$	$\mathcal{L}\{f\}$
1	$1 = t^0$	$\frac{1}{s}$	7	$\cos \omega t$	$\frac{s}{s^2 + \omega^2}$
2	t	$\frac{1}{s^2}$	8	$\sin \omega t$	$\frac{\omega}{s^2 + \omega^2}$
3	t^2	$\frac{2!}{s^3}$	9	$\cosh at$	$\frac{s}{s^2 - a^2}$
4	t^n ($n = 0, 1, \dots$)	$\frac{n!}{s^{n+1}}$	10	$\sinh at$	$\frac{a}{s^2 - a^2}$
5	t^a (a positive)	$\frac{\Gamma(a+1)}{s^{a+1}}$	11	$e^{at} \cos \omega t$	$\frac{s-a}{(s-a)^2 + \omega^2}$
6	e^{at}	$\frac{1}{s-a}$	12	$e^{at} \sin \omega t$	$\frac{\omega}{(s-a)^2 + \omega^2}$

第一平移定理

$$f = 1 \times e^{at} \rightarrow \mathcal{L}\{f\} = \frac{1}{s-a}$$

$$f = t \times e^{at} \rightarrow \mathcal{L}\{f\} = \frac{1}{(s-a)^2}$$

$$f = t \times e^{-at} \rightarrow \mathcal{L}\{f\} = \frac{1}{(s+a)^2}$$

e^{-at}

$\frac{1}{s+a}$

第一平移定理

$$s \xrightarrow{e^{at}} s-a$$

$$s \xrightarrow{e^{-at}} s+a$$

$\Gamma(a+1)$ in formula 5 is the so-called **gamma function** [(15) in Sec. 5.5 or (24) in App. A3.1]. We get formula 5 from (1), setting $st = x$:

$$\mathcal{L}(t^a) = \int_0^\infty e^{-st} t^a dt = \int_0^\infty e^{-x} \left(\frac{x}{s}\right)^a \frac{dx}{s} = \frac{1}{s^{a+1}} \int_0^\infty e^{-x} x^a dx$$

where $s > 0$. The last integral is precisely that defining $\Gamma(a+1)$, so we have $\Gamma(a+1)/s^{a+1}$, as claimed. (CAUTION! $\Gamma(a+1)$ has x^a in the integral, not x^{a+1} .)

Note the formula 4 also follows from 5 because $\Gamma(n+1) = n!$ for integer $n \geq 0$.

Formulas 6–10 were proved in Examples 2–4. Formulas 11 and 12 will follow from 7 and 8 by “shifting,” to which we turn next.

s-Shifting: Replacing s by $s - a$ in the Transform

The Laplace transform has the very useful property that, if we know the transform of $f(t)$, we can immediately get that of $e^{at}f(t)$, as follows.

THEOREM 2

First Shifting Theorem, s-Shifting

If $f(t)$ has the transform $F(s)$ (where $s > k$ for some k), then $e^{at}f(t)$ has the transform $F(s-a)$ (where $s-a > k$). In formulas,

$$\mathcal{L}\{e^{at}f(t)\} = F(s-a)$$

$$\mathcal{L}\{e^{3t}f(t)\} = F(s-3)$$

or, if we take the inverse on both sides,

$$e^{at}f(t) = \mathcal{L}^{-1}\{F(s-a)\}$$

$$e^{-5t}f(t) = \mathcal{L}^{-1}\{F(s+5)\}$$

PROOF We obtain $F(s-a)$ by replacing s with $s-a$ in the integral in (1), so that

$$F(s) = \int_0^\infty e^{-st} f(t) dt = \mathcal{L}\{f(t)\}$$

$$F(s-a) = \int_0^\infty e^{-(s-a)t} f(t) dt = \int_0^\infty e^{-st} [e^{at} f(t)] dt = \mathcal{L}\{e^{at} f(t)\}.$$

If $F(s)$ exists (i.e., is finite) for s greater than some k , then our first integral exists for $s-a > k$. Now take the inverse on both sides of this formula to obtain the second formula in the theorem. (CAUTION! $-a$ in $F(s-a)$ but $+a$ in $e^{at}f(t)$.) ■

EXAMPLE 5

s-Shifting: Damped Vibrations. Completing the Square

From Example 4 and the first shifting theorem we immediately obtain formulas 11 and 12 in Table 6.1,

$$\mathcal{L}\{e^{at} \cos \omega t\} = \frac{s-a}{(s-a)^2 + \omega^2}, \quad \mathcal{L}\{e^{at} \sin \omega t\} = \frac{\omega}{(s-a)^2 + \omega^2}.$$

For instance, use these formulas to find the inverse of the transform

$$\mathcal{L}(f) = \frac{3s-137}{s^2+2s+401}.$$

整理成可代入公式的形式，很重要！

$$\mathcal{L}\{\cos \omega t\} = \frac{s}{s^2 + \omega^2}$$

$$\mathcal{L}\{\sin \omega t\} = \frac{\omega}{s^2 + \omega^2}$$

Solution. Applying the inverse transform, using its linearity (Prob. 24), and completing the square, we obtain

$$\mathcal{L}(f) = \frac{3s - 137}{s^2 + 2s + 401} \rightarrow f = \mathcal{L}^{-1} \left\{ \frac{3(s+1) - 140}{(s+1)^2 + 400} \right\} = 3\mathcal{L}^{-1} \left\{ \frac{s+1}{(s+1)^2 + 20^2} \right\} - 7\mathcal{L}^{-1} \left\{ \frac{20}{(s+1)^2 + 20^2} \right\}.$$

We now see that the inverse of the right side is the damped vibration (Fig. 114)

$$f(t) = e^{-t} (3 \cos 20t - 7 \sin 20t).$$

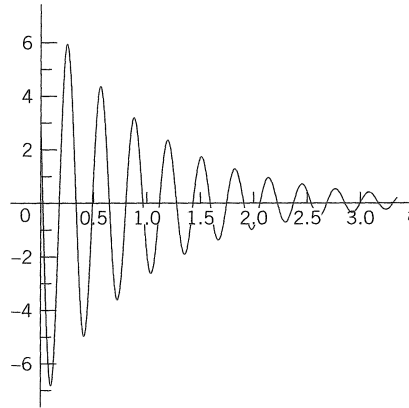


Fig. 114. Vibrations in Example 5

Existence and Uniqueness of Laplace Transforms

This is not a big *practical* problem because in most cases we can check the solution of an ODE without too much trouble. Nevertheless we should be aware of some basic facts.

A function $f(t)$ has a Laplace transform if it does not grow too fast, say, if for all $t \geq 0$ and some constants M and k it satisfies the “**growth restriction**”

$$|f(t)| \leq Me^{kt}.$$

(The growth restriction (2) is sometimes called “growth of exponential order,” which may be misleading since it hides that the exponent must be kt , not kt^2 or similar.)

$f(t)$ need not be continuous, but it should not be too bad. The technical term (generally used in mathematics) is *piecewise continuity*. $f(t)$ is **piecewise continuous** on a finite interval $a \leq t \leq b$ where f is defined, if this interval can be divided into *finitely many* subintervals in each of which f is continuous and has finite limits as t approaches either endpoint of such a subinterval from the interior. This then gives **finite jumps** as in Fig. 115 as the only possible discontinuities, but this suffices in most applications, and so does the following theorem.

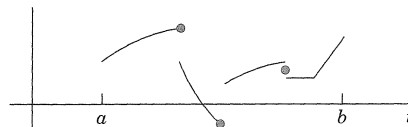


Fig. 115. Example of a piecewise continuous function $f(t)$.
(The dots mark the function values at the jumps.)

$$\begin{aligned} \frac{3s-137}{s^2+2s+401} &= \frac{3(s+1) - 137}{(s+1)^2 + 20^2} \\ &= \frac{3(s+1)}{(s+1)^2 + 20^2} - 7 \frac{20}{(s+1)^2 + 20^2} \\ \mathcal{L}^{-1}(F(s)) &= 3 \cos 20t \times e^{-t} \\ &\quad - 7 \sin 20t \times e^{-t} \end{aligned}$$

$$\mathcal{L}[t^n] = \frac{n!}{s^{n+1}}$$

$$\begin{aligned} \mathcal{L}^{-1}\left[\frac{1}{s^4}\right] &= \frac{1}{3!} \mathcal{L}^{-1}\left[\frac{3!}{s^4}\right] \\ &= \frac{1}{6} t^3 \end{aligned}$$

THEOREM 3

Existence Theorem for Laplace Transforms

If $f(t)$ is defined and piecewise continuous on every finite interval on the semi-axis $t \geq 0$ and satisfies (2) for all $t \geq 0$ and some constants M and k , then the Laplace transform $\mathcal{L}(f)$ exists for all $s > k$.

PROOF Since $f(t)$ is piecewise continuous, $e^{-st}f(t)$ is integrable over any finite interval on the t -axis. From (2), assuming that $s > k$ (to be needed for the existence of the last of the following integrals), we obtain the proof of the existence of $\mathcal{L}(f)$ from

$$|\mathcal{L}(f)| = \left| \int_0^\infty e^{-st}f(t) dt \right| \leq \int_0^\infty |f(t)|e^{-st} dt \leq \int_0^\infty Me^{kt}e^{-st} dt = \frac{M}{s-k}. \quad \blacksquare$$

Note that (2) can be readily checked. For instance, $\cosh t < e^t$, $t^n < n!e^t$ (because $t^n/n!$ is a single term of the Maclaurin series), and so on. A function that does not satisfy (2) for any M and k is e^{t^2} (take logarithms to see it). We mention that the conditions in Theorem 3 are sufficient rather than necessary (see Prob. 22).









Uniqueness. If the Laplace transform of a given function exists, it is uniquely determined. Conversely, it can be shown that if two functions (both defined on the positive real axis) have the same transform, these functions cannot differ over an interval of positive length, although they may differ at isolated points (see Ref. [A14] in App. 1). Hence we may say that the inverse of a given transform is essentially unique. In particular, if two continuous functions have the same transform, they are completely identical.

PROBLEM SET 6.1

1-16 LAPLACE TRANSFORMS

Find the transform. Show the details of your work. Assume that a, b, ω, θ are constants.

1. $2t + 8$
2. $(a - bt)^2$
3. $\cos 2\pi t$
4. $\cos^2 \omega t$
5. $e^{3t} \sinh t$
6. $e^{-t} \sinh 4t$
7. $\cos(\omega t + \theta)$
8. $1.5 \sin(3t - \pi/2)$




17-24 SOME THEORY

17. **Table 6.1.** Convert this table to a table for finding inverse transforms (with obvious changes, e.g., $\mathcal{L}^{-1}(1/s^n) = t^{n-1}/(n-1)$, etc).
18. Using $\mathcal{L}(f)$ in Prob. 10, find $\mathcal{L}(f_1)$, where $f_1(t) = 0$ if $t \leq 2$ and $f_1(t) = 1$ if $t > 2$.
19. **Table 6.1.** Derive formula 6 from formulas 9 and 10.
20. **Nonexistence.** Show that e^{t^2} does not satisfy a condition of the form (2).
21. **Nonexistence.** Give simple examples of functions (defined for all $t \geq 0$) that have no Laplace transform.
22. **Existence.** Show that $\mathcal{L}(1/\sqrt{t}) = \sqrt{\pi}/s$. [Use (30) $\Gamma(\frac{1}{2}) = \sqrt{\pi}$ in App. 3.1.] Conclude from this that the conditions in Theorem 3 are sufficient but not necessary for the existence of a Laplace transform.

補充資料：

Find the Laplace transform of the following function.

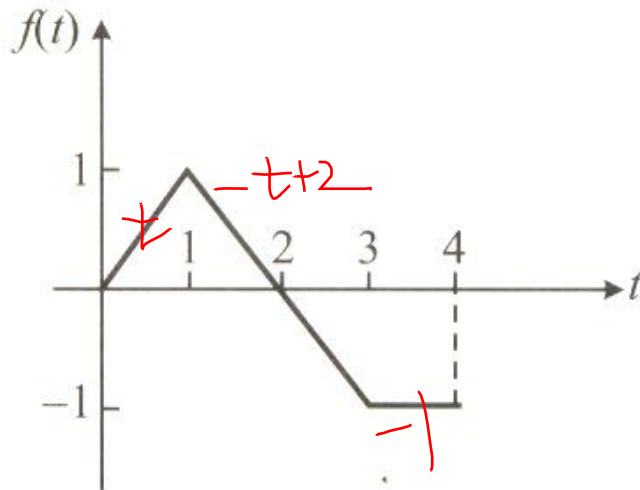

【Solution】

(a)

$$L[f(t)] = \int_0^1 e^{-st} t dt + \int_1^3 e^{-st} (-t+2) dt + \int_3^4 e^{-st} (-1) dt$$

(b)

$$f(t) = [u(t) - u(t-1)] \underline{t} + [u(t-1) - u(t-3)] \underline{(-t+2)} + [u(t-3) - u(t-4)] \cdot \underline{(-1)}$$

$$f(t) = t - 2u(t-1) \cdot (t-1) + u(t-3) \cdot (t-3) + u(t-4)$$

$$L[f(t)] = \frac{1}{s^2} - \frac{2}{s^2} e^{-s} + \frac{1}{s^2} e^{-3s} + \frac{1}{s} e^{-4s}$$

$$\begin{aligned} f(t) &= tu(t-0) - tu(t-1) - tu(t-1) + tu(t-3) + 2u(t-1) - 2u(t-3) - u(t-3) + u(t-4) \\ &= (t-0)u(t-0) - 2(t-1)u(t-1) + (t-3)u(t-3) + u(t-4) \end{aligned}$$

23. Change of scale. If $\mathcal{L}(f(t)) = F(s)$ and c is any positive constant, show that $\mathcal{L}(f(ct)) = F(s/c)/c$ (**Hint:** Use (1).) Use this to obtain $\mathcal{L}(\cos \omega t)$ from $\mathcal{L}(\cos t)$.

24. Inverse transform. Prove that $\mathcal{L}^{-1}$ is linear. **Hint:** Use the fact that $\mathcal{L}$ is linear.

25–32 INVERSE LAPLACE TRANSFORMS

Given $F(s) = \mathcal{L}(f)$, find $f(t)$. a, b, L, n are constants. Show the details of your work.

$$25. \frac{0.2s + 1.4}{s^2 + 1.96}$$

$$26. \frac{5s + 1}{s^2 - 25}$$

$$27. \frac{s}{L^2 s^2 + 1/4 \pi^2}$$

$$28. \frac{1}{(s + \sqrt{2})(s - \sqrt{3})}$$

$$29. \frac{2}{s^4} - \frac{48}{s^6}$$

$$30. \frac{4s + 32}{s^2 - 16}$$

$$31. \frac{-s + 11}{s^2 - 2s - 3}$$

$$32. \frac{1}{(s + a)(s + b)}$$

33–45 APPLICATION OF s-SHIFTING

In Probs. 33–36 find the transform. In Probs. 37–45 find the inverse transform. Show the details of your work.

$$33. t^3 e^{-2t}$$

$$34. ke^{-at} \cos \omega t$$

$$35. 2e^{-1/2t} \sin 4\pi t$$

$$36. \sinh t \cos t$$

$$37. \frac{2\pi}{(s + \pi)^3}$$

$$38. \frac{6}{(s + 1)^3}$$

$$39. \frac{90}{(s + \sqrt{3})^6}$$

$$40. \frac{4}{s^2 - 2s - 3}$$

$$41. \frac{\pi}{s^2 + 4s\pi + 3\pi^2}$$

$$42. \frac{a_0}{s + 1} + \frac{a_1}{(s + 1)^2} + \frac{a_2}{(s + 1)^3}$$

$$43. \frac{6s + 7}{2s^2 + 4s + 10}$$

$$44. \frac{a(s + k) + b\pi}{(s + k)^2 + \pi^2}$$

$$45. \frac{k_0}{s} + \frac{k_1}{(s - a)^2}$$

6.2 Transforms of Derivatives and Integrals. ODEs

$$\mathcal{L}[f] = F$$

$$\mathcal{L}[f'] = ?$$

$$\mathcal{L}[f''] = ?$$

$$\mathcal{L}[\int f dt] = ?$$

The Laplace transform is a method of solving ODEs and initial value problems. The crucial idea is that operations of calculus on functions are replaced by operations of algebra on transforms. Roughly, differentiation of $f(t)$ will correspond to multiplication of $\mathcal{L}(f)$ by s (see Theorems 1 and 2) and integration of $f(t)$ to division of $\mathcal{L}(f)$ by s . To solve

we must first consider the Laplace transform of derivatives. You have encountered this idea in your study of logarithms. Under the application of the natural logarithm, product of numbers becomes a sum of their logarithms, a division of numbers becomes difference of logarithms (see Appendix 3, formulas (2), (3)). To simplify calculations one of the main reasons that logarithms were invented in pre-computer times.

學習重點：

1. 微分函數的拉式轉換及其應用
2. 積分函數的拉式轉換及其應用
3. 以拉式轉換解ODE問題

THEOREM 1

Laplace Transform of Derivatives

The transforms of the first and second derivatives of $f(t)$ satisfy

(1)

$$\mathcal{L}(f') = s\mathcal{L}(f) - f(0)$$

(2)

$$\mathcal{L}(f'') = s^2\mathcal{L}(f) - sf(0) - f'(0).$$

很重要！

Formula (1) holds if $f(t)$ is continuous for all $t \geq 0$ and satisfies the growth restriction (2) in Sec. 6.1 and $f'(t)$ is piecewise continuous on every finite interval on the semi-axis $t \geq 0$. Similarly, (2) holds if f and f' are continuous for all $t \geq 0$ and satisfy the growth restriction and f'' is piecewise continuous on every finite interval on the semi-axis $t \geq 0$.

初始條件

$$\mathcal{L}[f''] = s^2 F(s) - sf(0) - f'(0)$$

PROOF

We prove (1) first under the *additional assumption* that f' is continuous. Then, by the definition and integration by parts,

以分部積分展開

$$\int u dv = uv - \int v du$$

$$u = e^{-st} \rightarrow du = -s e^{-st} dt$$

$$dv = f'(t) dt \rightarrow v = f(t)$$

$$\mathcal{L}(f') = \int_0^\infty e^{-st} f'(t) dt = \left[e^{-st} f(t) \right]_0^\infty + s \int_0^\infty e^{-st} f(t) dt = -f(0) + s \mathcal{L}(f)$$

Since f satisfies (2) in Sec. 6.1, the integrated part on the right is zero at the upper limit when $s > k$, and at the lower limit it contributes $-f(0)$. The last integral is $\mathcal{L}(f)$. It exists for $s > k$ because of Theorem 3 in Sec. 6.1. Hence $\mathcal{L}(f')$ exists when $s > k$ and (1) holds.

If f' is merely piecewise continuous, the proof is similar. In this case the interval of integration of f' must be broken up into parts such that f' is continuous in each such part.

The proof of (2) now follows by applying (1) to f'' and then substituting (1), that is

$$\mathcal{L}(f'') = s \mathcal{L}(f') - f'(0) = s[s \mathcal{L}(f) - f(0)] - f'(0) = s^2 \mathcal{L}(f) - sf(0) - f'(0).$$

Continuing by substitution as in the proof of (2) and using induction, we obtain the following extension of Theorem 1.

THEOREM 2

Laplace Transform of the Derivative $f^{(n)}$ of Any Order

Let $f, f', \dots, f^{(n-1)}$ be continuous for all $t \geq 0$ and satisfy the growth restriction (2) in Sec. 6.1. Furthermore, let $f^{(n)}$ be piecewise continuous on every finite interval on the semi-axis $t \geq 0$. Then the transform of $f^{(n)}$ satisfies

$$(3) \quad \mathcal{L}(f^{(n)}) = s^n \mathcal{L}(f) - s^{n-1} f(0) - s^{n-2} f'(0) - \dots - f^{(n-1)}(0).$$

至少背到三階微分之轉換

Transform of a Resonance Term (Sec. 6.8)

Let $f(t) = t \sin \omega t$. Then $f(0) = 0$, $f'(t) = \sin \omega t + \omega t \cos \omega t$, $f'(0) = 0$, $f'' = 2\omega \cos \omega t - \omega^2 t \sin \omega t$. Hence by (2),

$$\mathcal{L}(f'') = 2\omega \frac{s}{s^2 + \omega^2} - \omega^2 \mathcal{L}(f) = s^2 \mathcal{L}(f), \quad \text{thus} \quad \mathcal{L}(f) = \mathcal{L}(t \sin \omega t) = \frac{2\omega s}{(s^2 + \omega^2)^2}.$$

EXAMPLE 1

EXAMPLE 2

Formulas 7 and 8 in Table 6.1, Sec. 6.1

This is a third derivation of $\mathcal{L}(\cos \omega t)$ and $\mathcal{L}(\sin \omega t)$; cf. Example 4 in Sec. 6.1. Let $f(t) = \cos \omega t$. Then $f(0) = 1$, $f'(0) = 0$, $f''(t) = -\omega^2 \cos \omega t$. From this and (2) we obtain

$$\mathcal{L}(f'') = s^2 \mathcal{L}(f) - s = -\omega^2 \mathcal{L}(f). \quad \text{By algebra,} \quad \mathcal{L}(\cos \omega t) = \frac{s}{s^2 + \omega^2}.$$

Similarly, let $g = \sin \omega t$. Then $g(0) = 0$, $g' = \omega \cos \omega t$. From this and (1) we obtain

$$\mathcal{L}(g') = s \mathcal{L}(g) = \omega \mathcal{L}(\cos \omega t). \quad \text{Hence,} \quad \mathcal{L}(\sin \omega t) = \frac{\omega}{s} \mathcal{L}(\cos \omega t) = \frac{\omega}{s^2 + \omega^2}.$$

Laplace Transform of the Integral of a Function

Differentiation and integration are inverse operations, and so are multiplication and division. Since differentiation of a function $f(t)$ (roughly) corresponds to multiplication of its transform $\mathcal{L}(f)$ by s , we expect integration of $f(t)$ to correspond to division of $\mathcal{L}(f)$ by s :

(另解)

$$g'' = -\omega^2 \sin \omega t$$

$$\downarrow \mathcal{L}$$

$$\mathcal{L}(g'') = s^2 \mathcal{L}(g) - sg(0) - g'(0)$$

$$= s^2 \mathcal{L}(\sin \omega t) - 0 - \omega$$

$$= -\omega^2 \mathcal{L}(\sin \omega t)$$

$$(s^2 + \omega^2) \mathcal{L}(\sin \omega t) = \omega$$

$$\rightarrow \mathcal{L}(\sin \omega t) = \frac{\omega}{s^2 + \omega^2}$$

先取F(s)

先取f(t)

THEOREM 3
Laplace Transform of Integral

Let $F(s)$ denote the transform of a function $f(t)$ which is piecewise continuous for $t \geq 0$ and satisfies a growth restriction (2), Sec. 6.1. Then, for $s > 0$, $s > k$, and $t > 0$,

$$\mathcal{L}\left\{\int_0^t f(\tau) d\tau\right\} = \frac{1}{s} F(s), \quad \text{thus} \quad \int_0^t f(\tau) d\tau = \mathcal{L}^{-1}\left\{\frac{1}{s} F(s)\right\}.$$

PROOF

Denote the integral in (4) by $g(t)$. Since $f(t)$ is piecewise continuous, $g(t)$ is continuous, and (2), Sec. 6.1, gives

$$|g(t)| = \left| \int_0^t f(\tau) d\tau \right| \leq \int_0^t |f(\tau)| d\tau \leq M \int_0^t e^{k\tau} d\tau = \frac{M}{k} (e^{kt} - 1) \leq \frac{M}{k} e^{kt} \quad (k > 0).$$

This shows that $g(t)$ also satisfies a growth restriction. Also, $g'(t) = f(t)$, except at points at which $f(t)$ is discontinuous. Hence $g'(t)$ is piecewise continuous on each finite interval and, by Theorem 1, since $g(0) = 0$ (the integral from 0 to 0 is zero)

$$\mathcal{L}\{f(t)\} = \mathcal{L}\{g'(t)\} = s\mathcal{L}\{g(t)\} - g(0) = s\mathcal{L}\{g(t)\}.$$

Division by s and interchange of the left and right sides gives the first formula in (4), from which the second follows by taking the inverse transform on both sides. ■

EXAMPLE 3
Application of Theorem 3: Formulas 19 and 20 in the Table of Sec. 6.9

Using Theorem 3, find the inverse of $\frac{1}{s(s^2 + \omega^2)}$ and $\frac{1}{s^2(s^2 + \omega^2)}$.

Solution. From Table 6.1 in Sec. 6.1 and the integration in (4) (second formula with the sides interchanged) we obtain

(為什麼不可以用s處理?)

$$\frac{1}{\omega} \mathcal{L}^{-1}\left\{\frac{1}{s^2 + \omega^2}\right\} = \frac{\sin \omega t}{\omega} \quad \mathcal{L}^{-1}\left\{\frac{1}{s(s^2 + \omega^2)}\right\} = \int_0^t \frac{\sin \omega \tau}{\omega} d\tau = \frac{1}{\omega^2} (1 - \cos \omega t).$$

This is formula 19 in Sec. 6.9. Integrating this result again and using (4) as before, we obtain formula 20 in Sec. 6.9:

利用上面的結果, 再積分一次

$$\mathcal{L}^{-1}\left\{\frac{1}{s^2(s^2 + \omega^2)}\right\} = \mathcal{L}^{-1}\left\{\frac{1}{s^2} \cdot \frac{1}{(s^2 + \omega^2)}\right\} = \frac{1}{\omega^2} \int_0^t (1 - \cos \omega \tau) d\tau = \left[\frac{\tau}{\omega^2} - \frac{\sin \omega \tau}{\omega^3} \right]_0^t = \frac{t}{\omega^2} - \frac{\sin \omega t}{\omega^3}.$$


It is typical that or directly with $\sin \omega t / \omega$ integrate twice this example, try partial fraction reduction. ■

Differential Equations, Initial Value Problems

Let us now discuss how the Laplace transform method solves ODEs and initial value problems. Consider an initial value problem

$$y'' + ay' + by = r(t), \quad y(0) = K_0, \quad y'(0) = K_1 \dots \dots \dots (5)$$

代表系統



$F_0 \sin \omega t$ (外力(輸入))

系統的運動方程式: $mx'' + cx' + kx = F_0 \sin \omega t$
代表系統

輸入

where a and b are constant. Here $r(t)$ is the given input (driving force) applied to the mechanical or electrical system and $y(t)$ is the output (response to the input) to be obtained. In Laplace's method we do three steps:

注意程序！

1. 等號兩邊取拉式轉換
 $\mathcal{L}[y(t)] = Y(s)$
2. 代數運算(部份分式展開很重要！)
3. 取反拉式轉換
 $\mathcal{L}^{-1}[Y(s)] = y(t)$

Step 1. Setting up the subsidiary equation. This is an algebraic equation for the transform $Y = \mathcal{L}(y)$ obtained by transforming (5) by means of (1) and (2), namely,

$$[s^2 Y - sy(0) - y'(0)] + a[sY - y(0)] + bY = R(s)$$

等號兩邊取拉氏轉換，並代入初始條件

where $R(s) = \mathcal{L}(r)$. Collecting the Y -terms, we have the subsidiary equation

$$(s^2 + as + b)Y = (s + a)y(0) + y'(0) + R(s).$$

整理，有 Y 的在等號左邊，其他的在右邊

Step 2. Solution of the subsidiary equation by algebra. We divide by $s^2 + as + b$ and use the so-called transfer function

轉移函數(自動控制的學習重點)

設計PID控制器

(6)

$$Q(s) = \frac{1}{s^2 + as + b} = \frac{1}{(s + \frac{1}{2}a)^2 + b - \frac{1}{4}a^2}.$$

令分母=0, 可求出 s_1, s_2 用以判斷系統的特性

(Q is often denoted by H , but we need H much more frequently for other purposes.) This gives the solution

(7)

$$Y(s) = [(s + a)y(0) + y'(0)]Q(s) + R(s)Q(s).$$

If $y(0) = y'(0) = 0$, this is simply $Y = RQ$; hence

R 輸入

Q (系統)

Y 輸出

(代表系統)

$$Q = \frac{Y}{R} = \frac{\mathcal{L}(\text{output})}{\mathcal{L}(\text{input})} = \frac{\text{輸出}}{\text{輸入}} = \text{轉移函數}$$

and this explains the name of Q . Note that Q depends neither on $r(t)$ nor on the initial conditions (but only on a and b).

Step 3. Inversion of Y to obtain $y = \mathcal{L}^{-1}(Y)$. We reduce (7) (usually by *partial fractions* as in calculus) to a sum of terms whose inverses can be found from the tables (e.g., in Sec. 6.1 or Sec. 6.9) or by a CAS, so that we obtain the solution $y(t) = \mathcal{L}^{-1}(Y)$ of (5).

EXAMPLE 4

Initial Value Problem: The Basic Laplace Steps

Solve

$$y'' - y = t, \quad y(0) = 1, \quad y'(0) = 1.$$

Solution. **Step 1.** From (2) and Table 6.1 we get the subsidiary equation [with $Y = \mathcal{L}(y)$]

$$\textcircled{1} \quad s^2 Y - sy(0) - y'(0) - Y = 1/s^2, \quad \text{thus} \quad \textcircled{2} \quad (s^2 - 1)Y = s + 1 + 1/s^2.$$

Step 2. The transfer function is $Q = 1/(s^2 - 1)$, and (7) becomes

$$Y = (s + 1)Q + \frac{1}{s^2}Q = \frac{s + 1}{s^2 - 1} + \frac{1}{s^2(s^2 - 1)}.$$


Simplification of the first fraction and an expansion of the last fraction gives

$$Y = \frac{1}{s - 1} + \left(\frac{1}{s^2 - 1} - \frac{1}{s^2} \right).$$


部份分式展開與化簡成可代入公式的型式(最難!)
要多練習!!

$$\begin{aligned} \mathcal{L}[f'] &= s\mathcal{L}[f] - f(0) \\ \mathcal{L}[f''] &= s^2\mathcal{L}[f] - sf(0) - f'(0) \end{aligned}$$

自動控制領域之 PID 控制器設計

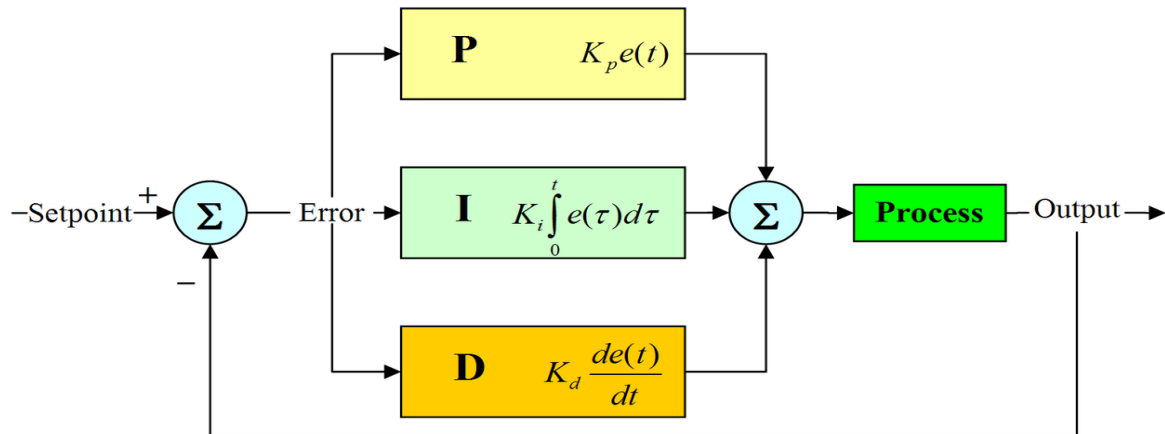


PID 控制器的方塊圖

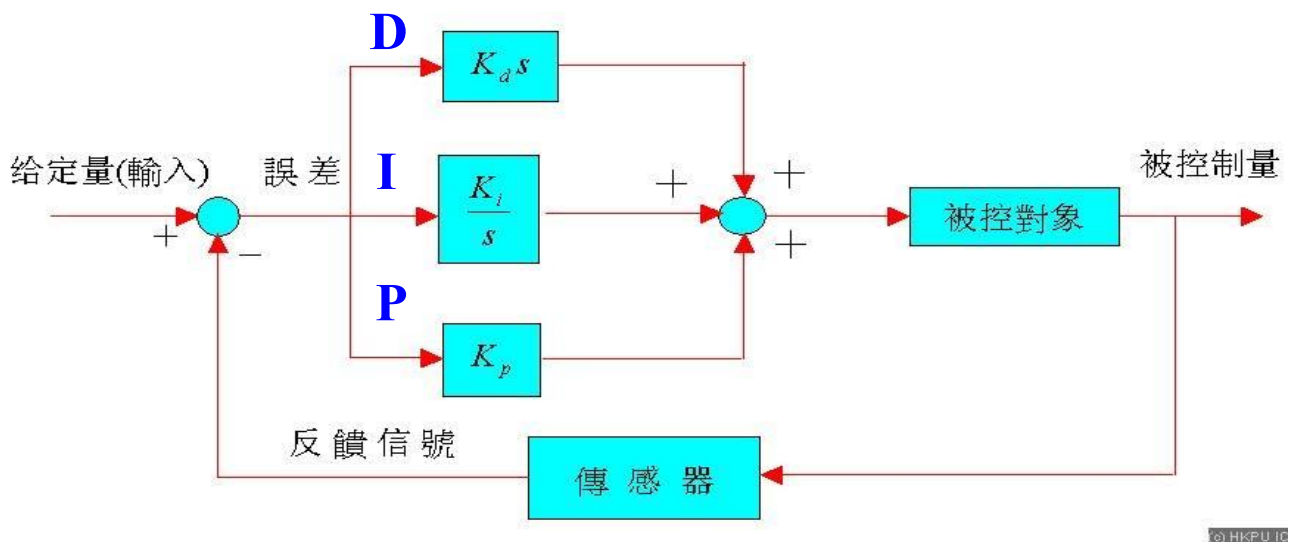


拉普拉斯轉換在 PID 控制器設計的應用

- 考慮 PID 控制系統如圖所示,令 $a = 0.2$ 當此閉迴路有一對共軛複根為 $\lambda = -1 \pm \sqrt{5}j$ 時,求解 K 、 b 及另一極點?(計算至小數點後第 3 位,以下四捨五入) (15 分)

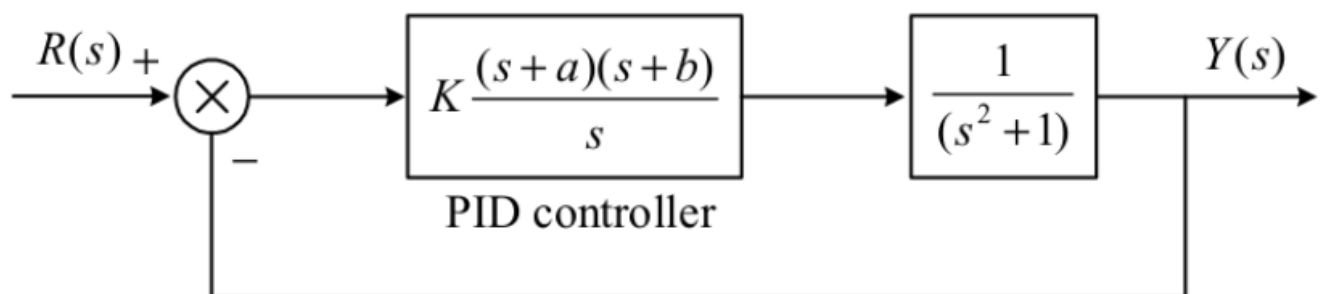


經濟部所屬事業機構新進職員甄試-自動控制


1. 考慮 PID 控制系統如圖所示,令 $a = 0$. 2 當此閉迴路有一對共軛複根為 $\lambda = -1 \pm \sqrt{5}j$ 時,求解 K 、 b 及另一極點?(計算至小數點後第 3 位,以下四捨五入)
(15 分)

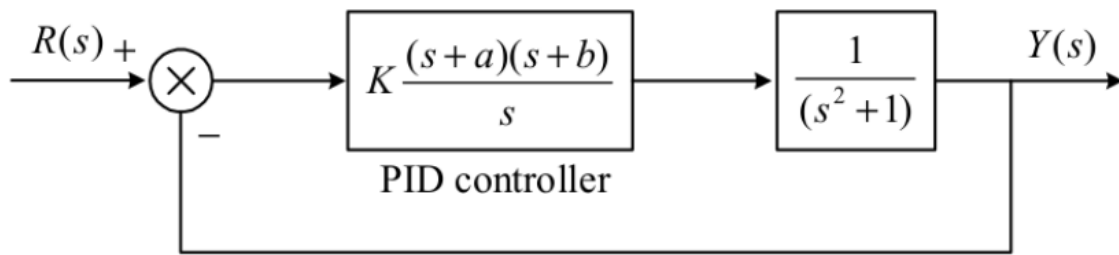

2. 如圖 (a) 所示為一控制方塊圖,請將圖 (a) 簡化成等效方塊如圖 (b) 所示,請問:(20分,每小題 10 分)
(一) 等效方塊圖中所示之 $G(s)$ 為何?
(二) 此閉迴路之轉移函數 $T(s) = Y(s) / R(s)$ 為何?

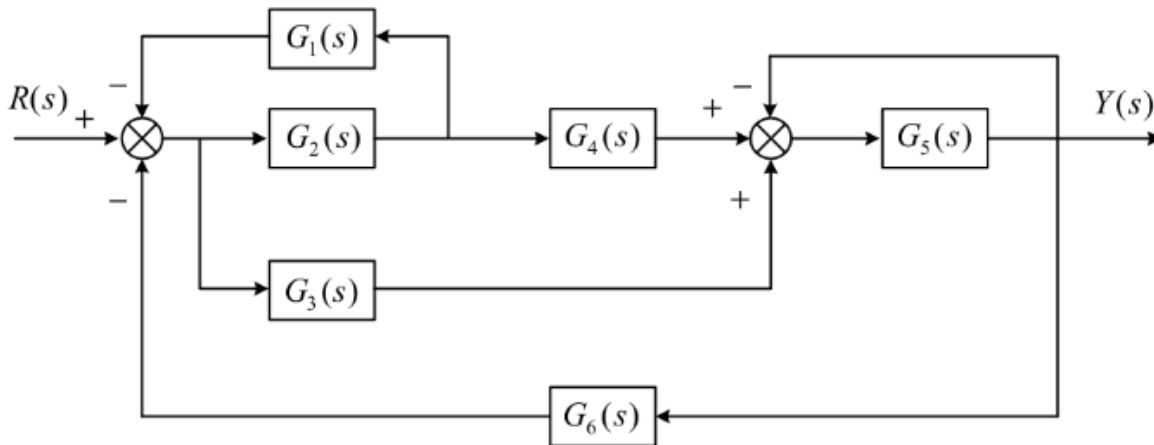


圖(a)

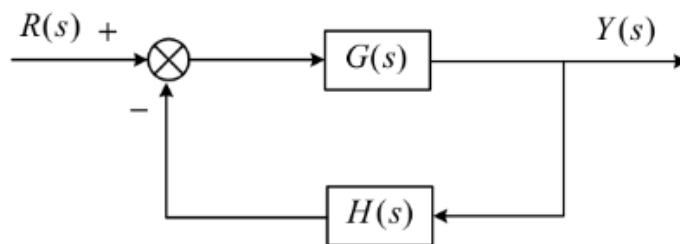

圖(b)

3. 考慮一閉迴路控制系統如圖所示,其開迴路轉移函數為 $\frac{16}{s(s+12)}$,請找出此系統之共振頻率、共振峰值及頻帶寬度為何值?(未列出算式不計分,計算至小數點後第 3 位,以下四捨五入)(15 分)

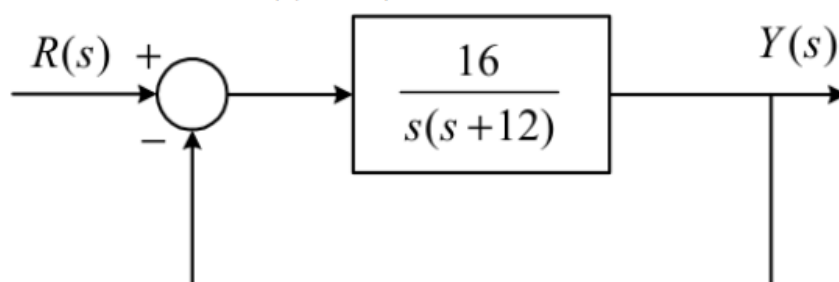


(學好拉普拉斯轉換技巧有
助於自動控制課程的銜接)

Step 3. From this expression for Y and Table 6.1 we obtain the solution

$$y(t) = \mathcal{L}^{-1}(Y) = \mathcal{L}^{-1}\left\{\frac{1}{s-1}\right\} + \mathcal{L}^{-1}\left\{\frac{1}{s^2-1}\right\} - \mathcal{L}^{-1}\left\{\frac{1}{s^2}\right\} = e^t + \sinh t - t.$$

The diagram in Fig. 116 summarizes our approach.

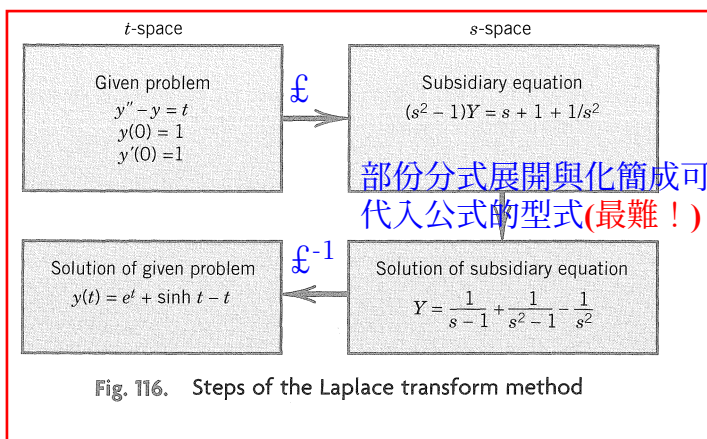

EXAMPLE 5

Comparison with the Usual Method

Solve the initial value problem

$$y'' + y' + 9y = 0, \quad y(0) = 0.16, \quad y'(0) = 0.$$

Solution. From (1) and (2) we see that the subsidiary equation is

$$s^2 Y - 0.16s + sY - 0.16 + 9Y = 0, \quad \text{thus} \quad (s^2 + s + 9)Y = 0.16(s + 1).$$

The solution is

$$Y = \frac{0.16(s+1)}{s^2 + s + 9} = \frac{0.16(s + \frac{1}{2}) + 0.08}{(s + \frac{1}{2})^2 + \frac{35}{4}} = 0.16 \frac{s + \frac{1}{2}}{(s + \frac{1}{2})^2 + (\frac{\sqrt{35}}{2})^2} + \frac{0.08}{(s + \frac{1}{2})^2 + (\frac{\sqrt{35}}{2})^2}$$

Hence by the first shifting theorem and the formulas for $\cos$ and $\sin$ in Table 6.1 we obtain

$$y(t) = \mathcal{L}^{-1}(Y) = e^{-t/2} \left(0.16 \cos \sqrt{\frac{35}{4}} t + \frac{0.08}{\frac{1}{2}\sqrt{35}} \sin \sqrt{\frac{35}{4}} t \right) = e^{-0.5t} (0.16 \cos 2.96t + 0.027 \sin 2.96t).$$

This agrees with Example 2, Case (III) in Sec. 2.4. The work was less.

Advantages of the Laplace Method

1. Solving a nonhomogeneous ODE does not require first solving the homogeneous ODE. See Example 4.
2. Initial values are automatically taken care of. See Examples 4 and 5.
3. Complicated inputs $r(t)$ (right sides of linear ODEs) can be handled very efficiently, as we show in the next sections.

初始條件 $t \neq 0$ 時該怎麼辦？

$$\mathcal{L}[f'] = s\mathcal{L}[f] - f(0)$$

$$\mathcal{L}[f''] = s^2\mathcal{L}[f] - sf(0) - f'(0)$$

EXAMPLE 6

Shifted Data Problems

This means initial value problems with initial conditions given at some $t = t_0 > 0$ instead of $t = 0$. For such a problem set $t = \tilde{t} + t_0$, so that $t = t_0$ gives $\tilde{t} = 0$ and the Laplace transform can be applied. For instance, solve

$$y'' + y = 2t, \quad y(\tfrac{1}{4}\pi) = \tfrac{1}{2}\pi, \quad y'(\tfrac{1}{4}\pi) = 2 - \sqrt{2}.$$

重要！

變成 $\tilde{t} = 0$

Solution. We have $t_0 = \frac{1}{4}\pi$ and we set $t = \tilde{t} + \frac{1}{4}\pi$. Then the problem is

$$\tilde{y}'' + \tilde{y} = 2(\tilde{t} + \tfrac{1}{4}\pi), \quad \tilde{y}(0) = \tfrac{1}{2}\pi, \quad \tilde{y}'(0) = 2 - \sqrt{2}$$

where $\tilde{y}(\tilde{t}) = y(t)$. Using (2) and Table 6.1 and denoting the transform of $\tilde{y}$ by $\tilde{Y}$, we see that the subsidiary equation of the “shifted” initial value problem is

$$\textcircled{1} \quad s^2\tilde{Y} - s \cdot \tfrac{1}{2}\pi - (2 - \sqrt{2}) + \tilde{Y} = \tfrac{2}{s^2} + \tfrac{\frac{1}{2}\pi}{s}, \quad \text{thus } \textcircled{2} \quad (s^2 + 1)\tilde{Y} = \tfrac{2}{s^2} + \tfrac{\frac{1}{2}\pi}{s} + \tfrac{1}{2}\pi s + 2 - \sqrt{2}.$$

Solving this algebraically for $\tilde{Y}$, we obtain

$$\tilde{Y} = \frac{2}{(s^2 + 1)s^2} + \frac{\frac{1}{2}\pi}{(s^2 + 1)s} + \frac{\frac{1}{2}\pi s}{s^2 + 1} + \frac{2 - \sqrt{2}}{s^2 + 1}. \quad \textcircled{3}$$

The inverse of the first two terms can be seen from Example 3 (with $\omega = 1$), and the last two terms give cos and sin,

$$\begin{aligned} \tilde{y} &= \mathcal{L}^{-1}(\tilde{Y}) = 2(\tilde{t} - \sin \tilde{t}) + \tfrac{1}{2}\pi(1 - \cos \tilde{t}) + \tfrac{1}{2}\pi \cos \tilde{t} + (2 - \sqrt{2}) \sin \tilde{t} \\ &= 2\tilde{t} + \tfrac{1}{2}\pi - \sqrt{2} \sin \tilde{t}. \end{aligned}$$

注意！ $\tilde{y}$ 不是解答

Now $\tilde{t} = t - \frac{1}{4}\pi$, $\sin \tilde{t} = \frac{1}{\sqrt{2}}(\sin t - \cos t)$, so that the answer (the solution) is

$$y = 2t - \sin t + \cos t.$$

$$\tilde{t} = t - \frac{\pi}{4}$$

代入

$$\sin(\alpha - \beta) = \sin(\alpha)\cos\beta - \cos\alpha\sin\beta$$

PROBLEM SET 6.2

1-11 INITIAL VALUE PROBLEMS (IVPS)

Solve the IVPs by the Laplace transform. If necessary, use partial fraction expansion as in Example 4 of the text. Show all details.

- $y' + \frac{2}{3}y = -4 \cos 2t, \quad y(0) = 0$
- $y' + 2y = 0, \quad y(0) = 1.5$
- $y'' + y' - 6y = 0, \quad y(0) = 1, \quad y'(0) = 1$
- $y'' + 9y = 10e^{-t}, \quad y(0) = 0, \quad y'(0) = 0$
- $y'' - \frac{1}{4}y = 0, \quad y(0) = 12, \quad y'(0) = 0$
- $y'' - 6y' + 5y = 29 \cos 2t, \quad y(0) = 3.2, \quad y'(0) = 6.2$
- $y'' + 7y' + 12y = 21e^{3t}, \quad y(0) = 3.5, \quad y'(0) = -10$
- $y'' - 4y' + 4y = 0, \quad y(0) = 8.1, \quad y'(0) = 3.9$
- $y'' - 3y' + 2y = 4t - 8, \quad y(0) = 2, \quad y'(0) = 7$
- $y'' + 0.04y = 0.02t^2, \quad y(0) = -25, \quad y'(0) = 0$
- $y'' + 3y' + 2.25y = 9t^3 + 64, \quad y(0) = 1, \quad y'(0) = 31.5$

12-15 SHIFTED DATA PROBLEMS

Solve the shifted data IVPs by the Laplace transform. Show the details.

- $y'' + 2y' - 3y = 0, \quad y(2) = -3, \quad y'(2) = -5$
- $y' - 6y = 0, \quad y(-1) = 4$
- $y'' + 2y' + 5y = 50t - 100, \quad y(2) = -4, \quad y'(2) = 14$
- $y'' + 3y' - 4y = 6e^{2t-3}, \quad y(1.5) = 4, \quad y'(1.5) = 5$

16-21 OBTAINING TRANSFORMS BY DIFFERENTIATION

Using (1) or (2), find $\mathcal{L}\{f\}$ if $f(t)$ equals:

- $t \cos 4t$
- $\cos^2 2t$
- $\sin^4 t$. Use Prob. 19.
- te^{at}
- $\cos^2 \omega t$
- $\sinh^2 t$

22. PROJECT. Further Results by Differentiation.

Proceeding as in Example 1, obtain

$$(a) \quad \mathcal{L}(t \cos \omega t) = \frac{s^2 - \omega^2}{(s^2 + \omega^2)^2}$$

and from this and Example 1: (b) formula 21, (c) 22, (d) 23 in Sec. 6.9,

$$(e) \quad \mathcal{L}(t \cosh at) = \frac{s^2 + a^2}{(s^2 - a^2)^2},$$

$$(f) \quad \mathcal{L}(t \sinh at) = \frac{2as}{(s^2 - a^2)^2}.$$

23–29

INVERSE TRANSFORMS
BY INTEGRATION

Using Theorem 3, find $f(t)$ if $\mathcal{L}(F)$ equals:

$$23. \quad \frac{2}{s^2} \qquad 24. \quad \frac{20}{s^3}$$

學習重點：

1. 認識單位步階函數與其拉氏轉換

2. 延遲時間的認識與第二平移定理(t-平移)

3. t-平移的拉氏轉換 $L[f(t-a)u(t-a)] = e^{-as}F(s)$
 $L^{-1}[e^{-as}F(s)] = f(t-a)u(t-a)$

30. PROJECT. Comments on Sec. 6.2. (a) Give reasons why Theorems 1 and 2 are more important than Theorem 3.

(b) Extend Theorem 1 by showing that if $f(t)$ is continuous, except for an ordinary discontinuity (finite jump) at some $t = a (> 0)$, the other conditions remaining as in Theorem 1, then (see Fig. 117)

$$(1^*) \quad \mathcal{L}(f') = s\mathcal{L}(f) - f(0) - [f(a+0) - f(a-0)]e^{-as}.$$

(c) Verify (1*) for $f(t) = e^{-t}$ if $0 < t < 1$ and 0 if $t > 1$.

(d) Compare the Laplace transform of solving ODEs with the method in Chap. 2. Give examples of your own to illustrate the advantages of the present method (to the extent we have seen them so far).

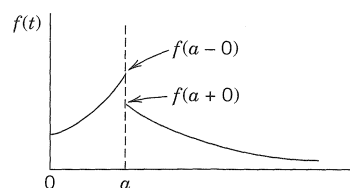


Fig. 117. Formula (1*)

單位步階函數

6.3 Unit Step Function (Heaviside Function).
Second Shifting Theorem (t-Shifting)

(是一種延遲時間的觀念！)

This section and the next one are extremely important because we shall now reach the point where the Laplace transform method shows its real power in applications and its superiority over the classical approach of Chap. 2. The reason is that we shall introduce two auxiliary functions, the *unit step function* or *Heaviside function* $u(t-a)$ (below) and *Dirac's delta* $\delta(t-a)$ (in Sec. 6.4). These functions are suitable for solving ODEs with complicated right sides of considerable engineering interest, such as single waves, inputs (driving forces) that are discontinuous or act for some time only, periodic inputs more general than just cosine and sine, or impulsive forces acting for an instant (hammerblows, for example).

Unit Step Function (Heaviside Function) $u(t-a)$

The **unit step function** or **Heaviside function** $u(t-a)$ is 0 for $t < a$, has a jump of size 1 at $t = a$ (where we can leave it undefined), and is 1 for $t > a$, in a formula:

(1)

$$u(t-a) = \begin{cases} 0 & \text{if } t < a \\ 1 & \text{if } t > a \end{cases}$$

 $(a \geq 0).$

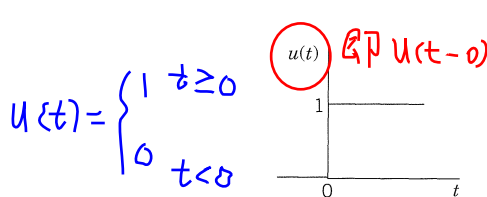
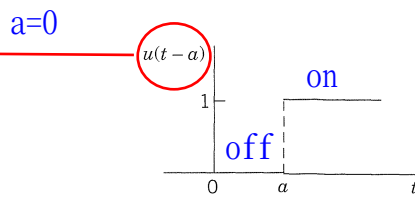
Fig. 118. Unit step function $u(t)$ Fig. 119. Unit step function $u(t - a)$

Figure 118 shows the special case $u(t)$, which has its jump at zero, and Fig. 119 the general case $u(t - a)$ for an arbitrary positive a . (For Heaviside, see Sec. 6.1.)

The transform of $u(t - a)$ follows directly from the defining integral in Sec. 6.1,

$$\mathcal{L}\{u(t - a)\} = \int_0^\infty e^{-st} u(t - a) dt = \int_a^\infty e^{-st} \cdot 1 dt = -\frac{e^{-st}}{s} \Big|_{t=a}^\infty;$$

here the integration begins at $t = a (\geq 0)$ because $u(t - a)$ is 0 for $t < a$. Hence

Handwritten: $\mathcal{L}\{u(t)\} = \mathcal{L}\{u(t-0)\}$ (2)

$$= \frac{e^{-0s}}{s} = \frac{1}{s} \quad (\text{公式})$$

$$= \mathcal{L}\{1\}$$

$$\mathcal{L}\{u(t - a)\} = \frac{e^{-as}}{s} \quad (\text{公式}) \quad (s > 0).$$


The unit step function is a typical “engineering function” made to measure for engineering applications, which often involve functions (mechanical or electrical driving forces) that are either “off” or “on.” Multiplying functions $f(t)$ with $u(t - a)$, we can produce all sorts of effects. The simple basic idea is illustrated in Figs. 120 and 121. In Fig. 120 the given function is shown in (A). In (B) it is switched off between $t = 0$ and $t = 2$ (because $u(t - 2) = 0$ when $t < 2$) and is switched on beginning at $t = 2$. In (C) it is shifted to the right by 2 units, say, for instance, by 2 sec, so that it begins 2 sec later in the same fashion as before. More generally we have the following.

Let $f(t) = 0$ for all negative t . Then $f(t - a)u(t - a)$ with $a > 0$ is $f(t)$ shifted (translated) to the right by the amount a .

Figure 121 shows the effect of many unit step functions, three of them in (A) and infinitely many in (B) when continued periodically to the right; this is the effect of a rectifier that clips off the negative half-waves of a sinusoidal voltage. **CAUTION!** Make sure that you fully understand these figures, in particular the difference between parts (B) and (C) of Fig. 120. Figure 120(C) will be applied next.

對函數 $f(t)u(t) = \begin{cases} f(t) & t \geq 0 \\ 0 & t < 0 \end{cases}$



而言, $f(t-a)u(t-a)$ 稱為 $f(t)u(t)$ 的延遲函數, 而 a 為延遲時間

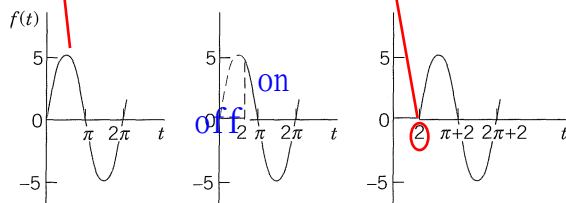


(A) $f(t) = 5 \sin t$ (B) $f(t)u(t - 2)$ (C) $f(t - 2)u(t - 2)$ 比較三者的差異性

Fig. 120. Effects of the unit step function: (A) Given function. (B) Switching off and on. (C) Shift.

$$k[u(t-1)-u(t-4)] + (-k)[u(t-4)-u(t-6)]$$

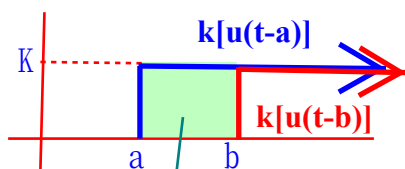

(A) $k[u(t-1) - 2u(t-4) + u(t-6)]$



(B) $4 \sin(\frac{1}{2}\pi t) [u(t) - u(t-2) + u(t-4) - u(t-6) + \dots]$

Fig. 121. Use of many unit step functions.

$$u(t-0)$$

Time Shifting (t-Shifting): Replacing t by $t - a$ in $f(t)$

The first shifting theorem ("s-shifting") in Sec. 6.1 concerned transforms $F(s) = \mathcal{L}\{f(t)\}$ and $F(s - a) = \mathcal{L}\{e^{at}f(t)\}$. The second shifting theorem will concern functions $f(t)$ and $f(t - a)$. Unit step functions are just tools, and the theorem will be needed to apply them in connection with any other functions.

THEOREM 1

Second Shifting Theorem; Time Shifting

If $f(t)$ has the transform $F(s)$, then the "shifted function"

$$(3) \quad \tilde{f}(t) = f(t - a)u(t - a) = \begin{cases} 0 & \text{if } t < a \\ f(t - a) & \text{if } t > a \end{cases}$$

has the transform $e^{-as}F(s)$. That is, if $\mathcal{L}\{f(t)\} = F(s)$, then

比較差異性

$$(4) \quad \mathcal{L}\{f(t - a)u(t - a)\} = e^{-as}F(s).$$

Or, if we take the inverse on both sides, we can write

$$(4^*) \quad f(t - a)u(t - a) = \mathcal{L}^{-1}\{e^{-as}F(s)\}.$$

Practically speaking, if we know $F(s)$, we can obtain the transform of (3) by multiplying $F(s)$ by e^{-as} . In Fig. 120, the transform of $5 \sin t$ is $F(s) = 5/(s^2 + 1)$, hence the shifted function $5 \sin(t - 2)u(t - 2)$ shown in Fig. 120(C) has the transform

$$e^{-2s}F(s) = 5e^{-2s}/(s^2 + 1).$$

PROOF

We prove Theorem 1. In (4), on the right, we use the definition of the Laplace transform, writing τ for t (to have t available later). Then, taking e^{-as} inside the integral, we have

$$e^{-as}F(s) = e^{-as} \int_0^{\infty} e^{-s\tau} f(\tau) d\tau = \int_0^{\infty} e^{-s(\tau+a)} f(\tau) d\tau$$

Substituting $\tau + a = t$, thus $\tau = t - a$, $d\tau = dt$ in the integral (CAUTION, the lower limit changes!), we obtain

$$e^{-as}F(s) = \int_a^{\infty} e^{-st} f(t - a) dt$$

另一個公式(後)

$$\mathcal{L}\{f(t)u(t-a)\}$$

$$= e^{-as} \mathcal{L}\{f(t+a)\}$$

$$\mathcal{L}\{5 \sin t\} = \frac{5}{s^2 + 1}$$

$$\mathcal{L}\{5 \sin(t-2)u(t-2)\} = \frac{5e^{-2s}}{s^2 + 1}$$

先找出 $f(t) \rightarrow F(s) \rightarrow$ 再 $\times e^{-as}$

$$\mathcal{L}\{f(t-a)u(t-a)\} \\ = \mathcal{L}\{\tilde{f}(t)\} = e^{-as}F(s)$$

the right side into a Laplace transform, we must have an integral from 0 to ∞ , not from a to ∞ . But this is easy. We multiply the integrand by $u(t-a)$. Then for t from 0 to a the integrand is 0, and we can write, with $\tilde{f}$ as in (3),

$$e^{-as}F(s) = \int_0^{\infty} e^{-st}f(t-a)u(t-a)dt = \int_0^{\infty} e^{-st}\tilde{f}(t)dt = \mathcal{L}\{\tilde{f}(t)\}$$

(Do you now see why $u(t-a)$ appears?) This integral is the left side of (4), the Laplace transform of $\tilde{f}(t)$ in (3). This completes the proof. ■

EXAMPLE 1

Application of Theorem 1. Use of Unit Step Functions

Write the following function using unit step functions and find its transform.

重要格式轉換！

$$f(t) = \begin{cases} 2 & \text{if } 0 < t < 1 \\ \frac{1}{2}t^2 & \text{if } 1 < t < \frac{1}{2}\pi \\ \cos t & \text{if } t > \frac{1}{2}\pi. \end{cases}$$

(Fig. 122)

$u(t-0)$

Solution. Step 1. In terms of unit step functions,

$$f(t) = 2(1 - u(t-1)) + \frac{1}{2}t^2(u(t-1) - u(t-\frac{1}{2}\pi)) + (\cos t)u(t-\frac{1}{2}\pi).$$

Indeed, $2(1 - u(t-1))$ gives $f(t)$ for $0 < t < 1$, and so on.

Step 2. To apply Theorem 1, we must write each term in $f(t)$ in the form $f(t-a)u(t-a)$. Thus, $2(1 - u(t-1))$ remains as it is and gives the transform $2(1 - e^{-s})/s$. Then

$$\mathcal{L}\left\{\frac{1}{2}t^2u(t-1)\right\} = \mathcal{L}\left\{\frac{1}{2}(t-1)^2 + (t-1) + \frac{1}{2}\right\}u(t-1) = \left(\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s}\right)e^{-s}$$

$$\mathcal{L}\left\{\frac{1}{2}t^2u\left(t-\frac{1}{2}\pi\right)\right\} = \mathcal{L}\left\{\frac{1}{2}\left(t-\frac{1}{2}\pi\right)^2 + \frac{\pi}{2}\left(t-\frac{1}{2}\pi\right) + \frac{\pi^2}{8}\right\}u\left(t-\frac{1}{2}\pi\right) \\ = \left(\frac{1}{s^3} + \frac{\pi}{2s^2} + \frac{\pi^2}{8s}\right)e^{-\pi s/2}$$

湊出所需的形
式(有點難, 要
特別注意!)

$$\mathcal{L}\left\{(\cos t)u\left(t-\frac{1}{2}\pi\right)\right\} = \mathcal{L}\left\{-\left(\sin\left(t-\frac{1}{2}\pi\right)\right)u\left(t-\frac{1}{2}\pi\right)\right\} = -\frac{1}{s^2+1}e^{-\pi s/2}.$$

Together,

$$\mathcal{L}(f) = \frac{2}{s} - \frac{2}{s}e^{-s} + \left(\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s}\right)e^{-s} - \left(\frac{1}{s^3} + \frac{\pi}{2s^2} + \frac{\pi^2}{8s}\right)e^{-\pi s/2} - \frac{1}{s^2+1}e^{-\pi s/2}.$$

$$f(t) = 2(1 - u(t-1)) + \frac{1}{2}t^2(u(t-1) - u(t-\frac{1}{2}\pi)) + (\cos t)u(t-\frac{1}{2}\pi).$$

(4**)

$$\mathcal{L}\{f(t)u(t-a)\} = e^{-as}\mathcal{L}\{f(t+a)\}.$$

另一種解題技巧! (較
簡單, 極力推薦!)

(4**) follows from (4) by writing $f(t-a) = g(t)$, hence $f(t) = g(t+a)$ and then again writing f for g . Thus,

$$\mathcal{L}\left\{\frac{1}{2}t^2u(t-1)\right\} = e^{-s}\mathcal{L}\left\{\frac{1}{2}(t+1)^2\right\} = e^{-s}\mathcal{L}\left\{\frac{1}{2}t^2 + t + \frac{1}{2}\right\} = e^{-s}\left(\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s}\right)$$

as before. Similarly for $\mathcal{L}\{\frac{1}{2}t^2u(t-\frac{1}{2}\pi)\}$. Finally, by (4**),

$$\mathcal{L}\left\{\cos t u\left(t-\frac{1}{2}\pi\right)\right\} = e^{-\pi s/2}\mathcal{L}\left\{\cos\left(t+\frac{1}{2}\pi\right)\right\} = e^{-\pi s/2}\mathcal{L}\{-\sin t\} = -e^{-\pi s/2}\frac{1}{s^2+1}.$$

$$e^{-\frac{\pi}{2}s}\mathcal{L}\left\{\frac{1}{2}\left(t+\frac{\pi}{2}\right)^2\right\} = e^{-\frac{\pi}{2}s}\mathcal{L}\left\{\frac{1}{2}t^2 + \frac{\pi}{2}t + \frac{\pi^2}{8}\right\} = e^{-\frac{\pi}{2}s}\left\{\frac{1}{s^3} + \frac{\pi}{2}\frac{1}{s^2} + \frac{\pi^2}{8}\frac{1}{s}\right\}$$

【補充資料】

$$\mathcal{L}[f(t-a)u(t-a)] = e^{-as}F(s)$$

湊出所需的形式(有點難, 要特別注意!)

$$f(t) = 2(1 - u(t-1)) + \frac{1}{2}t^2(u(t-1) - u(t - \frac{1}{2}\pi)) + (\cos t)u(t - \frac{1}{2}\pi).$$

$$L[2(1-u(t-1))] = \frac{2}{s} - 2\frac{e^{-s}}{s} = \frac{2(1-e^{-s})}{s}$$

$$L[\frac{1}{2}t^2u(t-1)] = L[(\frac{1}{2}(t-1)^2 + t - \frac{1}{2})u(t-1)] = L[(\frac{1}{2}(t-1)^2 + (t-1) + \frac{1}{2})u(t-1)]$$

$$= (\frac{1}{2}\frac{2!}{s^{2+1}} + \frac{1}{s^2} + \frac{1/2}{s})e^{-s} = (\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s})e^{-s}$$

$$\mathcal{L}[t^n] = \frac{n!}{s^{n+1}}$$

$$L[\frac{1}{2}t^2u(t-\frac{\pi}{2})] = L[(\frac{1}{2}(t-\frac{\pi}{2})^2 + \frac{\pi}{2}(t-\frac{\pi}{2}) + \frac{\pi^2}{8})u(t-\frac{\pi}{2})]$$

$$= (\frac{1}{s^3} + \frac{\pi}{2s^2} + \frac{\pi^2}{8s})e^{-\frac{\pi}{2}s}$$

$$\sin(\frac{\pi}{2} - t) = \cos t$$

$$\sin(-(t - \frac{\pi}{2}))$$

$$= \sin(t - \frac{\pi}{2})$$

$$(\text{因 } \sin(-\theta) = -\sin \theta)$$

$$L[\cos tu(t - \frac{\pi}{2})] = L[-\sin(t - \frac{\pi}{2})u(t - \frac{\pi}{2})] = -\frac{1}{s^2 + 1}e^{-\frac{\pi}{2}s}$$

$$\text{故 } L[f(t)] = \frac{2(1-e^{-s})}{s} + (\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s})e^{-s} + (\frac{1}{s^3} + \frac{\pi}{2s^2} + \frac{\pi^2}{8s})e^{-\frac{\pi}{2}s} - \frac{1}{s^2 + 1}e^{-\frac{\pi}{2}s}$$


另解

以 $L[f(t)u(t-a)] = e^{-as}L[f(t+a)]$ 公式

另一種解題技巧! (較簡單, 極力推薦!)

$$L[\frac{1}{2}t^2u(t-1)] = e^{-s}L[\frac{1}{2}(t+1)^2] = e^{-s}L[\frac{1}{2}(t^2 + 2t + 1)] = e^{-s}(\frac{1}{s^3} + \frac{1}{s^2} + \frac{1}{2s})$$

$$L[\cos tu(t - \frac{\pi}{2})] = e^{-\frac{\pi}{2}s}L[\cos(t + \frac{\pi}{2})] = e^{-\frac{\pi}{2}s}L[-\sin t] = -\frac{1}{s^2 + 1}e^{-\frac{\pi}{2}s}$$

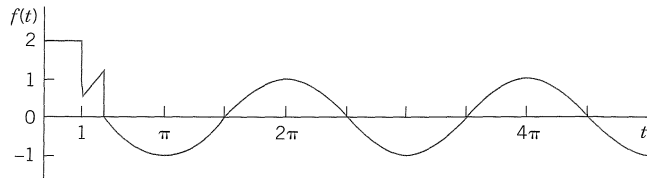
 Fig. 122. $f(t)$ in Example 1

 注意演進
關係！

EXAMPLE 2 Application of Both Shifting Theorems. Inverse Transform

$$\mathcal{L}^{-1}[e^{-as}F(s)] = f(t-a)u(t-a)$$

 Find the inverse transform $f(t)$ of

$$F(s) = \frac{1}{\pi} \frac{e^{-s}}{s^2 + \pi^2} + \frac{e^{-2s}}{s^2 + \pi^2} + \frac{e^{-3s}}{(s+2)^2}$$

$$\mathcal{L}^{-1}[F(s)] = f(t) \text{ 先求出}$$

Solution. Without the exponential functions in the numerator the three terms of $F(s)$ would have the inverses $(\sin \pi t)/\pi$, $(\sin \pi t)/\pi$, and te^{-2t} because $1/s^2$ has the inverse t , so that $1/(s+2)^2$ has the inverse te^{-2t} by the first shifting theorem in Sec. 6.1. Hence by the second shifting theorem (t -shifting),

$$f(t) = \frac{1}{\pi} \sin(\pi(t-1))u(t-1) + \frac{1}{\pi} \sin(\pi(t-2))u(t-2) + (t-3)e^{-2(t-3)}u(t-3).$$

第三象限

第一象限

分四種情況討論

$$0 < t < 1$$


$$1 < t < 2$$

$$2 < t < 3$$

$$3 < t$$

Now $\sin(\pi(t-1)) = -\sin \pi t$ and $\sin(\pi(t-2)) = \sin \pi t$, so that the first and second terms cancel each other when $t > 2$. Hence we obtain $f(t) = 0$ if $0 < t < 1$, $-(\sin \pi t)/\pi$ if $1 < t < 2$, 0 if $2 < t < 3$, and $(t-3)e^{-2(t-3)}$ if $t > 3$. See Fig. 123.

一定要會討論技巧!!



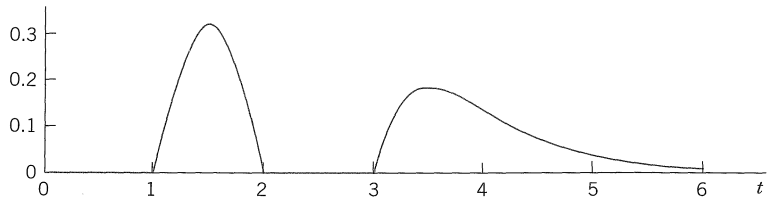

 Fig. 123. $f(t)$ in Example 2

EXAMPLE 3 Response of an RC-Circuit to a Single Rectangular Wave

Find the current $i(t)$ in the RC -circuit in Fig. 124 if a single rectangular wave with voltage V_0 is applied. The circuit is assumed to be quiescent before the wave is applied.

Solution. The input is $V_0[u(t-a) - u(t-b)]$. Hence the circuit is modeled by the integro-differential equation (see Sec. 2.9 and Fig. 124)

$$Ri(t) + \frac{q(t)}{C} = Ri(t) + \frac{1}{C} \int_0^t i(\tau) d\tau = v(t) = V_0[u(t-a) - u(t-b)].$$

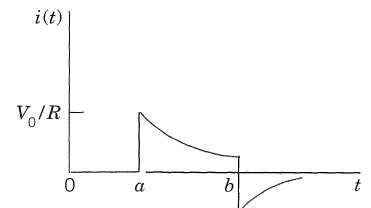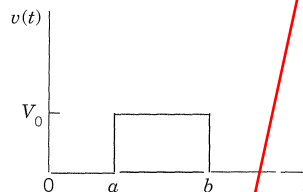
 Fig. 124. RC -circuit, electromotive force $v(t)$, and current in Example 3

Using Theorem 3 in Sec. 6.2 and formula (1) in this section, we obtain the subsidiary equation

$$I\left(R + \frac{1}{sC}\right) = \frac{V_0}{s} \{e^{-as} - e^{-bs}\} \quad \leftarrow \quad RI(s) + \frac{I(s)}{sC} = \frac{V_0}{s} [e^{-as} - e^{-bs}].$$

Solving this equation algebraically for $I(s)$, we get

$$I(s) = \frac{V_0}{s} \frac{sC}{RSc + 1} (e^{-as} - e^{-bs}) \quad I(s) = F(s)(e^{-as} - e^{-bs}) \quad \text{where} \quad F(s) = \frac{V_0/R}{s + 1/(RC)} \quad \text{and} \quad \mathcal{L}^{-1}(F) = \frac{V_0}{R} e^{-t/(RC)},$$

the last expression being obtained from Table 6.1 in Sec. 6.1. Hence Theorem 1 yields the solution (Fig. 124)

抽出共同項 $e^{-t/(RC)}$

$$i(t) = \mathcal{L}^{-1}(I) = \mathcal{L}^{-1}\{e^{-as}F(s)\} - \mathcal{L}^{-1}\{e^{-bs}F(s)\} = \frac{V_0}{R} [e^{-(t-a)/(RC)}u(t-a) - e^{-(t-b)/(RC)}u(t-b)];$$

that is, $i(t) = 0$ if $t < a$, and

分三種情況討論

$$i(t) = \begin{cases} K_1 e^{-t/(RC)} & \text{if } a < t < b \\ (K_1 - K_2)e^{-t/(RC)} & \text{if } t > b \end{cases}$$

if $a < t < b$

if $t > b$

$$\mathcal{L}^{-1}[e^{-as}F(s)] = \int (t-a)u(t-a)$$

where $K_1 = V_0 e^{a/(RC)}/R$ and $K_2 = V_0 e^{b/(RC)}/R$.

有興趣，自行練習！

Response of an RLC-Circuit to a Sinusoidal Input Acting Over a Time Interval

Find the response (the current) of the RLC-circuit in Fig. 125, where $E(t)$ is sinusoidal, acting for a short time interval only, say,

$$E(t) = 100 \sin 400t \quad \text{if } 0 < t < 2\pi \quad \text{and} \quad E(t) = 0 \quad \text{if } t > 2\pi$$

and current and charge are initially zero.

Solution. The electromotive force $E(t)$ can be represented by $(100 \sin 400t)(1 - u(t - 2\pi))$. Hence the model for the current $i(t)$ in the circuit is the integro-differential equation (see Sec. 2.9)

$$0.1i' + 11i + 100 \int_0^t i(\tau) d\tau = (100 \sin 400t)(1 - u(t - 2\pi)). \quad i(0) = 0, \quad i'(0) = 0.$$

From Theorems 2 and 3 in Sec. 6.2 we obtain the subsidiary equation for $I(s) = \mathcal{L}(i)$

$$0.1sI + 11I + 100 \frac{I}{s} = \frac{100 \cdot 400s}{s^2 + 400^2} \left(\frac{1}{s} - \frac{e^{-2\pi s}}{s} \right) \quad \text{注意！！}$$

Solving it algebraically and noting that $s^2 + 110s + 1000 = (s + 10)(s + 100)$, we obtain

$$\text{整理} \quad I(s) = \frac{1000 \cdot 400}{(s + 10)(s + 100)} \left(\frac{s}{s^2 + 400^2} - \frac{s e^{-2\pi s}}{s^2 + 400^2} \right) = I_1(s) - I_2(s)$$

For the first term in the parentheses ($\cdots$) times the factor in front of them we use the partial fraction expansion

$$\frac{400,000s}{(s + 10)(s + 100)(s^2 + 400^2)} = \frac{A}{s + 10} + \frac{B}{s + 100} + \frac{Ds + K}{s^2 + 400^2}.$$

$I_1(s)$ 部份
分式展開

Now determine A, B, D, K by your favorite method or by a CAS or as follows. Multiplication by the common denominator gives

$$400,000s = A(s + 100)(s^2 + 400^2) + B(s + 10)(s^2 + 400^2) + (Ds + K)(s + 10)(s + 100).$$

分子、分母
同除以RC

$$\frac{V_0/R}{s + \frac{1}{RC}}$$

EXAMPLE 4

$$\mathcal{L}[f(t)u(t-a)] = e^{-as}\mathcal{L}[f(t+a)]$$

$$100 e^{-0s} \mathcal{L}[\sin 400(t+0)] - 100 e^{-2\pi s} \mathcal{L}[\sin 400(t+2\pi)]$$

$$= 100 [1 - e^{-2\pi s}] \mathcal{L}[\sin 400t]$$

$$= 100 \left[\frac{1}{s} - \frac{e^{-2\pi s}}{s} \right] \frac{400s}{s^2 + 400^2}$$

(s可以不用現在就整理成此型式)

We set $s = -10$ and -100 and then equate the sums of the s^3 and s^2 terms to zero, obtaining (all values rounded)

$$\begin{array}{lll} (s = -10) & -4,000,000 = 90(10^2 + 400^2)A, & A = -0.27760 \\ (s = -100) & -40,000,000 = -90(100^2 + 400^2)B, & B = 2.6144 \\ (s^3\text{-terms}) & 0 = A + B + D, & D = -2.3368 \\ (s^2\text{-terms}) & 0 = 100A + 10B + 110D + K, & K = 258.66. \end{array}$$

Since $K = 258.66 = 0.6467 \cdot 400$, we thus obtain for the first term I_1 in $I = I_1 - I_2$

$$I_1 = -\frac{0.2776}{s+10} + \frac{2.6144}{s+100} - \frac{2.3368s}{s^2+400^2} + \frac{0.6467 \cdot 400}{s^2+400^2}.$$

由 $I_2(s) = I_1(s)e^{-2\pi s}$ 同理可得

$$\mathcal{L}^{-1}[e^{-as}F(s)] = f(t-a)u(t-a)$$

From Table 6.1 in Sec. 6.1 we see that its inverse is

$$i_1(t) = -0.2776e^{-10t} + 2.6144e^{-100t} - 2.3368\cos 400t + 0.6467\sin 400t.$$

This is the current $i(t)$ when $0 < t < 2\pi$. It agrees for $0 < t < 2\pi$ with that in Example 1 of Sec. 2.9 (except for notation), which concerned the same RLC -circuit. Its graph in Fig. 63 in Sec. 2.9 shows that the exponential terms decrease very rapidly. Note that the present amount of work was substantially less.

The second term I_2 of I differs from the first term by the factor $e^{-2\pi s}$. Since $\cos 400(t-2\pi) = \cos 400t$ and $\sin 400(t-2\pi) = \sin 400t$, the second shifting theorem (Theorem 1) gives the inverse $i_2(t) = 0$ if $0 < t < 2\pi$, and for $t > 2\pi$ it gives

$$i_2(t) = -0.2776e^{-10(t-2\pi)} + 2.6144e^{-100(t-2\pi)} - 2.3368\cos 400t + 0.6467\sin 400t.$$

Hence in $i(t)$ the cosine and sine terms cancel, and the current for $t > 2\pi$ is

$$i_1(t) - i_2(t) = i(t) = -0.2776(e^{-10t} - e^{-10(t-2\pi)}) + 2.6144(e^{-100t} - e^{-100(t-2\pi)}).$$

It goes to zero very rapidly, practically within 0.5 sec.

$$\begin{array}{l} i_2(t) \text{ if } t > 2\pi, i(t) = i_1(t) - i_2(t) \\ i_2(t) = 0 \text{ if } 0 < t < 2\pi, i(t) = i_1(t) \end{array}$$

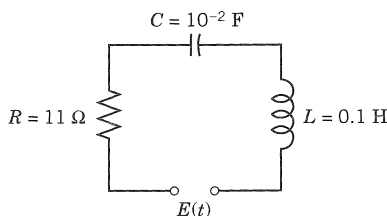


Fig. 125. RLC -circuit in Example 4

PROBLEM SET 6.3

1. **Report on Shifting Theorems.** Explain and compare the different roles of the two shifting theorems, using your own formulations and simple examples. Give no proofs.

2-11 SECOND SHIFTING THEOREM, UNIT STEP FUNCTION

Sketch or graph the given function, which is assumed to be zero outside the given interval. Represent it, using unit step functions. Find its transform. Show the details of your work.

2. t ($0 < t < 2$)
3. $t - 3$ ($t > 3$)
4. $\cos 2t$ ($0 < t < \pi$)
5. e^{-t} ($0 < t < \pi$)

6. $\sin \pi t$ ($2 < t < 4$)
7. $e^{-\pi/2t}$ ($1 < t < 3$)
8. t^2 ($1 < t < 2$)
9. $2t^2$ ($t > \frac{5}{2}$)
10. $\sinh t$ ($0 < t < 2$)
11. $\sin t$ ($\pi/2 < t < \pi$)

12-17 INVERSE TRANSFORMS BY THE 2ND SHIFTING THEOREM

Find and sketch or graph $f(t)$ if $\mathcal{L}(f)$ equals

12. $e^{-2s}/(s-1)^3$
13. $4(1 - e^{-\pi s})/(s^2 + 4)$
14. $4(e^{-2s} - 2e^{-5s})/s$
15. e^{-2s}/s^6
16. $2(e^{-s} - e^{-3s})/(s^2 - 4)$
17. $(1 + e^{-2\pi(s+1)})/(s+1)/((s+1)^2 + 1)$

【Example 4 整理】

$$0.1i' + 11i \neq 100 \int_0^t i(\tau) d\tau = 100 \sin 400t(1 - u(t - 2\pi)), \quad i(0) = 0, \quad i'(0) = 0$$

【Solution】

等號兩邊取拉式轉換、整理

$$\begin{aligned} 0.1sI + 11I + 100 \frac{I}{s} &= L[100 \sin 400t(u(t - 0) - u(t - 2\pi))] \\ &= 100e^{-0s} L[\sin 400(t + 0)] - 100e^{-2\pi s} L[\sin 400(t + 2\pi)] \\ &= 100(1 - e^{-2\pi s}) L[\sin 400t] \quad (\text{因 } L[f(t)u(t - a)] = e^{-as} L[f(t + a)]) \\ &= 100 \left(\frac{1}{s} - \frac{e^{-2\pi s}}{s} \right) \frac{400s}{s^2 + 400^2} \\ &= \left(\frac{1}{s} - \frac{e^{-2\pi s}}{s} \right) \frac{40000s}{s^2 + 400^2} \\ \Rightarrow 0.1sI + 11I + 100 \frac{I}{s} &= \left(\frac{1}{s} - \frac{e^{-2\pi s}}{s} \right) \frac{40000s}{s^2 + 400^2} \\ \Rightarrow 0.1s^2 I + 11sI + 100I &= (1 - e^{-2\pi s}) \frac{40000s}{s^2 + 400^2} \\ \Rightarrow (s^2 + 110s + 1000)I &= (s + 10)(s + 100)I = (1 - e^{-2\pi s}) \frac{40000s}{s^2 + 400^2} \\ \Rightarrow I(s) &= \frac{400000}{(s + 10)(s + 100)} \left(\frac{s}{s^2 + 400^2} - \frac{se^{-2\pi s}}{s^2 + 400^2} \right) \\ &= I_1(s) - I_2(s) \\ &= I_1(s) - I_1(s)e^{-2\pi s} \end{aligned}$$

$$L^{-1}[e^{-as}F(s)] = f(t - a)u(t - a)$$

$$\begin{aligned} L^{-1}[I(s)] &= L^{-1}[I_1(s)] - L^{-1}[I_2(s)] = L^{-1}[I_1(s)] - L^{-1}[I_1(s)e^{-2\pi s}] \\ i(t) &= i_1(t) - i_2(t) = i_1(t) - i_1(t - 2\pi)u(t - 2\pi) \quad \text{再進行討論} \end{aligned}$$

$$\begin{aligned}
 I_1(s) &= \frac{400000s}{(s+10)(s+100)(s^2+400^2)} \\
 &= \frac{A}{s+10} + \frac{B}{s+100} + \frac{Ds+K}{s^2+400^2} \quad (\text{部份分式展開}) \\
 &= \frac{-0.2776}{s+10} + \frac{2.6144}{s+100} + \frac{-2.3368s + 258.66}{s^2+400^2} \\
 &= -\frac{0.2776}{s+10} + \frac{2.6144}{s+100} - 2.3368 \frac{s}{s^2+400^2} + 0.6467 \frac{400}{s^2+400^2}
 \end{aligned}$$

(作反拉式轉換)

$$L^{-1}[I_1(s)] = i_1(t) = -0.2776e^{-10t} + 2.6144e^{-100t} - 2.3368\cos 400t + 0.6467\sin 400t$$

$$I_2(s) = \frac{400000s}{(s+10)(s+100)(s^2+400^2)} e^{-2\pi s} = I_1(s) e^{-2\pi s}$$

(作反拉式轉換)

$$\begin{aligned}
 L^{-1}[I_2(s)] &= i_2(t) = i_1(t-2\pi)u(t-2\pi) \\
 &= (-0.2776e^{-10(t-2\pi)} + 2.6144e^{-100(t-2\pi)} - 2.3368\cos 400(t-2\pi) + 0.6467\sin 400(t-2\pi))u(t-2\pi) \\
 &= (-0.2776e^{-10(t-2\pi)} + 2.6144e^{-100(t-2\pi)} - 2.3368\cos 400t + 0.6467\sin 400t)u(t-2\pi)
 \end{aligned}$$

$$\begin{aligned}
 i(t) &= i_1(t) - i_2(t) = (-0.2776e^{-10t} + 2.6144e^{-100t} - 2.3368\cos 400t + 0.6467\sin 400t) \\
 &\quad - (-0.2776e^{-10(t-2\pi)} + 2.6144e^{-100(t-2\pi)} - 2.3368\cos 400t + 0.6467\sin 400t)u(t-2\pi)
 \end{aligned}$$

討論 $0 < t < 2\pi$, $t > 2\pi$


(1) $0 < t < 2\pi$

$$\begin{aligned}
 i(t) &= i_1(t) - i_2(t) = i_1(t) - 0 \\
 &= -0.2776e^{-10t} + 2.6144e^{-100t} - 2.3368\cos 400t + 0.6467\sin 400t
 \end{aligned}$$

(2) $t > 2\pi$

$$\begin{aligned}
 i(t) &= i_1(t) - i_2(t) \\
 &= -0.2776e^{-10t} + 2.6144e^{-100t} - 2.3368\cos 400t + 0.6467\sin 400t \\
 &\quad - (-0.2776e^{-10(t-2\pi)} + 2.6144e^{-100(t-2\pi)} - 2.3368\cos 400t + 0.6467\sin 400t) \times 1 \\
 &= -0.2776e^{-10t} + 2.6144e^{-100t} + 0.2776e^{-10(t-2\pi)} - 2.6144e^{-100(t-2\pi)} \\
 &= -0.2776(e^{-10t} - e^{-10(t-2\pi)}) + 2.6144(e^{-100t} - e^{-100(t-2\pi)})
 \end{aligned}$$

39. $R = 2\ \Omega$, $L = 1\ \text{H}$, $C = 0.5\ \text{F}$, $v(t) = 1\ \text{kV}$ if $0 < t < 2$ and 0 if $t > 2$



40. $R = 2\ \Omega$, $L = 1\ \text{H}$, $C = 0.1\ \text{F}$, $v = 255 \sin t\ \text{V}$ if $0 < t < 2\pi$ and 0 if $t > 2\pi$

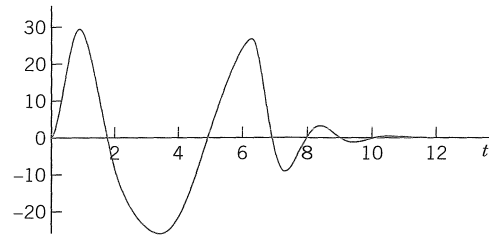


Fig. 131. Current in Problem 40

學習重點：

1. 認識脈衝函數與其拉式轉換
2. 部份分式展開的複習

6.4 Short Impulses. Dirac's Delta Function. Partial Fractions

An airplane making a “hard” landing, a mechanical system being hit by a hammerblow, a ship being hit by a single high wave, a tennis ball being hit by a racket, and many other similar examples appear in everyday life. They are phenomena of an impulsive nature where actions of forces—mechanical, electrical, etc.—are applied over short intervals of time.

We can model such phenomena and problems by “Dirac’s delta function,” and solve them very effectively by the Laplace transform.

To model situations of that type, we consider the function

(1)

$$f_k(t - a) = \begin{cases} 1/k & \text{if } a \leq t \leq a + k \\ 0 & \text{otherwise} \end{cases}$$

(Fig. 132)

(and later its limit as $k \rightarrow 0$). This function represents, for instance, a force of magnitude $1/k$ acting from $t = a$ to $t = a + k$, where k is positive and small. In mechanics, the integral of a force acting over a time interval $a \leq t \leq a + k$ is called the **impulse** of the force; similarly for electromotive forces $E(t)$ acting on circuits. Since the blue rectangle in Fig. 132 has area 1, the impulse of f_k in (1) is

(2)

$$I_k = \int_0^\infty f_k(t - a) dt = \int_a^{a+k} \frac{1}{k} dt = 1.$$

積分得到面積值等於1





Fig. 132. The function $f_k(t - a)$ in (1)



To find out what will happen if k becomes smaller and smaller, we take the limit of f_k as $k \rightarrow 0$ ($k > 0$). This limit is denoted by $\delta(t - a)$, that is,

$$\delta(t - a) = \lim_{k \rightarrow 0} f_k(t - a).$$

$\delta(t - a)$ is called the **Dirac delta function**² or the **unit impulse function**.

$\delta(t - a)$ is not a function in the ordinary sense as used in calculus, but a so-called *generalized function*.² To see this, we note that the impulse I_k of f_k is 1, so that from (1) and (2) by taking the limit as $k \rightarrow 0$ we obtain

$$(3) \quad \delta(t - a) = \begin{cases} \infty & \text{if } t = a \\ 0 & \text{otherwise} \end{cases} \quad \text{and} \quad \int_0^{\infty} \delta(t - a) dt = 1,$$

but from calculus we know that a function which is everywhere 0 except at a single point must have the integral equal to 0. Nevertheless, in impulse problems, it is convenient to operate on $\delta(t - a)$ as though it were an ordinary function. In particular, for a *continuous* function $g(t)$ one uses the property [often called the **sifting property** of $\delta(t - a)$, not to be confused with *shifting*]

(4)

$$\int_0^{\infty} g(t) \delta(t - a) dt = g(a)$$

which is plausible by (2).

To obtain the Laplace transform of $\delta(t - a)$, we write

$$f_k(t - a) = \frac{1}{k} [u(t - a) - u(t - (a + k))]$$

and take the transform [see (2)]

$$\mathcal{L}\{f_k(t - a)\} = \frac{1}{ks} [e^{-as} - e^{-(a+k)s}] = e^{-as} \frac{1 - e^{-ks}}{ks}.$$

分子、分母
同對k取微分

$\lim_{k \rightarrow 0} \frac{f_k(z)}{g(z)} = \lim_{z \rightarrow z_0} \frac{f'(z_0)}{g'(z_0)}$ We now take the limit as $k \rightarrow 0$. By l'Hôpital's rule the quotient on the right has the limit 1 (differentiate the numerator and the denominator separately with respect to k , obtaining se^{-ks} and s , respectively, and use $se^{-ks}/s \rightarrow 1$ as $k \rightarrow 0$). Hence the right side has the limit e^{-as} . This suggests defining the transform of $\delta(t - a)$ by this limit, that is,

$$\lim_{k \rightarrow 0} e^{-as} \frac{0 + s e^{-ks}}{s} = e^{-as} \quad (5)$$

$$(公式) \quad \mathcal{L}\{\delta(t - a)\} = e^{-as}.$$

$$\mathcal{L}\{\delta(t)\} = 1$$

The unit step and unit impulse functions can now be used on the right side of ODEs modeling mechanical or electrical systems, as we **比較差異 不要弄錯了**

²PAUL DIRAC (1902–1984), English physicist; ERWIN SCHRÖDINGER (1887–1961), Austrian physicist.

Generalized functions are also called *distributions*. They were introduced in 1936 by the Russian mathematician SERGEI L'VOVICH SOBOLEV (1908–1989), and in 1945, under wider aspects, by the French mathematician LAURENT SCHWARTZ (1915–2002).

$$\mathcal{L}\{u(t - a)\} = \frac{e^{-as}}{s}$$

$$(公式) \quad \mathcal{L}\{u(t)\} = \frac{1}{s}$$

EXAMPLE 1 Mass-Spring System Under a Square Wave

Determine the response of the damped mass-spring system (see Sec. 2.8) under a square wave, modeled by (see Fig. 133) **步驟1：建模 輸入**

$$L[f'] = sL[f] - f(0)$$

$$L[f''] = s^2 L[f] - sf(0) - f'(0)$$

$$y'' + 3y' + 2y = r(t) = u(t-1) - u(t-2), \quad y(0) = 0, \quad y'(0) = 0.$$

Solution. From (1) and (2) in Sec. 6.2 and (2) and (4) in this section we obtain the subsidiary equation

步驟2：等號兩邊取L

$$(s^2 + 3s + 2)Y = \frac{1}{s}(e^{-s} - e^{-2s}). \quad \text{Solution} \quad Y(s) = \frac{1}{s(s^2 + 3s + 2)}(e^{-s} - e^{-2s}).$$

Using the notation $F(s)$ and partial fractions, we obtain

$$F(s) = \frac{1}{s(s^2 + 3s + 2)} = \frac{1}{s(s+1)(s+2)} = \frac{\frac{1}{2}}{s} - \frac{1}{s+1} + \frac{\frac{1}{2}}{s+2}.$$

From Table 6.1 in Sec. 6.1, we see that the inverse is

$$f(t) = \mathcal{L}^{-1}(F) = \frac{1}{2} - e^{-t} + \frac{1}{2}e^{-2t}.$$

Therefore, by Theorem 1 in Sec. 6.3 (t -shifting) we obtain the square-wave response shown in Fig. 133, **步驟4：必要整理後做L⁻¹**

$$\mathcal{L}^{-1}[e^{-as}F(s)] = f(t-a)u(t-a)$$

$$y = \mathcal{L}^{-1}(F(s)e^{-s} - F(s)e^{-2s}) = f(t-1)u(t-1) - f(t-2)u(t-2)$$

分段討論

$$y(t) = \begin{cases} 0 & (0 < t < 1) \\ \frac{1}{2} - e^{-(t-1)} + \frac{1}{2}e^{-2(t-1)} & (1 < t < 2) \\ -e^{-(t-1)} + e^{-(t-2)} + \frac{1}{2}e^{-2(t-1)} - \frac{1}{2}e^{-2(t-2)} & (t > 2). \end{cases}$$

$$\left\{ \frac{1}{2} - e^{-(t-1)} + \frac{1}{2}e^{-2(t-1)} \right\} - \left\{ \frac{1}{2} - e^{-(t-2)} + \frac{1}{2}e^{-2(t-2)} \right\}$$

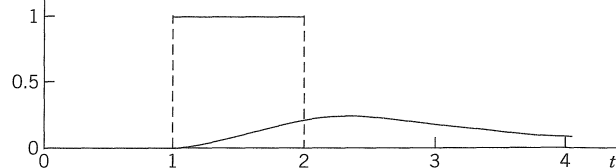


Fig. 133. Square wave and response in Example 1

自行練習!!

EXAMPLE 2 Hammerblow Response of a Mass-Spring System

Find the response of the system in Example 1 with the square wave replaced by a unit impulse at time $t = 1$.

Solution. We now have the ODE and the subsidiary equation

$$y'' + 3y' + 2y = \delta(t-1) \quad \text{and} \quad (s^2 + 3s + 2)Y = e^{-s}.$$

Solving algebraically gives

$$Y(s) = \frac{e^{-s}}{(s+1)(s+2)} = \left(\frac{1}{s+1} - \frac{1}{s+2} \right) e^{-s}.$$

By Theorem 1 the inverse is

$$y(t) = \mathcal{L}^{-1}(Y) = \begin{cases} 0 & \text{if } 0 < t < 1 \\ e^{-(t-1)} - e^{-2(t-1)} & \text{if } t > 1. \end{cases} \quad \text{分段討論}$$

$$\left\{ e^{-(t-1)} - e^{-2(t-1)} \right\} u(t-1)$$

$$\mathcal{L}[\delta(t-a)] = e^{-as}$$

$$\mathcal{L}[u(t-a)] = \frac{e^{-as}}{s}$$

注意其差異

$y(t)$ is shown in Fig. 134. Can you imagine how Fig. 133 approaches Fig. 134 as the wave becomes shorter and shorter, the area of the rectangle remaining 1?

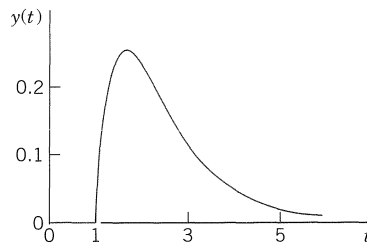


Fig. 134. Response to a hammerblow in Example 2

$$L[f'] = sL[f] - f(0)$$

$$L[f''] = s^2 L[f] - sf(0) - f'(0)$$

EXAMPLE 3 Four-Terminal RLC-Network

Find the output voltage response in Fig. 135 if $R = 20 \Omega$, $L = 1 \text{ H}$, $C = 10^{-4} \text{ F}$ the input is $\delta(t)$ (a unit impulse at time $t = 0$), and **current and charge are zero at time $t = 0$.**

$$\begin{aligned} I(0) &= 0 \rightarrow Q'(0) = 0 \\ Q(0) &= 0 \end{aligned}$$

Solution. To understand what is going on, note that the network is an RLC-circuit to which two wires at A and B are attached for recording the voltage $v(t)$ on the capacitor. Recalling from Sec. 2.9 that current $i(t)$ and charge $q(t)$ are related by $i = q' = dq/dt$, we obtain the model

$$Li' + Ri + \frac{q}{C} = Lq'' + Rq' + \frac{q}{C} = q'' + 20q' + 10,000q = \delta(t).$$

From (1) and (2) in Sec. 6.2 and (5) in this section we obtain the subsidiary equation for $Q(s) = \mathcal{L}(q)$

$$(s^2 + 20s + 10,000)Q = 1. \quad \text{Solution} \quad Q = \frac{1}{(s+10)^2 + 9900}.$$


$\frac{1}{99.5} \frac{99.5}{(s+10)^2 + 99.5^2}$

By the first shifting theorem in Sec. 6.1 we obtain from Q damped oscillations for q and v ; rounding $9900 \approx 99.50^2$, we get (Fig. 135)

$$q = \mathcal{L}^{-1}(Q) = \frac{1}{99.50} e^{-10t} \sin 99.50t \quad \text{and} \quad v = \frac{q}{C} = 100.5 e^{-10t} \sin 99.50t.$$

求電壓

10^{-4} F



Network

電容壓降，故要先求出 q

Voltage on the capacitor

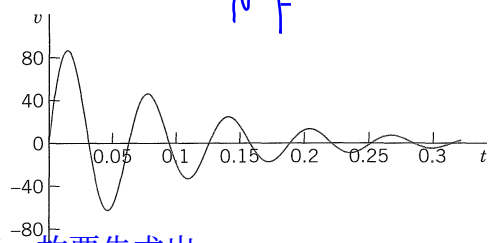


Fig. 135. Network and output voltage in Example 3

務必要運算熟練！

More on Partial Fractions 請見補充資料

We have seen that the solution Y of a subsidiary equation usually appears as a quotient of polynomials $Y(s) = F(s)/G(s)$, so that a partial fraction representation leads to a sum of expressions whose inverses we can obtain from a table, aided by the first shifting theorem (Sec. 6.1). These representations are sometimes called **Heaviside expansions**.

另外作法

An unpeated factor $s - a$ in $G(s)$ requires a single partial fraction $A/(s - a)$. See Examples 1 and 2. Repeated real factors $(s - a)^2$, $(s - a)^3$, etc., require partial fractions

$$\begin{aligned} \mathcal{L}\{f(t)u(t-a)\} &= e^{-as}\mathcal{L}\{f(t+a)\} \\ \Rightarrow 10\left[-e^{-0s}\mathcal{L}\{\sin 2(t+0)\} - e^{-\pi s}\mathcal{L}\{\sin 2(t+\pi)\}\right] \\ &= 10\mathcal{L}\{\sin 2t\}(1 - e^{-\pi s}) \end{aligned}$$

$$\frac{A_2}{(s-a)^2} + \frac{A_1}{s-a}, \quad \frac{A_3}{(s-a)^3} + \frac{A_2}{(s-a)^2} + \frac{A_1}{s-a}, \quad \text{etc.,}$$

The inverses are $(A_2t + A_1)e^{at}$, $(\frac{1}{2}A_3t^2 + A_2t + A_1)e^{at}$, etc.

Unpeated complex factors $(s - a)(s - \bar{a})$, $a = \alpha + i\beta$, $\bar{a} = \alpha - i\beta$, require a partial fraction $(As + B)/[(s - \alpha)^2 + \beta^2]$. For an application, see Example 4 in Sec. 6.3. A further one is the following.

$$10\{\sin 2(t-0)u(t-0) - \sin 2(t-\pi)u(t-\pi)\}$$

寫成可代入公式的形式

EXAMPLE 4

Unpeated Complex Factors. Damped Forced Vibrations

Solve the initial value problem for a damped mass-spring system acted upon by a sinusoidal force for some time interval (Fig. 136),

$$L\{f'\} = sL\{f\} - f(0)$$

$$L\{f''\} = s^2L\{f\} - sf(0) - f'(0)$$

$$y'' + 2y' + 2y = r(t), \quad r(t) = 10 \sin 2t \text{ if } 0 < t < \pi \text{ and } 0 \text{ if } t > \pi; \quad y(0) = 1, \quad y'(0) = -5.$$

Solution. From Table 6.1, (1), (2) in Sec. 6.2, and the second shifting theorem in Sec. 6.3, we obtain the subsidiary equation

$$(s^2 + 2s + 2)Y + (-s + 5) = (s^2Y - s + 5) + 2(sY - 1) + 2Y = 10 \frac{2}{s^2 + 4} (1 - e^{-\pi s}).$$

We collect the Y -terms, $(s^2 + 2s + 2)Y$, take $-s + 5 - 2 = -s + 3$ to the right, and solve,

$$(6) \quad Y = \frac{20}{(s^2 + 4)(s^2 + 2s + 2)} - \frac{20e^{-\pi s}}{(s^2 + 4)(s^2 + 2s + 2)} + \frac{s - 3}{s^2 + 2s + 2}.$$

For the last fraction we get from Table 6.1 and the first shifting theorem

$$(7) \quad \mathcal{L}^{-1}\left\{\frac{s + 1 - 4}{(s + 1)^2 + 1}\right\} = e^{-t}(\cos t - 4 \sin t).$$

In the first fraction in (6) we have unpeated complex roots, hence a partial fraction representation

$$\frac{20}{(s^2 + 4)(s^2 + 2s + 2)} = \frac{As + B}{s^2 + 4} + \frac{Ms + N}{s^2 + 2s + 2}.$$

Multiplication by the common denominator gives

$$20 = (As + B)(s^2 + 2s + 2) + (Ms + N)(s^2 + 4).$$

We determine A , B , M , N . Equating the coefficients of each power of s on both sides gives the four equations

$$\begin{aligned} (a) \quad [s^3]: \quad 0 &= A + M & (b) \quad [s^2]: \quad 0 &= 2A + B + N \\ (c) \quad [s]: \quad 0 &= 2A + 2B + 4M & (d) \quad [s^0]: \quad 20 &= 2B + 4N. \end{aligned}$$

We can solve this, for instance, obtaining $M = -A$ from (a), then $A = B$ from (c), then $N = -3A$ from (b), and finally $A = -2$ from (d). Hence $A = -2$, $B = -2$, $M = 2$, $N = 6$, and the first fraction in (6) has the representation

$$(8) \quad \frac{-2s - 2}{s^2 + 4} + \frac{2(s + 1) + 6 - 2}{(s + 1)^2 + 1}. \quad \text{Inverse transform: } -2 \cos 2t - \sin 2t + e^{-t}(2 \cos t + 4 \sin t).$$

比較係數法

$$\mathcal{L}^{-1}[e^{as}F(s)] = f(t-a)u(t-a)$$

The sum of this inverse and (7) is the solution of the problem for $0 < t < \pi$, namely (the sines cancel),

(7)式+(8)式= (9)

$$y(t) = 3e^{-t} \cos t - 2 \cos 2t - \sin 2t \quad \text{if } 0 < t < \pi.$$

In the second fraction in (6), taken with the minus sign, we have the factor $e^{-\pi s}$, so that from (8) and the second shifting theorem (Sec. 6.3) we get the inverse transform of this fraction for $t > 0$ in the form

$$\begin{aligned} & u(t-\pi) \left[+2 \cos(2t-2\pi) + \sin(2t-2\pi) - e^{-(t-\pi)} [2 \cos(t-\pi) + 4 \sin(t-\pi)] \right] \\ &= (2 \cos 2t + \sin 2t) - e^{-(t-\pi)} (2 \cos t + 4 \sin t) \quad u(t-\pi) \dots \dots (9') \text{式} \end{aligned}$$

The sum of this and (9) is the solution for $t > \pi$

(9)式+(9')式= (10)

$$y(t) = e^{-t} [(3 + 2e^{\pi}) \cos t + 4e^{\pi} \sin t] \quad \text{if } t > \pi.$$

Figure 136 shows (9) (for $0 < t < \pi$) and (10) (for $t > \pi$), a beginning vibration, which goes to zero rapidly because of the damping and the absence of a driving force after $t = \pi$.

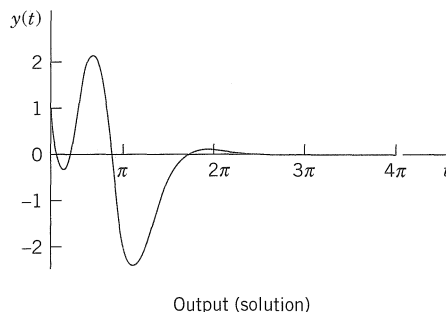
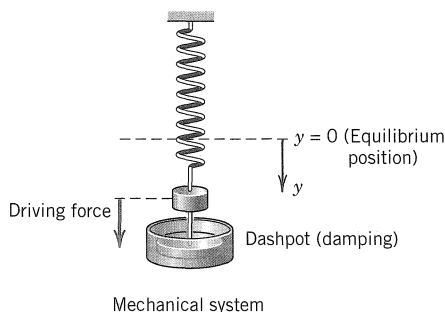


Fig. 136. Example 4

The case of repeated complex factors $[(s-a)(s-\bar{a})]^2$, which is important in connection with resonance, will be handled by “convolution” in the next section.

PROBLEM SET 6.4

1. **CAS PROJECT. Effect of Damping.** Consider a vibrating system of your choice modeled by

$$y'' + cy' + ky = \delta(t).$$

- (a) Using graphs of the solution, describe the effect of continuously decreasing the damping to 0, keeping k constant.
 - (b) What happens if c is kept constant and k is continuously increased, starting from 0?
 - (c) Extend your results to a system with two δ -functions on the right, acting at different times.
2. **CAS EXPERIMENT. Limit of a Rectangular Wave. Effects of Impulse.**

(a) In Example 1 in the text, take a rectangular wave of area 1 from 1 to $1+k$. Graph the responses for a sequence of values of k approaching zero, illustrating that for smaller and smaller k those curves approach

the curve shown in Fig. 134. *Hint:* If your CAS gives no solution for the differential equation, involving k , take specific k 's from the beginning.

(b) Experiment on the response of the ODE in Example 1 (or of another ODE of your choice) to an impulse $\delta(t-a)$ for various systematically chosen a (> 0); choose initial conditions $y(0) \neq 0, y'(0) = 0$. Also consider the solution if no impulse is applied. Is there a dependence of the response on a ? On b if you choose $b\delta(t-a)$? Would $-\delta(t-\tilde{a})$ with $\tilde{a} > a$ annihilate the effect of $\delta(t-a)$? Can you think of other questions that one could consider experimentally by inspecting graphs?

3-12 EFFECT OF DELTA (IMPULSE) ON VIBRATING SYSTEMS

Find and graph or sketch the solution of the IVP. Show the details.

$$3. y'' + 9y = \delta(t - \pi/2), \quad y(0) = 2, y'(0) = 0$$

【補充資料】

$$Y = \frac{20}{(s^2 + 4)(s^2 + 2s + 2)} - \frac{20e^{-\pi s}}{(s^2 + 4)(s^2 + 2s + 2)} + \frac{s - 3}{s^2 + 2s + 2}$$

$$\begin{aligned} L^{-1}\left[\frac{20}{(s^2 + 4)(s^2 + 2s + 2)}\right] &= L^{-1}\left[\frac{As + B}{s^2 + 4} + \frac{Ms + N}{s^2 + 2s + 2}\right] = L^{-1}\left[\frac{-2s - 2}{s^2 + 4} + \frac{2s + 6}{s^2 + 2s + 2}\right] \\ &= L^{-1}\left[-2\frac{s}{s^2 + 4} - \frac{2}{s^2 + 4} + \frac{2(s+1)+4}{(s+1)^2 + 1}\right] = L^{-1}\left[-2\frac{s}{s^2 + 4} - \frac{2}{s^2 + 4} + \frac{2(s+1)}{(s+1)^2 + 1} + \frac{4}{(s+1)^2 + 1}\right] \\ &= -2\cos 2t - \sin 2t + e^{-t}(2\cos t + 4\sin t)\dots\dots\dots(A) \end{aligned}$$

$$\begin{aligned} L^{-1}\left[\frac{20e^{-\pi s}}{(s^2 + 4)(s^2 + 2s + 2)}\right] &= L^{-1}\left[\left(-2\frac{s}{s^2 + 4} - \frac{2}{s^2 + 4} + \frac{2(s+1)}{(s+1)^2 + 1} + \frac{4}{(s+1)^2 + 1}\right)e^{-\pi s}\right] \\ &= [-2\cos 2(t - \pi) - \sin 2(t - \pi) + e^{-(t-\pi)}(2\cos(t - \pi) + 4\sin(t - \pi))]u(t - \pi) \\ &= [-2\cos 2t - \sin 2t + e^{-(t-\pi)}(-2\cos t - 4\sin t)]u(t - \pi)\dots\dots\dots(B) \end{aligned}$$

$$L^{-1}\left[\frac{s - 3}{s^2 + 2s + 2}\right] = L^{-1}\left[\frac{s + 1 - 4}{(s + 1)^2 + 1}\right] = L^{-1}\left[\frac{s + 1}{(s + 1)^2 + 1} - \frac{4}{(s + 1)^2 + 1}\right] = e^{-t}(\cos t - 4\sin t)\dots\dots\dots(C)$$

$$\begin{aligned} y(t) &= (A) - (B) + (C) = -2\cos 2t - \sin 2t + e^{-t}(2\cos t + 4\sin t) \\ &\quad - [-2\cos 2t - \sin 2t + e^{-(t-\pi)}(-2\cos t - 4\sin t)]u(t - \pi) \\ &\quad + e^{-t}(\cos t - 4\sin t) \end{aligned}$$

討論：



if $0 < t < \pi$

$$\begin{aligned} y(t) &= -2\cos 2t - \sin 2t + e^{-t}(2\cos t + 4\sin t) \\ &\quad - 0 + e^{-t}(\cos t - 4\sin t) \\ &= 3e^{-t}\cos t - 2\cos 2t - \sin 2t \end{aligned}$$

if $t > \pi$

$$\begin{aligned} y(t) &= -2\cos 2t - \sin 2t + e^{-t}(2\cos t + 4\sin t) \\ &\quad - [-2\cos 2t - \sin 2t + e^{-(t-\pi)}(-2\cos t - 4\sin t)] + e^{-t}(\cos t - 4\sin t) \\ &= 3e^{-t}\cos t - 2\cancel{\cos 2t} - \cancel{\sin 2t} + 2\cancel{\cos 2t} + \cancel{\sin 2t} + e^{-(t-\pi)}(2\cos t + 4\sin t) \\ &= 3e^{-t}\cos t + e^{-(t-\pi)}(2\cos t + 4\sin t) \\ &= e^{-t}[(3 + 2e^\pi)\cos t + 4e^\pi \sin t] \end{aligned}$$

【例題】試求下列函數之拉氏轉換

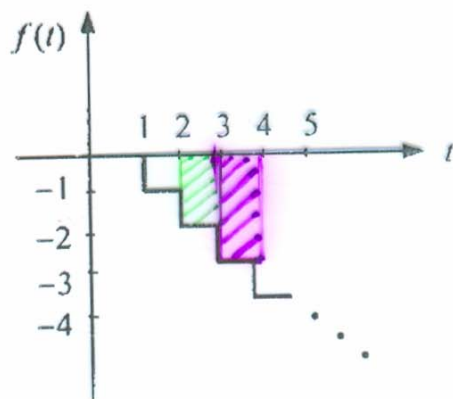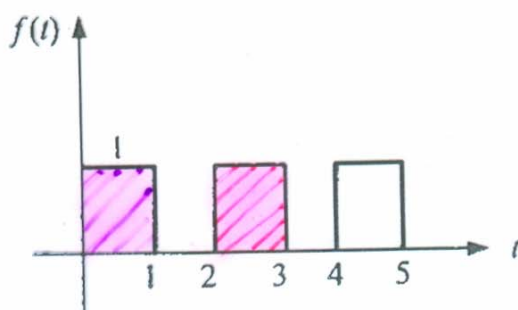

[87 中央環工(25%)]

(a) $f(t) = [H(t) - H(t-1)] + [H(t-2) - H(t-3)] + \dots$

$1 + b + b^2 + \dots$

$\therefore L[f(t)] = \frac{1}{s} - \frac{1}{s}e^{-s} + \frac{1}{s}e^{-2s} - \frac{1}{s}e^{-3s} + \dots = \frac{1}{s(1+e^{-s})}$

$= \frac{1}{1-b}$

(b) $f(t) = [U(t-1) - U(t-2)](-1) + [U(t-2) - U(t-3)](-2) + \dots$

$\frac{1}{s}(1 - e^{-s} + e^{-2s} - e^{-3s} + \dots)$

$f(t) = -U(t-1) - U(t-2) - U(t-3) - \dots$

$L[f(t)] = -L[U(t-1)] - L[U(t-2)] - L[U(t-3)] - L[U(t-4)] - \dots$

$= -\frac{1}{s}e^{-s} - \frac{1}{s}e^{-2s} - \frac{1}{s}e^{-3s} - \frac{1}{s}e^{-4s} - \dots$

$= -\frac{1}{s}e^{-s}(1 + e^{-s} + e^{-2s} + \dots)$

$= -\frac{1}{s}e^{-s} \frac{1}{1-e^{-s}} = \frac{-e^{-s}}{s(1-e^{-s})}$

【例題】

試畫下列函數圖形


(a) $U(x-a) - U(x-b)$, $a < b$

(b) $[U(x-a) - U(x-b)]x^2$, $a < b$



(c) $U(x-2\pi)\sin x$

【解】


(a)

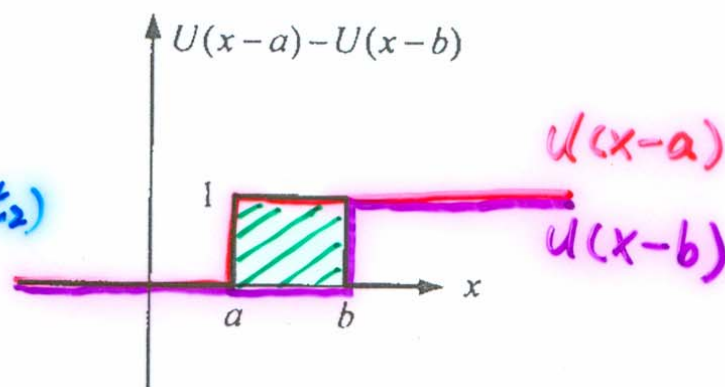

$e(t) = A U_s(t-t_1) - A U_s(t-t_2)$

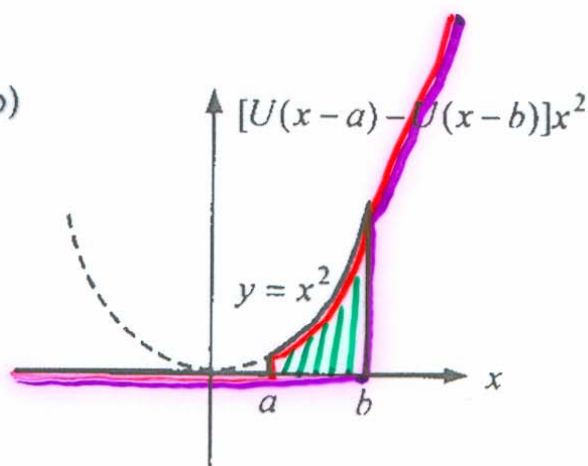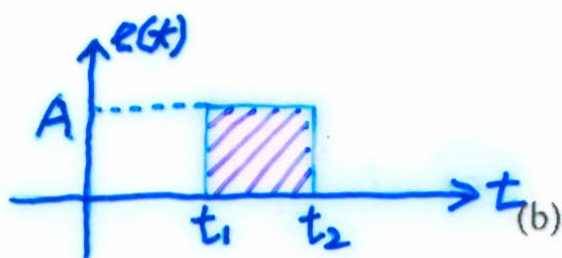

(c)

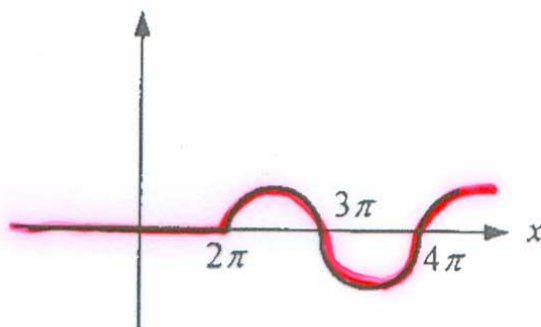

【部分分式展開技巧補充資料】

部分分式

令 $F(s) = \frac{N(s)}{D(s)}$ 為有理函數(rational function)， $N(s)$ 與 $D(s)$ 分別為 s 的多項式(polynomial)，則

項的次數

(1) 若 $\deg N(s) = \deg D(s)$ ：則稱 $F(s)$ 為真分有理函數(proper rational function)

(2) 若 $\deg N(s) < \deg D(s)$ ：則稱 $F(s)$ 為嚴格真分有理函數(strictly proper rational function)

假設 $F(s) = \frac{N(s)}{D(s)}$ 為嚴格真分有理函數，則 $F(s)$ 的部分分式(partial fraction)可分為下列三種情形討論。

$$F(s) = \frac{N(s)}{(s+a)D'(s)} \Rightarrow \text{等號兩邊同乘以}(s+a)$$

$$\Rightarrow (s+a)F(s) = A + (\dots)(s+a) = \frac{N(s)}{D'(s)}$$

1. 對單根 $s+a$ 的部分分式：

$s=-a$ 代入

$$F(s) = \frac{N(s)}{D(s)} = \frac{A}{s+a} + \dots \Rightarrow A + (\dots)\cancel{(s+a)}|_{s=-a} = (s+a)F(s)|_{s=-a} = \frac{N(s)}{D'(s)}|_{s=-a}$$

$$A = [(s+a)F(s)]|_{s=-a}$$

其中 A 稱為 $F(s)$ 在 $s=-a$ 處的剩值(residue)。

例題 1-6：

$$F(s) = \frac{18(s+1)}{s(s+3)(s+6)} = \frac{A}{s} + \frac{B}{s+3} + \frac{C}{s+6}$$

$$A = \cancel{s} \frac{18(s+1)}{(s+3)(s+6)} \Big|_{s=0} = 1$$

$$B = \cancel{(s+3)} \frac{18(s+1)}{s(s+6)} \Big|_{s=-3} = 4$$

$$C = \cancel{(s+6)} \frac{18(s+1)}{s(s+3)} \Big|_{s=-6} = -5$$

2. 對 m 個重根 $(s+a)^m$ 的部分分式：

$$F(s) = \frac{A_m}{(s+a)^m} + \frac{A_{m-1}}{(s+a)^{m-1}} + \cdots + \frac{A_1}{(s+a)} + \cdots$$

分式的微分：

$$\left(\frac{f(t)}{g(t)}\right)' = \frac{f'(t)g(t) - f(t)g'(t)}{g^2(t)}$$

$$A_m = \frac{(s+a)^m F(s)}{1} \Big|_{s=-a}$$

$$A_{m-1} = \frac{1}{1!} \frac{d}{ds} \left[(s+a)^m F(s) \right] \Big|_{s=-a}$$

$$A_{m-2} = \frac{1}{2!} \frac{d^2}{ds^2} \left[(s+a)^m F(s) \right] \Big|_{s=-a}$$

⋮

$$A_1 = \frac{1}{(m-1)!} \frac{d^{m-1}}{ds^{m-1}} \left[(s+a)^m F(s) \right] \Big|_{s=-a}$$

$= A_{m-(m-1)}$

$$F(s) = \frac{N(s)}{(s+a)^m D'(s)} \Rightarrow \text{等號兩邊同乘以}(s+a)^m$$

$$\Rightarrow (s+a)^m F(s) = \frac{N(s)}{D'(s)}$$

$s = -a$ 代入

$$A_m = \frac{N(s)}{D'(s)} \Big|_{s=-a}, \quad A_{m-1} = \frac{d}{ds} \left(\frac{N(s)}{D'(s)} \right) \Big|_{s=-a}$$

其中， A_1 稱為 $F(s)$ 在重根 $s = -a$ 處的剩值 (residue)。

例題 1-7：

$$F(s) = \frac{48(s+2)}{(s+1)(s+3)(s+4)^2}$$

$$= \frac{A_2}{(s+4)^2} + \frac{A_1}{(s+4)} + \frac{B}{(s+3)} + \frac{C}{(s+1)}$$

$$B = (s+3)F(s) \Big|_{s=-3} = 24$$

$$C = (s+1)F(s) \Big|_{s=-1} = \frac{8}{3}$$

$$A_2 = (s+4)^2 F(s) \Big|_{s=-4} = -32$$

$$A_1 = \frac{d}{ds} \left[(s+4)^2 F(s) \right] \Big|_{s=-4} = -\frac{80}{3}$$

3. 對共軛複根 $(s+\alpha+jw)(s+\alpha-jw)$ 的部分分式： 不建議使用公式，而是利用配對推導方法

$$F(s) = \frac{As+B}{(s+\alpha+jw)(s+\alpha-jw)} + \cdots$$

$$= \left(\frac{V_1}{w}\right) \frac{w}{(s+\alpha)^2 + w^2} + \left(\frac{V_2}{w}\right) \frac{s+\alpha}{(s+\alpha)^2 + w^2} + \cdots$$

$$Y = \frac{0.16(s+1)}{s^2+s+9} = \frac{0.16(s+\frac{1}{2})+0.08}{(s+\frac{1}{2})^2+\frac{35}{4}} = 0.16 \frac{s+\frac{1}{2}}{(s+\frac{1}{2})^2+(\sqrt{\frac{35}{4}})^2} + \frac{0.08}{\sqrt{\frac{35}{4}}} \frac{\sqrt{\frac{35}{4}}}{(s+\frac{1}{2})^2+(\sqrt{\frac{35}{4}})^2}$$

其中常數 V_1, V_2 分別為 $(s + \alpha + jw)(s + \alpha - jw)F(s)|_{s=-\alpha+jw}$ 的實部和虛部。

推導：令 $R(s) = (s + \alpha + jw)(s + \alpha - jw)F(s)$ ，則 $R(s) = As + B + (s + \alpha + jw)(s + \alpha - jw)(\cdots)$ 。令 $s = -\alpha + jw$ ，可得

$$\begin{aligned} R(-\alpha + jw) &= A \times (-\alpha + jw) + B = (B - \alpha A) + jwA \\ &\triangleq V_1 + jV_2 \end{aligned}$$

所以， $A = \frac{V_2}{w}, B - \alpha A = V_1$ ，且

$$\begin{aligned} F(s) &= \frac{As + B}{(s + \alpha + jw)(s + \alpha - jw)} + \cdots \\ &= \frac{A(s + \alpha) + (B - \alpha A)}{(s + \alpha + jw)(s + \alpha - jw)} + \cdots \\ &= \left(\frac{V_1}{w}\right) \frac{w}{(s + \alpha)^2 + w^2} + \left(\frac{V_2}{w}\right) \frac{s + \alpha}{(s + \alpha)^2 + w^2} + \cdots \end{aligned}$$

□

例題 1-8：求解下列函數的部分分式，（共軛複根 $s = -1 \pm j$ ）

$$F(s) = \frac{s + 3}{(s + 2)(s^2 + 2s + 2)} = \frac{\frac{1}{2}}{s+2} + \frac{-\frac{1}{2}s+1}{(s+1)^2+1} = \frac{\frac{1}{2}}{s+2} + \frac{-\frac{1}{2}(s+1)+\frac{3}{2}}{(s+1)^2+1}$$

$$\text{定義 } R(s) = (s^2 + 2s + 2)F(s) = \frac{s+3}{s+2}, \text{ 則 } = \frac{\frac{1}{2}}{s+2} + \left(-\frac{1}{2}\right) \frac{(s+1)}{(s+1)^2+1} + \frac{3}{2} \frac{1}{(s+1)^2+1}$$

$$R(-1 + j) = \frac{-1 + j + 3}{-1 + j + 2} = \frac{3}{2} - j\frac{1}{2}$$

所以， $V_1 = \frac{3}{2}, V_2 = -\frac{1}{2}, \alpha = 1, w = 1$ 。根據公式，

$$F(s) = \frac{\frac{1}{2}}{s+2} + \left(\frac{3}{2}\right) \frac{1}{(s+1)^2+1} + \left(-\frac{1}{2}\right) \frac{s+1}{(s+1)^2+1}$$

注意：以上探討各種部分分式的方法，目的在於反拉氏轉換的方便。
在控制系統的計算應用中，部分分式是非常重要的技巧。

4. $y'' + 16y = 4\delta(t - 3\pi)$, $y(0) = 2$, $y'(0) = 0$
5. $y'' + 4y = \delta(t - \pi) - \delta(t - 2\pi)$,
 $y(0) = 0$, $y'(0) = 1$
6. $y'' + 4y' + 5y = \delta(t - 1)$, $y(0) = 0$, $y'(0) = 3$
7. $4y'' + 16y' + 17y = 3e^{-t} + \delta(t - \frac{1}{4})$,
 $y(0) = \frac{3}{5}$, $y'(0) = -\frac{3}{5}$
8. $y'' + 3y' + 2y = 10(\sin t + \delta(t - 1))$, $y(0) = 1$,
 $y'(0) = -1$
9. $y'' + 2y' + 2y = [1 - u(t - 2)]e^t - e^2\delta(t - 2)$,
 $y(0) = 0$, $y'(0) = 1$
10. $y'' + 5y' + 6y = \delta(t - \frac{1}{2}\pi) + u(t - \pi)\cos t$,
 $y(0) = 0$, $y'(0) = 0$
11. $y'' + 3y' + 2y = u(t - 1) + \delta(t - 2)$,
 $y(0) = 0$, $y'(0) = 1$
12. $y'' + 2y' + 5y = 25t - 100\delta(t - \pi)$, $y(0) = -2$,
 $y'(0) = 5$

13. PROJECT. Heaviside Formulas. (a) Show that for a simple root a and fraction $A/(s - a)$ in $F(s)/G(s)$ we have the *Heaviside formula*

$$A = \lim_{s \rightarrow a} \frac{(s - a)F(s)}{G(s)}.$$

(b) Similarly, show that for a root a of order m and fractions in

$$\begin{aligned} \frac{F(s)}{G(s)} &= \frac{A_m}{(s - a)^m} + \frac{A_{m-1}}{(s - a)^{m-1}} + \cdots \\ &+ \frac{A_1}{s - a} + \text{further fractions} \end{aligned}$$

we have the *Heaviside formulas* for the first coefficient

$$A_m = \lim_{s \rightarrow a} \frac{(s - a)^m F(s)}{G(s)}$$

and for the other coefficients

$$A_k = \frac{1}{(m - k)!} \lim_{s \rightarrow a} \frac{d^{m-k}}{ds^{m-k}} \left[\frac{(s - a)^m F(s)}{G(s)} \right],$$

$$k = 1, \dots, m - 1.$$

14. TEAM PROJECT. Laplace Transform of Periodic Functions

(a) **Theorem.** The Laplace transform of a piecewise continuous function $f(t)$ with period p is

$$(11) \quad \mathcal{L}(f) = \frac{1}{1 - e^{-ps}} \int_0^p e^{-st} f(t) dt \quad (s > 0).$$

Prove this theorem. *Hint:* Write $\int_0^\infty = \int_0^p + \int_p^{2p} + \cdots$.

Set $t = (n - 1)p$ in the n th integral. Take out $e^{-(n-1)p}$ from under the integral sign. Use the sum formula for the geometric series.

(b) **Half-wave rectifier.** Using (11), show that the half-wave rectification of $\sin \omega t$ in Fig. 137 has the Laplace transform

$$\begin{aligned} \mathcal{L}(f) &= \frac{\omega(1 + e^{-\pi s/\omega})}{(s^2 + \omega^2)(1 - e^{-2\pi s/\omega})} \\ &= \frac{\omega}{(s^2 + \omega^2)(1 - e^{-\pi s/\omega})}. \end{aligned}$$

(A *half-wave rectifier* clips the negative portions of the curve. A *full-wave rectifier* converts them to positive; see Fig. 138.)

(c) **Full-wave rectifier.** Show that the Laplace transform of the full-wave rectification of $\sin \omega t$ is

$$\frac{\omega}{s^2 + \omega^2} \coth \frac{\pi s}{2\omega}.$$




Fig. 137. Half-wave rectification




Fig. 138. Full-wave rectification

(d) **Saw-tooth wave.** Find the Laplace transform of the saw-tooth wave in Fig. 139.

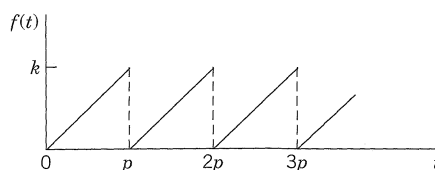


Fig. 139. Saw-tooth wave

15. Staircase function. Find the Laplace transform of the staircase function in Fig. 140 by noting that it is the difference of kt/p and the function in 14(d).

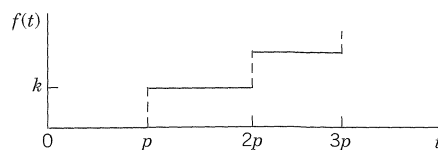


Fig. 140. Staircase function

學習重點：

1. 認識摺積定義與其拉式轉換
2. 積分方程式之求解運算

6.5 Convolution. Integral Equations

摺積

Convolution has to do with the multiplication of transforms. The situation is as follows. Addition of transforms provides no problem; we know that $\mathcal{L}(f+g) = \mathcal{L}(f) + \mathcal{L}(g)$. Now **multiplication of transforms** occurs frequently in connection with ODEs, integral equations, and elsewhere. Then we usually know $\mathcal{L}(f)$ and $\mathcal{L}(g)$ and would like to know the function whose transform is the product $\mathcal{L}(f)\mathcal{L}(g)$. We might perhaps guess that it is fg , but this is false. The transform of a product is generally different from the product of the transforms of the factors,

$$\mathcal{L}(fg) \neq \mathcal{L}(f)\mathcal{L}(g) = F(s)G(s) \quad \text{in general.}$$

簡單範例：

To see this take $f = e^t$ and $g = 1$. Then $fg = e^t$, $\mathcal{L}(fg) = 1/(s-1)$, but $\mathcal{L}(f) = 1/(s-1)$ and $\mathcal{L}(1) = 1/s$ give $\mathcal{L}(f)\mathcal{L}(g) = 1/(s^2-s)$.

According to the next theorem, the correct answer is that $\mathcal{L}(f)\mathcal{L}(g)$ is the transform of the **convolution** of f and g , denoted by the standard notation $f * g$ and defined by the integral

先求出

$$(1) \mathcal{L}^{-1}[F] = f$$

$$\mathcal{L}^{-1}[G] = g$$

$$h(t) = (f * g)(t) = \int_0^t f(\tau)g(t-\tau) d\tau.$$

$$= \int_0^t f(t-\tau)g(\tau) d\tau$$

Convolution Theorem

If two functions f and g satisfy the assumption in the existence theorem in Sec. 6.1, so that their transforms F and G exist, the product $H = FG$ is the transform of h given by (1). (Proof after Example 2.)

EXAMPLE 1

Convolution ① $\frac{1}{s-a} \cdot \frac{1}{s}$

Let $H(s) = 1/[(s-a)s]$. Find $h(t)$.

Solution. $1/(s-a)$ has the inverse $f(t) = e^{at}$ and $1/s$ has the inverse $g(t) = 1$. With $f(\tau) = e^{a\tau}$ and $g(t-\tau) \equiv 1$ we thus obtain from (1) the answer

$$\textcircled{2} h(t) = e^{at} * 1 = \int_0^t e^{a\tau} \cdot 1 d\tau = \frac{1}{a}(e^{at} - 1)$$

To check, calculate

驗算結果 $H(s) = \mathcal{L}(h)(s) = \frac{1}{a} \left(\frac{1}{s-a} - \frac{1}{s} \right) = \frac{1}{a} \cdot \frac{a}{s^2-as} = \frac{1}{s-a} \cdot \frac{1}{s} = \mathcal{L}(e^{at})\mathcal{L}(1).$

Convolution

Let $H(s) = 1/(s^2 + \omega^2)^2$. Find $h(t)$.

Solution. The inverse of $1/(s^2 + \omega^2)$ is $(\sin \omega t)/\omega$. Hence from (1) and the first formula in (11) in App. 3.1 we obtain

$$h(t) = \frac{\sin \omega t}{\omega} * \frac{\sin \omega t}{\omega} = \frac{1}{\omega^2} \int_0^t \sin \omega \tau \sin \omega(t-\tau) d\tau$$

$$= \frac{1}{2\omega^2} \int_0^t [-\cos \omega t + \cos(2\omega\tau - \omega t)] d\tau$$

$$\sin \alpha \sin \beta = \frac{1}{2} [\cos(\alpha - \beta) - \cos(\alpha + \beta)]$$

$$\mathcal{L}^{-1} \left[\frac{1}{s^2 + \omega^2} \right] = \frac{1}{\omega} \mathcal{L}^{-1} \left[\frac{\omega}{s^2 + \omega^2} \right]$$

$$= \frac{1}{\omega} \sin \omega t$$

積化和差公式

$$\sin A \cos B = \frac{1}{2} [\sin(A+B) + \sin(A-B)]$$

$$\cos A \sin B = \frac{1}{2} [\sin(A+B) - \sin(A-B)]$$

$$\cos A \cos B = \frac{1}{2} [\cos(A+B) + \cos(A-B)]$$

$$\sin A \sin B = \frac{1}{2} [\cos(A-B) - \cos(A+B)]$$

$$\left[\frac{\sin(2\omega t - \omega t)}{2\omega} \right]_0^t = \frac{\sin(2\omega t - \omega t)}{2\omega} - \frac{\sin(\tau - \omega t)}{2\omega} = \frac{1}{2\omega^2} \left[-\tau \cos \omega t + \frac{\sin \omega \tau}{\omega} \right]_{\tau=0}^t$$

$$= \frac{1}{2\omega^2} \left[-t \cos \omega t + \frac{\sin \omega t}{\omega} \right]$$

$$= \frac{\sin \omega t}{2\omega} - \frac{\sin(-\omega t)}{2\omega} = \frac{\sin \omega t}{\omega}$$

in agreement with formula 21 in the table in Sec. 6.9.

PROOF We prove the Convolution Theorem 1. CAUTION! Note which ones are the variables of integration! We can denote them as we want, for instance, by τ and p , and write

97成大土木(15%)

$$F(s) = \int_0^\infty e^{-s\tau} f(\tau) d\tau \quad \text{and} \quad G(s) = \int_0^\infty e^{-sp} g(p) dp$$

We now set $t = p + \tau$ where τ is at first constant. Then $p = t - \tau$, and t varies from τ to ∞ . Thus

$$dp = dt$$

$$F(s)G(s) = \int_0^\infty e^{-s\tau} f(\tau) G(s) d\tau$$

$$G(s) = \int_\tau^\infty e^{-s(t-\tau)} g(t-\tau) dt = e^{s\tau} \int_\tau^\infty e^{-st} g(t-\tau) dt$$

τ in F and t in G vary independently. Hence we can insert the G -integral into the F -integral. Cancellation of $e^{-s\tau}$ and $e^{s\tau}$ then gives

$$F(s)G(s) = \int_0^\infty e^{-s\tau} f(\tau) \int_\tau^\infty e^{-st} g(t-\tau) dt d\tau = \int_0^\infty f(\tau) \int_\tau^\infty e^{-st} g(t-\tau) dt d\tau$$

兩者積分程序、範圍不同，但結果都是藍色面積

Here we integrate for fixed τ over t from τ to ∞ and then over τ from 0 to ∞ . This is the blue region in Fig. 141. Under the assumption on f and g the order of integration can be reversed (see Ref. [A5] for a proof using uniform convergence). We then integrate first over τ from 0 to t and then over t from 0 to ∞ , that is,

$$F(s)G(s) = \int_0^\infty e^{-st} \left[\int_0^t f(\tau) g(t-\tau) d\tau \right] dt = \int_0^\infty e^{-st} h(t) dt = \mathcal{L}(h) = H(s).$$

This completes the proof.




Fig. 141. Region of integration in the $t\tau$ -plane in the proof of Theorem 1

定理 5

摺合定理


若 $L[f(t)] = F(s)$, $L[g(t)] = G(s)$, 則

$$L\left[\int_0^t f(t-\tau)g(\tau)d\tau\right] = L\left[\int_0^t f(\tau)g(t-\tau)d\tau\right] = F(s)G(s)$$

【97 成大土木 15%】

證明：

$$\begin{aligned} L\left[\int_0^t f(t-\tau)g(\tau)d\tau\right] &= \int_0^\infty e^{-st} \int_0^t f(t-\tau)g(\tau)d\tau dt \\ &= \int_0^\infty \int_0^t e^{-st} f(t-\tau)g(\tau)d\tau dt \\ &= \int_0^\infty \int_\tau^\infty e^{-st} f(t-\tau)g(\tau)dt d\tau \\ &= \int_0^\infty g(\tau) \int_\tau^\infty e^{-st} f(t-\tau)dt d\tau \end{aligned}$$

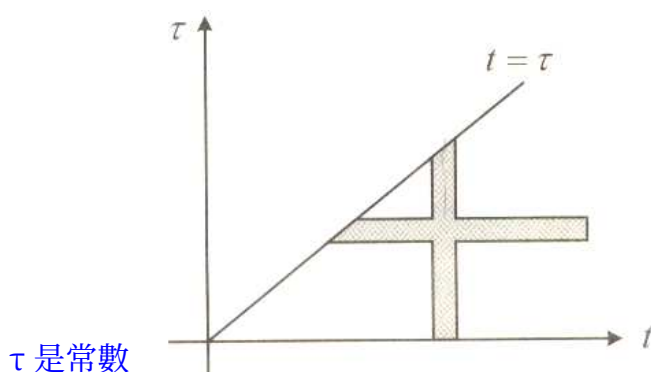

令 $x = t - \tau$, $dx = dt - d\tau = dt$

$$\begin{aligned} \text{原式} &= \int_0^\infty g(\tau) \int_0^\infty e^{-s(x+\tau)} f(x)dx d\tau = \int_0^\infty g(\tau) e^{-s\tau} \int_0^\infty e^{-sx} f(x)dx d\tau \\ &= \int_0^\infty g(\tau) e^{-s\tau} F(s) d\tau = F(s) \int_0^\infty g(\tau) e^{-s\tau} d\tau \end{aligned}$$

故 $L\left[\int_0^t f(t-\tau)g(\tau)d\tau\right] = F(s) \cdot G(s)$

同理 $L\left[\int_0^t f(\tau)g(t-\tau)d\tau\right] = F(s) \cdot G(s)$

From the definition it follows almost immediately that convolution has the properties

$$f * g = g * f \quad (\text{commutative law})$$

$$f * (g_1 + g_2) = f * g_1 + f * g_2 \quad (\text{distributive law})$$

$$(f * g) * v = f * (g * v) \quad (\text{associative law})$$

$$f * 0 = 0 * f = 0$$

similar to those of the multiplication of numbers. However, there are differences of which you should be aware.

EXAMPLE 3

Unusual Properties of Convolution

$f * 1 \neq f$ in general. For instance,

$$t * 1 = \int_0^t \tau \cdot 1 \, d\tau = \frac{1}{2} t^2 \neq t.$$

$f(\tau) = \tau$
 $g(t) = 1 = g(t - \tau)$

$(f * f)(t) \geq 0$ may not hold. For instance, Example 2 with $\omega = 1$ gives

$$\sin t * \sin t = -\frac{1}{2} t \cos t + \frac{1}{2} \sin t$$

(Fig. 142). ■




Fig. 142. Example 3

We shall now take up the case of a complex double root (left aside in the last section in connection with partial fractions) and find the solution (the inverse transform) directly by convolution.

EXAMPLE 4

Repeated Complex Factors. Resonance

In an undamped mass-spring system, resonance occurs if the frequency of the driving force equals the natural frequency of the system. Then the model is (see Sec. 2.8)

$$m y'' + k y = F_0 \sin \omega t \rightarrow y'' + \frac{k}{m} y = \frac{F_0}{m} \sin \omega t$$

$(\omega = \omega_0)$

where $\omega_0^2 = k/m$, k is the spring constant, and m is the mass of the body attached to the spring. We assume $y(0) = 0$ and $y'(0) = 0$, for simplicity. Then the subsidiary equation is

$$s^2 Y + \omega_0^2 Y = \frac{K \omega_0}{s^2 + \omega_0^2}. \quad \text{Its solution is } Y = \frac{K \omega_0}{(s^2 + \omega_0^2)^2}.$$

This is a transform as in Example 2 with $\omega = \omega_0$ and multiplied by $K\omega_0$. Hence from Example 2 we can see directly that the solution of our problem is

$$y(t) = \frac{K\omega_0}{2\omega_0^2} \left(-t \cos \omega_0 t + \frac{\sin \omega_0 t}{\omega_0} \right) = \frac{K}{2\omega_0^2} (-\omega_0 t \cos \omega_0 t + \sin \omega_0 t).$$

造成共振的原因

We see that the first term grows without bound. Clearly, in the case of resonance such a term must occur. (See also a similar kind of solution in Fig. 55 in Sec. 2.8.)

Application to Nonhomogeneous Linear ODEs

Nonhomogeneous linear ODEs can now be solved by a general method based on convolution by which the solution is obtained in the form of an integral. To see this, recall from Sec. 6.2 that the subsidiary equation of the ODE

$$(2) \quad y'' + ay' + by = r(t) \quad (a, b \text{ constant})$$

has the solution [(7) in Sec. 6.2]

$$Y(s) = [(s+a)y(0) + y'(0)]Q(s) + R(s)Q(s)$$

with $R(s) = \mathcal{L}(r)$ and $Q(s) = 1/(s^2 + as + b)$ the transfer function. Inversion of the first term [...] provides no difficulty; depending on whether $\frac{1}{4}a^2 - b$ is positive, zero, or negative, its inverse will be a linear combination of two exponential functions, or of the form $(c_1 + c_2t)e^{-at/2}$, or a damped oscillation, respectively. The interesting term is $R(s)Q(s)$ because $r(t)$ can have various forms of practical importance, as we shall see. If $y(0) = 0$ and $y'(0) = 0$, then $Y = RQ$, and the convolution theorem gives the solution

$$y(t) = \int_0^t q(t-\tau)r(\tau) d\tau.$$

(方法2) 利用摺積定理求解y(t)

(3) 先求出q(t)與r(t)

EXAMPLE 5

Response of a Damped Vibrating System to a Single Square Wave

Using convolution, determine the response of the damped mass-spring system modeled by

$$y'' + 3y' + 2y = r(t),$$

$$r(t) = 1 \text{ if } 1 < t < 2 \text{ and } 0 \text{ otherwise.}$$

$$y(0) = y'(0) = 0.$$

This system with an input (a driving force) that acts for some time only (Fig. 143) has been solved by partial fraction reduction in Sec. 6.4 (Example 1).

Solution by Convolution. The transfer function and its inverse are

$$Q(s) = \frac{1}{s^2 + 3s + 2} = \frac{1}{(s+1)(s+2)} = \frac{1}{s+1} - \frac{1}{s+2}, \quad \text{hence}$$

$$q(t) = e^{-t} - e^{-2t}.$$

Hence the convolution integral (3) is (except for the limits of integration)

$$y(t) = \int_0^t q(t-\tau)r(\tau) d\tau = \int [e^{-(t-\tau)} - e^{-2(t-\tau)}] d\tau = e^{-(t-\tau)} - \frac{1}{2}e^{-2(t-\tau)}$$

Now comes an important point in handling convolution. $r(\tau) = 1$ if $1 < \tau < 2$ only. Hence if $t < 1$, the integral is zero. If $1 < t < 2$, we have to integrate from $\tau = 1$ (not 0) to t . This gives (with the first two terms from the upper limit)

$$y(t) = e^{-0} - \frac{1}{2}e^{-0} - (e^{-(t-1)} - \frac{1}{2}e^{-2(t-1)}) = \frac{1}{2} - e^{-(t-1)} + \frac{1}{2}e^{-2(t-1)}.$$

$$= \left[\begin{array}{c} \leftarrow \\ \leftarrow \\ \leftarrow \end{array} \right] t$$

$$(s^2 - 5s + 6)y(s) = R(s)$$

$$+ a(s)y(s) + b y(s) = R$$


$$(s^2 + as + b)Y = (s+a)y(0) + y'(0) + R$$

$$Y = \frac{1}{s^2 + as + b} R$$

$$= QR \quad \mathcal{L}^{-1}$$

(方法1) 利用部份分式求解v(t)

積分範圍必須分段討論
(有點難, 要特別注意!)

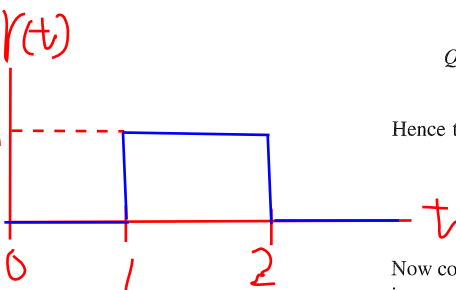

0 < t < 1, r(t)=0, 積分值=0
1 < t < 2, r(t)=1, 積分範圍1~t
t > 2, r(t)=0, 積分範圍1~2

積分範圍如何判定?

$$r(\tau) = 0$$

$t > 2$, 只有1~2間 $r(\tau) = 1$ 存在, 故積分範圍只能1到2

If $t > 2$, we have to integrate from $\tau = 1$ to 2 (not to t). This gives

$$y(t) = e^{-(t-2)} - \frac{1}{2}e^{-2(t-2)} - (e^{-(t-1)} - \frac{1}{2}e^{-2(t-1)}).$$

Figure 143 shows the input (the square wave) and the interesting output, which is zero from 0 to 1, then increases, reaches a maximum (near 2.6) after the input has become zero (why?), and finally decreases to zero in a monotone fashion.

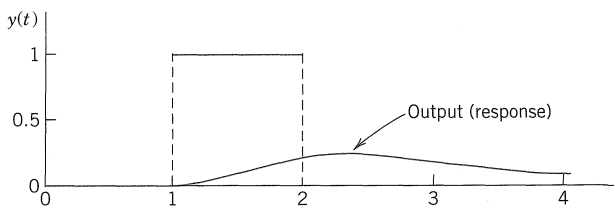


Fig. 143. Square wave and response in Example 5

特定解題步驟, 重要!

Integral Equations

指未知函數出現在積分式中(亦可能出現在積分式之外)

Convolution also helps in solving certain **integral equations**, that is, equations in which the unknown function $y(t)$ appears in an integral (and perhaps also outside of it). This concerns equations with an integral of the form of a convolution. Hence these are special and it suffices to explain the idea in terms of two examples and add a few problems in the problem set.

未知函數...待求之解

EXAMPLE 6

A Volterra Integral Equation of the Second Kind

Solve the Volterra integral equation of the second kind³

$$y(t) - \int_0^t y(\tau) \sin(t - \tau) d\tau = t.$$

步驟1: 積分方程式寫成摺積的形式(看不出來也不用解了)

Solution. From (1) we see that the given equation can be written as a convolution, $y - y * \sin t = t$. Writing $Y = \mathcal{L}(y)$ and applying the convolution theorem, we obtain

$$Y(s) - Y(s) \frac{1}{s^2 + 1} = Y(s) \frac{s^2}{s^2 + 1} = \frac{1}{s^2}.$$

步驟2: 等號兩邊取 $\mathcal{L}$

The solution is

步驟3: 移項整理
成 $Y(s) = \dots$

$$Y(s) = \frac{s^2 + 1}{s^4} = \frac{1}{s^2} + \frac{1}{s^4}$$

and gives the answer
步驟4: 必要整理

$$y(t) = t + \frac{t^3}{6}.$$

$$\mathcal{L}[t^n] = \frac{n!}{s^{n+1}}$$

Check the result by a CAS or by substitution and 後做 $\mathcal{L}^{-1}$

ts (which will need patience). ■

EXAMPLE 7

Another Volterra Integral Equation of the Second Kind

Solve the Volterra integral equation

$$y(t) - \int_0^t (1 + \tau)y(t - \tau) d\tau = 1 - \sinh t.$$

³If the upper limit of integration is *variable*, the equation is named after the Italian mathematician VITO VOLTERRA (1860–1940), and if that limit is *constant*, the equation is named after the Swedish mathematician ERIK IVAR FREDHOLM (1866–1927). “Of the second kind (first kind)” indicates that y occurs (does not occur) outside of the integral.

Solution. By (1) we can write $y - (1 + t) * y = 1 - \sinh t$. Writing $Y = \mathcal{L}(y)$, we obtain by using the convolution theorem and then taking common denominators

步驟2 $Y(s) \left[1 - \left(\frac{1}{s} + \frac{1}{s^2} \right) \right] = \frac{1}{s} - \frac{1}{s^2 - 1}$, hence $Y(s) \cdot \frac{s^2 - s - 1}{s^2} = \frac{s^2 - 1 - s}{s(s^2 - 1)}$.

$(s^2 - s - 1)/s$ cancels on both sides, so that solving for Y simply gives

步驟3 $Y(s) = \frac{s}{s^2 - 1}$ and the solution is $y(t) = \cosh t$.
步驟4

PROBLEM SET 6.5

1-7 CONVOLUTIONS BY INTEGRATION

Find:

1. $1 * (-1)$
2. $1 * \sin \omega t$
3. $e^{-t} * e^t$
4. $(\cos \omega t) * (\cos \omega t)$
5. $(\cos \omega t) * 1$
6. $e^{at} * e^{bt} (a \neq b)$
7. $t * e^{-t}$

8-14 INTEGRAL EQUATIONS

Solve by the Laplace transform, showing the details:

8. $y(t) + 4 \int_0^t y(\tau)(t - \tau) d\tau = 2t$
9. $y(t) + \int_0^t y(\tau) d\tau = 2$
10. $y(t) - \int_0^t y(\tau) \sin 2(t - \tau) d\tau = \sin 2t$
11. $y(t) - \int_0^t (t - \tau)y(\tau) d\tau = 1$
12. $y(t) + \int_0^t y(\tau) \cosh(t - \tau) d\tau = t + e^t$
13. $y(t) + 2e^t \int_0^t y(\tau)e^{-\tau} d\tau = te^t$
14. $y(t) - \int_0^t y(\tau)(t - \tau) d\tau = 2 - \frac{1}{2}t^2$

15. CAS EXPERIMENT. Variation of a Parameter.

- (a) Replace 2 in Prob. 13 by a parameter k and investigate graphically how the solution curve changes if you vary k , in particular near $k = -2$.
- (b) Make similar experiments with an integral equation of your choice whose solution is oscillating.

16. TEAM PROJECT. Properties of Convolution. Prove:

- (a) Commutativity, $f * g = g * f$
- (b) Associativity, $(f * g) * v = f * (g * v)$
- (c) Distributivity, $f * (g_1 + g_2) = f * g_1 + f * g_2$
- (d) **Dirac's delta.** Derive the sifting formula (4) in Sec. 6.4 by using f_k with $a = 0$ [(1), Sec. 6.4] and applying the mean value theorem for integrals.
- (e) **Unspecified driving force.** Show that forced vibrations governed by

$$y'' + \omega^2 y = r(t), \quad y(0) = K_1, \quad y'(0) = K_2$$

with $\omega \neq 0$ and an unspecified driving force $r(t)$ can be written in convolution form,

$$y = \frac{1}{\omega} \sin \omega t * r(t) + K_1 \cos \omega t + \frac{K_2}{\omega} \sin \omega t.$$

17-26 INVERSE TRANSFORMS BY CONVOLUTION

Showing details, find $f(t)$ if $\mathcal{L}(f)$ equals:

17. $\frac{5.5}{(s + 1.5)(s - 4)}$
18. $\frac{1}{(s - a)^2}$
19. $\frac{2\pi s}{(s^2 + \pi^2)^2}$
20. $\frac{9}{s(s + 3)}$
21. $\frac{\omega}{s^2(s^2 - \omega^2)}$
22. $\frac{e^{-as}}{s(s - 2)}$
23. $\frac{40.5}{s(s^2 - 9)}$
24. $\frac{240}{(s^2 + 1)(s^2 + 25)}$
25. $\frac{18s}{(s^2 + 36)^2}$

26. **Partial Fractions.** Solve Probs. 17, 21, and 23 by partial fraction reduction.

積分方程

$$\int_0^t f(\tau) e^{-2(t-\tau)} d\tau$$

例題

Solve the integral equation $f(t) = \cos t + e^{-2t} \int_0^t f(\tau) e^{2\tau} d\tau$

[88 北科光電 (10%)]

【解】

$$L[f(t)] = L[\cos t] + L[f(t) * e^{-2t}] \quad (\text{利用摺合定理})$$

$$\bar{f} = \frac{s}{s^2+1} + \bar{f} \cdot \frac{1}{s+2}, \left(1 - \frac{1}{s+2}\right) \bar{f} = \frac{s}{s^2+1}$$

$$\bar{f} = \frac{s(s+2)}{(s+1)(s^2+1)} = -\frac{1}{2} \cdot \frac{1}{s+1} + \frac{1}{2} \cdot \frac{3s+1}{s^2+1}$$

$$\therefore f(t) = -\frac{1}{2} e^{-t} + \frac{1}{2} [3 \cos t + \sin t]$$

$$f * e^{-t}$$

例題

Solve the following integral equation $f(t) = 2t^2 + \int_0^t f(t-\alpha) e^{-\alpha} d\alpha$

[88 台大機械 (10%)]

【解】

$$L[f(t)] = 2L[t^2] + L\left[\int_0^t f(t-\alpha) e^{-\alpha} d\alpha\right]$$

$$\bar{f} = \frac{4}{s^3} + L[f(t)] \cdot L[e^{-t}] = \frac{4}{s^3} + \bar{f} \cdot \frac{1}{s+1}, \left(1 - \frac{1}{s+1}\right) \bar{f} = \frac{4}{s^3}$$

$$\bar{f} = \frac{4(s+1)}{s^4} = \frac{4}{s^3} + \frac{4}{s^4}$$

$$\therefore f(t) = 2t^2 + \frac{2}{3} t^3$$

$$L[t^a] = \frac{a!}{s^{a+1}}$$

$$L[t^2] = \frac{2}{s^3}$$

$$L[t^3] = \frac{6}{s^4}$$

摺合定理

$$\text{若 } L[f(t)] = F(s), L[g(t)] = G(s)$$

$$\text{則 } L\left[\int_0^t f(t-\tau) g(\tau) d\tau\right] = L\left[\int_0^t f(\tau) g(t-\tau) d\tau\right]$$

$$= F(s) G(s) \quad [85 \text{ 台大材料 (25\%)}]$$

例題

Solve the integral equation for $y(t)$

$$y(t) = t^2 - 4 \int_0^t (t - \tau)y(\tau)d\tau$$

[88 成大航太(14%)]

【解】

$$L[y] = L[t^2] - 4L[y(t) * t]$$

$$\bar{y} = \frac{2}{s^3} - \frac{4}{s^2} \cdot \bar{y}, \left(\frac{s^2 + 4}{s^2} \right) \bar{y} = \frac{2}{s^3}, \bar{y} = \frac{2}{s(s^2 + 4)}$$

$$y = L^{-1} \left[\frac{2}{s(s^2 + 4)} \right] = \int_0^t L^{-1} \left[\frac{2}{s^2 + 4} \right] dt = \int_0^t \sin 2t dt = \frac{1}{2} [1 - \cos 2t]$$

例題

Solve $Y(t) = t^2 + \int_0^t Y(u) \cdot \sin(t - u) du$

[87 台科機械(20%)] [88 中山光電(15%)]

【解】

$$\text{令 } y = L[Y(t)]$$

$$L[Y] = L[t^2] + L[Y(t) * \sin t]$$

$$y = \frac{2}{s^3} + y \cdot \frac{1}{s^2 + 1}, \left(1 - \frac{1}{s^2 + 1} \right) y = \frac{2}{s^3}, y = \frac{2}{s^3} + \frac{2}{s^5}$$

$$Y = t^2 + \frac{1}{12} t^4$$

6.6 Differentiation and Integration of Transforms.

ODEs with Variable Coefficients

$$ty'' + 3ty' + 2y = 0 \text{ 應該如何解?}$$

The variety of methods for obtaining transforms and inverse transforms and their application in solving ODEs is surprisingly large. We have seen that they include direct integration, the use of linearity (Sec. 6.1), shifting (Secs. 6.1, 6.3), convolution (Sec. 6.5), and differentiation and integration of functions $f(t)$ (Sec. 6.2). In this section, we shall consider operations of somewhat lesser importance. They are the differentiation and integration of transforms $F(s)$ and corresponding operations for functions $f(t)$. We show how they are applied to ODEs with variable coefficients.

Differentiation of Transforms

It can be shown that, if a function $f(t)$ satisfies the conditions of the existence theorem in Sec. 6.1, then the derivative $F'(s) = dF/ds$ of the transform $F(s) = \mathcal{L}(f)$ can be obtained by differentiating $F(s)$ under the integral sign with respect to s (proof in Ref. [GenRef4] listed in App. 1). Thus, if

$$F'(s) = \mathcal{L}\{-tf(t)\}$$

$$F(s) = \int_0^{\infty} e^{-st} f(t) dt, \xrightarrow[\text{then}]{\text{對 } s \text{ 取微分}} F'(s) = \int_0^{\infty} e^{-st} (-t) f(t) dt.$$

Consequently, if $\mathcal{L}(f) = F(s)$, then

$$\int_0^{\infty} (-t) e^{-st} f(t) dt = \int_0^{\infty} e^{-st} (-t) f(t) dt = -F'(s)$$

(1) 公式 $\mathcal{L}\{tf(t)\} = -F'(s)$,

hence

$$\mathcal{L}^{-1}\{F'(s)\} = -tf(t)$$

先求出 $\mathcal{L}\{f(t)\} = F(s)$, 再微分取負號

where the second formula is obtained by applying $\mathcal{L}^{-1}$ on both sides of the first formula. In this way, differentiation of the transform of a function corresponds to the multiplication of the function by $-t$.

EXAMPLE 1

Differentiation of Transforms. Formulas 21–23 in Sec. 6.9

We shall derive the following three formulas.

公式1:

$$\frac{d}{ds} \left(\frac{g}{f} \right) = \frac{g'f - fg'}{f^2}$$

(2)

公式2:

$$\mathcal{L}[\sin \beta t] = \frac{\beta}{s^2 + \beta^2}$$

(4)

$\mathcal{L}(f)$	$f(t)$
$\frac{1}{(s^2 + \beta^2)^2}$	$\frac{1}{2\beta^3}(\sin \beta t - \beta t \cos \beta t)$
$\frac{s}{(s^2 + \beta^2)^2}$	$\frac{t}{2\beta} \sin \beta t$
$\frac{s^2}{(s^2 + \beta^2)^2}$	$\frac{1}{2\beta}(\sin \beta t + \beta t \cos \beta t)$

Solution. From (1) and formula 8 (with $\omega = \beta$) in Table 6.1 of Sec. 6.1 we obtain by differentiation (CAUTION! Chain rule!)

$$\begin{aligned} & \text{除} \\ & \mathcal{L}(t \sin \beta t) = \frac{2\beta s}{(s^2 + \beta^2)^2} \\ & \text{得證(3)式} \\ & \parallel \\ & -\frac{d}{ds} \left[\frac{\beta}{s^2 + \beta^2} \right] \end{aligned}$$

Dividing by 2β and using the linearity of $\mathcal{L}$, we obtain (3).

Formulas (2) and (4) are obtained as follows. From (1) and formula 7 (with $\omega = \beta$) in Table 6.1 we find

$$(5) \quad \frac{-d}{ds} \left[\frac{s}{s^2 + \beta^2} \right] = \mathcal{L}(t \cos \beta t) = -\frac{(s^2 + \beta^2) - 2s^2}{(s^2 + \beta^2)^2} = \frac{s^2 - \beta^2}{(s^2 + \beta^2)^2}.$$

From this and formula 8 (with $\omega = \beta$) in Table 6.1 we have

$$\mathcal{L} \left(t \cos \beta t \pm \frac{1}{\beta} \sin \beta t \right) = \frac{s^2 - \beta^2}{(s^2 + \beta^2)^2} \pm \frac{1}{s^2 + \beta^2}.$$

On the right we now take the common denominator. Then we see that for the plus sign the numerator becomes $s^2 - \beta^2 + s^2 + \beta^2 = 2s^2$, so that (4) follows by division by 2. Similarly, for the minus sign the numerator takes the form $s^2 - \beta^2 - s^2 - \beta^2 = -2\beta^2$, and we obtain (2). This agrees with Example 2 in Sec. 6.5. ■

Integration of Transforms

Similarly, if $f(t)$ satisfies the conditions of the existence theorem in Sec. 6.1 and the limit of $f(t)/t$, as t approaches 0 from the right, exists, then for $s > k$,

$$(6) \quad \mathcal{L} \left\{ \frac{f(t)}{t} \right\} = \int_s^\infty F(\tilde{s}) d\tilde{s} \quad \text{hence} \quad \mathcal{L}^{-1} \left\{ \int_s^\infty F(\tilde{s}) d\tilde{s} \right\} = \frac{f(t)}{t}.$$

先求出 $\mathcal{L}\{f(t)\} = F(s)$, 再積分

In this way, integration of the transform of a function $f(t)$ corresponds to the division of $f(t)$ by t .

We indicate how (6) is obtained. From the definition it follows that

$$\int_s^\infty F(\tilde{s}) d\tilde{s} = \int_s^\infty \left[\int_0^\infty e^{-\tilde{s}t} f(t) dt \right] d\tilde{s},$$

and it can be shown (see Ref. [GenRef4] in App. 1) that under the above assumptions we may reverse the order of integration, that is,

$$\int_s^\infty F(\tilde{s}) d\tilde{s} = \int_0^\infty \left[\int_s^\infty e^{-\tilde{s}t} f(t) d\tilde{s} \right] dt = \int_0^\infty f(t) \left[\int_s^\infty e^{-\tilde{s}t} d\tilde{s} \right] dt.$$

Integration of $e^{-\tilde{s}t}$ with respect to $\tilde{s}$ gives $e^{-\tilde{s}t}/(-t)$. Here the integral over $\tilde{s}$ on the right equals e^{-st}/t . Therefore,

$$\int_s^\infty F(\tilde{s}) d\tilde{s} = \int_0^\infty e^{-st} \frac{f(t)}{t} dt = \mathcal{L} \left\{ \frac{f(t)}{t} \right\} \quad (s > k). \quad \blacksquare$$

EXAMPLE 2 Differentiation and Integration of Transforms

Find the inverse transform of $\ln \left(1 + \frac{\omega^2}{s^2} \right) = \ln \frac{s^2 + \omega^2}{s^2}$. 解法1: 視為 $F(s)$, 求 $f(t)$

Solution. Denote the given transform by $F(s)$. Its derivative is

$$F'(s) = \frac{d}{ds} (\ln(s^2 + \omega^2) - \ln s^2) = \frac{2s}{s^2 + \omega^2} - \frac{2s}{s^2}.$$

$$\mathcal{L}^{-1}\{F'(s)\} = -tf'(t)$$

$$[\ln f(x)]' = \frac{f'(x)}{f(x)}$$

Taking the inverse transform and using (1), we obtain

$$\mathcal{L}^{-1}\{F'(s)\} = \mathcal{L}^{-1}\left\{\frac{2s}{s^2 + \omega^2} - \frac{2}{s}\right\} = 2 \cos \omega t - 2 = -tf(t).$$

Hence the inverse $f(t)$ of $F(s)$ is $f(t) = 2(1 - \cos \omega t)/t$. This agrees with formula 42 in Sec. 6.9. Alternatively, if we let

解法2:

$$\ln\left(1 + \frac{\omega^2}{s^2}\right) = \ln \frac{s^2 + \omega^2}{s^2} \quad \text{視為} \int_s^\infty G(s) ds$$

$$G(s) = \frac{2s}{s^2 + \omega^2} - \frac{2}{s}, \quad \text{then} \quad g(t) = \mathcal{L}^{-1}(G) = 2(\cos \omega t - 1). < 0$$

From this and (6) we get, in agreement with the answer just obtained,

$$\mathcal{L}^{-1}\left\{\ln \frac{s^2 + \omega^2}{s^2}\right\} = \mathcal{L}^{-1}\left\{\int_s^\infty G(s) ds\right\} = -\frac{g(t)}{t} = \frac{2}{t}(1 - \cos \omega t), > 0$$

the minus occurring since s is the lower limit of integration.

In a similar way we obtain formula 43 in Sec. 6.9,

$$\mathcal{L}^{-1}\left\{\ln\left(1 - \frac{a^2}{s^2}\right)\right\} = \frac{2}{t}(1 - \cosh at). \text{ (自行練習)}$$

Special Linear ODEs with Variable Coefficients

Formula (1) can be used to solve certain ODEs with variable coefficients. The idea is this. Let $\mathcal{L}(y) = Y$. Then $\mathcal{L}(y') = sY - y(0)$ (see Sec. 6.2). Hence by (1),

$$\mathcal{L}(ty') = -\frac{d}{ds}[sY - \underbrace{y(0)}_{\text{常數}}] = -Y - s\frac{dY}{ds}.$$

Similarly, $\mathcal{L}(y'') = s^2Y - sy(0) - \underbrace{y'(0)}_{\text{常數}}$ and by (1)

$$(8) \quad \mathcal{L}(ty'') = -\frac{d}{ds}[s^2Y - sy(0) - \underbrace{y'(0)}_{\text{常數}}] = -2sY - s^2\frac{dY}{ds} + y(0).$$

特別注意

Hence if an ODE has coefficients such as $at + b$, the subsidiary equation is a first-order ODE for Y , which is sometimes simpler than the given second-order ODE. But if the latter has coefficients $at^2 + bt + c$, then two applications of (1) would give a second-order ODE for Y , and this shows that the present method works well only for rather special ODEs with variable coefficients. An important ODE for which the method is advantageous is the following.

EXAMPLE 3 Laguerre's Equation. Laguerre Polynomials

Laguerre's ODE is

$$(9) \quad ty'' + (1-t)y' + ny = 0.$$

We determine a solution of (9) with $n = 0, 1, 2, \dots$. From (7)–(9) we get the subsidiary equation

$$\left[-2sY - s^2\frac{dY}{ds} + y(0)\right] + sY - y(0) - \left(-Y - s\frac{dY}{ds}\right) + nY = 0.$$

取微分得 $G(s)$

$$\mathcal{L}^{-1}\left[\int_s^\infty G(s) ds\right] = \frac{g(t)}{t}$$

除 t

$$\mathcal{L}^{-1} \downarrow$$

$$g(t)$$

先找出公式的規律性...

$$\mathcal{L}[tf(t)] = -F'(s) = -\frac{d}{ds}\mathcal{L}[f(t)]$$

因此

$$\mathcal{L}[tf(t)] = -\frac{d}{ds}\mathcal{L}[f(t)]$$

$$\mathcal{L}[tf''(t)] = -\frac{d}{ds}\mathcal{L}[f''(t)]$$

公式應用見補充資料...

$$\text{求 } L^{-1}\left[\frac{2s}{(s^2+1)^2}\right] = ?$$

解法一：

$$\text{公式 } L^{-1}[F'(s)] = -t f(t) = -t L^{-1}[F(s)] = -t L^{-1}\left[\int F'(s) ds\right]$$

$$L^{-1}[F'(s)] = L^{-1}\left[\frac{2s}{(s^2+1)^2}\right] = -t L^{-1}[F(s)] = -t L^{-1}\left[\frac{-1}{s^2+1}\right] = -t(-\sin t) = t \sin t$$

解法二：

$$\text{公式 } h(t) = (f * g)(t) = \int_0^t f(\tau)g(t-\tau)d\tau = \int_0^t f(t-\tau)g(\tau)d\tau$$

$$L^{-1}\left[\frac{2}{s^2+1}\right] = 2 \sin t, \quad L^{-1}\left[\frac{s}{s^2+1}\right] = \cos t$$

$$\begin{cases} \sin a \cos b = \frac{1}{2}[\sin(a+b) + \sin(a-b)] \\ \cos(-t) = \cos t \end{cases}$$

$$L^{-1}\left[\frac{2s}{(s^2+1)^2}\right] = 2 \int_0^t \sin(\tau) \cos(t-\tau) d\tau = 2 \int_0^t \frac{1}{2} [\sin(t) + \sin(2\tau-t)] d\tau$$

$$= \tau \sin t - \frac{1}{2} \cos(2\tau-t) \Big|_0^t = t \sin t - \frac{1}{2} \cos(2t-t) - 0 + \frac{1}{2} \cos(0-t)$$

$$= t \sin t - \frac{1}{2} \cos(t) + \frac{1}{2} \cos(-t) = t \sin t$$

Simplification gives

$$(s - s^2) \frac{dY}{ds} + (n + 1 - s)Y = 0.$$

Separating variables, using partial fractions, integrating (with the constant of integration taken to be zero), and taking exponentials, we get

$$(10^*) \quad \frac{dY}{Y} = -\frac{n+1-s}{s-s^2} ds = \left(\frac{n}{s-1} - \frac{n+1}{s} \right) ds \quad \text{and} \quad Y = \frac{(s-1)^n}{s^{n+1}}.$$

We write $l_n = \mathcal{L}^{-1}(Y)$ and prove **Rodriguez's formula**

$$(10) \quad l_0 = 1, \quad l_n(t) = \frac{e^t}{n!} \frac{d^n}{dt^n} (t^n e^{-t}), \quad n = 1, 2, \dots$$

These are polynomials because the exponential terms cancel if we perform the indicated differentiations. They are called **Laguerre polynomials** and are usually denoted by L_n (see Problem Set 5.7, but we continue to reserve capital letters for transforms). We prove (10). By Table 6.1 and the first shifting theorem (s -shifting),

$$\mathcal{L}(t^n e^{-t}) = \frac{n!}{(s+1)^{n+1}}, \quad \text{hence by (3) in Sec. 6.2} \quad \mathcal{L}\left\{ \frac{d^n}{dt^n} (t^n e^{-t}) \right\} = \frac{n! s^n}{(s+1)^{n+1}}$$

because the derivatives up to the order $n-1$ are zero at 0. Now make another shift and divide by $n!$ to get [see (10) and then (10*)]

$$\mathcal{L}(l_n) = \frac{(s-1)^n}{s^{n+1}} = Y. \quad \blacksquare$$

PROBLEM SET 6.6

- 1. REVIEW REPORT. Differentiation and Integration of Functions and Transforms.** Make a draft of these four operations from memory. Then compare your draft with the text and write a 2- to 3-page report on these operations and their significance in applications.

2-11 TRANSFORMS BY DIFFERENTIATION

Showing the details of your work, find $\mathcal{L}(f)$ if $f(t)$ equals:

2. $3t \sinh 4t$
3. $\frac{1}{4}e^{-2t}$
4. $te^{-t} \cos t$
5. $t \sin \omega t$
6. $t^2 \sin 3t$
7. $t^2 \sinh 2t$
8. $te^{-kt} \sin t$
9. $\frac{1}{2}t^2 \cos \frac{\pi}{2}t$
10. $t^n e^{kt}$
11. $\frac{1}{2} \sin 2\pi t$

- 12. CAS PROJECT. Laguerre Polynomials.** (a) Write a CAS program for finding $l_n(t)$ in explicit form from (10). Apply it to calculate $l_0, \dots, l_{10}$. Verify that $l_0, \dots, l_{10}$ satisfy Laguerre's differential equation (9).

- (b) Show that

$$l_n(t) = \sum_{m=0}^n \frac{(-1)^m}{m!} \binom{n}{m} t^m$$

and calculate $l_0, \dots, l_{10}$ from this formula.

- (c) Calculate $l_0, \dots, l_{10}$ recursively from $l_0 = 1, l_1 = 1 - t$ by

$$(n+1)l_{n+1} = (2n+1-t)l_n - nl_{n-1}.$$

- (d) A **generating function** (definition in Problem Set 5.2) for the Laguerre polynomials is

$$\sum_{n=0}^{\infty} l_n(t)x^n = (1-x)^{-1}e^{tx/(x-1)}.$$

Obtain $l_0, \dots, l_{10}$ from the corresponding partial sum of this power series in x and compare the l_n with those in (a), (b), or (c).

- 13. CAS EXPERIMENT. Laguerre Polynomials.** Experiment with the graphs of $l_0, \dots, l_{10}$, finding out empirically how the first maximum, first minimum, $\dots$ is moving with respect to its location as a function of n . Write a short report on this.

【補充一】 請證明初值定理與廣義初值定理，如下：

若 $\mathcal{L}[f(t)] = F(s)$ 則 $\lim_{t \rightarrow 0} f(t) = \lim_{s \rightarrow \infty} sF(s)$, $\lim_{t \rightarrow 0} \frac{f(t)}{g(t)} = \lim_{s \rightarrow \infty} \frac{F(s)}{G(s)}$

【Solution】

$$L[f'(t)] = sF(s) - f(0)$$

$$\int_0^{\infty} e^{-st} f'(t) dt = sF(s) - f(0)$$

$$\therefore \lim_{s \rightarrow \infty} \int_0^{\infty} e^{-st} f'(t) dt = \int_0^{\infty} e^{-\infty t} f'(t) dt = 0 = \lim_{s \rightarrow \infty} [sF(s) - f(0)]$$

移項

$$\therefore f(0) = \lim_{s \rightarrow \infty} sF(s) \quad \text{that is} \quad \lim_{t \rightarrow 0} f(t) = \lim_{s \rightarrow \infty} sF(s)$$

同理可證 $\lim_{t \rightarrow 0} g(t) = \lim_{s \rightarrow \infty} sG(s)$

$$\text{Hence } \lim_{t \rightarrow 0} \frac{f(t)}{g(t)} = \lim_{s \rightarrow \infty} \frac{sF(s)}{sG(s)} = \lim_{s \rightarrow \infty} \frac{F(s)}{G(s)}$$

【補充二】 請證明終值定理與廣義終值定理，如下：

若 $\mathcal{L}[f(t)] = F(s)$ 則 $\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} sF(s)$, $\lim_{t \rightarrow \infty} \frac{f(t)}{g(t)} = \lim_{s \rightarrow 0} \frac{F(s)}{G(s)}$

【Solution】

$$\mathcal{L}[f'(t)] = sF(s) - f(0)$$

$$\int_0^{\infty} e^{-st} f'(t) dt = sF(s) - f(0)$$

$$\therefore \lim_{s \rightarrow 0} \int_0^{\infty} e^{-st} f'(t) dt = \int_0^{\infty} e^{-0t} f'(t) dt = [f(t)]_0^{\infty} = \lim_{s \rightarrow 0} [sF(s) - f(0)]$$

$$\therefore f(\infty) - f(0) = \lim_{s \rightarrow 0} [sF(s) - f(0)] \quad \text{that is} \quad f(\infty) = \lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} sF(s)$$

Similarly $\lim_{t \rightarrow \infty} g(t) = \lim_{s \rightarrow 0} sG(s)$

同理可證

$$\text{Hence } \lim_{t \rightarrow \infty} \frac{f(t)}{g(t)} = \lim_{s \rightarrow 0} \frac{sF(s)}{sG(s)} = \lim_{s \rightarrow 0} \frac{F(s)}{G(s)}$$

$$X(s) = \frac{F}{s+a}$$

取F

If $x(t) = Fe^{-at} \Rightarrow x(0) = F, x(\infty) = 0$

The initial value theorem

$$\lim_{t \rightarrow 0} x(t) = x(0) = \lim_{s \rightarrow \infty} sX(s) = \lim_{s \rightarrow \infty} F \left(\frac{s}{s+a} \right) = F$$

The final value theorem

$$\lim_{t \rightarrow \infty} x(t) = x(\infty) = \lim_{s \rightarrow 0} sX(s) = \lim_{s \rightarrow 0} F \left(\frac{s}{s+a} \right) = 0$$

91年|交通大學機械所(乙組)

5. Use the Laplace transform method to solve the following ordinary differential equation.

$$tx'' + x' + tx = 0 \quad (0 \leq t \leq \infty) \quad x(0) = 1, \quad x'(0) = 0$$

where prime denotes the differentiation with respect to t . (15%)

[Note: $\mathcal{L}[J_0(t)] = \frac{1}{\sqrt{s^2 + 1}}$ ($s > 0$), where $J_0(t)$ is the Bessel function of the first kind. $\mathcal{L}$: Laplace Transform: $J_0(0) = 1$]

【Solution】

答題關鍵：

Laplace transform, Bessel eq.

$$tx'' + x' + tx = 0, \quad x(0) = 1, \quad x'(0) = 0$$

Take Laplace transform. Let $\mathcal{L}\{x(t)\} = X(s) = X$

$$-\frac{d}{ds}[s^2 X - sx(0) - x'(0)] + sX - x(0) - \frac{d}{ds}X = 0$$

$$-2sX - s^2 \frac{dX}{ds} + 1 + sX - 1 - \frac{dX}{ds} = 0$$

$$(s^2 + 1) \frac{dX}{ds} + sX = 0$$

$$\frac{dX}{X} = -\frac{s}{s^2 + 1} ds$$

$$\ln X = -\frac{1}{2} \ln(s^2 + 1) + \ln c$$

$$X(s) = \frac{c}{\sqrt{s^2 + 1}}$$

$$\lim_{t \rightarrow 0} x(t) = x(0) = 1 = \lim_{s \rightarrow \infty} sX(s) = \lim_{s \rightarrow \infty} s \frac{c}{\sqrt{s^2 + 1}} = c$$

$$\therefore c = 1$$

$$X(s) = \frac{1}{\sqrt{s^2 + 1}} \Rightarrow x(t) = J_0(t) \quad \checkmark$$

$$\mathcal{L}[t f(t)] = -\frac{dF(s)}{ds}$$

$$\int \frac{f'(x)}{f(x)} dx = \ln|f(x)| + C$$

由初值定理

$$= \frac{sc}{s} = c$$

太小計

Use the Laplace transform to solve

$$ty'' + (4t + 2)y' - 4y = 0, \quad y(0) = 2$$

【95 北科電機 15%】

解： $L[ty''] + 4L[ty'] + 2L[y'] - 4L[y] = 0$ ，令 $Y(s) = L[y]$

$$-\frac{d}{ds}L[y''] - 4\frac{d}{ds}L[y'] + 2(sY - 2) - 4Y = 0$$

$$-\frac{d}{ds}[s^2Y - 2s - y'(0)] - 4\frac{d}{ds}(sY - 2) + 2sY - 4 - 4Y = 0$$

$$-s^2 \frac{dY}{ds} - 2sY + 2 - 4\left(s \frac{dY}{ds} + Y\right) + 2sY - 4 - 4Y = 0$$

$$-(s^2 + 4s) \frac{dY}{ds} - 8Y - 2 = 0, \quad s(s + 4) \frac{dY}{ds} + 8\left(Y + \frac{1}{4}\right) = 0$$

$$\frac{1}{Y + \frac{1}{4}} dY + \frac{8}{s(s + 4)} ds = 0, \quad \frac{1}{Y + \frac{1}{4}} dY + 2\left(\frac{1}{s} - \frac{1}{s + 4}\right) ds = 0$$

分離變數法求Y

$$\ln\left(Y + \frac{1}{4}\right) + 2[\ln s - \ln(s + 4)] = \ln c$$

$$Y + \frac{1}{4} = \frac{c(s + 4)^2}{s^2}, \quad Y = -\frac{1}{4} + \frac{c(s + 4)^2}{s^2}$$

利用初值定理找 c ， $\lim_{t \rightarrow 0} y(t) = \lim_{s \rightarrow \infty} sY(s)$

$$2 = \lim_{s \rightarrow \infty} s \left[-\frac{1}{4} + c \cdot \frac{(s + 4)^2}{s^2} \right], \quad c = \frac{1}{4}, \quad Y = \frac{2}{s} + \frac{4}{s^2}$$

$$y = 2 + 4t$$

$$(fg)' = f'g + fg'$$

$$\lim_{t \rightarrow 0} y(t) = y(0) = 2 = \lim_{s \rightarrow \infty} sY(s) = \lim_{s \rightarrow \infty} s \left[-\frac{1}{4} + c \frac{(s + 4)^2}{s^2} \right]$$

$$2 = \lim_{s \rightarrow \infty} \left[-\frac{s}{4} + c(s + 8 + \frac{16}{s}) \right]$$

$$\lim_{s \rightarrow \infty} \left[\left(-\frac{1}{4} + c\right)s + 8c + \frac{16c}{s} \right] = 2$$

$$c = \frac{1}{4}$$

14-20 INVERSE TRANSFORMS

Using differentiation, integration, s -shifting, or convolution, and showing the details, find $f(t)$ if $\mathcal{L}(f)$ equals:

14. $\frac{s}{(s^2 + 16)^2}$

15. $\frac{s}{(s^2 - 4)^2}$

16. $\frac{2s + 6}{(s^2 + 6s + 10)^2}$

17. $\ln \frac{s}{s-1}$

19. $\ln \frac{s^2 + 1}{(s-1)^2}$

18. $\operatorname{arccot} \frac{s}{\pi}$

20. $\ln \frac{s+a}{s+b}$

指聯立方程式

6.7 Systems of ODEs

學習重點：利用拉氏轉換解聯立ODE的解

The Laplace transform method may also be used for solving systems of ODEs, as we shall explain in terms of typical applications. We consider a first-order linear system with constant coefficients (as discussed in Sec. 6.2).

題目給予的聯立方程式

$$\begin{bmatrix} x_1' \\ x_2' \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} g_1 \\ g_2 \end{bmatrix}$$

矩陣解法--第四章

以向量(矩陣)
形式表示

$$\begin{aligned} y_1' &= a_{11}y_1 + a_{12}y_2 + g_1(t) \\ y_2' &= a_{21}y_1 + a_{22}y_2 + g_2(t) \end{aligned}$$

Writing $Y_1 = \mathcal{L}(y_1)$, $Y_2 = \mathcal{L}(y_2)$, $G_1 = \mathcal{L}(g_1)$, $G_2 = \mathcal{L}(g_2)$, we obtain from (1) in Sec. 6.2 the subsidiary system

步驟1：
取拉氏轉換步驟2：
移項整理成
標準形式

$$sY_1 - y_1(0) = a_{11}Y_1 + a_{12}Y_2 + G_1(s)$$

$$sY_2 - y_2(0) = a_{21}Y_1 + a_{22}Y_2 + G_2(s).$$

By collecting the Y_1 - and Y_2 -terms we have

$$(2) \quad \begin{aligned} (a_{11} - s)Y_1 + a_{12}Y_2 &= -y_1(0) - G_1(s) \\ a_{21}Y_1 + (a_{22} - s)Y_2 &= -y_2(0) - G_2(s). \end{aligned}$$

步驟3：
以Cramer's rule
求解 Y_1, Y_2

By solving this system algebraically for $Y_1(s), Y_2(s)$ and taking the inverse Laplace transform, we obtain the solution $y_1 = \mathcal{L}^{-1}(Y_1)$, $y_2 = \mathcal{L}^{-1}(Y_2)$ of the given system (1).

步驟4：
取反拉氏轉換

Note that (1) and (2) may be written in vector form (and similarly for the systems in the examples); thus, setting $\mathbf{y} = [y_1 \ y_2]^T$, $\mathbf{A} = [a_{jk}]$, $\mathbf{g} = [g_1 \ g_2]^T$, $\mathbf{Y} = [Y_1 \ Y_2]^T$, $\mathbf{G} = [G_1 \ G_2]^T$ we have

$$\mathbf{y}' = \mathbf{A}\mathbf{y} + \mathbf{g} \quad \text{and} \quad (\mathbf{A} - s\mathbf{I})\mathbf{Y} = -\mathbf{y}(0) - \mathbf{G}.$$

$$sY(s) - y(0) = AY(s) + G(s)$$

以向量(矩陣)形式表示
方程式，解法必須
有第四章的背景知識。

EXAMPLE 1 Mixing Problem Involving Two Tanks

Tank T_1 in Fig. 144 initially contains 100 gal of pure water. Tank T_2 initially contains 100 gal of water in which 150 lb of salt are dissolved. The inflow into T_1 is 2 gal/min from T_2 and 6 gal/min containing 6 lb of salt from the outside. The inflow into T_2 is 8 gal/min from T_1 . The outflow from T_2 is $2 + 6 = 8$ gal/min, as shown in the figure. The mixtures are kept uniform by stirring. Find and plot the salt contents $y_1(t)$ and $y_2(t)$ in T_1 and T_2 , respectively.

T: 轉置(行列對調)

$$\mathbf{I}: \text{單位矩陣} = \begin{bmatrix} 1 & & 0 \\ & \ddots & \\ 0 & & 1 \end{bmatrix}$$

$$Y_1 = \begin{pmatrix} -\frac{6}{s} & 0.02 \\ -150 & -0.08-s \end{pmatrix}$$

$$Y_2 = \begin{pmatrix} -0.08-s & 0.02 \\ 0.08 & -0.08-s \end{pmatrix} = \Delta$$

Solution. The model is obtained in the form of two equations

Time rate of change = Inflow/min - Outflow/min

for the two tanks (see Sec. 4.1). Thus,

$$y_1' = -\frac{8}{100}y_1 + \frac{2}{100}y_2 + 6, \quad y_2' = \frac{8}{100}y_1 - \frac{8}{100}y_2.$$

The initial conditions are $y_1(0) = 0, y_2(0) = 150$. From this we see that the subsidiary system (2) is

$$\begin{aligned} \text{步驟1:} \quad & (-0.08 - s)Y_1 + 0.02Y_2 = -\frac{6}{s} \\ \text{取拉氏轉換} \quad & 0.08Y_1 + (-0.08 - s)Y_2 = -150. \end{aligned}$$

步驟2:
移項整理成
標準形式

We solve this algebraically for Y_1 and Y_2 by elimination (or by Cramer's rule in Sec. 7.7), and we write the solutions in terms of partial fractions,

部分分式展開

步驟3:
以Cramer's rule
求解Y1, Y2

$$\begin{aligned} Y_1 &= \frac{9s + 0.48}{s(s + 0.12)(s + 0.04)} = \frac{100}{s} - \frac{62.5}{s + 0.12} - \frac{37.5}{s + 0.04} \\ Y_2 &= \frac{150s^2 + 12s + 0.48}{s(s + 0.12)(s + 0.04)} = \frac{100}{s} + \frac{125}{s + 0.12} - \frac{75}{s + 0.04}. \end{aligned}$$

By taking the inverse transform we arrive at the solution

步驟4:
取反拉氏轉換

$$\begin{aligned} y_1 &= 100 - 62.5e^{-0.12t} - 37.5e^{-0.04t} \\ y_2 &= 100 + 125e^{-0.12t} - 75e^{-0.04t}. \end{aligned}$$

Figure 144 shows the interesting plot of these functions. Can you give physical explanations for their main features? Why do they have the limit 100? Why is y_2 not monotone, whereas y_1 is? Why is y_1 from some time on suddenly larger than y_2 ? Etc.

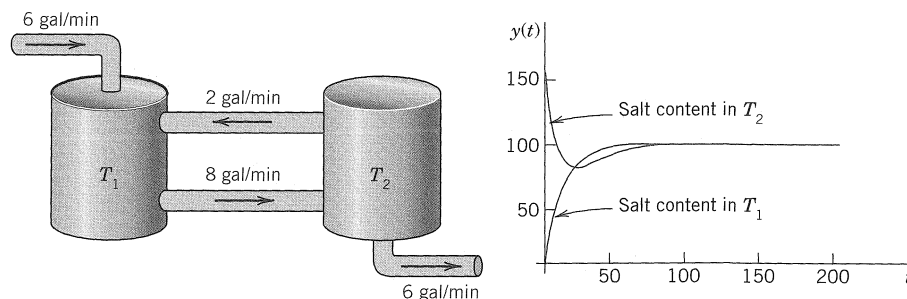


Fig. 144. Mixing problem in Example 1

Other systems of ODEs of practical importance can be solved by the Laplace transform method in a similar way, and eigenvalues and eigenvectors, as we had to determine them in Chap. 4, will come out automatically, as we have seen in Example 1.

EXAMPLE 2 Electrical Network

Find the currents $i_1(t)$ and $i_2(t)$ in the network in Fig. 145 with L and R measured in terms of the usual units (see Sec. 2.9), $v(t) = 100$ volts if $0 \leq t \leq 0.5$ sec and 0 thereafter, and $i(0) = 0, i'(0) = 0$.

Solution. The model of the network is obtained from Kirchhoff's Voltage Law as in Sec. 2.9. For the lower circuit we obtain

$$0.8i_1' + 1(i_1 - i_2) + 1.4i_1 = 100[1 - u(t - \frac{1}{2})]$$

↑
↓
 $u(t - \frac{1}{2})$

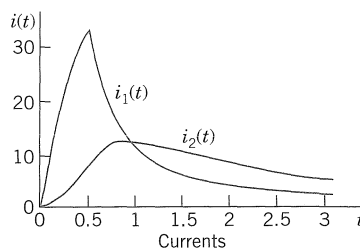
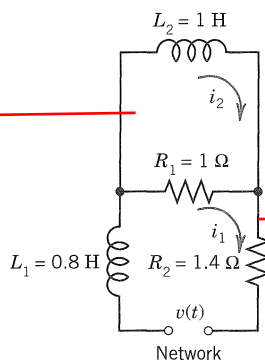


Fig. 145. Electrical network in Example 2

$$V_L = \mathcal{L}I'$$

$$V_R = RI$$

$$V_C = \frac{Q}{C}$$

and for the upper

$$1 \cdot i_2' + 1(i_2 - i_1) = 0.$$

Division by 0.8 and ordering gives for the lower circuit

$$i_1' + 3i_1 - 1.25i_2 = 125[1 - u(t - \frac{1}{2})]$$

and for the upper

$$i_2' - i_1 + i_2 = 0.$$

With $i_1(0) = 0, i_2(0) = 0$ we obtain from (1) in Sec. 6.2 and the second shifting theorem the subsidiary system

$$\begin{aligned} (s+3)I_1 - 1.25I_2 &= 125\left(\frac{1}{s} - \frac{e^{-s/2}}{s}\right) \\ -I_1 + (s+1)I_2 &= 0. \end{aligned}$$

Solving algebraically for I_1 and I_2 gives

以Cramer's rule
求解 I_1, I_2

$$I_1 = \frac{125(s+1)}{s(s+\frac{1}{2})(s+\frac{7}{2})}(1 - e^{-s/2}),$$

$$I_2 = \frac{125}{s(s+\frac{1}{2})(s+\frac{7}{2})}(1 - e^{-s/2}).$$

The right sides, without the factor $1 - e^{-s/2}$, have the partial fraction expansions

$$\frac{500}{7s} - \frac{125}{3(s+\frac{1}{2})} - \frac{625}{21(s+\frac{7}{2})}$$

and

部份分式展開

$$\frac{500}{7s} - \frac{250}{3(s+\frac{1}{2})} + \frac{250}{21(s+\frac{7}{2})},$$

respectively. The inverse transform of this gives the solution for $0 \leq t \leq \frac{1}{2}$,

$$\mathcal{L}^{-1}\left[\frac{e^{-as}}{s}\right] = f(t-a)u(t-a)$$

$$i_1(t) = -\frac{125}{3}e^{-t/2} - \frac{625}{21}e^{-7t/2} + \frac{500}{7}$$

$$i_2(t) = -\frac{250}{3}e^{-t/2} + \frac{250}{21}e^{-7t/2} + \frac{500}{7}$$

$$(0 \leq t \leq \frac{1}{2})$$

$$I_1 = I(s)(1 - e^{-s/2})$$

$$i_1(t) = i(t) - i(t - \frac{1}{2})u(t - \frac{1}{2})$$

分 $0 \leq t \leq 1/2$ 與 $t > 1/2$ 討論

一定要熟練的技巧!

整理

取拉氏轉換
並整理成標準形式

經過必要整理,
取反拉氏轉換

$$I_1 = \frac{125(s+1)}{s^2+4s+1.75} \cdot \frac{1}{s}(1 - e^{-s/2})$$

$$s^2+4s+\frac{7}{4}$$

$$= (s+\frac{1}{2})(s+\frac{7}{2})$$

化成分式計算較容易

According to the second shifting theorem the solution for $t > \frac{1}{2}$ is $i_1(t) - i_1(t - \frac{1}{2})$ and $i_2(t) - i_2(t - \frac{1}{2})$, that is,

$$i_1(t) = -\frac{125}{3}(1 - e^{1/4})e^{-t/2} - \frac{625}{21}(1 - e^{7/4})e^{-7t/2}$$

$$i_2(t) = -\frac{250}{3}(1 - e^{1/4})e^{-t/2} + \frac{250}{21}(1 - e^{7/4})e^{-7t/2}$$

$(t > \frac{1}{2})$.

Can you explain physically why both currents eventually go to zero, and why $i_1(t)$ has a sharp cusp whereas $i_2(t)$ has a continuous tangent direction at $t = \frac{1}{2}$? ■

Systems of ODEs of higher order can be solved by the Laplace transform method in a similar fashion. As an important application, typical of many similar mechanical systems, we consider coupled vibrating masses on springs.

向上為負

$$m\vec{a} = \sum \vec{F}$$

$$m_1 y_1'' = -k(y_2 - y_1) - k y_1$$

$$m_2 y_2'' = -k(y_2 - y_1) - k y_2$$

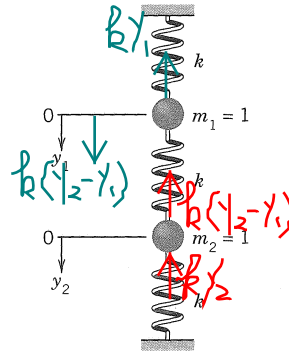


Fig. 146. Example 3

EXAMPLE 3 Model of Two Masses on Springs (Fig. 146)

The mechanical system in Fig. 146 consists of two bodies of mass 1 on three springs of the same spring constant k and of negligibly small masses of the springs. Also damping is assumed to be practically zero. Then the model of the physical system is the system of ODEs

(3) 二階ODE聯立！！

$$y_1'' = -ky_1 + k(y_2 - y_1)$$

$$y_2'' = -k(y_2 - y_1) - ky_2$$

Here y_1 and y_2 are the displacements of the bodies from their positions of static equilibrium. These ODEs follow from **Newton's second law**, *Mass $\times$ Acceleration = Force*, as in Sec. 2.4 for a single body. We again regard downward forces as positive and upward as negative. On the upper body, $-ky_1$ is the force of the upper spring and $k(y_2 - y_1)$ that of the middle spring, $y_2 - y_1$ being the net change in spring length—think this over before going on. On the lower body, $-k(y_2 - y_1)$ is the force of the middle spring and $-ky_2$ that of the lower spring.

We shall determine the solution corresponding to the initial conditions $y_1(0) = 1$, $y_2(0) = 1$, $y_1'(0) = \sqrt{3}k$, $y_2'(0) = -\sqrt{3}k$. Let $Y_1 = \mathcal{L}(y_1)$ and $Y_2 = \mathcal{L}(y_2)$. Then from (2) in Sec. 6.2 and the initial conditions we obtain the subsidiary system

$$s^2 Y_1 - s - \sqrt{3}k = -kY_1 + k(Y_2 - Y_1)$$

$$s^2 Y_2 - s + \sqrt{3}k = -k(Y_2 - Y_1) - kY_2$$

This system of linear algebraic equations in the unknowns Y_1 and Y_2 may be written

$$(s^2 + 2k)Y_1 - kY_2 = s + \sqrt{3}k$$

$$-ky_1 + (s^2 + 2k)Y_2 = s - \sqrt{3}k.$$

取拉氏轉換並整理成標準形式

Elimination (or Cramer's rule in Sec. 7.7) yields the solution, which we can expand in terms of partial fractions,

$$\frac{s^3 + \sqrt{3}ks^2 + 3ks + \sqrt{3}k}{(s^2 + k)(s^2 + 3k)}$$

$$= \frac{As+B}{s^2+3k} + \frac{Cs+D}{s^2+k}$$

$$A=0$$

$$B=\sqrt{3}k$$

$$C=1$$

$$D=0$$

$$Y_1 = \frac{(s + \sqrt{3}k)(s^2 + 2k) + k(s - \sqrt{3}k)}{(s^2 + 2k)^2 - k^2} = \frac{s}{s^2 + k} + \frac{\sqrt{3}k}{s^2 + 3k}$$

$$Y_2 = \frac{(s^2 + 2k)(s - \sqrt{3}k) + k(s + \sqrt{3}k)}{(s^2 + 2k)^2 - k^2} = \frac{s}{s^2 + k} - \frac{\sqrt{3}k}{s^2 + 3k}$$

Hence the solution of our initial value problem is (Fig. 147)

$$y_1(t) = \mathcal{L}^{-1}(Y_1) = \cos \sqrt{k}t + \sin \sqrt{3k}t$$

$$y_2(t) = \mathcal{L}^{-1}(Y_2) = \cos \sqrt{k}t - \sin \sqrt{3k}t$$

取反拉氏轉換

We see that the motion of each mass is harmonic (the system is undamped!), being the superposition of a "slow" oscillation and a "rapid" oscillation.

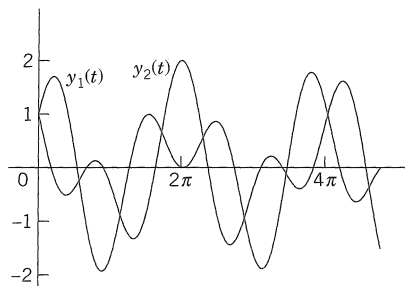


Fig. 147. Solutions in Example 3

PROBLEM SET 6.7

1. TEAM PROJECT. Comparison of Methods for Linear Systems of ODEs

(a) **Models.** Solve the models in Examples 1 and 2 of Sec. 4.1 by Laplace transforms and compare the amount of work with that in Sec. 4.1. Show the details of your work.

(b) **Homogeneous Systems.** Solve the systems (8), (11)–(13) in Sec. 4.3 by Laplace transforms. Show the details.

(c) **Nonhomogeneous System.** Solve the system (3) in Sec. 4.6 by Laplace transforms. Show the details.

2-15

SYSTEMS OF ODES

習題多練習！！

Using the Laplace transform and showing the details of your work, solve the IVP:

2. $y_1' - y_2 = 0, \quad y_1 + y_2' = 2 \cos t,$
 $y_1(0) = 1, \quad y_2(0) = 0$

3. $y_1' - 2y_1 + 3y_2 = 0, \quad y_2' - y_1 + 2y_2 = 0,$
 $y_1(0) = 1, \quad y_2(0) = 0$

4. $y_1' = 4y_2 - 8 \cos 4t, \quad y_2' = -3y_1 - 9 \sin 4t,$
 $y_1(0) = 0, \quad y_2(0) = 3$

5. $y_1' = y_2 + 2 - u(t-1), \quad y_2' = -y_1 + 1 - u(t-1),$
 $y_1(0) = 1, \quad y_2(0) = 0$

6. $y_1' = 5y_1 + y_2, \quad y_2' = y_1 + 5y_2,$
 $y_1(0) = 1, \quad y_2(0) = -3$

7. $y_1' = 2y_1 - 4y_2 + u(t-1)e^t,$
 $y_2' = y_1 - 3y_2 + u(t-1)e^t, \quad y_1(0) = 3, \quad y_2(0) = 0$

8. $y_1' = -2y_1 + 3y_2, \quad y_2' = 4y_1 - y_2,$
 $y_1(0) = 4, \quad y_2(0) = 3$

9. $y_1' = y_1 + y_2, \quad y_2' = -y_1 + 3y_2, \quad y_1(0) = 1,$
 $y_2(0) = 0$

10. $y_1' = -y_2, \quad y_2' = -y_1 + 2[1 - u(t-2\pi)] \cos t,$
 $y_1(0) = 1, \quad y_2(0) = 0$

11. $y_1'' = y_1 + 3y_2, \quad y_2'' = 4y_1 - 4e^t,$
 $y_1(0) = 2, \quad y_1'(0) = 3, \quad y_2(0) = 1, \quad y_2'(0) = 2$

12. $y_1'' = -4y_1 + 5y_2, \quad y_2'' = -y_1 + 2y_2,$
 $y_1(0) = 1, \quad y_1'(0) = 0, \quad y_2(0) = 2, \quad y_2'(0) = 0$

13. $y_1'' + y_2 = -101 \sin 10t, \quad y_2'' + y_1 = 101 \sin 10t,$
 $y_1(0) = 0, \quad y_1'(0) = 6, \quad y_2(0) = 8, \quad y_2'(0) = -6$

二階ODE聯立！！

Laplace 轉換解聯立 O.D.E.

補充資料要熟練！！

例題

Use the Laplace transform method to find the solution of system.

$$y_1' - 2y_1 - y_2 = 2e^{5t}, y_2' - y_1 - 2y_2 = 3e^{2t}, y_1(0) = y_2(0) = 0$$

[87 台大化工(10%)]

【解】

$$\begin{cases} s\bar{y}_1 - 2\bar{y}_1 - \bar{y}_2 = \frac{2}{s-5} \\ s\bar{y}_2 - \bar{y}_1 - 2\bar{y}_2 = \frac{3}{s-2} \end{cases}, \begin{cases} (s-2)\bar{y}_1 - \bar{y}_2 = \frac{2}{s-5} \\ -\bar{y}_1 + (s-2)\bar{y}_2 = \frac{3}{s-2} \end{cases}$$

Cramer's rule
求解！

$$\bar{y}_2 = \frac{3s-13}{(s-1)(s-3)(s-5)} = -\frac{5}{4} \frac{1}{s-1} + \frac{1}{s-3} + \frac{1}{4} \frac{1}{s-5}$$

$$\bar{y}_1 = \frac{2s^2 - 5s - 7}{(s-1)(s-2)(s-3)(s-5)} = \frac{5}{4} \frac{1}{s-1} - \frac{3}{s-2} + \frac{1}{s-3} + \frac{3}{4} \frac{1}{s-5}$$

$$\therefore y_1 = \frac{5}{4}e^t - 3e^{2t} + e^{3t} + \frac{3}{4}e^{5t}$$

$$y_2 = -\frac{5}{4}e^t + e^{3t} + \frac{1}{4}e^{5t}$$

例題

Solve $\dot{x} = x + y, \dot{y} = -2x + 4y + 1, x(0) = 1, y(0) = 0$

[88 成大航太(14%)]

【解】

$$\begin{cases} s\bar{x} - 1 = \bar{x} + \bar{y} \\ s\bar{y} = -2\bar{x} + 4\bar{y} + \frac{1}{s} \end{cases}, \begin{cases} (s-1)\bar{x} - \bar{y} = 1 \\ 2\bar{x} + (s-4)\bar{y} = \frac{1}{s} \end{cases}$$

Cramer's rule
求解！

$$\bar{x} = \frac{s^2 - 4s + 1}{s(s-2)(s-3)} = \frac{1}{6s} - \frac{2}{3} \frac{1}{s-3} + \frac{3}{2} \frac{1}{s-2}$$

$$\bar{y} = \frac{-s-1}{s(s-2)(s-3)} = -\frac{1}{6s} - \frac{4}{3} \frac{1}{s-3} + \frac{3}{2} \frac{1}{s-2}$$

$$\therefore x = \frac{1}{6} - \frac{2}{3}e^{3t} + \frac{3}{2}e^{2t}$$

$$y = -\frac{1}{6} - \frac{4}{3}e^{3t} + \frac{3}{2}e^{2t}$$

例題

Solve the initial value problem using the method of Laplace transformations:

$$\begin{cases} \frac{dx}{dt} = 2x - 3y \\ \frac{dy}{dt} = y - 2x \end{cases} \quad \text{subject to } x(0) = 8, y(0) = 3.$$

[88 中央化工(15%)] [88 交大電子(11%)]

【解】

$$L[\dot{x}] = 2L[x] - 3L[y], \quad s\bar{x} - 8 = 2\bar{x} - 3\bar{y}$$

$$L[\dot{y}] = L[y] - 2L[x], \quad s\bar{y} - 3 = \bar{y} - 2\bar{x}$$

Cramer's rule
求解！

$$\begin{cases} (s-2)\bar{x} + 3\bar{y} = 8, & \bar{x} = \frac{3}{s-4} + \frac{5}{s+1} \\ 2\bar{x} + (s-1)\bar{y} = 3, & \bar{y} = \frac{-2}{s-4} + \frac{5}{s+1} \end{cases}$$

$$x = 3e^{4t} + 5e^{-t}, \quad y = -2e^{4t} + 5e^{-t}$$

例題 二階ODE聯立！！

Use the Laplace transform method to solve the simultaneous differential equations

$$4 \frac{d^2 u}{dt^2} + \frac{d^2 v}{dt^2} - v = 0, \frac{d^2 u}{dt^2} - u - v = 0$$

where $u(0) = 1$ and $u'(0) = v(0) = v'(0) = 0$.

[88 成大土木(20%)]

【解】

$$\begin{cases} 4L[u''] + L[v''] - L[v] = 0 \\ L[u''] - L[u] - L[v] = 0 \end{cases}$$

$$\begin{cases} 4(s^2 \bar{u} - s) + s^2 \bar{v} - \bar{v} = 0, 4s^2 \bar{u} + (s^2 - 1)\bar{v} = 4s \\ s^2 \bar{u} - s - \bar{u} - \bar{v} = 0, (s^2 - 1)\bar{u} - \bar{v} = s \end{cases} \quad \left. \begin{array}{l} \text{Cramer's rule} \\ \text{求解！} \end{array} \right\}$$

$$\bar{u} = \frac{s^3 + 3s}{(s^2 + 1)^2} = \frac{s}{s^2 + 1} + \frac{2s}{(s^2 + 1)^2}, \bar{v} = -\frac{4s}{(s^2 + 1)^2}$$

$$\therefore L^{-1}\left[\frac{2s}{(s^2 + 1)^2}\right] = t \cdot L^{-1}\left[\int \frac{2s}{(s^2 + 1)^2} ds\right] = t \cdot L^{-1}\left[\frac{-1}{s^2 + 1}\right] = t \cdot \sin t$$

$$\therefore u = \cos t + t \sin t, v = -2t \sin t$$

$$\mathcal{L}^{-1}\{F'(s)\} = -tf(t) = -t \mathcal{L}^{-1}\{F(s)\} = -t \mathcal{L}^{-1}\left[\int_0^\infty F'(s) ds\right]$$

微分

Solve the initial value problem using Laplace transform method:

$$\begin{cases} 4u'' + v'' - v = 0 \\ u'' - u - v = 0 \end{cases}, \text{ where } u(0)=1, \quad u'(0)=v(0)=v'(0)=0$$

【Solution】

一、取拉氏轉換

$$4L[u''] + L[v''] - L[v] = 0 \Rightarrow 4(s^2\bar{u} - su(0) - u'(0)) + (s^2\bar{v} - sv(0) - v'(0)) - \bar{v} = 0$$

$$L[u''] - L[u] - L[v] = 0 \Rightarrow (s^2\bar{u} - su(0) - u'(0)) - \bar{u} - \bar{v} = 0$$

二、整理克拉瑪標準形式

$$\begin{cases} 4s^2\bar{u} + (s^2 - 1)\bar{v} = 4s \\ (s^2 - 1)\bar{u} - \bar{v} = s \end{cases} \Rightarrow \bar{u} = \frac{\Delta_{\bar{u}}}{\Delta}, \quad \bar{v} = \frac{\Delta_{\bar{v}}}{\Delta}$$

$$\Delta = \begin{vmatrix} 4s^2 & s^2 - 1 \\ s^2 - 1 & -1 \end{vmatrix} = -4s^2 - (s^2 - 1)^2 = -(s^2 + 1)^2,$$

$$\Delta_{\bar{u}} = \begin{vmatrix} 4s & s^2 - 1 \\ s & -1 \end{vmatrix} = -4s - s^3 + s = -(s^3 + 3s),$$

$$\Delta_{\bar{v}} = \begin{vmatrix} 4s^2 & 4s \\ s^2 - 1 & s \end{vmatrix} = 4s^3 - 4s^3 + 4s = 4s.$$

三、部分分式展開與整理

$$\bar{u} = \frac{\Delta_{\bar{u}}}{\Delta} = \frac{(s^3 + 3s)}{(s^2 + 1)^2} = \frac{As + B}{s^2 + 1} + \frac{Cs + D}{(s^2 + 1)^2} = \frac{s}{s^2 + 1} + \frac{2s}{(s^2 + 1)^2}$$

$$s^3 + 3s = (As + B)(s^2 + 1) + Cs + D = As^3 + Bs^2 + (A + C)s + B + D$$

$$A=1, \quad B=0, \quad C=2, \quad D=0$$

$$\bar{v} = \frac{\Delta_{\bar{v}}}{\Delta} = -\frac{4s}{(s^2 + 1)^2} = -2\frac{2s}{(s^2 + 1)^2}$$

四、進行反拉式轉換

$$\text{求 } L^{-1}\left[\frac{2s}{(s^2+1)^2}\right] = ?$$

$$\text{公式 } h(t) = (f * g)(t) = \int_0^t f(\tau)g(t-\tau)d\tau = \int_0^t f(t-\tau)g(\tau)d\tau$$

$$L^{-1}\left[\frac{2}{s^2+1}\right] = 2\sin t, \quad L^{-1}\left[\frac{s}{s^2+1}\right] = \cos t$$

$$\begin{cases} \sin a \cos b = \frac{1}{2}[\sin(a+b) + \sin(a-b)] \\ \cos(-t) = \cos t \end{cases}$$

$$L^{-1}\left[\frac{2s}{(s^2+1)^2}\right] = 2\int_0^t \sin(\tau)\cos(t-\tau)d\tau = 2\int_0^t \frac{1}{2}[\sin(t) + \sin(2\tau-t)]d\tau$$

$$= \tau \sin t - \frac{1}{2} \cos(2\tau-t) \Big|_0^t = t \sin t - \frac{1}{2} \cos(2t-t) - 0 + \frac{1}{2} \cos(0-t)$$

$$= t \sin t - \frac{1}{2} \cos(t) + \frac{1}{2} \cos(-t) = t \sin t$$

$$u = L^{-1}[\bar{u}] = L^{-1}\left[\frac{s}{s^2+1} + \frac{2s}{(s^2+1)^2}\right] = \cos t + t \sin t$$

$$v = L^{-1}[\bar{v}] = L^{-1}\left[-2\frac{2s}{(s^2+1)^2}\right] = -2(t \sin t) = -2t \sin t$$

6.8 Laplace Transform: General Formulas

Formula	Name, Comments	Sec.
$F(s) = \mathcal{L}\{f(t)\} = \int_0^{\infty} e^{-st}f(t) dt$ $f(t) = \mathcal{L}^{-1}\{F(s)\}$	Definition of Transform Inverse Transform	6.1
$\mathcal{L}\{af(t) + bg(t)\} = a\mathcal{L}\{f(t)\} + b\mathcal{L}\{g(t)\}$	Linearity	6.1
$\mathcal{L}\{e^{at}f(t)\} = F(s - a)$ $\mathcal{L}^{-1}\{F(s - a)\} = e^{at}f(t)$	s-Shifting (First Shifting Theorem)	6.1
$\mathcal{L}(f') = s\mathcal{L}(f) - f(0)$ $\mathcal{L}(f'') = s^2\mathcal{L}(f) - sf(0) - f'(0)$ $\mathcal{L}(f^{(n)}) = s^n\mathcal{L}(f) - s^{(n-1)}f(0) - \dots$ $\dots - f^{(n-1)}(0)$ $\mathcal{L}\left\{\int_0^t f(\tau) d\tau\right\} = \frac{1}{s} \mathcal{L}(f)$	Differentiation of Function Integration of Function	6.2
$(f * g)(t) = \int_0^t f(\tau)g(t - \tau) d\tau$ $= \int_0^t f(t - \tau)g(\tau) d\tau$ $\mathcal{L}(f * g) = \mathcal{L}(f)\mathcal{L}(g)$	Convolution	6.5
$\mathcal{L}\{f(t - a)u(t - a)\} = e^{-as}F(s)$ $\mathcal{L}^{-1}\{e^{-as}F(s)\} = f(t - a)u(t - a)$	t-Shifting (Second Shifting Theorem)	6.3
$\mathcal{L}\{tf(t)\} = -F'(s)$ $\mathcal{L}\left\{\frac{f(t)}{t}\right\} = \int_s^{\infty} F(\tilde{s}) d\tilde{s}$	Differentiation of Transform Integration of Transform	6.6
$\mathcal{L}(f) = \frac{1}{1 - e^{-ps}} \int_0^p e^{-st}f(t) dt$	f Periodic with Period p	6.4 Project 16

6.9 Table of Laplace Transforms

For more extensive tables, see Ref. [A9] in Appendix 1.

	$F(s) = \mathcal{L}\{f(t)\}$	$f(t)$	Sec.
1	$1/s$	1	6.1
2	$1/s^2$	t	
3	$1/s^n \quad (n = 1, 2, \dots)$	$t^{n-1}/(n-1)!$	
4	$1/\sqrt{s}$	$1/\sqrt{\pi t}$	
5	$1/s^{3/2}$	$2\sqrt{t/\pi}$	
6	$1/s^a \quad (a > 0)$	$t^{a-1}/\Gamma(a)$	
7	$\frac{1}{s-a}$	e^{at}	6.1
8	$\frac{1}{(s-a)^2}$	te^{at}	
9	$\frac{1}{(s-a)^n} \quad (n = 1, 2, \dots)$	$\frac{1}{(n-1)!} t^{n-1} e^{at}$	
10	$\frac{1}{(s-a)^k} \quad (k > 0)$	$\frac{1}{\Gamma(k)} t^{k-1} e^{at}$	
11	$\frac{1}{(s-a)(s-b)} \quad (a \neq b)$	$\frac{1}{a-b} (e^{at} - e^{bt})$	
12	$\frac{s}{(s-a)(s-b)} \quad (a \neq b)$	$\frac{1}{a-b} (ae^{at} - be^{bt})$	
13	$\frac{1}{s^2 + \omega^2}$	$\frac{1}{\omega} \sin \omega t$	6.1
14	$\frac{s}{s^2 + \omega^2}$	$\cos \omega t$	
15	$\frac{1}{s^2 - a^2}$	$\frac{1}{a} \sinh at$	
16	$\frac{s}{s^2 - a^2}$	$\cosh at$	
17	$\frac{1}{(s-a)^2 + \omega^2}$	$\frac{1}{\omega} e^{at} \sinh \omega t$	
18	$\frac{s-a}{(s-a)^2 + \omega^2}$	$e^{at} \cos \omega t$	
19	$\frac{1}{s(s^2 + \omega^2)}$	$\frac{1}{\omega^2} (1 - \cos \omega t)$	6.2
20	$\frac{1}{s^2(s^2 + \omega^2)}$	$\frac{1}{\omega^3} (\omega t - \sin \omega t)$	

(continued)

Table of Laplace Transforms (*continued*)

	$F(s) = \mathcal{L}\{f(t)\}$	$f(t)$	Sec.
21	$\frac{1}{(s^2 + \omega^2)^2}$	$\frac{1}{2\omega^3}(\sin \omega t - \omega t \cos \omega t)$	} 6.6
22	$\frac{s}{(s^2 + \omega^2)^2}$	$\frac{t}{2\omega} \sin \omega t$	
23	$\frac{s^2}{(s^2 + \omega^2)^2}$	$\frac{1}{2\omega}(\sin \omega t + \omega t \cos \omega t)$	
24	$\frac{s}{(s^2 + a^2)(s^2 + b^2)} \quad (a^2 \neq b^2)$	$\frac{1}{b^2 - a^2}(\cos at - \cos bt)$	
25	$\frac{1}{s^4 + 4k^4}$	$\frac{1}{4k^3}(\sin kt \cos kt - \cos kt \sinh kt)$	
26	$\frac{s}{s^4 + 4k^4}$	$\frac{1}{2k^2} \sin kt \sinh kt$	
27	$\frac{1}{s^4 - k^4}$	$\frac{1}{2k^3}(\sinh kt - \sin kt)$	
28	$\frac{s}{s^4 - k^4}$	$\frac{1}{2k^2}(\cosh kt - \cos kt)$	
29	$\sqrt{s-a} - \sqrt{s-b}$	$\frac{1}{2\sqrt{\pi t^3}}(e^{bt} - e^{at})$	I 5.5
30	$\frac{1}{\sqrt{s+a}\sqrt{s+b}}$	$e^{-(a+b)t/2} I_0\left(\frac{a-b}{2}t\right)$	
31	$\frac{1}{\sqrt{s^2 + a^2}}$	$J_0(at)$	J 5.4
32	$\frac{s}{(s-a)^{3/2}}$	$\frac{1}{\sqrt{\pi t}} e^{at}(1 + 2at)$	I 5.5
33	$\frac{1}{(s^2 - a^2)^k} \quad (k > 0)$	$\frac{\sqrt{\pi}}{\Gamma(k)} \left(\frac{t}{2a}\right)^{k-1/2} I_{k-1/2}(at)$	
34	e^{-as}/s	$u(t-a)$	6.3
35	e^{-as}	$\delta(t-a)$	6.4
36	$\frac{1}{s} e^{-k/s}$	$J_0(2\sqrt{kt})$	J 5.4
37	$\frac{1}{\sqrt{s}} e^{-k/s}$	$\frac{1}{\sqrt{\pi t}} \cos 2\sqrt{kt}$	
38	$\frac{1}{s^{3/2}} e^{-k/s}$	$\frac{1}{\sqrt{\pi k}} \sinh 2\sqrt{kt}$	
39	$e^{-k\sqrt{s}} \quad (k > 0)$	$\frac{k}{2\sqrt{\pi t^3}} e^{-k^2/4t}$	

(continued)

Table of Laplace Transforms (*continued*)

	$F(s) = \mathcal{L}\{f(t)\}$	$f(t)$	Sec.
40	$\frac{1}{s} \ln s$	$-\ln t - \gamma \quad (\gamma \approx 0.5772)$	γ 5.5
41	$\ln \frac{s-a}{s-b}$	$\frac{1}{t}(e^{bt} - e^{at})$	
42	$\ln \frac{s^2 + \omega^2}{s^2}$	$\frac{2}{t}(1 - \cos \omega t)$	6.6
43	$\ln \frac{s^2 - a^2}{s^2}$	$\frac{2}{t}(1 - \cosh at)$	
44	$\arctan \frac{\omega}{s}$	$\frac{1}{t} \sin \omega t$	
45	$\frac{1}{s} \operatorname{arccot} s$	$\operatorname{Si}(t)$	App. A3.1

CHAPTER 6 REVIEW QUESTIONS AND PROBLEMS

- State the Laplace transforms of a few simple functions from memory.
- What are the steps of solving an ODE by the Laplace transform?
- In what cases of solving ODEs is the present method preferable to that in Chap. 2?
- What property of the Laplace transform is crucial in solving ODEs?
- Is $\mathcal{L}\{f(t) + g(t)\} = \mathcal{L}\{f(t)\} + \mathcal{L}\{g(t)\}$? $\mathcal{L}\{f(t)g(t)\} = \mathcal{L}\{f(t)\}\mathcal{L}\{g(t)\}$? Explain.
- When and how do you use the unit step function and Dirac's delta?
- If you know $f(t) = \mathcal{L}^{-1}\{F(s)\}$, how would you find $\mathcal{L}^{-1}\{F(s)/s^2\}$?
- Explain the use of the two shifting theorems from memory.
- Can a discontinuous function have a Laplace transform? Give reason.
- If two different continuous functions have transforms, the latter are different. Why is this practically important?

11–19 LAPLACE TRANSFORMS

Find the transform, indicating the method used and showing the details.

- $3 \cosh t - 5 \sinh 2t$
- $e^{-2t}(\cos 2t - 4 \sin 2t)$
- $\cos^2(\frac{1}{2}\pi t)$
- $16t^2 u(t - \frac{1}{4})$

15. $e^{-t/2}u(t - 2)$

17. $\cos t - t \sin t$

19. $4t * e^{-2t}$

16. $u(t - 2\pi) \cos 2t$

18. $(\sin \omega t) * (\cos \omega t)$

20–28 INVERSE LAPLACE TRANSFORM

Find the inverse transform, indicating the method used and showing the details:

20. $\frac{7.5}{s^2 - 2s - 8}$

21. $\frac{s-1}{s^2} e^{-s}$

22. $\frac{\frac{1}{16}}{s^2 + s + \frac{1}{2}}$

23. $\frac{s \sin \theta + \omega \cos \theta}{s^2 + \omega^2}$

24. $\frac{s^2 - 6.25}{(s^2 + 6.25)^2}$

25. $\frac{2(1-s)}{s^3}$

26. $\frac{2s-10}{s^3} e^{-5s}$

27. $\frac{2s+1}{s^2+2s+5}$

28. $\frac{3s}{s^2 - 2s + 2}$

29–37 ODEs AND SYSTEMS

Solve by the Laplace transform, showing the details and graphing the solution:

29. $y'' + 2y' + 5y = 25t, \quad y(0) = -2, \quad y'(0) = -5$

30. $y'' + 16y = 48(t - \pi), \quad y(0) = -1, \quad y'(0) = 0$