

三级考试环境安装流程

step1：安装python（推荐python3.12）

step2：换国内源

step3：安装jupyter notebook


step4：考试所需的库包安装

step1：安装python（推荐python3.12）

windows系统直接双击压缩包里的exe文件进行安装

mac系统 安装压缩包的pkg文件

请确保勾选“Add Python to PATH”选项，以便能够在命令行中直接调用 python命令

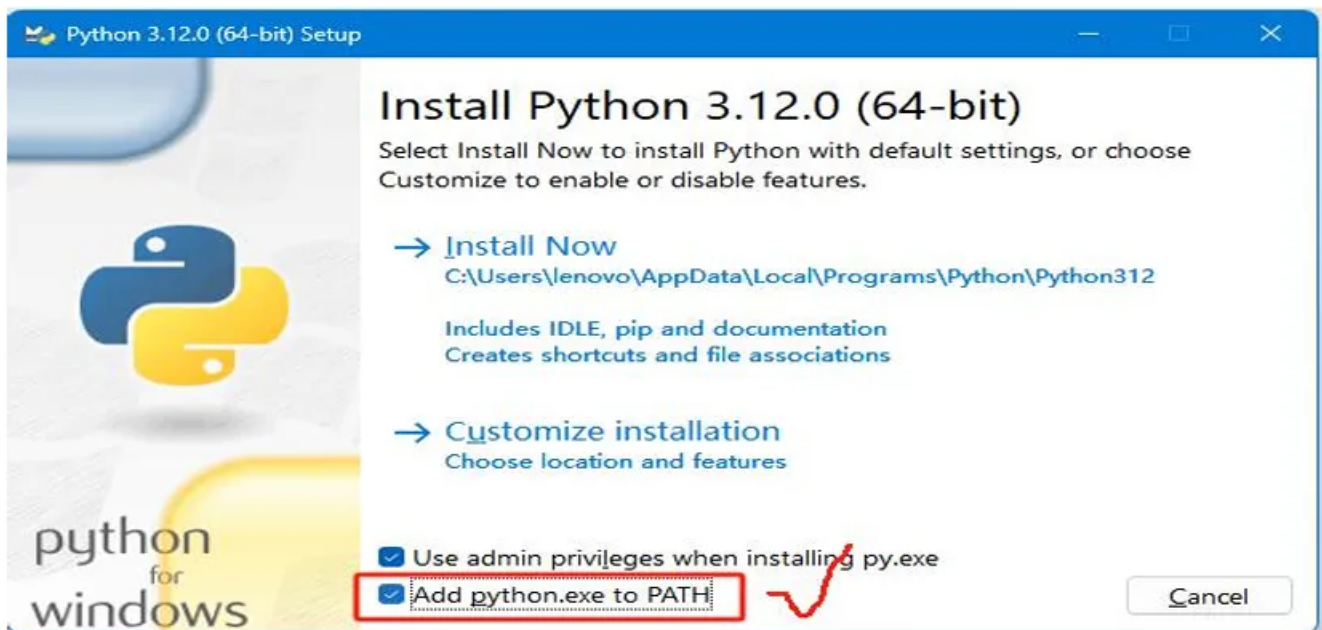

验证安装是否成功，可以通过命令行输入python --version来检查Python版本信息。

```
管理员: 命令提示符
Microsoft Windows [版本 10.0.26100.3194]
(c) Microsoft Corporation. 保留所有权利。

C:\Users\lenovo>python --version
Python 3.11.2      显示版本号表示安装成功

C:\Users\lenovo>_
```

mac在终端执行python查看是否安装成功

step2：换国内源

windows在命令行执行换源命令，不然下载太慢。

```
▼ Bash |
1 pip config set global.index-url https://mirrors.aliyun.com/pypi/simple

Microsoft Windows [版本 10.0.19045.6093]
(c) Microsoft Corporation. 保留所有权利。

C:\Users\SAITC>pip config set global.index-url https://mirrors.aliyun.com/pypi/simple
Writing to C:\Users\SAITC\AppData\Roaming\pip\pip.ini

C:\Users\SAITC>_
```

mac在终端执行换源命令,mac是 pip3

```
▼ Bash |
1 pip3 config set global.index-url https://mirrors.aliyun.com/pypi/simple
```

step3：安装jupyter notebook

在命令行执行安装命令


```
▼ Bash |
1 # 以下两个命令都可以，选一个
2 pip install jupyter
3 # 或
4 pip install notebook
5
6 # mac系统是pip3安装
7 pip3 install jupyter
```

```
C:\Users\SAITC>pip install jupyter_
```

安装完成后，在命令行中输入jupyter notebook来启动Jupyter Notebook服务器。

```
管理员: 命令提示符
C:\Users\lenovo>jupyter notebook 输入命令，回车
```

默认情况下会在浏览器中自动打开Jupyter界面，表示安装成功了

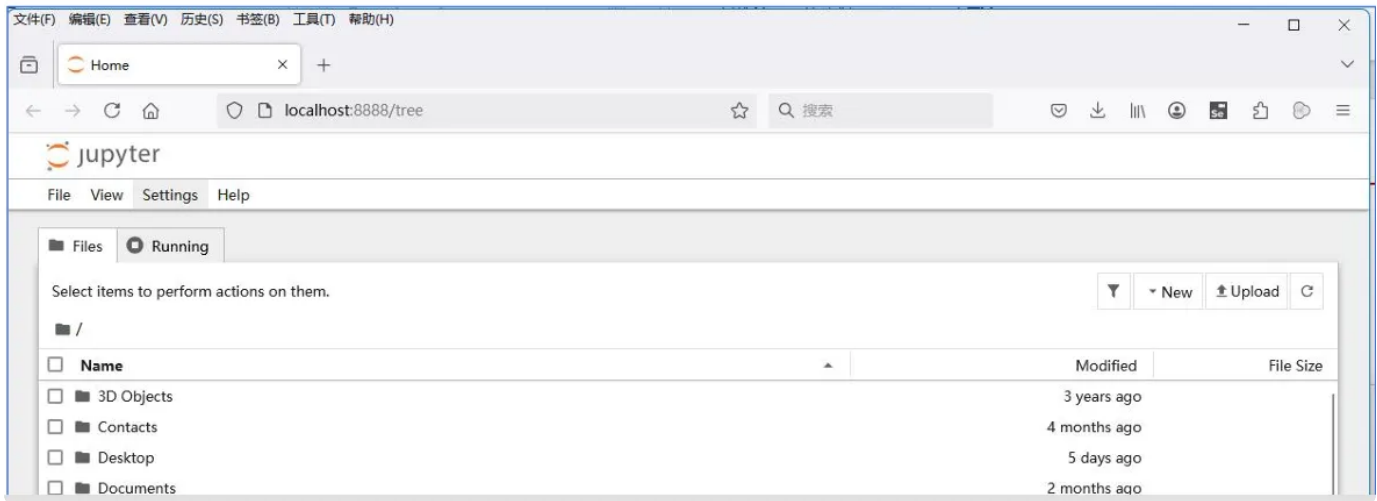

step4 ： 考试所需的库包安装

将压缩包内的requirements.txt拷贝到命令行启动的路径，一般在c:/users/用户名/

```
C:\WINDOWS\system32\CMD.exe
Microsoft Windows [版本 10.0.19045.6093]
(c) Microsoft Corporation。保留所有权利。
C:\Users\SAITC>
```

在命令行执行安装库的命令

```
▼ Bash |
1 pip install -r requirements.txt

Microsoft Windows [版本 10.0.19045.6093]
(c) Microsoft Corporation。保留所有权利。
C:\Users\SAITC>pip install -r requirements.txt
```

mac系统在终端执行安装库的命令

```
▼ Bash |
1 pip3 install -r requirements.txt
```

安装完成后，打开jupyter notebook，新建一个python，执行如下导入库的测试代码，没报错就全部安装成功

```
1 import pandas as pd
2 import numpy as np
3 import matplotlib.pyplot as plt
4 from sklearn.preprocessing import StandardScaler
5 from sklearn.model_selection import train_test_split
6 from sklearn.preprocessing import MinMaxScaler
7 import seaborn as sns
8 from sklearn.preprocessing import LabelEncoder
9 from sklearn.linear_model import LogisticRegression
10 import pickle
11 from sklearn.metrics import classification_report
12 from imblearn.over_sampling import SMOTE
13 from sklearn.pipeline import Pipeline
14 from sklearn.ensemble import RandomForestRegressor
15 import xgboost as xgb
16 import joblib
17 from sklearn.linear_model import LinearRegression
18 from sklearn.tree import DecisionTreeRegressor
19 import onnxruntime as ort
20 import scipy.special
21 from PIL import Image
22 import onnx
23 import os
24 import time
25 import cv2
```

```
In [1]: import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
from sklearn.preprocessing import StandardScaler
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import MinMaxScaler
import seaborn as sns
from sklearn.preprocessing import LabelEncoder
from sklearn.linear_model import LogisticRegression
import pickle
from sklearn.metrics import classification_report
from imblearn.over_sampling import SMOTE
from sklearn.pipeline import Pipeline
from sklearn.ensemble import RandomForestRegressor
import xgboost as xgb
import joblib
from sklearn.linear_model import LinearRegression
from sklearn.tree import DecisionTreeRegressor
from sklearn.metrics import mean_squared_error, mean_absolute_error, r2_score
import onnxruntime as ort
import scipy.special
from PIL import Image
import onnx
import os
import time
import cv2
```