




 如何高效地部署   
`go-openbmclapi`

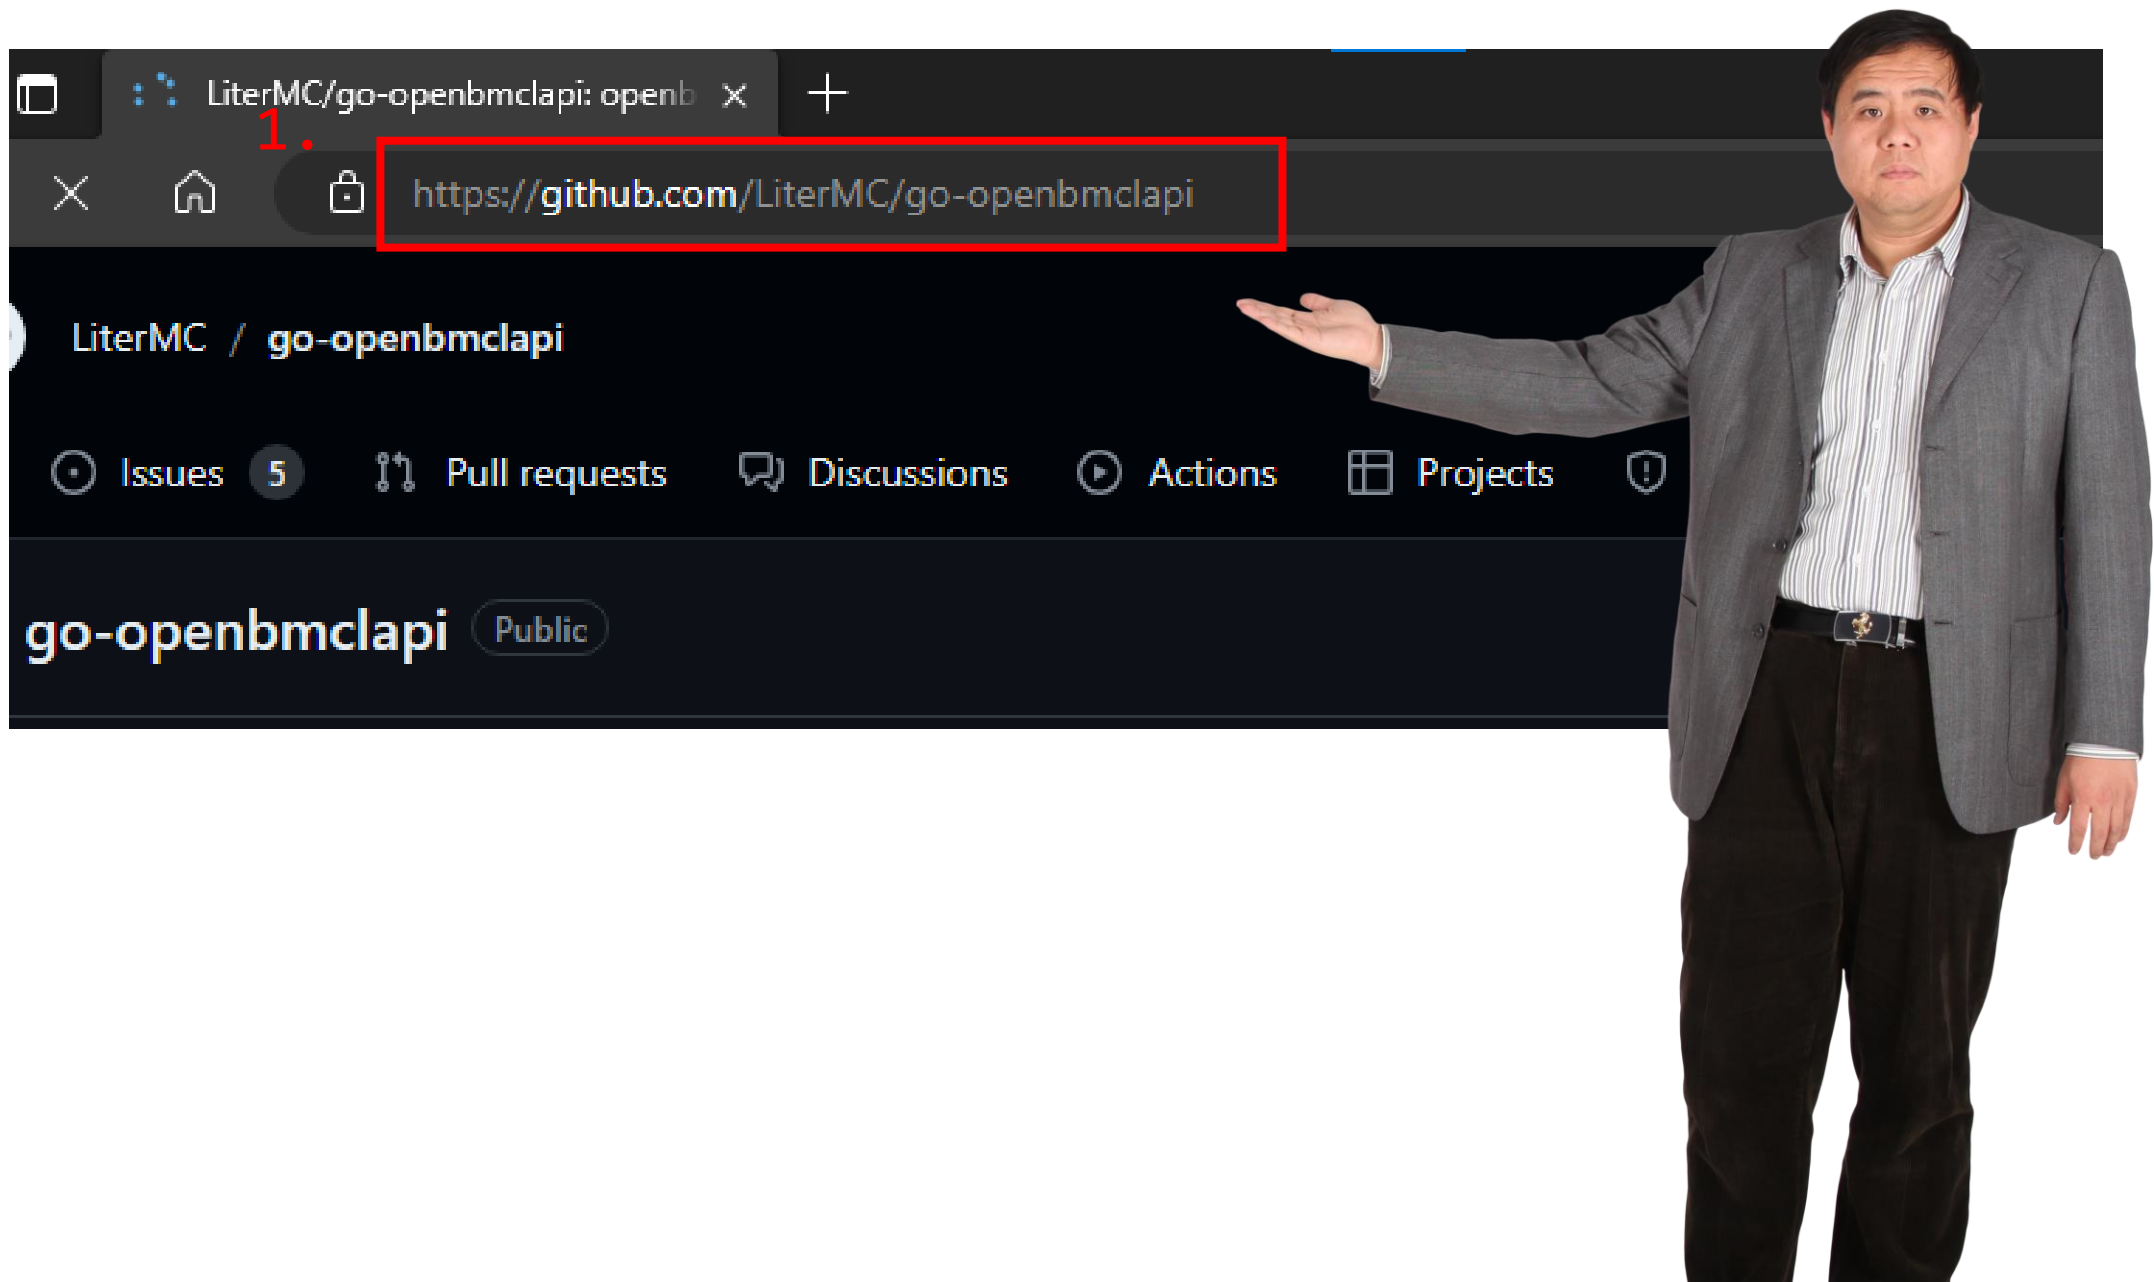

master

2 Branches 141 Tags

Add file

&lt;&gt; Code

About

openbmclapi written in Golang

minecraft

mirror

golang-application

bmclapi

openbmclapi

Readme

AGPL-3.0 license

Activity

Custom properties

29 stars

1 watching

15 forks

Report repository

Releases 133

Release v1.9.7-7 Latest


3 hours ago


+ 132 releases

2. Packages

No packages published

zyxkad	fix nil panic on ErrorFromRedirect	5a2f314 · 2 hours ago	415 Commits
.github/workflows	add platforms to docker build	2 weeks ago	
cache	move the caches to a separate folder	4 days ago	
dashboard	fix log box will show when not logged	2 hours ago	
database	bring back hijacker	2 days ago	
internal	bump cluster version to 1.9.6	2 days ago	
limited	reforged folder structure	4 days ago	
log	add a few panic recorder	4 days ago	
service	fix: Executable path is not absolute (#32)	last week	
storage	fix #40 temporary file will closed after request was sent	3 hours ago	
utils	reforged folder structure	4 days ago	
.dockerignore	fix dockerignore	4 days ago	
.gitignore	move the caches to a separate folder	4 days ago	
CONTRIBUTORS.md	Update CONTRIBUTORS.md	4 days ago	

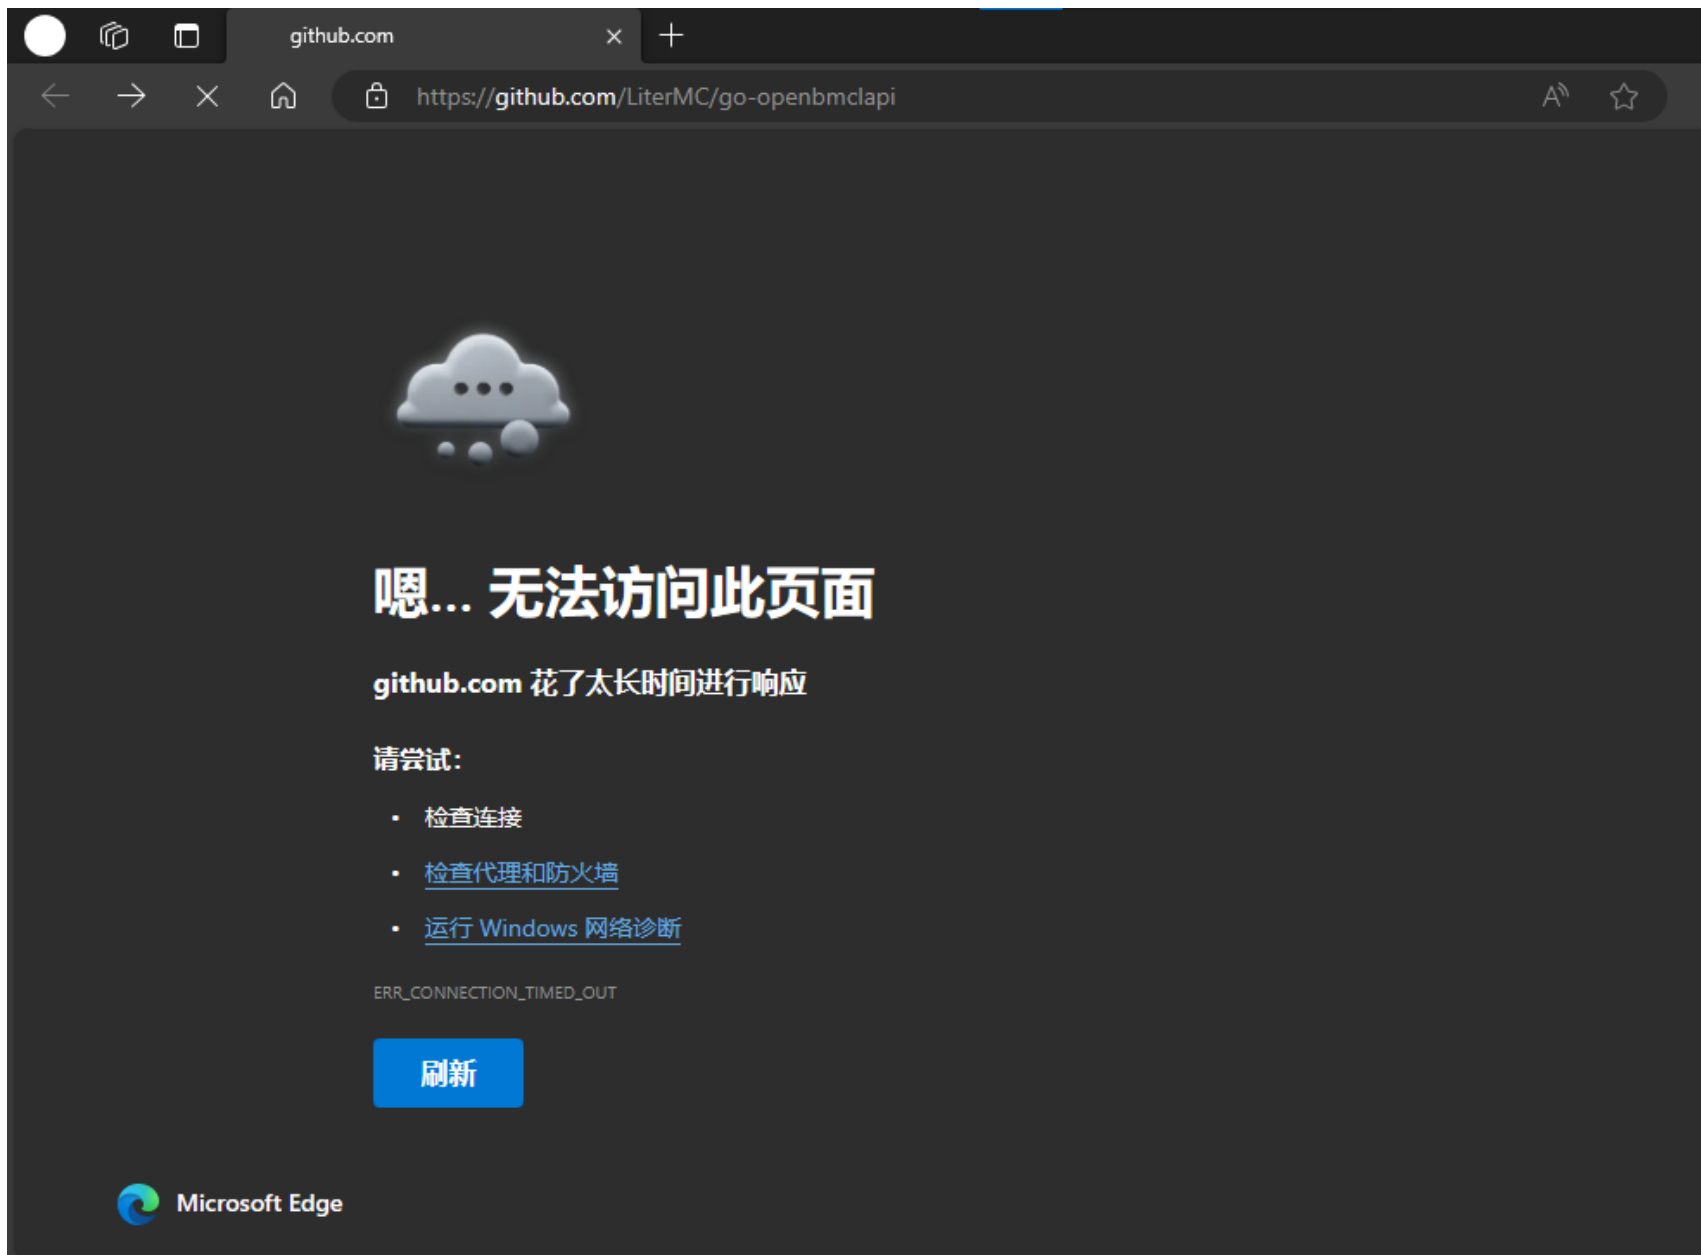

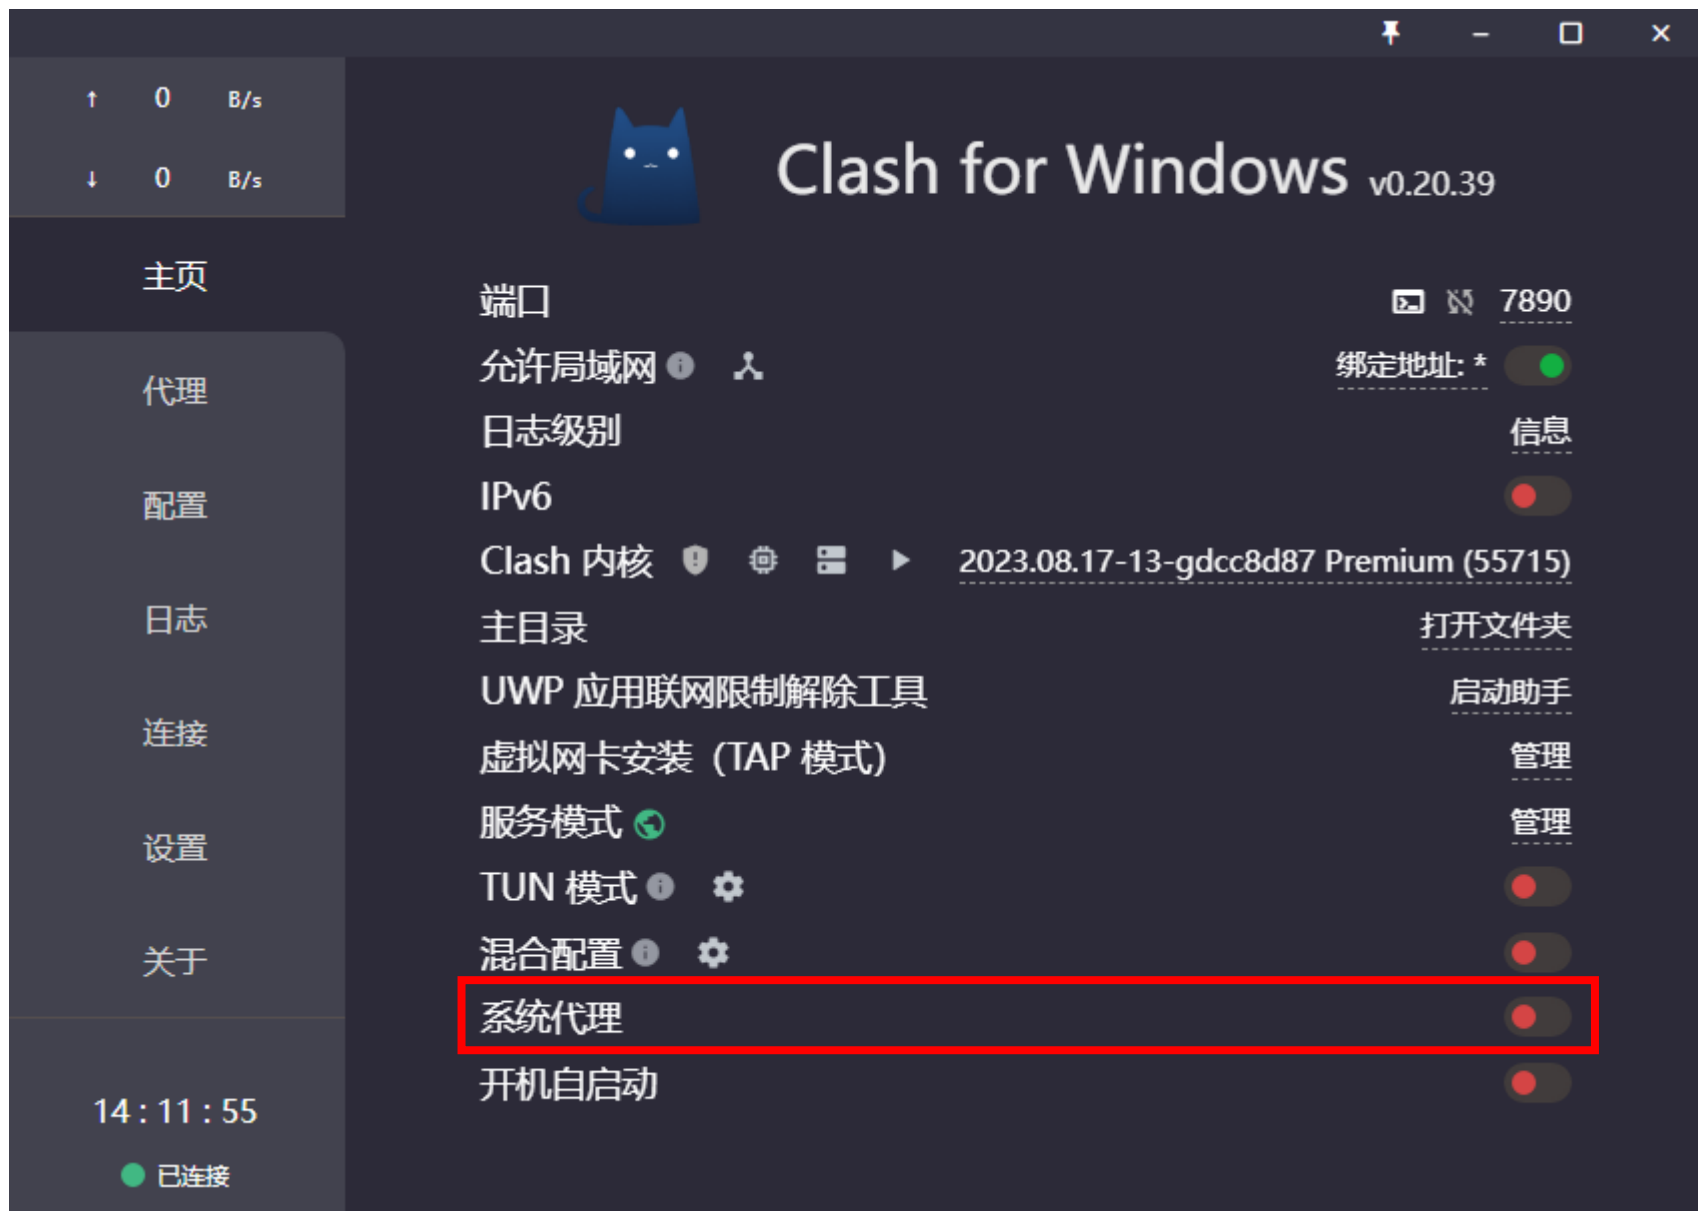

# Release v1.9.7-7

Latest

github-actions released this 3 hours ago v1.9.7-7 e5cd4d1

## Fix

修复了使用多个网盘时 tmp 文件会在中途被关闭的问题 #40

### Assets 12

- go-openbmclapi-darwin-amd64
- go-openbmclapi-darwin-arm64
- go-openbmclapi-linux-386
- go-openbmclapi-linux-amd64
- go-openbmclapi-linux-arm
- go-openbmclapi-linux-arm64
- go-openbmclapi-windows-386.exe
- go-openbmclapi-windows-amd64.exe
- go-openbmclapi-windows-arm.exe
- go-openbmclapi-windows-arm64.exe
- Source code (zip)

Compare

# Release v1.9.7-7

Latest

github-actions released this 3 hours ago v1.9.7-7 e5cd4d1

## Fix

修复了使用多个网盘时 tmp 文件会在中途被关闭的问题 #40

### Assets 12

- |                                  |      |
|----------------------------------|------|
| go-openbmclapi-darwin-amd64      | 15.2 |
| go-openbmclapi-darwin-arm64      | 14.9 |
| go-openbmclapi-linux-386         | 14.8 |
| go-openbmclapi-linux-amd64       | 15.3 |
| go-openbmclapi-linux-arm         | 14.7 |
| go-openbmclapi-linux-arm64       | 14.9 |
| go-openbmclapi-windows-386.exe   | 15.1 |
| go-openbmclapi-windows-amd64.exe | 15.7 |
| go-openbmclapi-windows-arm.exe   | 14.9 |
| go-openbmclapi-windows-arm64.exe | 14.9 |
| Source code (zip)                |      |

在新标签页中打开链接

在新窗口中打开链接

在 InPrivate 窗口中打开链接

在分屏窗口中打开链接

将链接另存为

复制链接

添加到集锦



共享

屏蔽元素



检查




4.

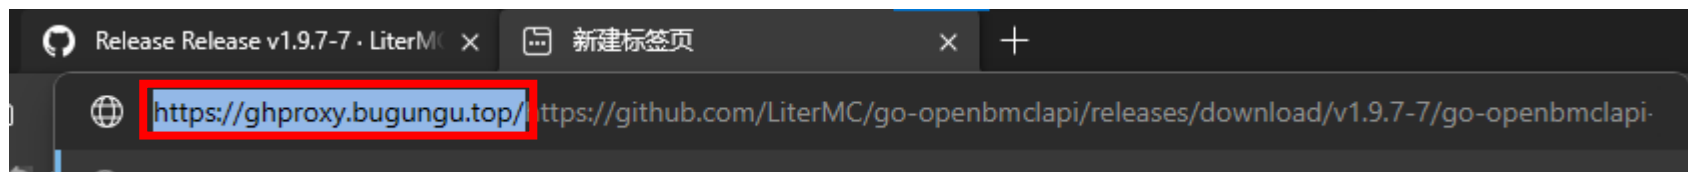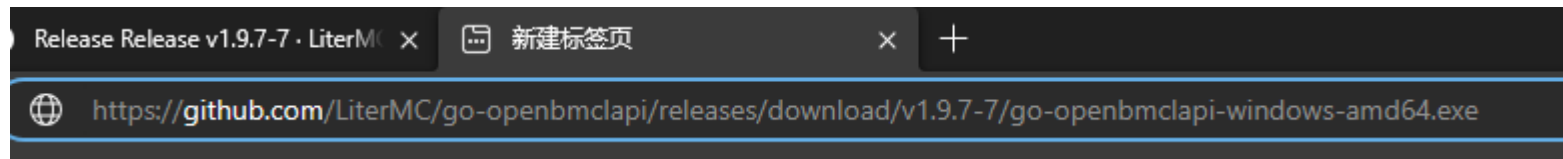

Enter

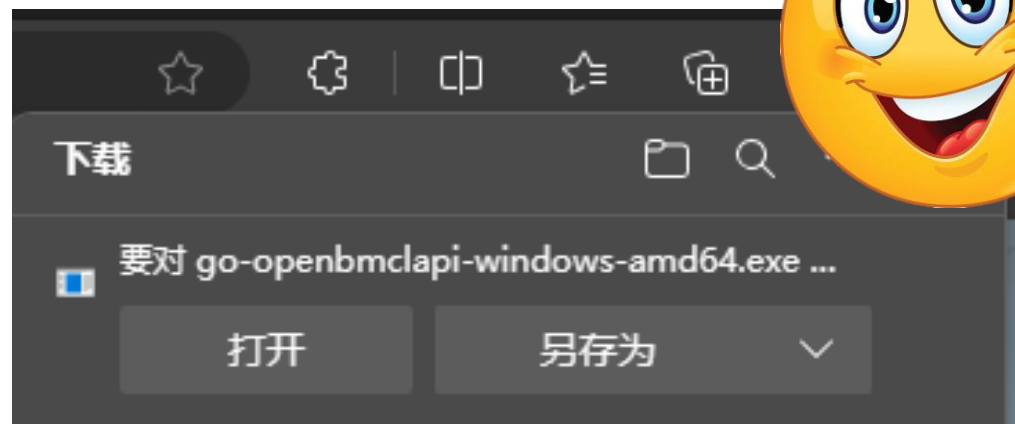



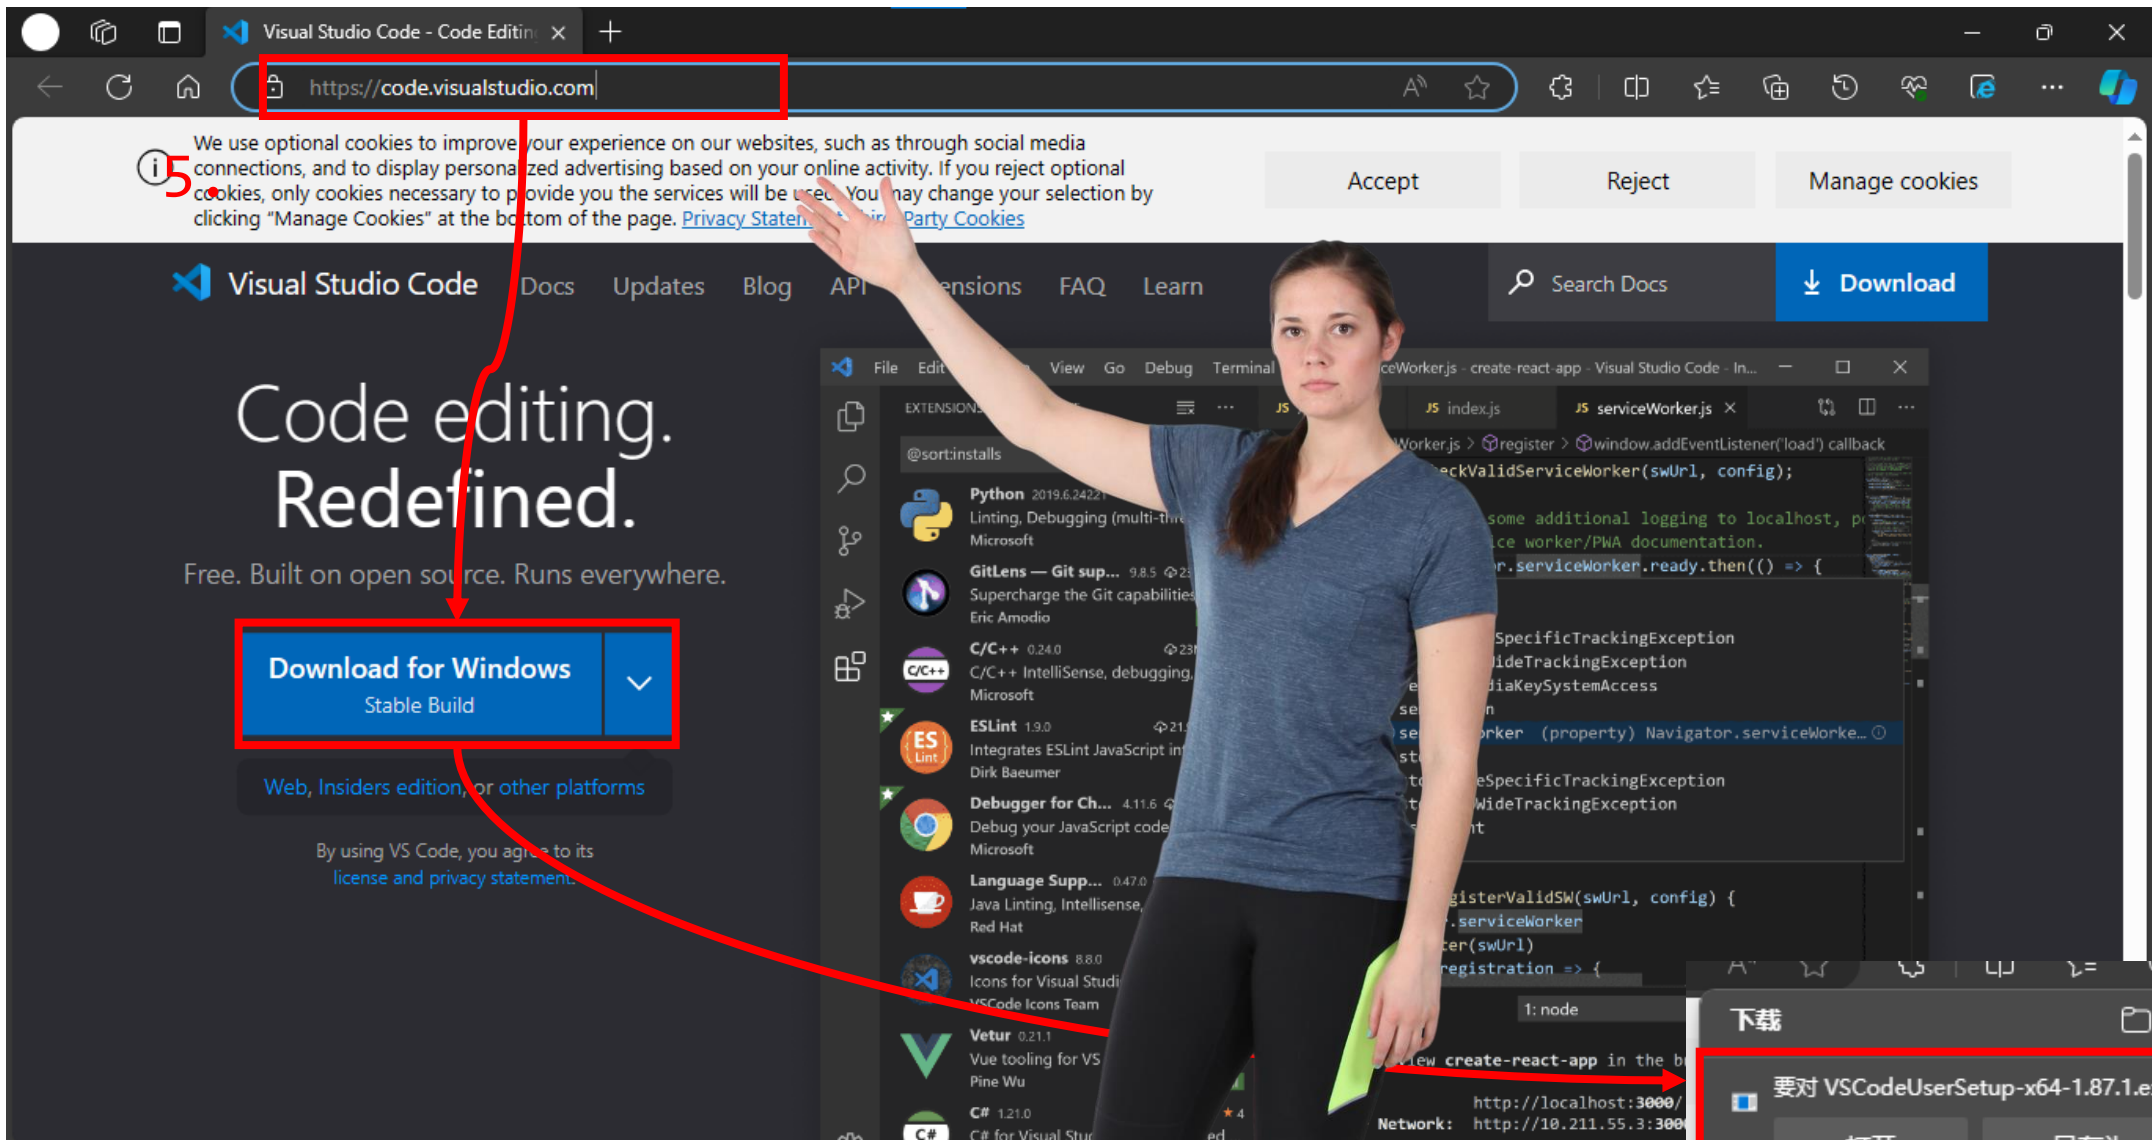

5 We use optional cookies to improve your experience on our websites, such as through social media connections, and to display personalized advertising based on your online activity. If you reject optional cookies, only cookies necessary to provide you the services will be used. You may change your selection by clicking "Manage Cookies" at the bottom of the page. [Privacy Statement](#) [Third Party Cookies](#)

Accept

Reject

Manage cookies

# Code editing. Redefined.

Free. Built on open source. Runs everywhere.

Download for Windows

Stable Build

Web, Insiders edition, or other platforms

By using VS Code, you agree to its  
[license and privacy statement](#).


下载



要对 VSCodeUserSetup-x64-1.87.1.exe 执行...

打开

另存为



今天 (1)			
 VSCodeUserSetup-x64-1.87.1.exe	2024/3/8 20:57	应用程序	95,830 KB

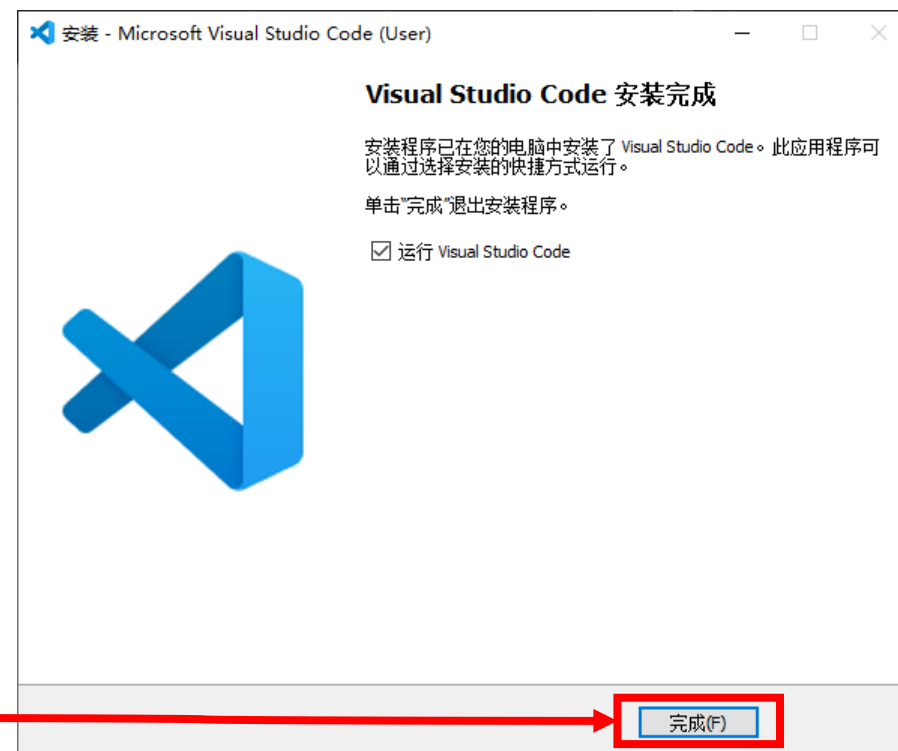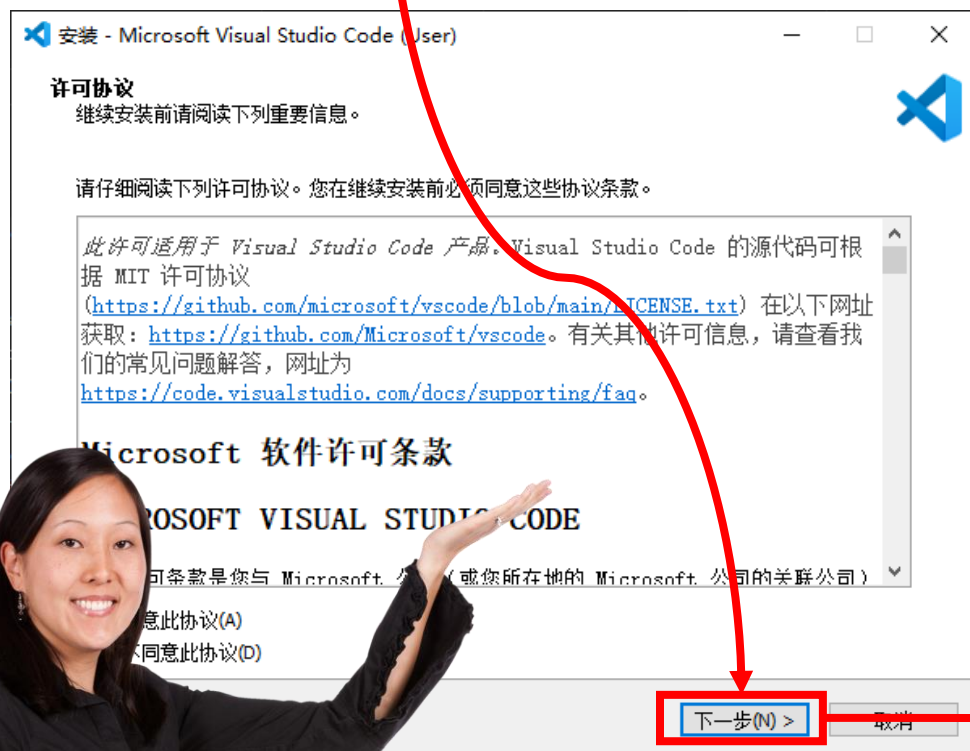

6.

The image is a composite showing a woman standing in front of two overlapping screenshots of the Visual Studio Code (VS Code) interface, illustrating the steps to install and activate the Chinese (Simplified) Language Pack.

**Left Screenshot (Extensions View):**

- The **EXTENSIONS** view is active, showing a search for **Chinese**.
- The **Chinese (Simplified) (简体中文) Language Pack** by Microsoft is listed at the top.
- The **Install** button for this extension is highlighted with a red box.
- A red box highlights the **Extensions** icon in the left sidebar.



**Right Screenshot (Extension Details View):**


- The details for the **Chinese (Simplified) (简体中文) Language Pack** are shown.
- The **Change Language and Restart** button is highlighted with a red box.
- A red box highlights the **Settings** icon in the bottom right corner of the VS Code window.


**Red Annotations:**

- A red arrow points from the **Extensions** icon in the left sidebar to the **Chinese (Simplified)** extension.
- A red arrow points from the **Install** button in the left screenshot to the **Change Language and Restart** button in the right screenshot.


7.

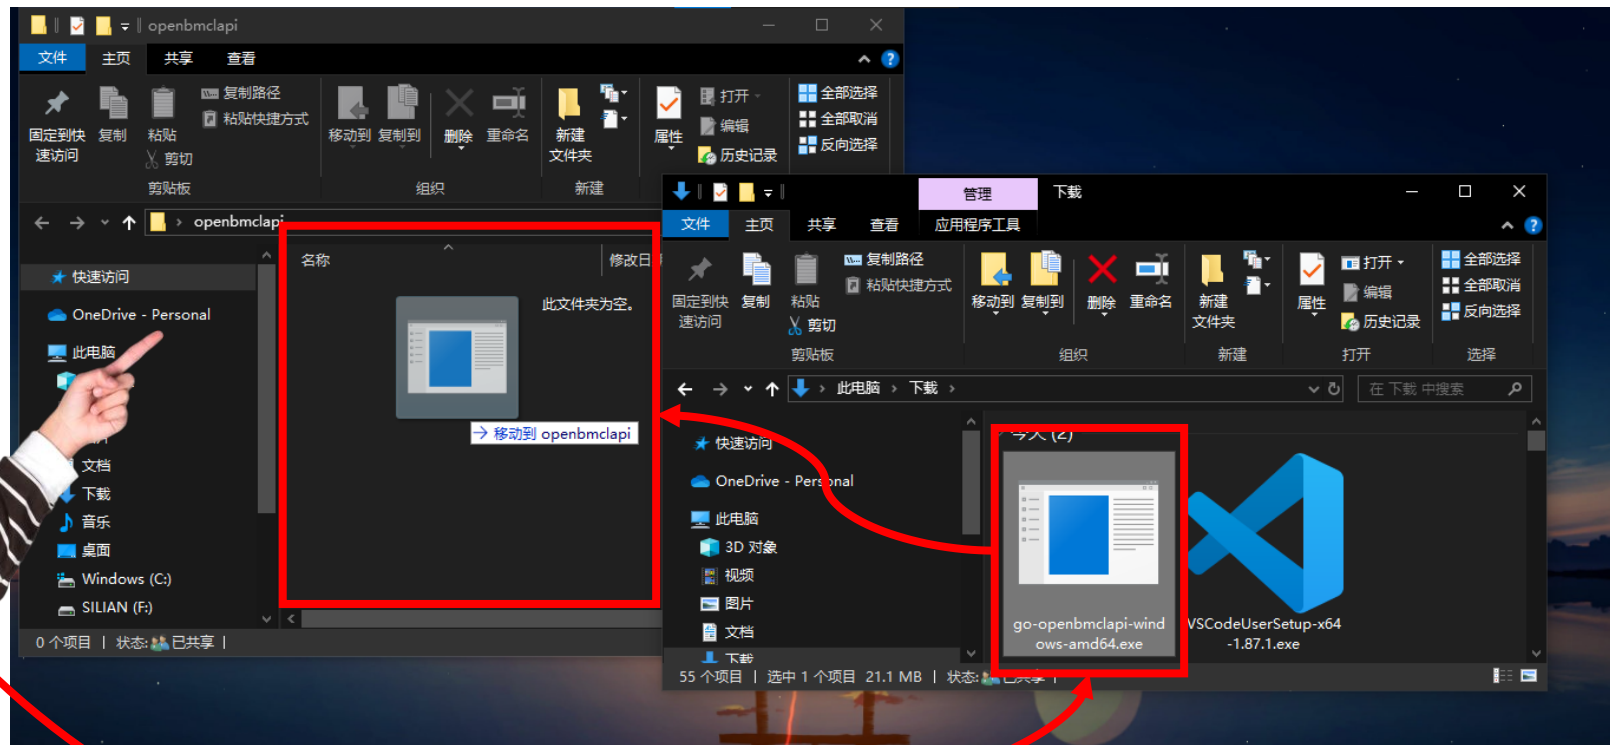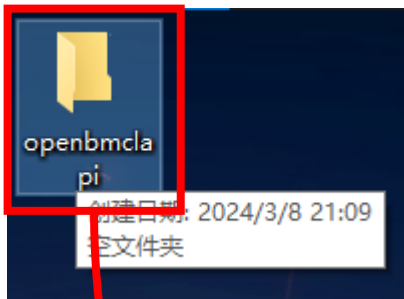

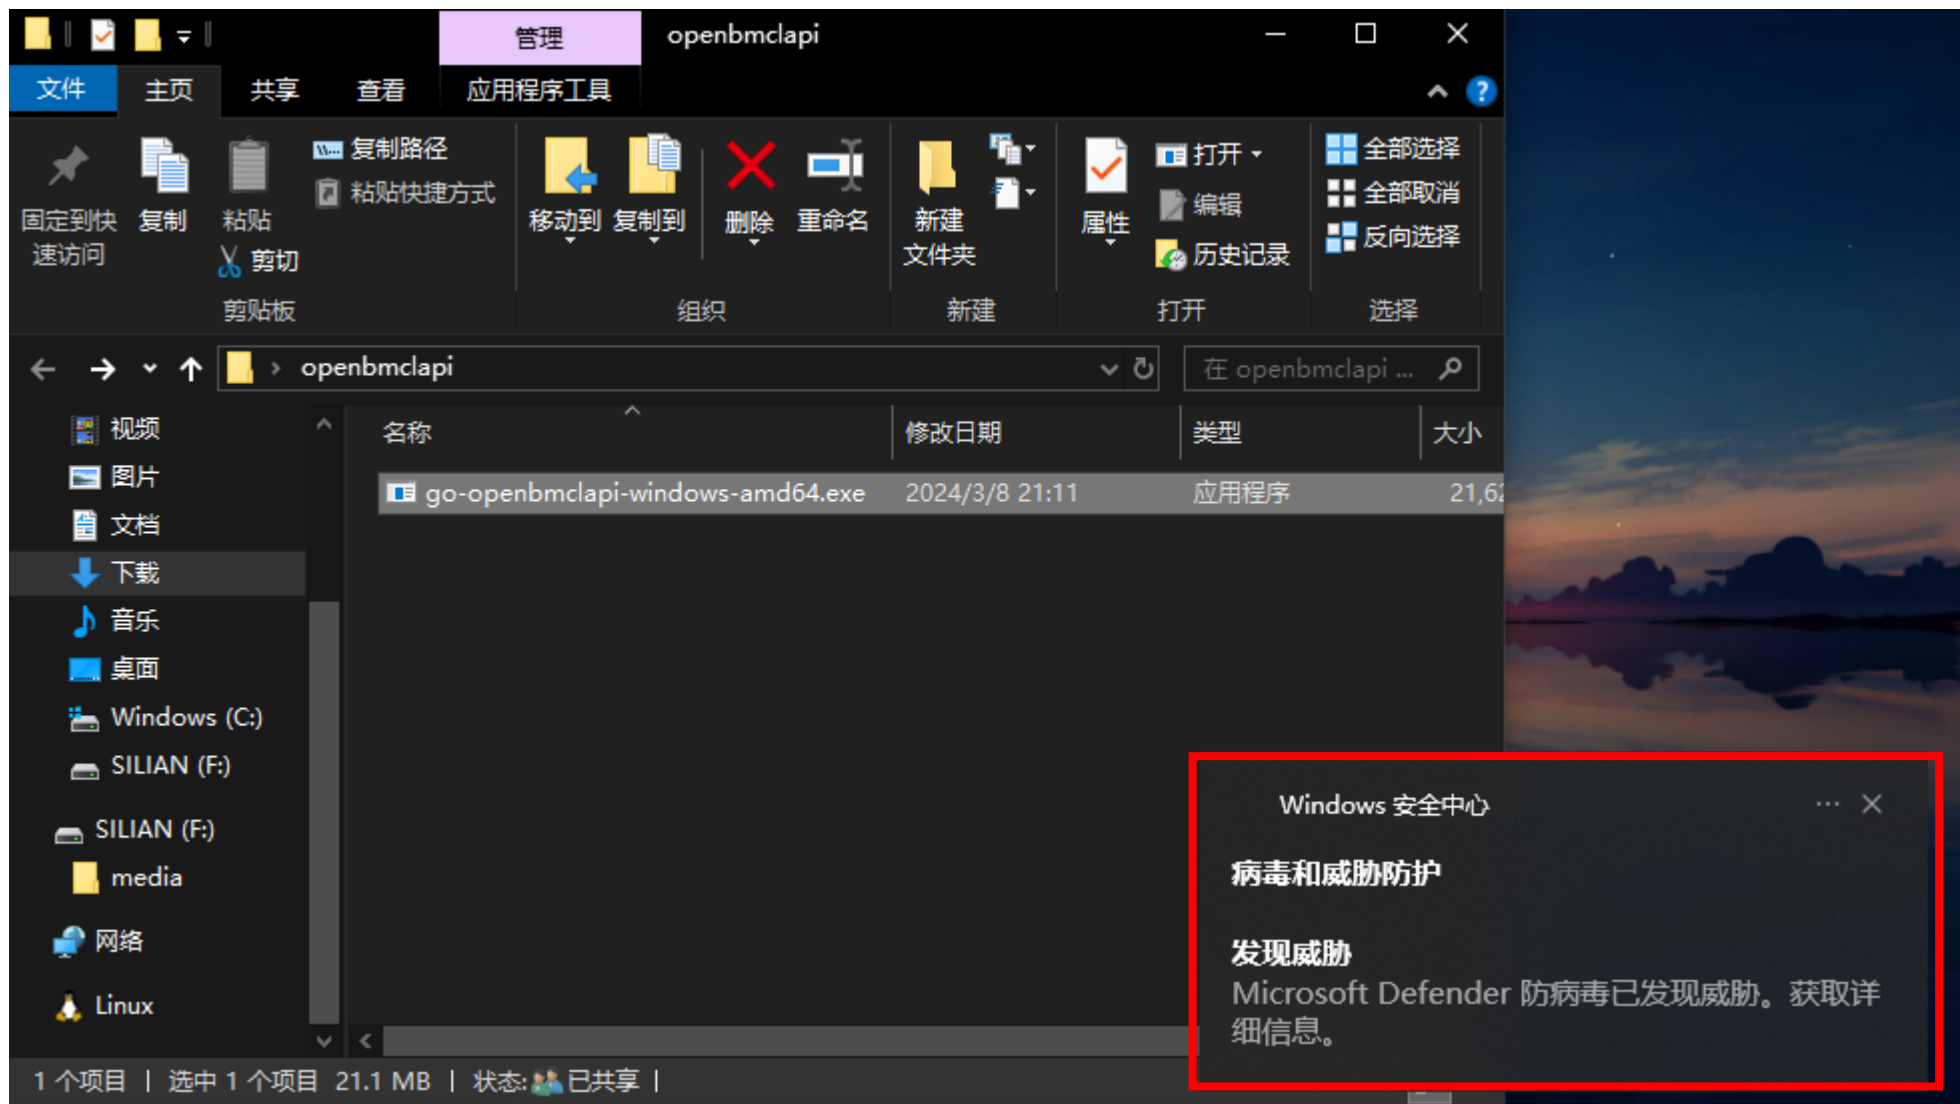

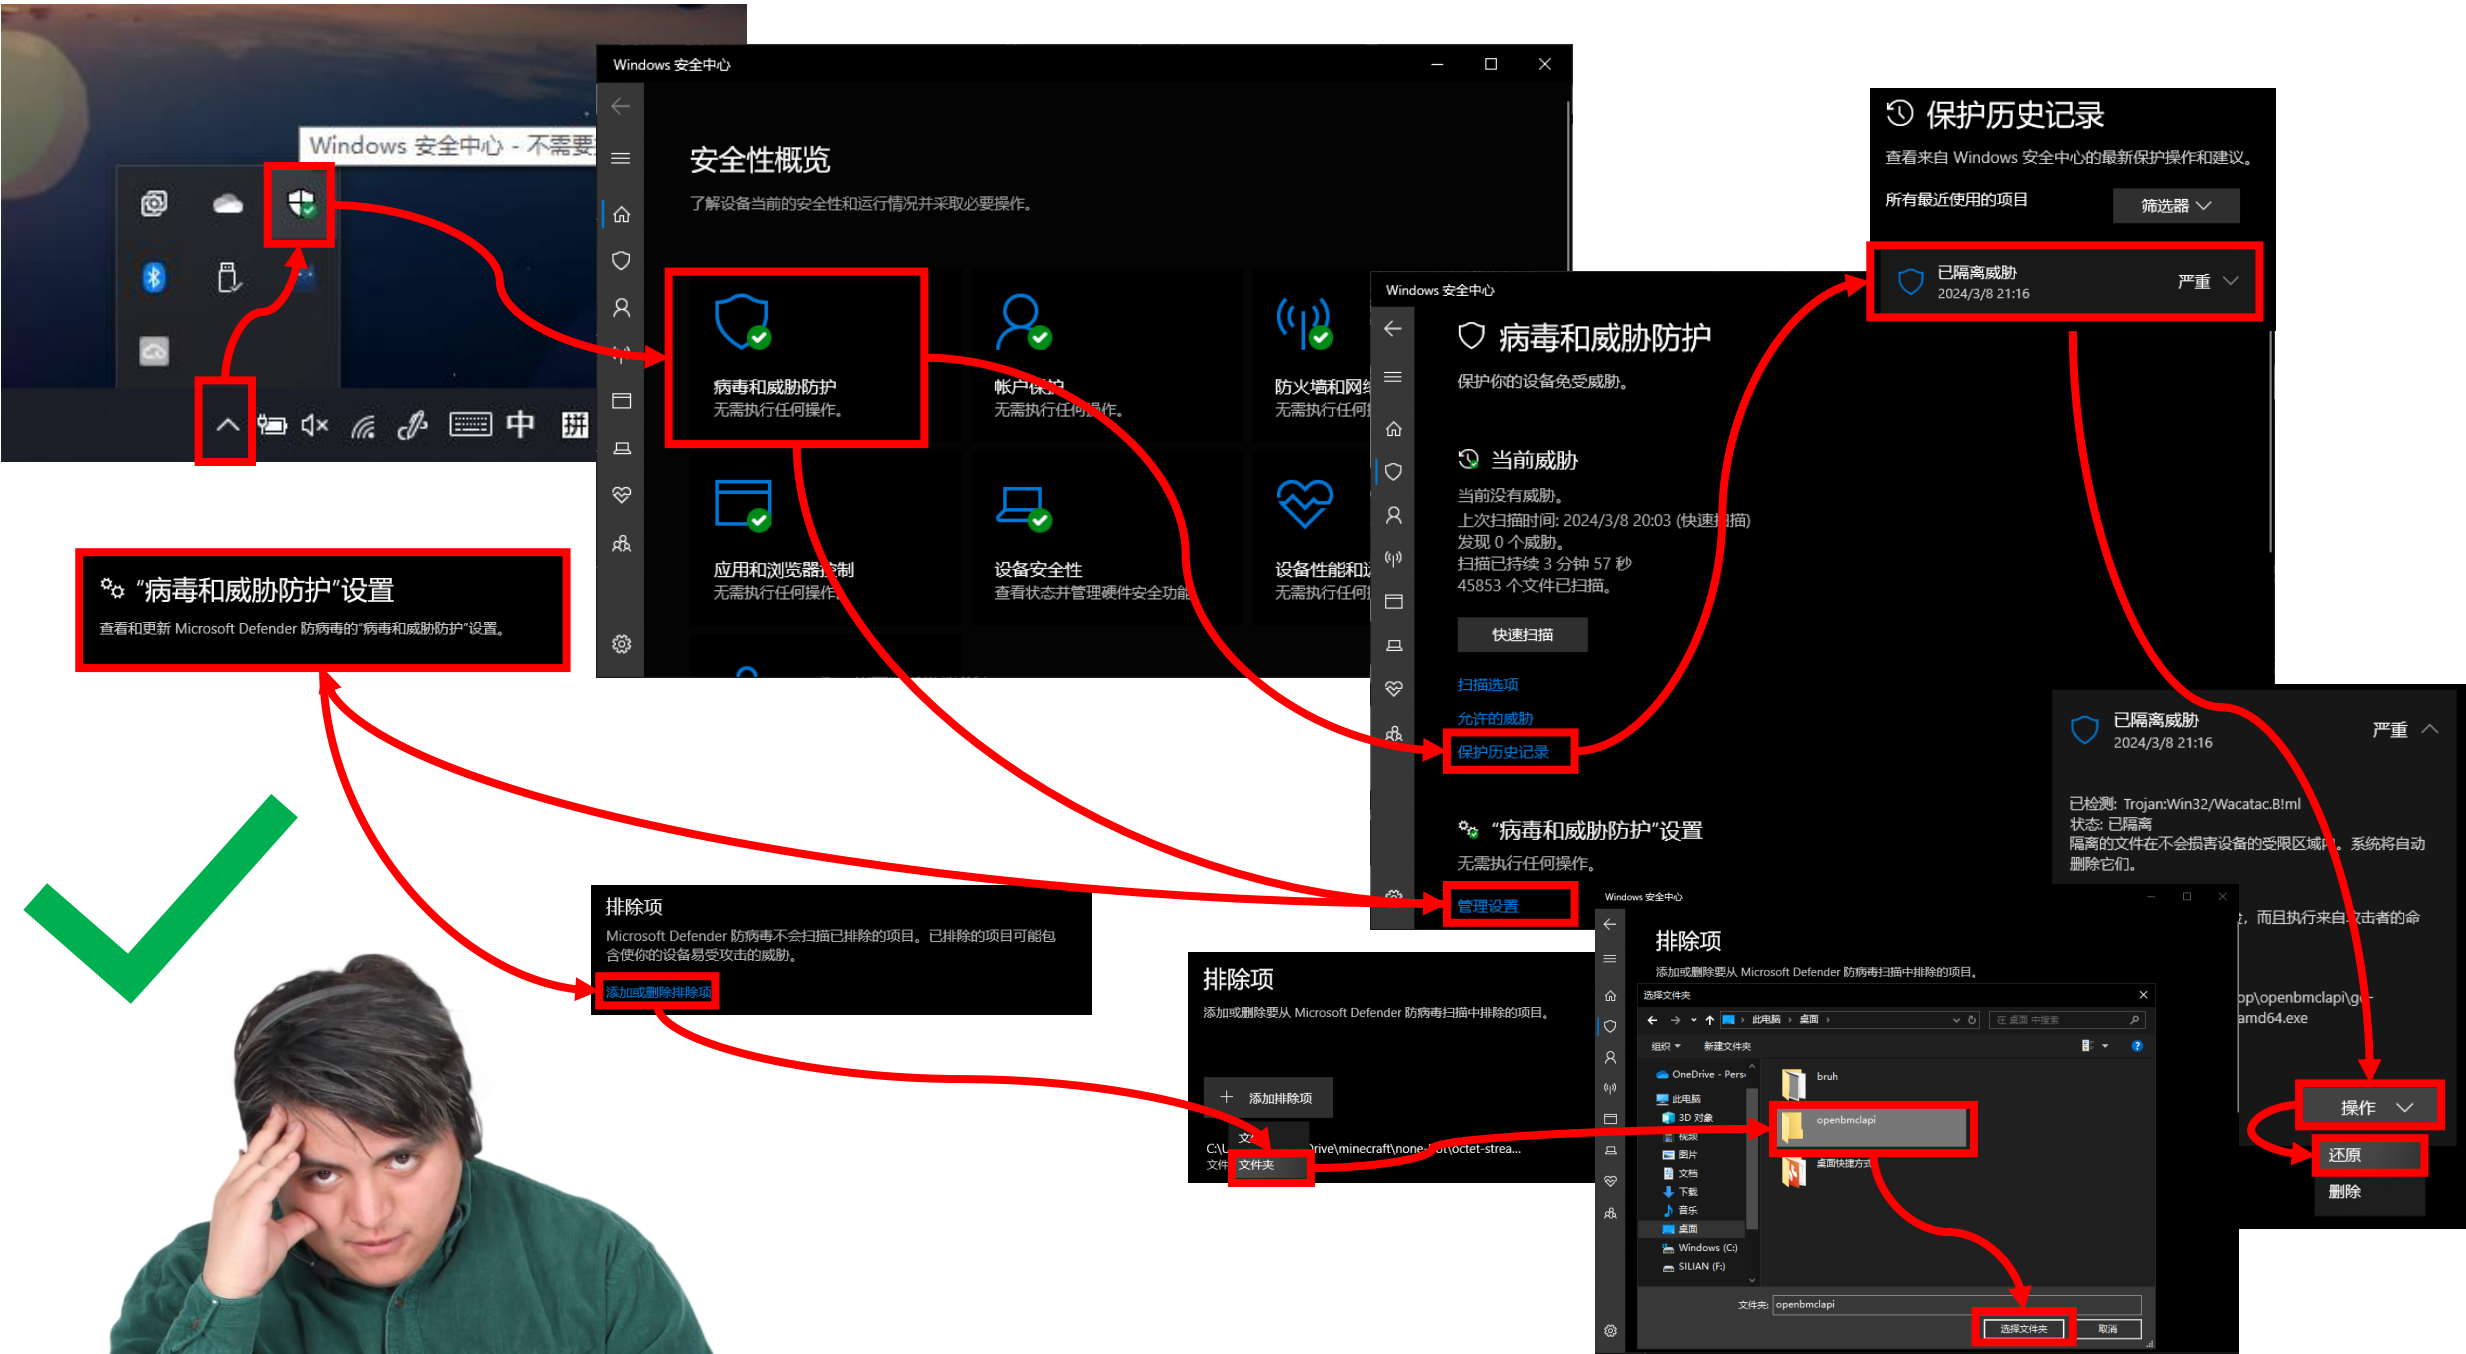

8.

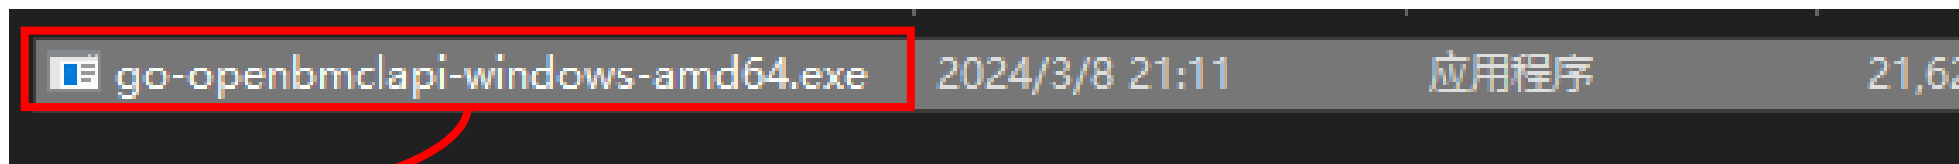

Enter

## Windows 已保护你的电脑

Microsoft Defender SmartScreen 阻止了无法识别的应用启动。运行此应用可能会导致你的电脑存在风险。

更多信息

## Windows 已保护你的电脑

Microsoft Defender SmartScreen 阻止了无法识别的应用启动。运行此应用可能会导致你的电脑存在风险。

应用: go-openbmclapi-windows-amd64.exe

发行者: 发布者未知


仍要运行

不运行

```
C:\Users\silia\Desktop\openbr x + v
[INFO][21:41:21]: language: zh-CN

Go-OpenBmclAPI Copyright (C) 2023 Kevin Z <zyxkad@gmail.com>
This program comes with ABSOLUTELY NO WARRANTY;
This is free software, and you are welcome to redistribute it under certain conditions;
Use subcommand 'license' for more information

[ERRO][21:41:22]: 未找到配置文件, 正在创建
[ERRO][21:41:22]: 配置文件已创建, 请修改, 并重启程序
[ERRO][21:41:22]: 节点正在退出, 代码 -1
[ERRO][21:41:22]: 请在提交问题前阅读 https://github.com/LiterMC/go-openbmclapi?tab=readme-ov-file#faq
[WARN][21:41:22]: 检测到您是新手 Windows 用户. 我们正在帮助您打开浏览器 ...
```





## 9. 注册并安装 QQ






不会 Baidu 百度 么?

注册并安装QQ

×

百度一下

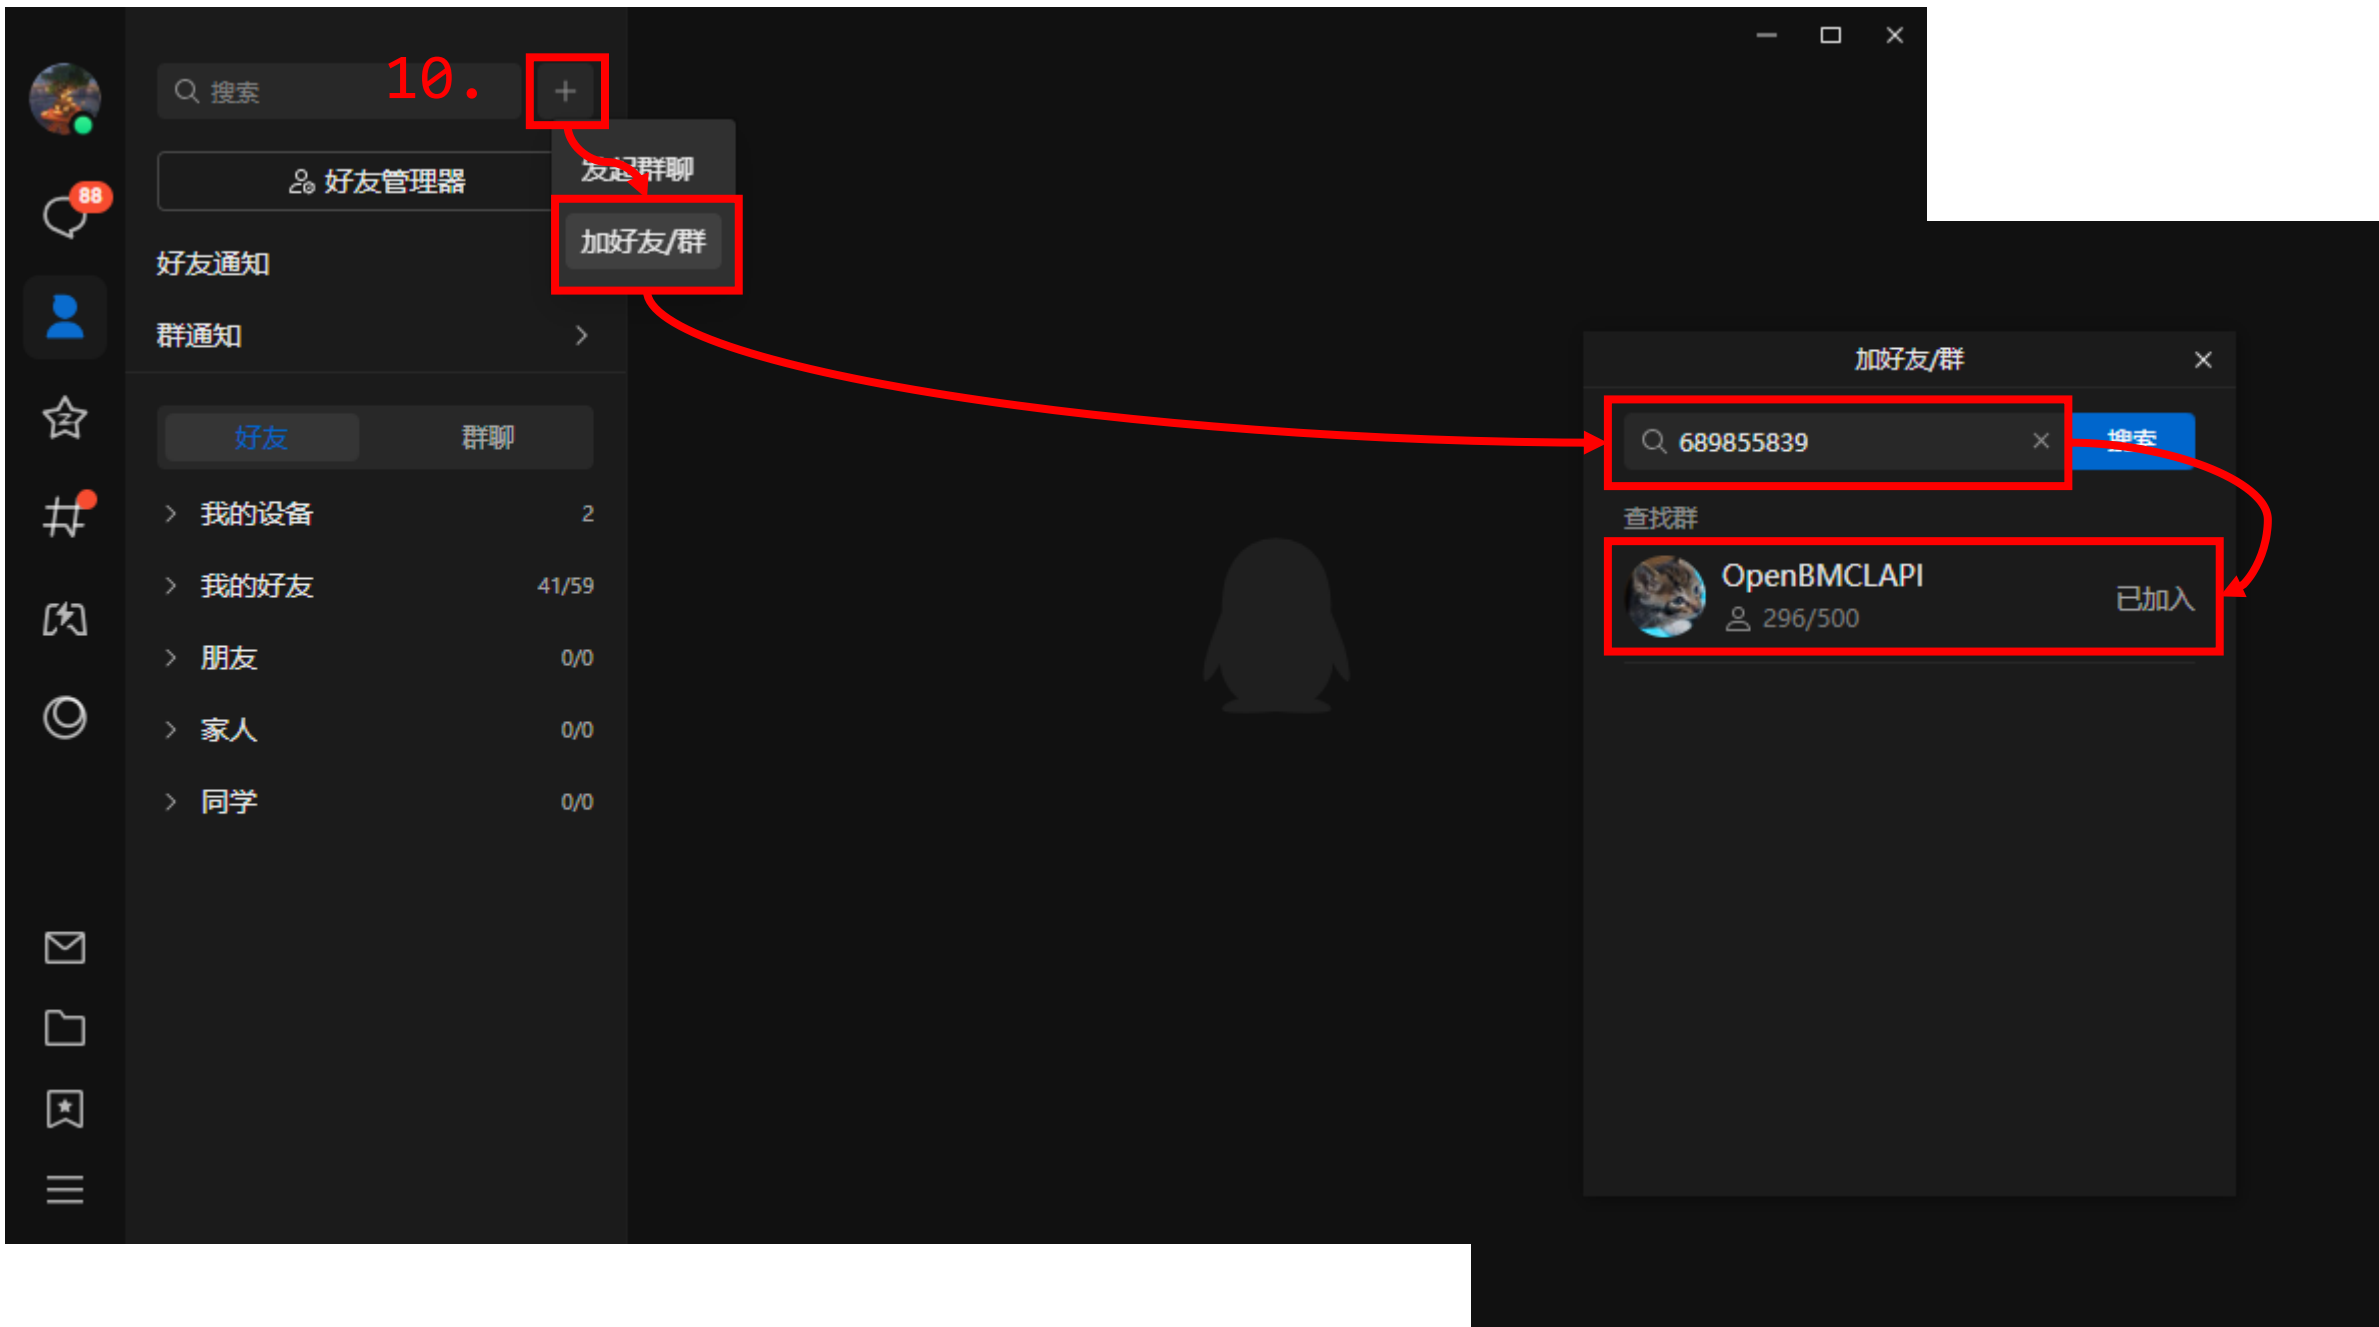

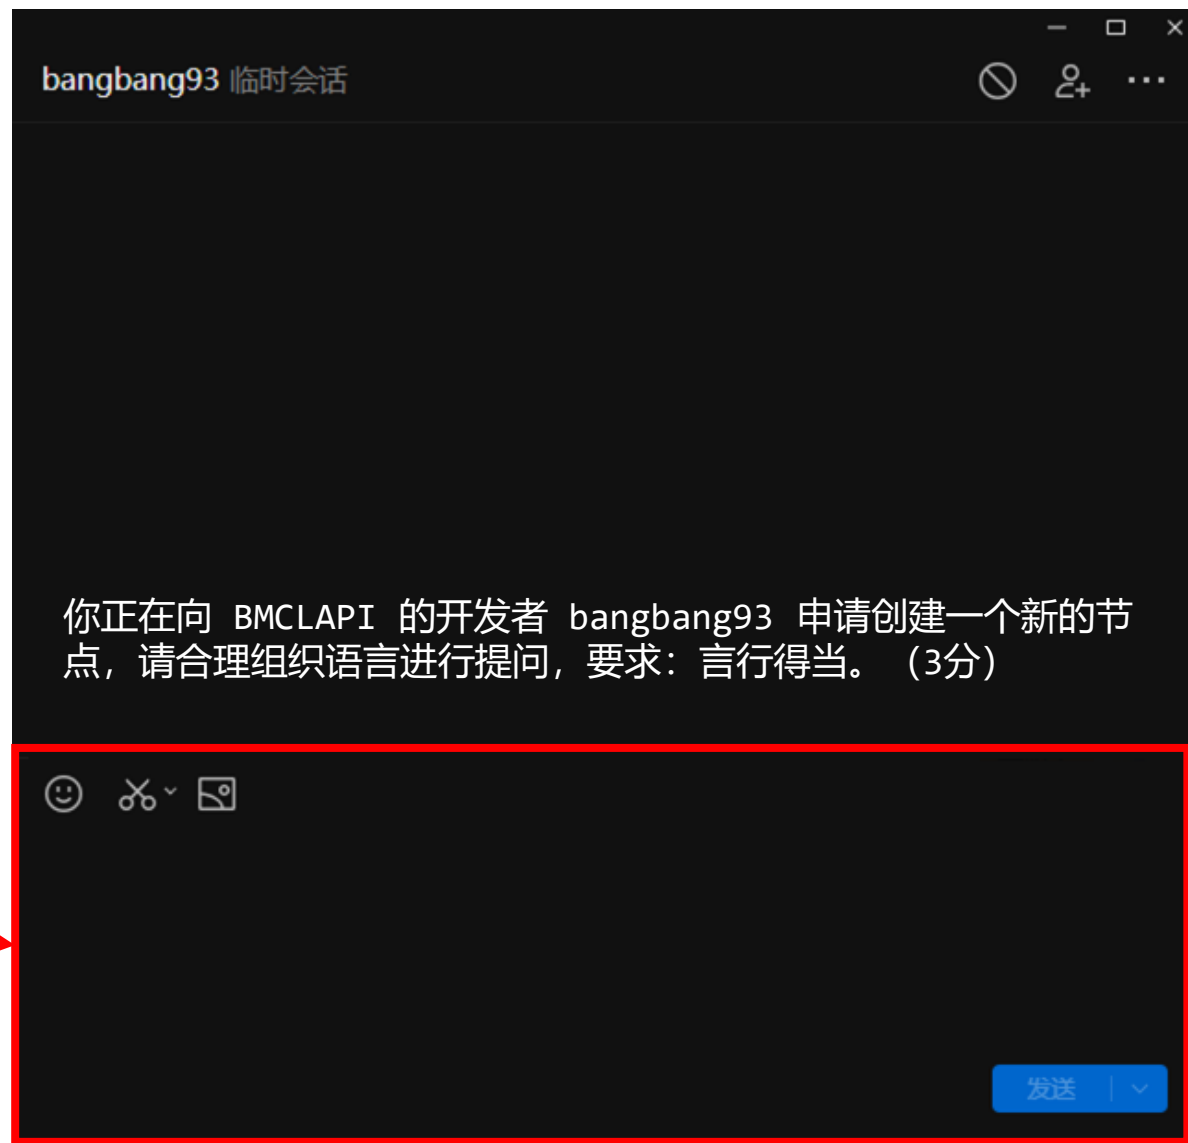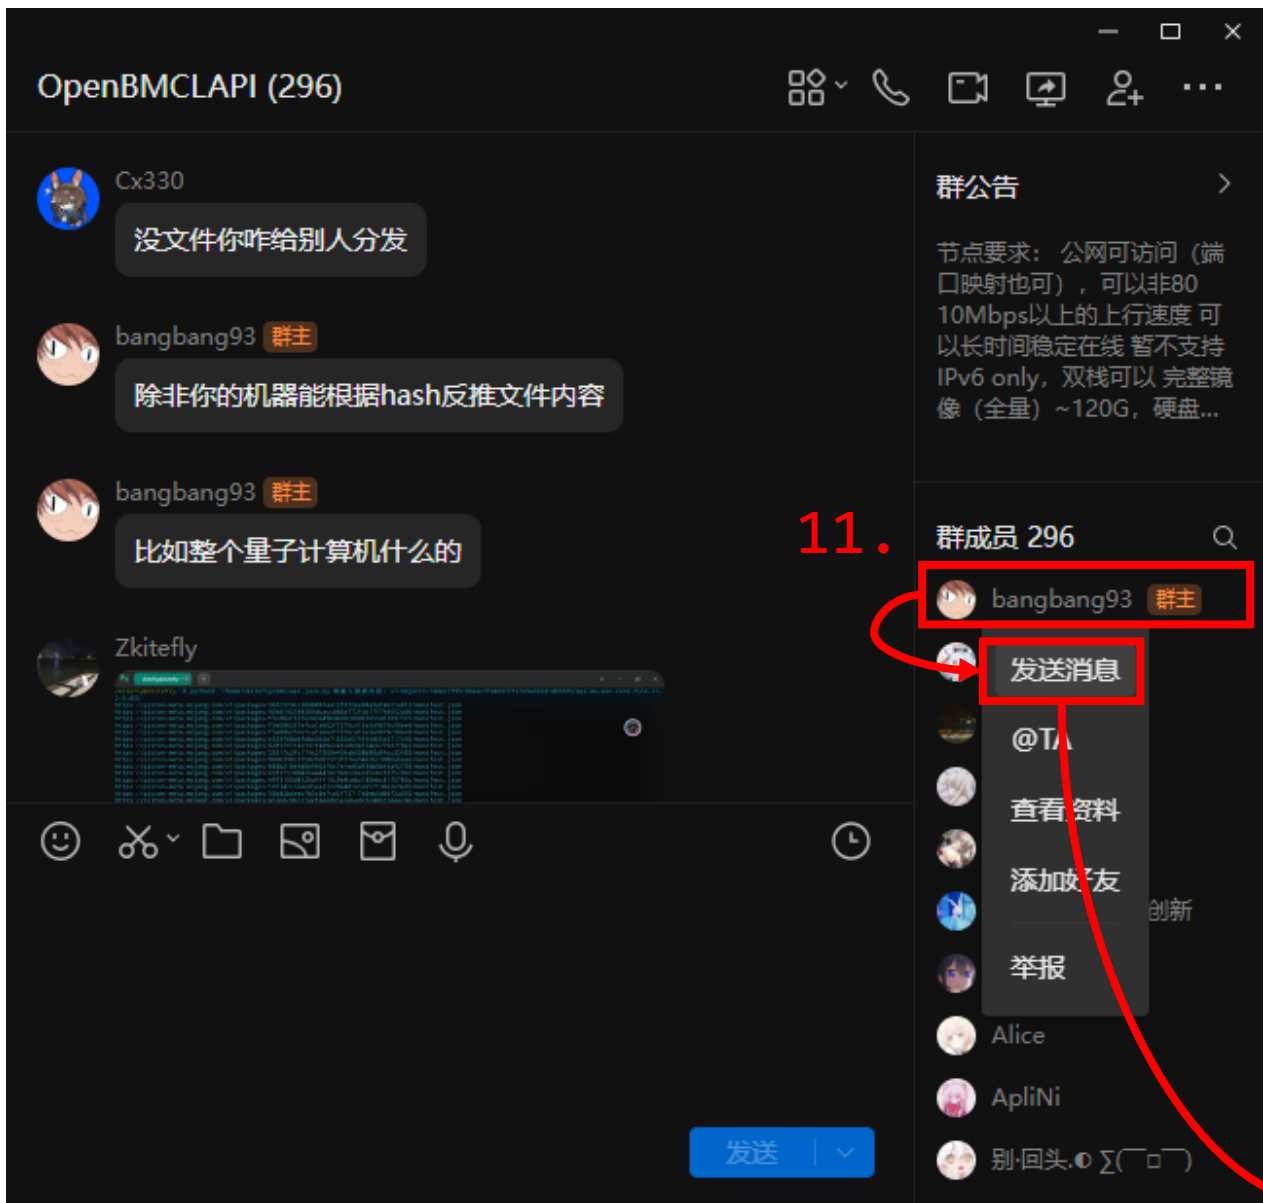

12.

CLUSTER\_ID= [REDACTED]  
CLUSTER\_SECRET= [REDACTED]

```
1 log-slots: 7
2 no-access-log: false
3 access-log-slots: 16
4 byoc: false
5 use-cert: false
6 trusted-x-forwarded-for: false
7 public-host: ""
8 public-port: 0
9 port: 4000
10- cluster-id: ${CLUSTER_ID}
11- cluster-secret: ${CLUSTER_SECRET}
12 sync-interval: 10
13 only-gc-when-start: false
14 download-max-conn: 16
15 max-reconnect-count: 10
16 certificates:
17   - cert: /path/to/cert.pem
18     key: /path/to/key.pem
19 cache:
20   type: inmem
21 serve-limit:
22   enable: false
23   max-conn: 16384
24   upload-rate: 12288
25 dashboard:
26   enable: true
```

```
1 log-slots: 7
2 no-access-log: false
3 access-log-slots: 16
4 byoc: false
5 use-cert: false
6 trusted-x-forwarded-for: false
7 public-host: ""
8 public-port: 0
9 port: 4000
10+ cluster-id: "[REDACTED]"
11+ cluster-secret: "[REDACTED]"
12 sync-interval: 10
13 only-gc-when-start: false
14 download-max-conn: 16
15 max-reconnect-count: 10
16 certificates:
17   - cert: /path/to/cert.pem
18     key: /path/to/key.pem
19 cache:
20   type: inmem
21 serve-limit:
22   enable: false
23   max-conn: 16384
24   upload-rate: 12288
25 dashboard:
26   enable: true
```

修改前

修改后

名称

logs

config.yaml

go-openbm

你要如何打开这个文件?

继续使用此应用

Visual Studio Code

其他选项

在 Microsoft Store 中查找应用

更多应用 ↓

☐ 始终使用此应用打开 .yaml 文件

确定

13.

```
3 access-log-slots: 16
4 byoc: false
5 use-cert: false
6 trusted-x-forwarded-for: false
7 public-host: ""
8 public-port: 0
9 port: 4000
```

填写你对外开放的端口



config.yaml	2024/3/9 0:12	Yaml 源文件
go-openbmclapi-windows-amd64.exe	2024/3/8 21:11	应用程序



```
Windows PowerShell
Go-OpenBmclAPI Copyright (C) 2023 Kevin Z <zyxkad@gmail.com>
This program comes with ABSOLUTELY NO WARRANTY;
This is free software, and you are welcome to redistribute it under certain conditions;
Use subcommand 'license' for more information

[INFO][00:35:11]: Starting Go-OpenBmclApi v1.7.3 (v1.7.3-12)
[INFO][00:35:12]: Dialing wss://openbmclapi.bangbang93.com/socket.io/?EI0=4&clusterId=65d31d7d2bd2ce73ade5a48d&clusterSecret=<*****>&transport=websocket
[INFO][00:35:13]: Requesting certificates, please wait ...
[INFO][00:35:13]: Certificate requested
[INFO][00:35:13]: Server public at https://65d31d7d2bd2ce73ade5a48d.openbmclapi.933.moe:15153 (0.0.0.0:15153)
[INFO][00:35:13]: Fetching file list
[INFO][00:35:17]: Preparing to sync files...
```