

Тема лабораторной работы	lb_5.1
Выполняющий	Малолетко Александр
Помогающий	

Ход работы

1) захожу на swagger и могу поменять API ключ

Available authorizations ×

api_key (apiKey)
Name: api_key
In: header
Value:

Authorize Close

Scopes are used to grant an application different levels of access to data on behalf of the end user. Each API may declare one or more scopes. API requires the following scopes. Select which ones you want to grant to Swagger UI.

petstore_auth (OAuth2, implicit)
Authorization URL: <https://petstore.swagger.io/oauth/authorize>
Flow: implicit
client_id:

Scopes: [select all](#) [select none](#)

☐ read:pets
☐ read:your pets

2) создаю нового питомца

```
{
  "id": 321354,
  "category": {
    "id": 0,
    "name": "string"
  },
  "name": "Popa",
  "photoUrls": [
    "string"
  ],
  "tags": [
    {
      "id": 0,
      "name": "string"
    }
  ],
  "status": "available"
}
```

Curl

```
curl -X 'POST' \
  'https://petstore.swagger.io/v2/pet' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/json' \
  -d '{
    "id": 321354,
    "category": {
      "id": 0,
      "name": "string"
    },
    "name": "Popa",
    "photoUrls": [
      "string"
    ],
    "tags": [
      {
        "id": 0,
        "name": "string"
      }
    ],
    "status": "available"
  }'
```

Xml

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Pet>
  <category>
    <id>0</id>
    <name>string</name>
  </category>
  <id>321354</id>
  <name>Popa</name>
  <photoUrls>
    <photoUrl>string</photoUrl>
  </photoUrls>
  <status>available</status>
  <tags>
    <tag>
      <id>0</id>
      <name>string</name>
    </tag>
  </tags>
</Pet>
```

3) перешел на свагерэдитор и вставил новый код и нажал execute


The screenshot shows the Swagger Editor interface. On the left, the Swagger definition for the OpenWeatherMap API is displayed. It includes a title, description, version, terms of service, contact information, license, servers, paths, and a specific operation for the /pet endpoint (POST). The operation is described as 'Current weather data' and includes a summary, description, operationId, parameters, and tags.

On the right, the 'Execute' button has been clicked, and the 'Server response' section shows the results of the request. The status is '200 Successful response', and the response body is a JSON object representing a pet, which matches the JSON body provided in the curl command above.

Code	Description	Links
200	Successful response	No links

--	--

4)скачиваю файл из свагерэдитор затем перехожу по ссылке с работы и скачиваю zip файл и вставляю скачанный файл в папку затем открываю index.html через блок

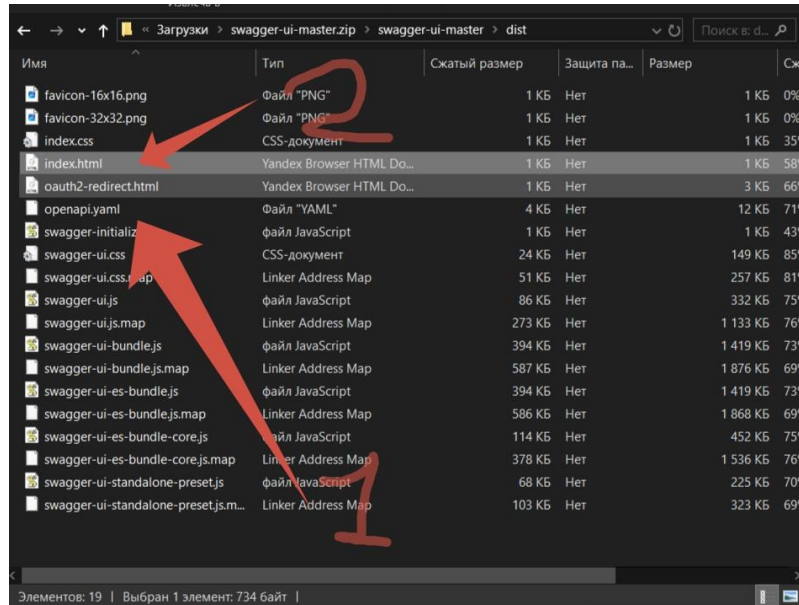

5) но файл не открывается эх жаль

Page Not Found

Sorry, page not found. Try searching for the topic instead. Also, please let me know about the broken link.

About Tom Johnson



I'm an API technical writer based in the Seattle area. On this blog, I write about topics related to technical writing and communication — such as software documentation, API documentation, AI, information architecture, content strategy, writing processes, plain language, tech comm careers, and more. Check out my [API documentation course](#) if you're looking for more info about documenting APIs. Or see my [posts on AI](#) and [AI course section](#) for more on the latest in AI and tech comm.

If you're a technical writer and want to keep on top of the latest trends in the tech comm, be sure to subscribe to email updates below. You can also [learn more about me](#) or [contact me](#). Finally, note that the opinions I express on my blog are my own points of view, not that of my employer.

Результат

Научился работать на editor.swagger.io но не смог до делать работу потому что нет нужных строк в index.html и файл не открывается в интернете

Критерий
оценивания

Отлично	Четко, лаконично, по факту, гитхаб на ура
Хорошо	Небольшие корректировки
Удовлетворительно	С вопросами, и комментариями
Неудовлетворительно	Ничего непонятно