



MODULE- 5

HTML

BY: KRITI KAUSIK

HTML

INTRODUCTION TO HTML

- With HTML you can create your own Web site.
- HTML stands for **Hyper Text Markup Language**.
- HTML is not a programming language, it is a **Markup Language**.
- A markup language is a set of **markup tags**.
- HTML uses **markup tags** to describe web pages.
- HTML is **not case sensitive** language.
- HTML documents **contain HTML tags** and plain text.

MARKUP LANGUAGE

Computer language that uses tags to define elements within a document.

It is human-readable.

Contains standard words, rather than typical programming syntax.

The two most popular are:-

HTML(Hypertext Markup Language).

XML(Extensible Markup Language).

STRUCTURE OF HTML PAGE

HTML Page Structure

`<!DOCTYPE html>` ← Tells version of HTML

`<html>` ← HTML Root Element

`<head>` ← Used to contain page HTML metadata

`<title>Page Title</title>` ← Title of HTML page

`</head>`

`<body>` ← Hold content of HTML

`<h2>Heading Content</h2>` ← HTML heading tag

`<p>Paragraph Content</p>` ← HTML paragraph tag

`</body>`

`</html>`

HTML Elements and Tags

- A tag is always enclosed in angle bracket <>like <HTML>
- HTML tags normally **come in pairs** like <HTML> and </HTML> i.e.

Start tag = <HTML>

End tag =</HTML>


- Start and end tags are also called **opening tags** and **closing tags**

HOW TO START

- Write html code in notepad.
- Save the file with (.Html)/(.Htm) extension.
- View the page in any web browser viz. INTERNET EXPLORER, NETSCAPE NAVIGATOR etc.
- The purpose of a web browser (like internet explorer or firefox) is to read html documents and display them as web pages.

Code With HTML

```
<HTML>  
<HEAD>  
<TITLE>  
MY FIRST PAGE  
</TITLE>  
</HEAD>  
<BODY>  
GLOBAL INFORMATION CHANNEL  
</BODY>  
</HTML>
```

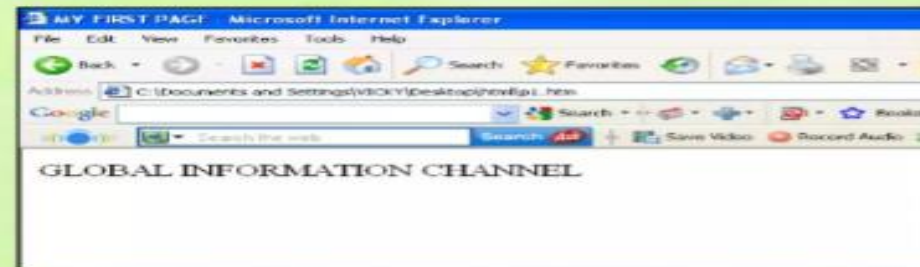

Explain these tags

- **<HTML>** - Describe HTML web page that is to be viewed by a web browser.
- **<HEAD>** - This defines the header section of the page.
- **<TITLE>** - This shows a caption in the title bar of the page.
- **<BODY>** - This tag show contents of the web page will be displayed.

Types of HTML Tags

There are two different types of tags:->

Container Element:->

Container Tags contains **start tag** & **end tag** i.e.
<HTML>... </HTML>

Empty Element:->

Empty Tags contains **start tag** i.e.


Text Formatting Tags

Heading Element:->

- There are six heading elements (<H1>,<H2>,<H3>,<H4>, <H5>,<H6>).
- All the six heading elements are container tag and requires a closing tag.
- <h1> will print the **largest heading**
- <h6> will print the **smallest heading**

Heading Tag Code

```
<html>
<title>heading</title>
<body>
<h1> GLOBAL INFO CHANNEL</h1>
<h2> GLOBAL INFO CHANNEL</h2>
<h3> GLOBAL INFO CHANNEL</h3>
<h4> GLOBAL INFO CHANNEL</h4>
<h5> GLOBAL INFO CHANNEL</h5>
<h6> GLOBAL INFO CHANNEL</h6>
</body>
</html>
```

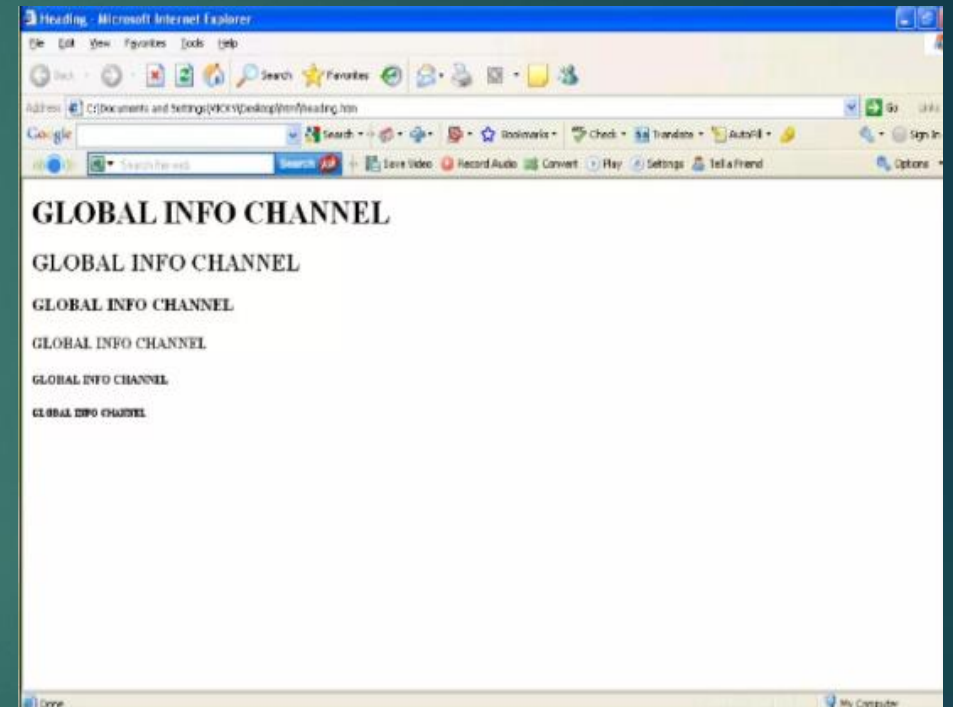

HTML Paragraph Tag

- HTML documents are divided into paragraphs.
- Paragraphs are defined with the **<p>** tag i.e.

`<p>This is a paragraph</p>`

`<p>This is another paragraph</p>`

`<pre>This text is preformatted</pre>`



Line Break & Horizontal Line Tag

- if you want a line break or a new line without starting a new paragraph Use the `<br>` tag.
- Defines a horizontal line use `<hr>` tag.
- `<br>` `<hr>` element are empty HTML element i.e. Global Information Channel

Global Information
 Channel



Text Formatting Tags



	Defines bold text
<big>	Defines big text
	Defines emphasized text
<i>	Defines italic text
<small>	Defines small text
	Defines strong text
<sub>	Defines subscripted text
<sup>	Defines superscripted text
<ins>	Defines inserted text
	Defines deleted text
<tt>	Defines teletype text
<u>	Defines underline text
<strike>	Defines strike text

Inserting formatting tags for Text:

HTML Text Formatting and Formatting Elements

**** - Important text

<small> - Smaller text

**** - Bold text

<u> - Underline

<i> - Italic text

<mark> - Marked text

**** - Deleted text

<ins> - Inserted text


**** - Emphasized text

<sub> - Subscript text

<sup> - Superscript text

Text Formatting Code

```
<html>
<head></head>
<body>
<b>This text is Bold</b>
<br><em>This text is Emphasized</em>
<br><i>This text is Italic</i>
<br><small>This text is Small</small>
<br>This is<sub> Subscript</sub> and
<sup>Superscript</sup>
<br><strong>This text is Strong</strong>
<br><big>This text is Big</big>
<br><u>This text is Underline</u>
<br><strike>This text is Strike</strike>
<br><tt>This text is Teletype</tt>
</body>
</html>
```

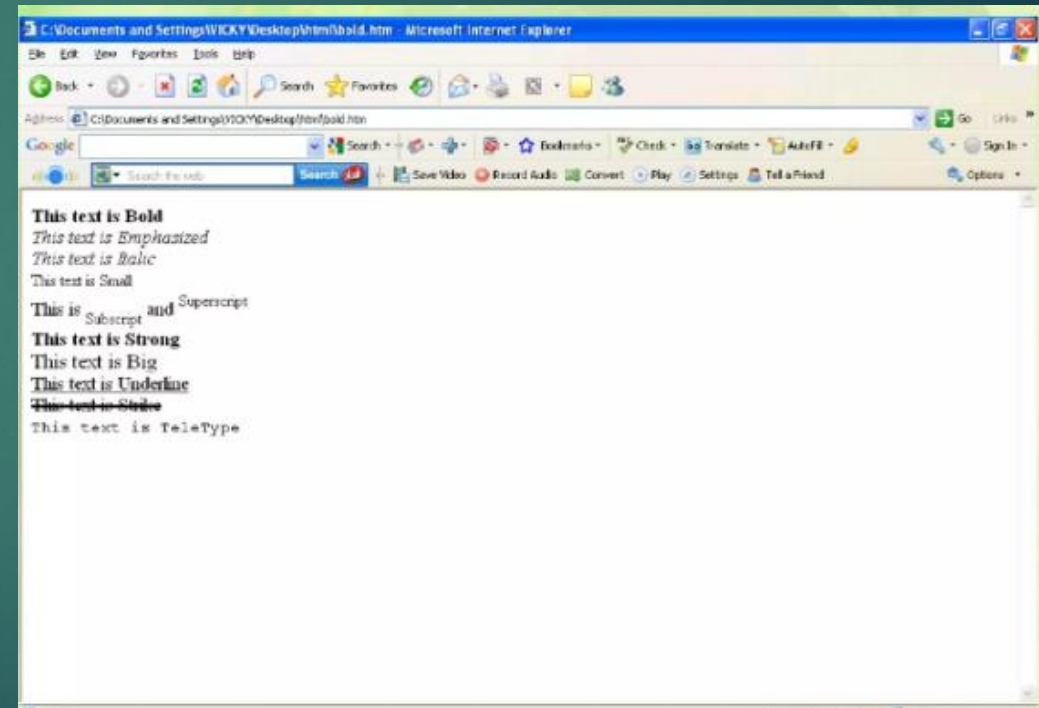


Font Tag

- This element is used to format the **size**, **typeface** and **color** of the enclosed text.
- The commonly used fonts for web pages are Arial, Comic Sans MS , Lucida Sans Unicode, Arial Black, Courier New, Times New Roman, Arial Narrow, Impact, Verdana.
- The size attribute in font tag takes values from **1 to 7**.

Font Tag Code

```
<html>
<head><title> fonts</title></head>
<body>
<br><font color="green" size="7" face="Arial"> GLOBAL
INFORMATION CHANNEL </font>
<br><font color="green" size="6" face="Comic Sans MS ">
GLOBAL INFORMATION CHANNEL </font>
<br><font color="green" size="5" face="Lucida Sans Unicode">
GLOBAL INFORMATION CHANNEL </font>
<br><font color="green" size="4" face="Courier New"> GLOBAL
INFORMATION CHANNEL </font>
<br><font color="green" size="3" face="Times New Roman">
GLOBAL INFORMATION CHANNEL </font>
<br><font color="green" size="2" face="Arial Black"> GLOBAL
INFORMATION CHANNEL </font>
<br><font color="green" size="1" face="Impact"> GLOBAL
INFORMATION CHANNEL </font>
</body>
</html>
```

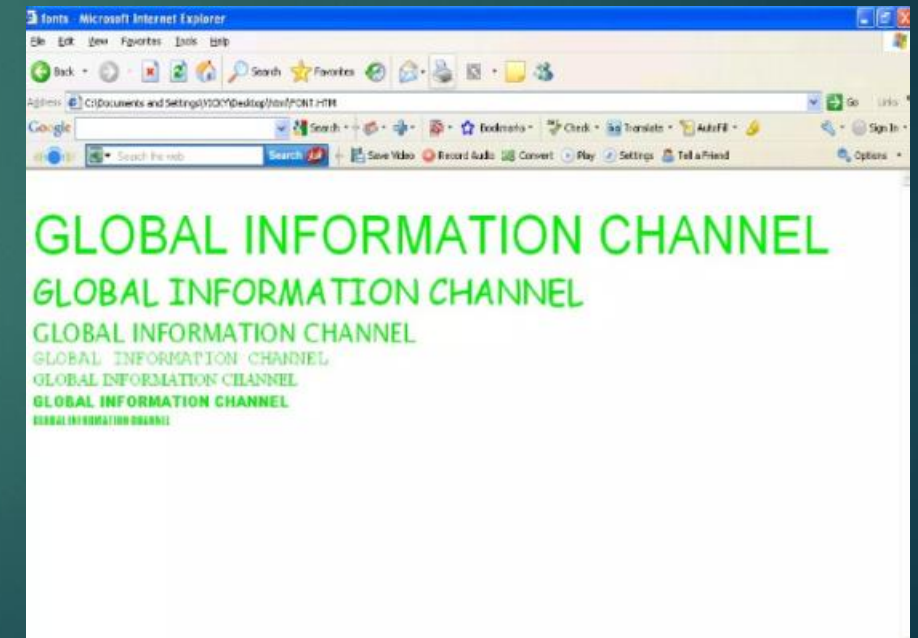

Background & Text Color Tag

- The attribute bgcolor is used for changing the back ground color of the page.
`<body bgcolor="Green" >`
- Text is use to change the color of the enclosed text.
`<body text="White">`



Text Alignment Tag

- It is use to alignment of the text.
 - 1.Left alignment <align="left">
 - 2.Right alignment <align="right">
 - 3.Center alignment <align="center">



HTML List Tag

- Lists provide methods to show item or element sequences in document content. There are three main types of lists:->

1. **Unordered lists**:-unordered lists are bulleted.
2. **Ordered lists**:- Ordered lists are numbered.
3. **Definition lists**:- Used to create a definition list

List Tags

	 is an empty tag,it is used for representing the list items
	Ordered list
	Unordered list
<DL>	Defines a definition list
<DT>	Defines a term (an item) in a definition list
<DD>	Defines a description of a term in a definition list

Unordered List

- TYPE attribute to the tag to show different bullets like:-

- 1.Disc
- 2.Circle
- 3.Square

<ul Type =“disc”>.....

- The attribute TYPE can also be used with element.


Unordered List



```
<html><body>
<h4>Disc bullets list:</h4>
<ul type="disc"> <li>Jones</li>
<li>Smith</li>
<li>Hayes</li>
<li>Jackson</li></ul>
<h4>Circle bullets list:</h4>
<ul type="circle"> <li>Jones</li>
<li>Simth</li>
<li>Hayes</li>
<li>Jackson</li></ul>
<h4>Square bullets list:</h4>
<ul type="square"> <li>Jones</li>
<li>Smith</li>
<li>Hayes</li>
<li>Jackson</li></ul>
</body></html>
```


Ordered List

- The TYPE attribute has the following value like:-
 - 1.TYPE = "1" (Arabic numbers)
 - 2.TYPE = "a" (Lowercase alphanumeric)
 - 3.TYPE = "A" (Uppercase alphanumeric)
 - 4.TYPE = "i" (Lowercase Roman numbers)
 - 5.TYPE = "I" (Uppercase Roman numbers)
- By default **Arabic numbers** are used

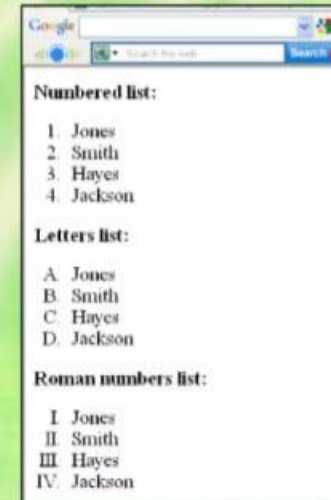

List

```
<html><body>
<h4>Numbered list:</h4>
<ol> <li>Jones</li>
<li>Smith</li>
<li>Hayes</li>
<li>Jackson</li></ol>
<h4>Letters list:</h4>
<ol type="A"> <li>Jones</li>
<li>Smith</li>
<li>Hayes</li>
<li>Jackson</li></ol>
<h4>Roman numbers list:</h4>
<ol type="I"> <li>Jones</li>
<li>Smith</li>
<li>Hayes</li>
<li>Jackson</li></ol>
</body></html>
```

HTML Frames

<frameset>, <frame> and <iframe>

- ♦ Frames provide a way to show multiple HTML documents in a single Web page
 - ♦ The page is split into multiple parts horizontally or vertically

```
<html>
  <head><title>Frames Example</title></head>
  <frameset cols="25%,*,25%">
    <frame src="left.html" />
    <frame src="middle.html" />
    <frame src="right.html" />
  </frameset>
</html>
```

frames.html

- ♦ Embedded frames provide a way to show one Web site inside another Web site:


iframe-demo.html

```
<html>
  <head><title>IFrame Example</title></head>
  <iframe name="iframeGoogle" width="600" height="400"
src="http://www.google.com" frameborder="yes"
scrolling="yes"></iframe>
</html>
```


HTML Table Tag

<table>	used to create table
<tr>	table is divided into rows
<td>	each row is divided into data cells
<th>	Headings in a table
<Caption>	caption to the table
<colgroup>	Defines groups of table columns
<col>	Defines the attribute values for one or more columns in a table
<thead>	Defines a table head
<tbody>	Defines a table body
<tfoot>	Defines a table footer
<Cellspacing>	amount of space between table cells.
<Cellpadding>	space around the edges of each cell
<Colspan>	No of column working with will span
<rowspan>	No of rows working with will span
<Border>	attribute takes a number

Code & Result of the Table

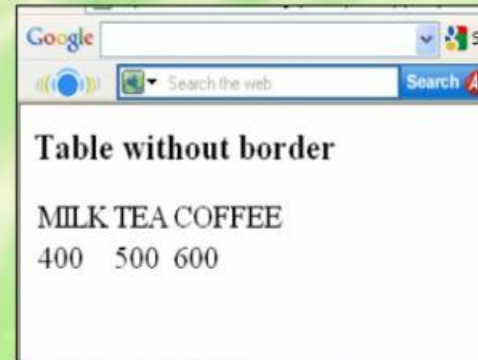

```
<html>
<body>
<h3>Table without
border</h3>
<table>
<tr> <td>MILK</td>
<td>TEA</td>
<td>COFFEE</td> </tr>
<tr> <td>400</td>
<td>500</td>
<td>600</td> </tr>
</table>
</body>
</html>
```


Table Border

Table Border attribute is used to display border of table. Border attribute value specify the width of border. Default table border is zero. Table border can have any numeric value.

Table border 1

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table border="1">
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
```

Table border 5

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table border="5">
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
```

Cellpadding

Cellpadding means padding of text or content inside table cell from the table border.
Default cell padding is 1.

Table without cellpadding

S No	Name
1	abc
2	xyz

```
<table border="1">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</table>
```

Table with cellpadding 0

S No	Name
1	abc
2	xyz

```
<table border="1" cellpadding="0">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</table>
```

Table with cellpadding 10

S No	Name
1	abc
2	xyz

```
<table border="1" cellpadding="10">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</table>
```

Cellspacing

Cellspacing attribute in table is used to set margin between table cells and table border. Default cellspacing is 2. Using cellspacing attribute, we can change margin between two cells.

Table cellspacing

S No	Name
1	abc
2	xyz

```
<table border="1">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</table>
```

cellspacing 0

S No	Name
1	abc
2	xyz

```
<table border="1" cellspacing="0">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</tbody>
</table>
```


cellspacing 10

S No	Name
1	abc
2	xyz

```
<table border="1" cellspacing="10">
  <tr>
    <td>S No</td>
    <td>Name</td>
  </tr>
  <tr>
    <td>1</td>
    <td>abc</td>
  </tr>
  <tr>
    <td>2</td>
    <td>xyz</td>
  </tr>
</tbody>
</table>
```



- ♦ Tables have two important attributes:

- ♦ cellspacing




- ♦ Defines the empty space between the cells

- ♦ cellpadding



- ♦ Defines the empty space around the cell contents

Cellpadding, Image & Background Code

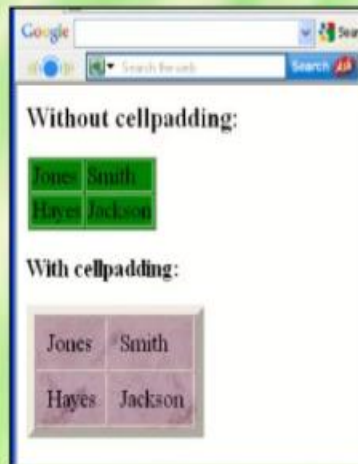

```
<html><body>
<h3>Without cellpadding:</h3>
<table border="2" bgcolor="green">
<tr> <td>Jones</td>
<td>Smith</td></tr>
<tr> <td>Hayes</td>
<td>Jackson</td></tr></table>
<h4>With cellpadding:</h4>
<table border="8"
cellpadding="10"
background="file:///C:/WINDOWS/FeatherTexture.b
mp">
<tr> <td>Jones</td>
<td>Smith</td></tr>
<tr> <td>Hayes</td>
<td>Jackson</td></tr></table>
</body></html>
```



Table Width

In HTML table, width attribute was used to set width of table.

Table with width 300	
row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table width="300">
  <tr>
    <td>row 1, cell 1</td>
    <td>row 1, cell 2</td>
  </tr>
  <tr>
    <td>row 2, cell 1</td>
    <td>row 2, cell 2</td>
  </tr>
</table>
```

Table Caption

Caption tag is used inside table to add caption or title of table. Default text align of caption is center.

Caption tag is always used as First Child of table element. Thus tr, thead, tbody or tfoot are used after table caption.

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table>
  <caption>Table Caption</caption>
  <tr>
    <td>row 1, cell 1</td>
    <td>row 1, cell 2</td>
  </tr>
  <tr>
    <td>row 2, cell 1</td>
    <td>row 2, cell 2</td>
  </tr>
</table>
```


Align Attribute in Table

Align attribute is used in table tag, tr, or td to align text. Align center for table can also align whole table to middle.

Align values

Left

Center

Right

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table border="1" align="center">
<tr>
<td>row 1, cell 1</td>
<td>row 1, cell 2</td>
</tr>
<tr>
<td>row 2, cell 1</td>
<td>row 2, cell 2</td>
</tr>
</table>
```

Bgcolor

bgcolor attribute was used in table to set background color of table.

row 1, cell 1	row 1, cell 2
row 2, cell 1	row 2, cell 2

```
<table border="1" bgcolor="#FF0000">
  <tr>
    <td>row 1, cell 1</td>
    <td>row 1, cell 2</td>
  </tr>
  <tr>
    <td>row 2, cell 1</td>
    <td>row 2, cell 2</td>
  </tr>
</table>
```

Images in web page:

- ❑ The HTML tag is used to embed an image in a web page.
- ❑ Images are not technically inserted into a web page; images are linked to web pages. The tag creates a holding space for the referenced image.
- ❑ The tag is empty, it contains attributes only, and does not have a closing tag.
- ❑ The tag has two required attributes:
 - src - Specifies the path to the image.
 - alt – Specifies an alternate text for the image.

Tag	Description
	Defines an image
<map>	Defines an image map
<area>	Defines an area inside an image map

The alt Attribute

If a browser cannot find an image, it will display the value of the **alt** attribute:

Alternative text

The alt attribute should reflect the image content, so users who cannot see the image gets an understanding of what the image contains:



```
<!DOCTYPE html>
<html>
<body>

<h2>Alternative text</h2>

<p>The alt attribute should reflect the image content, so users who cannot see the image gets
an understanding of what the image contains:</p>



</body>
</html>
```

The alt Attribute

If a browser cannot find an image, it will display the value of the **alt** attribute:

```
<!DOCTYPE html>
<html>
<body>

<p>If a browser cannot find the image, it will display the alternate text:</p>



</body>
</html>
```



If a browser cannot find the image, it will display the alternate text:

 Flowers in Chania

Image Size - Width and Height

Image Size

Use the style attribute to specify the width and height of an image:



```
<!DOCTYPE html>
<html>
<body>

<h2>Image Size</h2>

<p>Use the style attribute to specify the width and height of an image:</p>


</body>
</html>
```



Width and Height, or Style?

The `width`, `height`, and `style` attributes are valid in HTML.

However, we suggest using the `style` attribute. It prevents styles sheets from changing the size of images:

```
<!DOCTYPE html>
<html>
<head>
<style>
/* This stylesheet sets the width of all images to 100%: */
img {
  width: 100%;
}
</style>
</head>
<body>

<h2>Styling Images</h2>
<p>The image below has the width attribute set to 128 pixels, but the stylesheet overrides it, and sets the width to 100%.</p>


<p>The image below uses the style attribute, where the width is set to 128 pixels which overrides the stylesheet:</p>


</body>
</html>
```


Image as a Link

To use an image as a link, put the `<img>` tag inside the `<a>` tag:

Image as a Link

The image is a link. You can click on it.



Add "border:0;" to prevent IE9 (and earlier) from displaying a border around the image.

```
<!DOCTYPE html>
<html>
<body>

<h2>Image as a Link</h2>
<p>The image is a link. You can click on it.</p>

<a href="default.asp">
  
</a>

<p>Add "border:0;" to prevent IE9 (and earlier) from displaying a border around the image.
</p>

</body>
</html>
```

Background Image

To add a background image on an HTML element, use the CSS property background-image:



```
<html>
<body background="background.jpg">
<h3>Look: A background image!</h3>
<p>Both gif and jpg files can be used as HTML
backgrounds.</p>
<p>If the image is smaller than the page, the
image will repeat itself.</p>
</body>
</html>
```

Inserting a Background Image to your Page

- Similar to the background color, a **background image** is displayed behind text.
- By default the image is tiled to fill the page and scrolls with the page.

Example: `<body style="background-image:url(background.jpg)">`

or

`<body style="background-color:white;background-image:url(background.png)">`

By default, the background image is repeated both horizontally and vertically to fill the window. You can force it not to repeat by adding the background-repeat to the body tag.

Example: background-repeat:repeat-x (repeat horizontally)

background-repeat:repeat-y (repeat vertically)

background-repeat:no-repeat

Syntax: `<body style="background-color:white;color:white;background-image:url(image.url);background-repeat:repeat-x">`

Hyperlink Tag


- A hyperlink is a reference (an address) to a resource on the web.
- Hyperlinks can point to any resource on the web: an HTML page, an image, a sound file, a movie, etc.
- The HTML anchor element `<a>`, is used to define both hyperlinks and anchors.

`<a href="url">Link text</a>`

- The **href attribute** defines the link address.

`<a href="http://www.globalinfochannel/">Visit globalinfochannel!</a>`

Result of Hyperlink Code

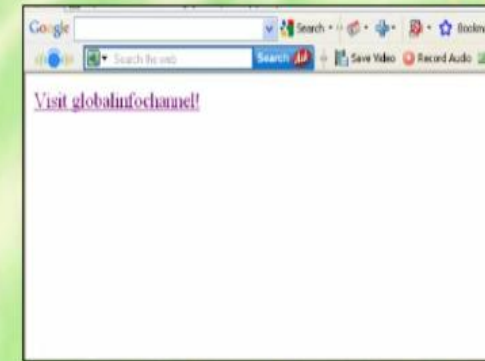

Linking two or more web pages

HTML pages: page1.html and page2.html, and we want to link from page1.html to page2.html.

```
<html>
<head>
  <title>Page 1</title>
</head>
<body>
  <h1>Welcome to Page 1</h1>
  <p>This is the content of Page 1.</p>

  <a href="page2.html">Go to Page 2</a>
</body>
</html>
```

```
<html>
<head>
  <title>Page 2</title>
</head>
<body>
  <h1>Welcome to Page 2</h1>
  <p>This is the content of Page 2.</p>

  <a href="page1.html">Go back to Page 1</a>
</body>
</html>
```

Linking within a web page

```
<html>
<head>
  <title>Internal Link Example</title>
</head>
<body>
  <h1>Table of Contents</h1>
  <ul>
    <li><a href="#section1">Section 1</a></li>
    <li><a href="#section2">Section 2</a></li>
  </ul>

  <h2 id="section1">Section 1</h2>
  <p>This is the content of section 1.</p>

  <h2 id="section2">Section 2</h2>
  <p>This is the content of section 2.</p>

  <p><a href="#top">Back to Top</a></p>
</body>
</html>
```

Table of Contents

- [Section 1](#)
- [Section 2](#)

Section 1

This is the content of section 1.

Section 2

This is the content of section 2.

[Back to Top](#)

Linking to an external page

When you want to navigate to some other page or any other URL by clicking on a link on webpage, external links are created.

```
<html>
<head>
  <title>Link to External Page</title>
</head>
<body>
  <p>Click the link below to visit an external website:</p>
  <a href="https://www.example.com">Visit Example.com</a>
</body>
</html>
```

Click the link below to visit an external website:

[Visit Example.com](https://www.example.com)

Linking to a specific point in another web page

```
<html>
<head>
<title> HOME </title>
</head>
<body>
<h1>HTML</h1>
<h2>Topics</h2>
<ul>

<li><a href="topic.html">Development</a></li>
<li><a href="topic.html">Markup</a></li>
<li><a href="topic.html">Semantic</a></li>
</ul>
</body>
</html>
```

HTML

Topics

- [Development](#)
- [Markup](#)
- [Semantic](#)

Linking image file

```
<html>
<head>
  <title>Linking an Image in HTML</title>
</head>
<body>
  <p>Click the image below to go to another page:</p>

  <a href="page2.html">
    
  </a>
</body>
</html>
```

Click the image below to go to another page:



Mailto:

```
<html>
<head>
  <title>Mailto Link Example</title>
</head>
<body>
  <p>Click the link below to send an email:</p>

  <a href="mailto:youremail@example.com">Send an Email</a>
</body>
</html>
```

Click the link below to send an email:

[Send an Email](mailto:youremail@example.com)

Add marquees of scrolling text

- ▶ An HTML marquee is a scrolling piece of text displayed either horizontally across or vertically down your webpage depending on the settings.
- ▶ This is created by using HTML <marquee> tag.

```
<html>

  <head>
    <title>HTML marquee Tag</title>
  </head>

  <body>
    <marquee>This is basic example of marquee</marquee>
  </body>

</html>
```

```
<html>

  <head>
    <title>HTML marquee Tag</title>
  </head>

  <body>
    <marquee direction = "right">This text will scroll from left to right
    </marquee>
  </body>


</html>
```

width	provides the width or breadth of a marquee. For example <code>width="10"</code> or <code>width="20%"</code>
height	provides the height or length of a marquee. For example <code>height="20"</code> or <code>height="30%"</code>
direction	provides the direction or way in which your marquee will allow you to scroll. The value of this attribute can be: left, right, up or down
scrolldelay	provides a feature whose value will be used for delaying among each jump.
scrollamount	provides value for speeding the marquee feature
behavior	provides the scrolling type in a marquee. That scrolling can be like sliding, scrolling or alternate
loop	provides how many times the marquee will loop
bgcolor	provides a background color where the value will be either the name of the color or the hexadecimal color-code.
vspace	provides a vertical space and its value can be like: <code>vspace="20"</code> or <code>vspace="30%"</code>
hspace	provides a horizontal space and its value can be like: <code>hspace="20"</code> or <code>hspace="30%"</code>

INSERTING AUDIO

```
<!DOCTYPE html>
<html>
<head>
<title>Page Title</title>
</head>
<body>
<h2>Click play button to play audio</h2>
<audio src="./test.mp3" controls></audio>
</body>
</html>
```

Click play button to play audio




Attribute	Value	Description
autoplay	autoplay	When the page is loaded. It specifies to play audio as soon as possible.
controls	controls	It displays audio control.
loop	loop	It will start the audio again when it is finished.
muted	muted	When the page is loaded audio will be automatically muted.
preload	auto metadata none	It specifies how the author thinks the audio will be loaded when the page is ready.
src	URL	It specifies the URL of the audio file.

INSERTING VIDEO

```
<html>
<head>
<title>Page Title</title>
</head>
<body>
<h2>Click play button to play video</h2>
<video src="./test.mp4" controls></video>
</body>
</html>
```

Click play button to play video

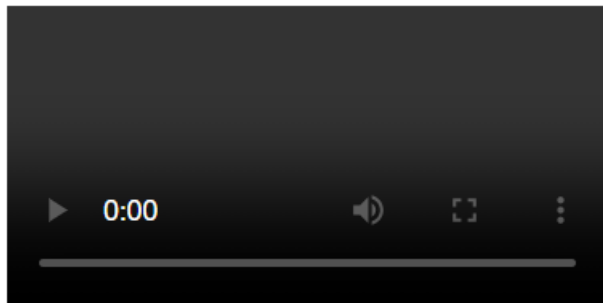

autoplay	autoplay	When the page is loaded. It specifies to play video as soon as possible.
controls	controls	It displays video control such as play, pause, and stop.
loop	loop	It will start the video again when it is finished.
muted	muted	When the page is loaded video will be automatically muted.
poster	URL	It specifies an image will be shown until video play.
preload	auto metadata none	It specifies how the author thinks the video will be loaded when the page is ready.
src	URL	It specifies the URL of the audio file.
width	pixels	It specifies the width of the video area. The default value of width is 'auto'.
height	pixels	It specifies the height of the video area. The default value of height is 'auto'.

HTML Form

- A form is an area that can contain form elements.
- Form elements are elements that allow the user to enter information in a form. like text fields, textarea fields, drop-down menus, radio buttons and checkboxes etc
- A form is defined with the **<form>** tag.
- The syntax:-

<form>

input elements

</form>

Form Tags

<form>

Defines a form for user input used to create an input field

<input>

Creates a single line text entry field

<text>

Defines a text-area (a multi-line text input control)

<textarea>

Creates a single line text entry field. And the characters entered are shown as asterisks (*)

<password>

Defines a label to a control

<label>

Creates a Radio Button.

<option>

Defines a selectable list (a drop-down box)

<select>

Defines a push button

attribute of the option element.

select or unselect a checkbox

A drop-down box is a selectable list

<button>

<value>

<checkbox>

<dropdown box>

Code of the HTML Form

```
<html><body><form>
<h1>Create a Internet Mail Account</h1>
<p>First Name <input type="text" name="T1" size="30"></p>
<p>Last Name <input type="text" name="T2" size="30"></p>
<p>Desired Login Name <input type="text" name="T3" size="20">
@mail.com</p>
<p>Password <input type="password" name="T4" size="20"></p>
<input type="radio" checked="checked" name="sex" value="male" />
Male<br>
<input type="radio" name="sex" value="female" /> Female
<p>Birthday <input type="text" name="T6" size="05">
<select size="1" name="D2">
<option>-Select One-</option>
<option>January</option>
<option>February</option>
<option>March</option> </select>
<input type="text" name="T7" size="10"></p>
Type Yourself<textarea rows="4" name="S1" cols="20"></textarea>
<br><input type="submit" value="Accept" name="B1"> <input
type="reset" value="Cancel" name="B2"></br> </form></body></html>
```



The screenshot shows a Microsoft Internet Explorer window with the title "C:\Documents and Settings\WIKY\Desktop\htmlForm1.htm - Microsoft Internet Explorer". The address bar shows the file path. The browser's toolbar includes buttons for Back, Forward, Stop, Reload, Home, Search, Favorites, and a menu. The main content area displays the rendered HTML form titled "Create a Internet Mail Account". The form includes text input fields for First Name, Last Name, and Desired Login Name (with "@mail.com" pre-filled), a password field, radio buttons for Male (selected) and Female, a Birthday field with a dropdown menu, a "Type Yourself" text area, and "Accept" and "Cancel" buttons. The status bar at the bottom shows "Done" and "My Computer".



THANK YOU