

Kiosk Clocking

Configuration Guide

PeopleXD Workforce Management

Table of Contents

Document Control	4
1. Overview.....	5
1.1. Purpose of the Guide	5
1.2. What is Kiosk?.....	5
1.3. Tablet Certification Matrix	6
2. How to set up the Kiosk Solution	7
2.1. Step 1 - Enable Menu Options.....	7
2.2. Step 2 - Enable and configure Kiosk Site	8
2.2.1. Enable Kiosk Site.....	8
2.2.2. Configuring Kiosk Site Settings.....	8
Set Admin Pin	9
Reset Admin Pin.....	9
Pin Settings.....	9
Kiosk Employee Display.....	10
Upload Kiosk Logo/Background Image.....	11
2.3. Step 3 - Create and Customise your Kiosks.....	12
2.3.1. Create your Kiosk	12
2.3.2. Customise your Kiosk	13
2.4. Step 4 - Assign Criteria Groups to your Kiosk	13
2.4.1. Create your Criteria Groups:.....	14
2.4.2. Assign your Criteria Groups to your Kiosk:.....	14
2.5. Step 5 - Assign the Kiosk Widget on the Employee Dashboard.....	15
2.6. Step 6 - Generate Employee Pins.....	17
2.6.1. Actions - Generate Employee Pins	17
2.6.2. Kiosk Group - Generate Kiosk Pins.....	17
2.6.3. Automatic Generation of Pins for New Starter	18
2.7. Step 7 - Setup Kiosk device	18
3. Managing Kiosk	21

Table of Contents

3.1. Kiosk Device Configuration Screen	21
3.1.1. Kiosk 3-Dot Menu Options	22
View/Edit.....	22
Assign Criteria Group	22
View Employees	22
View Devices	23
Generate Kiosk Pins	24
Deactivate.....	24
3.2. HeartBeat	25
3.3. Badge Screen	25
3.4. Native App – Kiosk settings	26
3.5. Kiosk Offline Support.....	26
3.5.1. To enable Kiosk Offline Support	27
4. The Kiosk App	29
4.1. Employee Clocking	29
4.1.1. Employee Clocking Offline	31
4.2. Business Absence	32
4.2.1. Business Absence Clocking Offline	33
4.3. Admin Tool.....	33
4.3.1. Admin Tool Offline	34
5. Clocking Behaviours.....	37
6. Frequently Asked Questions	38
7. Menu Options	39
7.1. Menu Options	39

Document Control

Version	Date	Author	Details
1.0	17/05/2023	Georga Edwards	Published to Customer Portal
1.1	07/06/2023	Georga Edwards	Update to screen titles
1.2	11/08/2023	Georga Edwards	Update section 2.7 Company ID must be entered in lower case
1.3	25/06/2025	Georga Edwards	Added Section 3.5 Kiosk Offline Support Section 4.1.1 Employee Clocking Offline Section 4.2.1 Business Absence Clocking Offline Section 4.3.1 Admin Tool Offline Section 5 Clocking Behaviours

1. Overview

1.1. Purpose of the Guide

The purpose of this document is to walk you through the configuration required to setting up your PeopleXD Kiosk and granting the required user access for administrators/managers and employees. Items covered include:

- Kiosk Overview.
- Steps required for Kiosk setup.
- User Access.

1.2. What is Kiosk?

The Access PeopleXD Kiosk App allows businesses to use Android or Apple Tablets to collect time and attendance information for their employees.

- Employees can clock in/out from a shared tablet, no need to login to portal.
- Tablets can be placed in strategic locations to ensure employees are where they should be when clocking.
- Works Anywhere, no special equipment needed.
- Quick set up & easy to use.
- No third-party integration required.
- Fully secure PIN control access.
- Joiners & leavers are automatically included/excluded.
- Optional configuration to restrict employees to predefined tablets.
- Supports Offline Clockings.



Note: The Kiosk App, Portal and Native App all share the same clocking parameter.

1.3. Tablet Certification Matrix

The specifications for tablets to host Access PeopleXD Kiosk are as below:

Device	Requirements
iPad	Min iOS - 12.4 iPad Air gen 3 (10.5in - released 2019) - 2224 x 1668 px at 264 ppi iPad mini gen 5 (7.9in - released 2019) - 2048 x 1536 px at 326 ppi Requirement is based on iOS (as Apple does not allow publishing apps for any iOS earlier than 12.4) - screen size here is not important as there are no iPads less than 2000px wide that support iOS 12+
Android	Min Android 8 (API 27, Oreo) Any, based on Nexus 7 (7in - released 2012) - 1280 x 800 px at 216 ppi Requirement is based on OS (as Google does not allow publishing apps for any OS earlier than API 27-Android 8) AND screen size to make sure the app looks ok and is usable



Note: Landscape mode only supported.


2. How to set up the Kiosk Solution

There are 7 steps required to setup and enable your Kiosk solution. These must be completed in order, to ensure Kiosk work correctly. We will walk you through each of these steps below.


2.1. Step 1 - Enable Menu Options

The Kiosk menu profile needs to be imported to an existing menu profile. This will enable all menu options & webservices to the user to access the Kiosk functionality. To do this:

1. Go to **Security**.
2. Select **Menu Profiles**.
3. Search for the relevant menu profile e.g. Coreportal_Admin.
4. Select **Import Menu Options** from the drop-down menu.

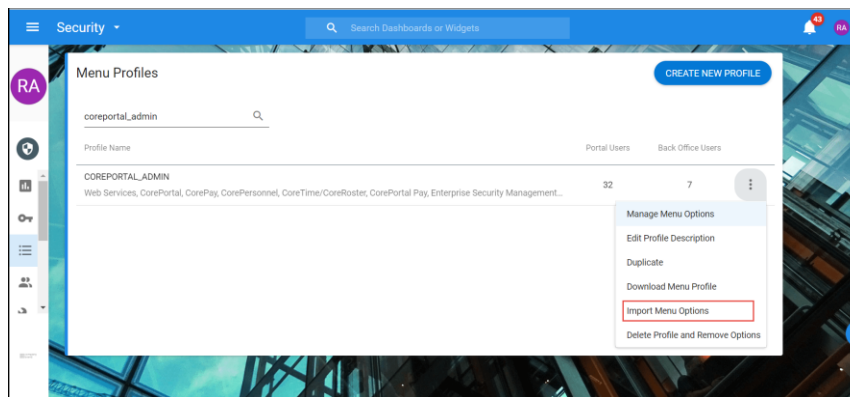

5. Select **From existing menu profile**.
6. Click **OK**

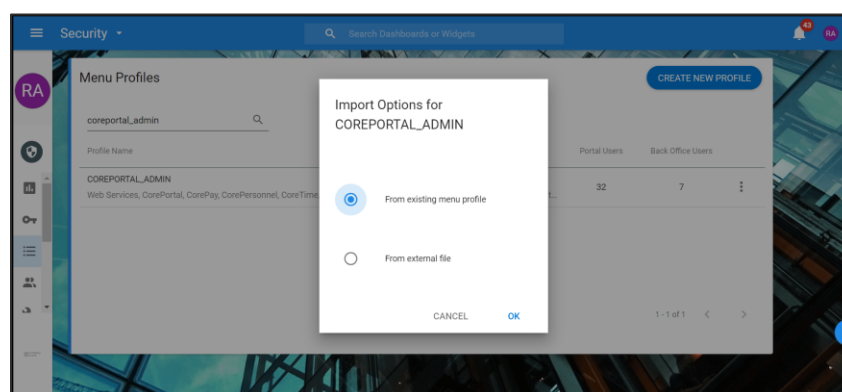


7. Search for **WFM_KIOSK_CLOCKING_CONFIG**
8. Click **OK** and you will receive a confirmation message.
9. Once imported, all menu options & webservices have been assigned to the existing menu profile e.g. Coreportal_Admin

2.2. Step 2 – Enable and configure Kiosk Site

2.2.1. Enable Kiosk Site


1. Navigate to **WFM Admin Dashboard**
2. From the menu select **WFM Configuration**
3. Under Configuration Settings, search for and click on the **Kiosk Device Configuration** tile
4. Within the Kiosk Device Grouping Screen, from the **Actions** button drop-down menu select **Kiosk Site Settings**
5. **Enable** the **Kiosk Site** toggle
6. Kiosk is now enabled and ready to be configured to your Organisational requirements

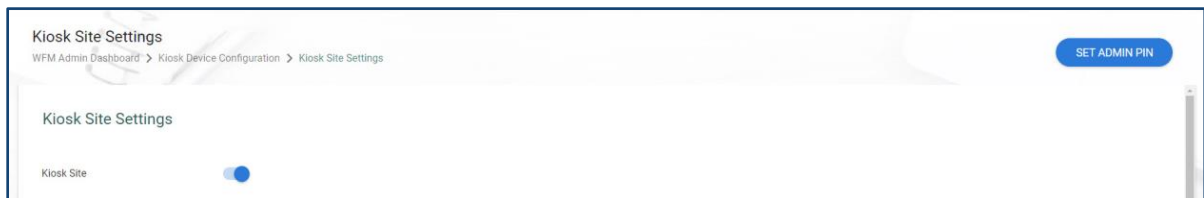

2.2.2. Configuring Kiosk Site Settings


From the Kiosk Site Settings screen, the admin can configure the Kiosk device. This includes:

- Set / Reset Admin Pin
- Pin Settings
- Kiosk Employee Display
- Upload Kiosk Logo/Background Image

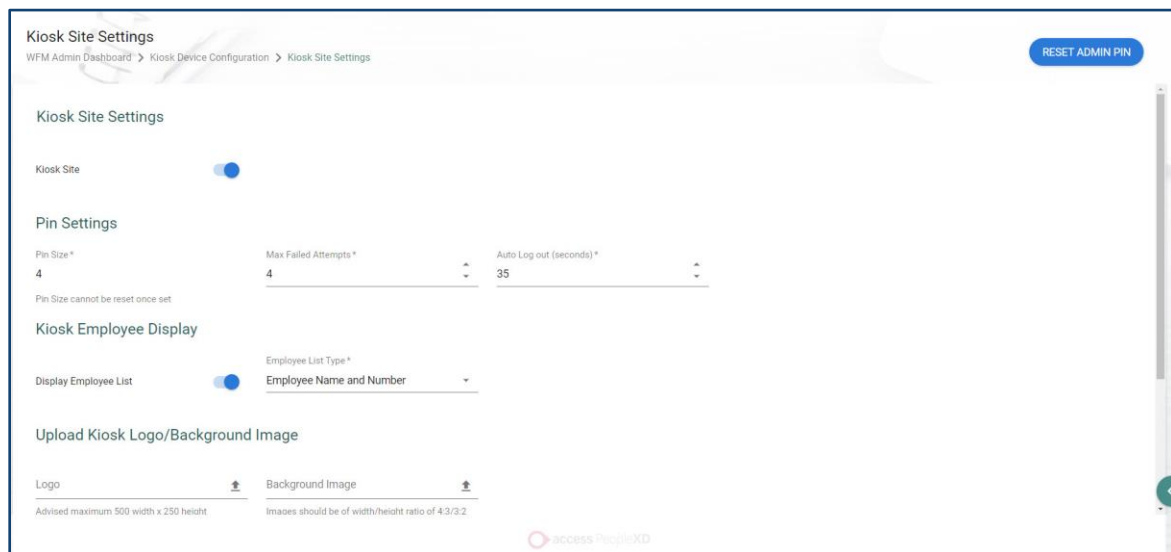


Kiosk Clocking – Configuration Guide

Set Admin Pin allows you to set the Administrator pin. This must be 6 digits in length. This will allow the Admin to login to the admin settings on the kiosk device to run reports and interrogate the data.

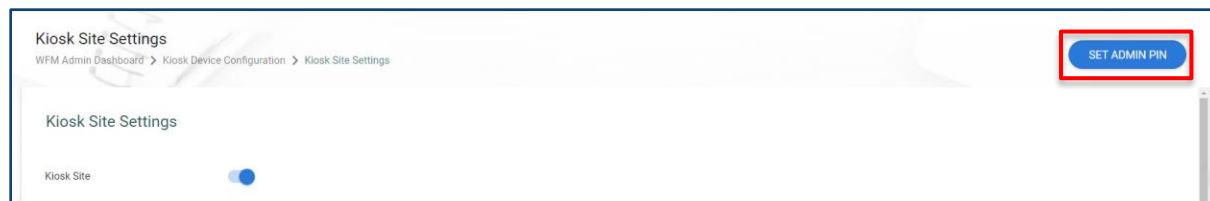

Reset Admin Pin replaces the Set Admin Pin, once created, and allows the admin to reset the pin to access admin settings if locked out. The maximum login attempts for an Admin is 5 and then they will be locked out and need to use this Reset Admin Pin to gain access.

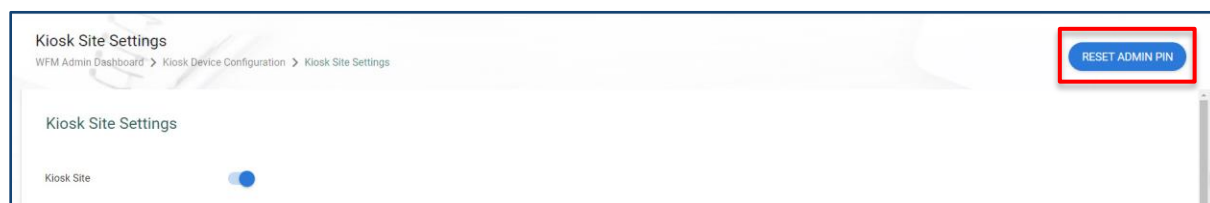

Pin Settings determines the pin length, failed attempt limits and the auto log out time set by the organisation for employees when using the Kiosk device.

A screenshot of the 'Pin Settings' configuration form. The title 'Pin Settings' is in blue. There are three input fields: 'Pin Size *' with a value of '4', 'Max Failed Attempts *' with a value of '3', and 'Auto Log out (seconds) *' with a value of '20'. Each field has a small up/down arrow icon to its right. Below the 'Pin Size' field, there is a note: 'Pin Size cannot be reset once set'.

The table below details the fields and information required to configure your **Pin Settings** on the site settings screen, these are all Mandatory Fields:

Field	Details
Pin Size	This determines the length of pin created for employees to use logging in to the Kiosk. This is a numerical field, with a minimum field length of 4 and a maximum field length of 10 digits.

Field	Details
	Note: once the pin size is set & saved this is un-editable. A message is displayed as confirmation: 
Max Failed Attempts	This determines the number of failed pin login attempts the employee can have before their account is locked. Note: 99 is the maximum value that can be added.
Auto Log Out	This determines, in seconds, the length of time the employee has to enter their pin on the device before the device auto logs the employee out. On the Kiosk Device this is denoted with the use of a reducing time bar at the bottom of the screen. Note: Minimum value for this field is 10 seconds, and the maximum value is 999 seconds.

Kiosk Employee Display determines whether you want an employee list displayed on the Kiosk app and if so, what employee details are listed.

To enable the Kiosk list settings, activate the **Display Employee List** toggle and select your required list option from the drop-down menu.

Kiosk Employee Display

Display Employee List
☒

Employee List Type *

Employee Name and Number

Employee Number

Employee Name

Employee Name and Number

Note: Should you not want the Kiosk device to show other employee details, leave the Display Employee list toggle disabled. This means the employee will be prompted to enter their badge number to login to the Kiosk device before entering their pin.

The table below details the drop-down menu options available to configure your **Kiosk Settings**, if enabled, on the site settings screen:

Field	Details
Employee Number	This will display Employee number only.
Employee Name	This will display Employee name only.
Employee Number & Name	This will display Employee Number & Name.

Upload Kiosk Logo/Background Image allows you to upload a logo and background image for use on all Kiosk devices. This is a parent logo and background image that can be further customised, per kiosk, which we will cover later on.

- The logo can be up to 20MB and we advise a maximum sizing of 500 x 250.
- The background image should be of width/height ratio 4:3/3:2

Once uploaded these will display under the **Preview** heading.

Upload Kiosk Logo/Background Image

Logo

access peopleXD RGB.jpg

×

⬆

Advised maximum 500 width x 250 height

Background Image

Background image.png

×

⬆

Images should be of width/height ratio of 4:3/3:2

Preview

SS


Logo



Background Image

2.3. Step 3 – Create and Customise your Kiosks

Once the Kiosk site has been enabled and the site settings determined the individual kiosks can be created and managed via the **Kiosk Device Configuration** screen. A kiosk (Device Group) can be created for each location required and the associated criteria group added.

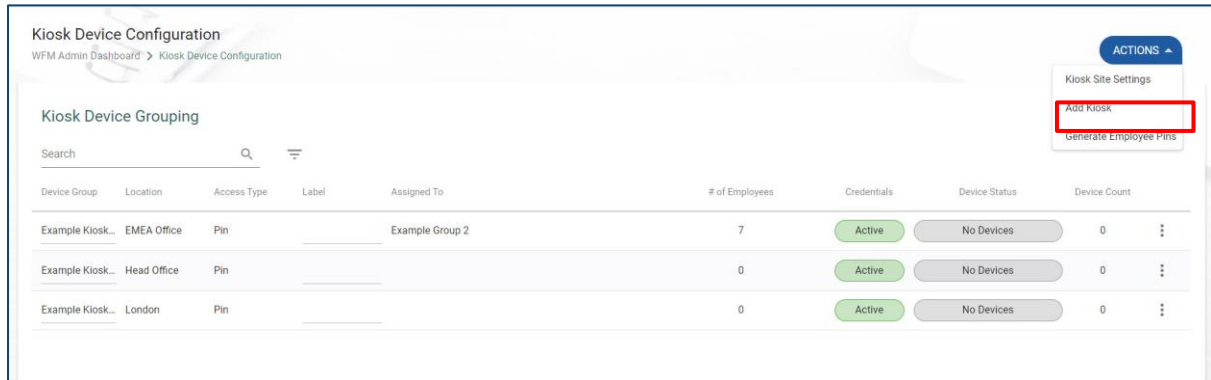


2.3.1. Create your Kiosk

To add a kiosk, follow the steps below:

1. Within the Kiosk Device Configuration Screen, from the **Actions** button drop-down menu select **Add Kiosk**
2. Give the Kiosk a **name**, special characters are not recognised
3. Enter a valid **email address**, this should be an administrators email address
4. Use the drop-down menu to **select the Location**. If your location is not listed in the drop-down menu, it will need to be created. This can be done following the below breadcrumbs details to access the Location setup screen:
 - Portal: Admin Dashboard > Data Centre > Reference Data > Location Code
 - Back Office: Core Personnel > Reference K-P > Location
5. Add a descriptive **Label** (optional), useful if you are adding multiple kiosks to help identify.
6. Click **OK**
7. Your kiosk is now created and will open the kiosk configuration screen for you to customise further.

On creation the below privileges will automatically be assigned to your Kiosk. These can be accessed via the following breadcrumb:

Security > Web Service Apps > Web Service Application Setup > Select your Kiosk > from the 3-dot menu Select Update Privileges > search Kiosk

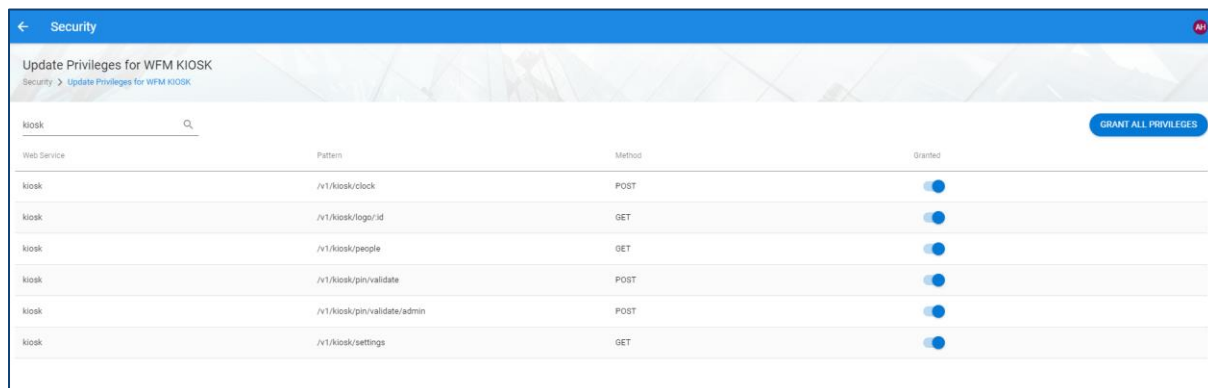

2.3.2. Customise your Kiosk

You can further customise your Kiosk replacing the parent logo and background image for specific location imagery and enabling employee photos to be displayed on the Kiosk device.

To do this:

1. From the Kiosk Device Configuration screen, select the **Kiosk** you want to amend.
2. Use the 3-dot menu to select **View/Edit**.
3. You will be taken to the Kiosk summary screen where you can:
 - **Enable Employee Photos** on your Kiosk app by activate the Employee Photos toggle.
 - **Replace the parent logo/background image**, with bespoke Kiosk imagery, using Upload Kiosk Logo/Background Image. Once uploaded these will display under Preview.

2.4. Step 4 – Assign Criteria Groups to your Kiosk


As part of the Kiosk setup process the next step you are required to complete is to add criteria groups to your kiosk, this is done from the Kiosk Device Configuration screen.

Criteria groups allow you to group employees based on reference data in their employee record. For example, you could group all employees in a particular department or location.


Your criteria groups will need to be created before they can be assigned to your kiosk.

2.4.1. Create your Criteria Groups:

1. Select the Kiosk you want to update and from the 3-dot menu, select **Assign Criteria Group**
2. Click the **Manage Criteria Groups** button, from here you can manage all existing criteria groups and create new criteria groups

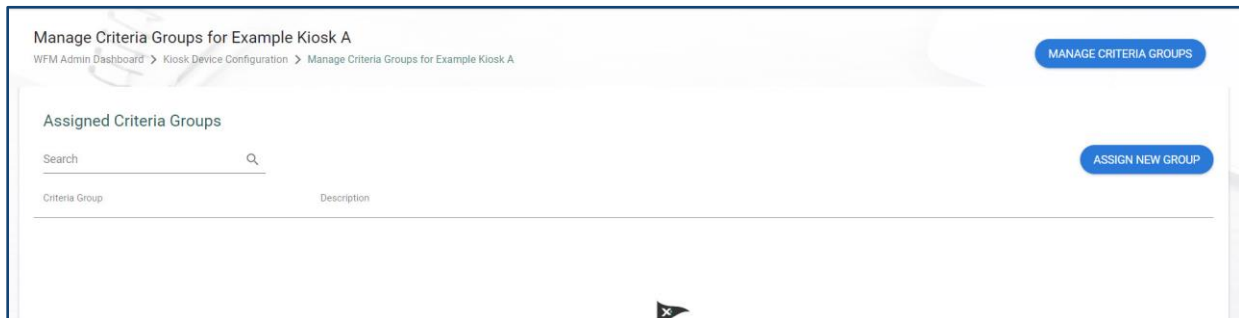

3. Click **Add** to create a new group
4. Give your group a **Name** and select the **type**, then click **OK**
5. Click on your required reference data from the left-hand menu
6. Select the relevant attributes from the **Available column** and use the arrow to move them to the **Assigned column**, this list is automatically saved
7. Using the breadcrumb to return to the **Manage Criteria Groups** screen and confirm the criteria is correct, you can delete/edit rules using the 3-dot menu
8. Repeat to create all required criteria groups

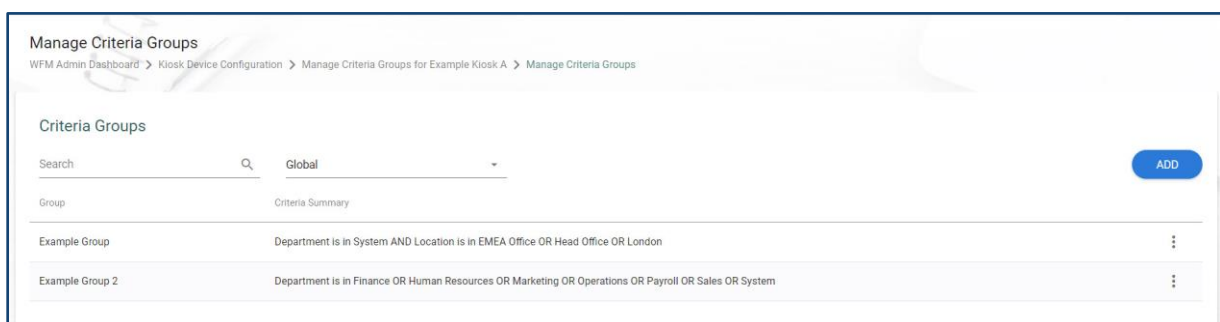


2.4.2. Assign your Criteria Groups to your Kiosk:

Now your criteria groups are created they are ready to be assigned to the kiosk. To do this:

1. Use the breadcrumb to return to **Manage Criteria Groups for your Kiosk**
2. Click the **Assign New Group** button

Kiosk Clocking – Configuration Guide

3. Use the **drop-down menu** to select the criteria group you would like assign and click **OK**, this is automatically saved
4. Repeat the process to add additional criteria groups to your kiosk, if required
5. Use the breadcrumb to return to the **Kiosk Device Configuration** screen and confirm the criteria is correct
6. The kiosk will now show the number of employees assigned

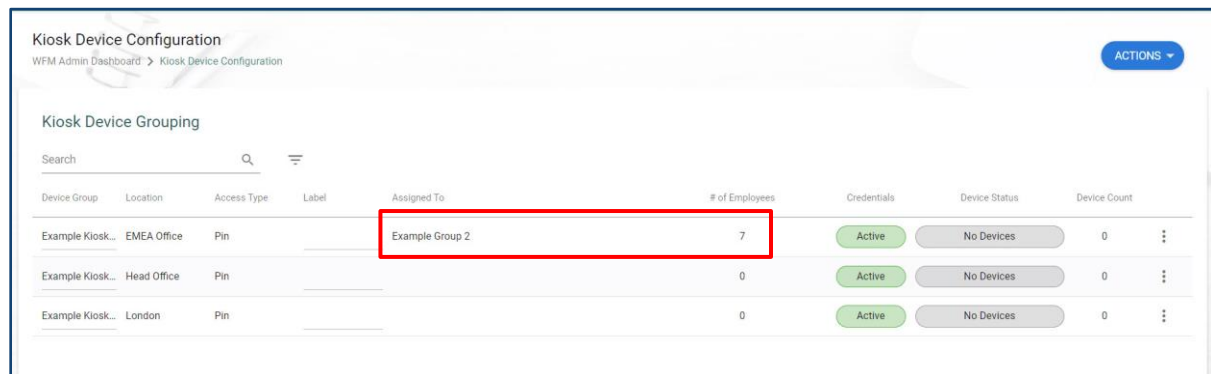

Kiosk Device Configuration

WFM Admin Dashboard > Kiosk Device Configuration

Kiosk Device Grouping


Search

Device Group	Location	Access Type	Label	Assigned To	# of Employees	Credentials	Device Status	Device Count
Example Kiosk...	EMEA Office	Pin		Example Group 2	7	Active	No Devices	0
Example Kiosk...	Head Office	Pin			0	Active	No Devices	0
Example Kiosk...	London	Pin			0	Active	No Devices	0

Note: Only active employees are returned.

2.5. Step 5 - Assign the Kiosk Widget on the Employee Dashboard


The Kiosk widget, once enabled, will appear on the employee dashboard. From within the widget the employee will be able to manage their pin for example, reset or view status.

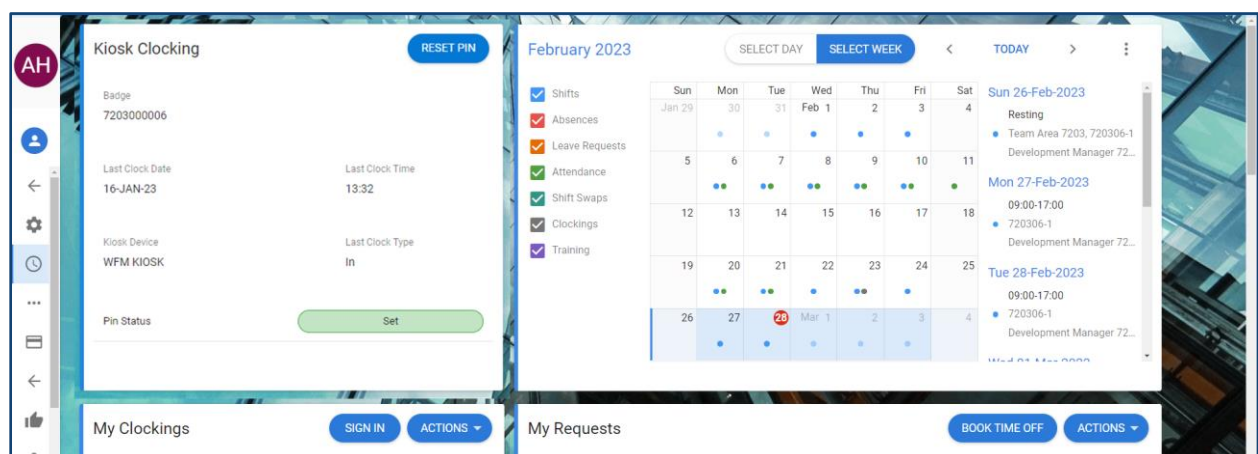


To enable the Kiosk widget, follow the steps below:

Kiosk Clocking – Configuration Guide

- Select **Dashboard Configuration** from the quick jump menu
- Using the drop-down menu select **My Dashboard**
- Under Dashboard Tabs search for **Time**
- Now under the Tab Widgets search for **Kiosk Clocking** and **Activate** the toggle
- Click **CONFIGURE** and associate the menu profile to the widget
 1. Search for the relevant menu profile e.g. Coreportal_Employee
 2. Once selected enable the Selected toggle

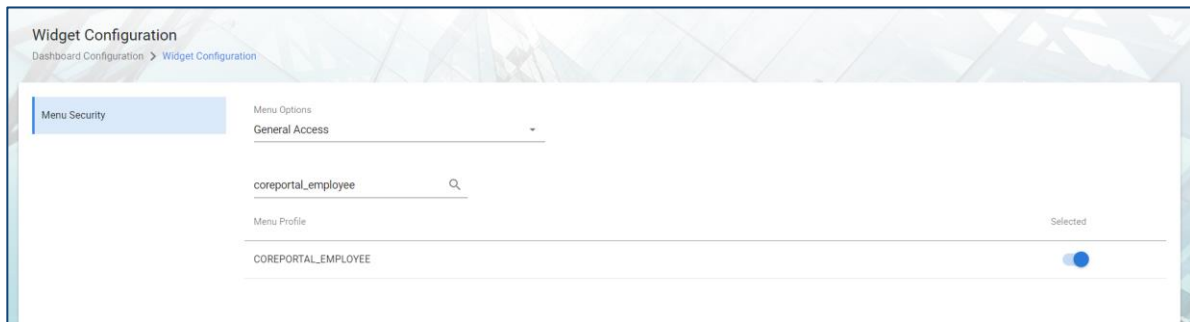

- Use the breadcrumb trail to return to **Dashboard Configuration**
- Assign the Kiosk Clocking a position on the Employee Dashboard, this is numerical, 1 being the first to appear on the dashboard.

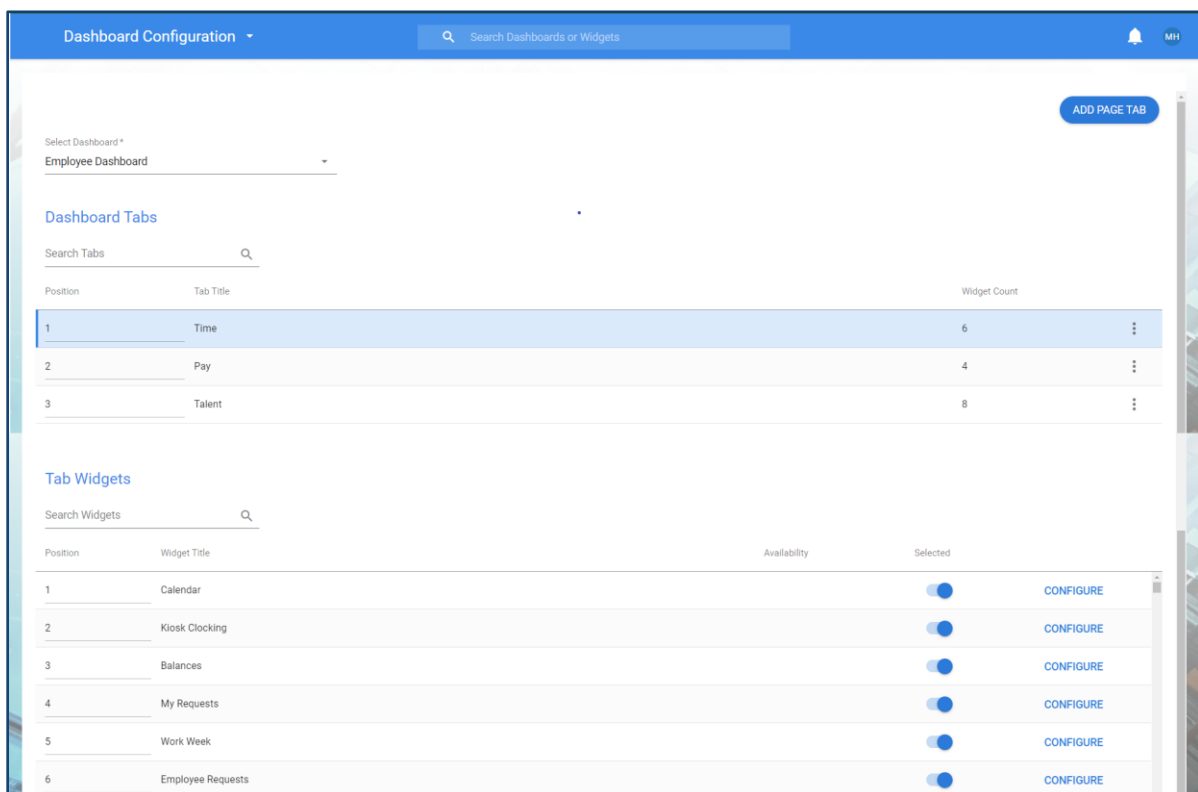

- The kiosk widget is now enabled for all employees. From here they will be able to reset their pin or see the pin status e.g.: Pin Not Set, Locked etc

2.6. Step 6 - Generate Employee Pins

There are 2 ways to generate employee pins. This can be done for all employees via the Actions button or for a specific Device Group from the associated 3-dot menu option.

2.6.1. Actions – Generate Employee Pins

This will generate an email for all employees assigned to a Kiosk via a criteria group and who have a valid badge, providing them with their pin to access the kiosk device.

If an employee is assigned to multiple criteria groups, they will only receive one email notification when the employee pins are generated.

To generate employee pin notifications:

1. Navigate to **WFM Admin Dashboard**
2. From the menu select **WFM Configuration**
3. Under Configuration Settings, search for and click on the **Kiosk Device Configuration** tile
4. Within the Kiosk Device Configuration screen, from the **Actions** button drop-down menu select **Generate Employee Pins**
5. Emails are now generated and will be sent to all employees with a valid badge



Note: Emails will only be sent to employee with a valid email address on their Employee Record.

2.6.2. Kiosk Group – Generate Kiosk Pins

This will generate an email for all employees assigned to the Kiosk (Device Group) via a criteria group and who have a valid badge, providing them with their pin to access the kiosk device. Only employees assigned to this device group who don't already have pins will get pins generated.

If an employee is assigned to multiple criteria groups, they will only receive one email notification when the employee pins are generated.

To generate device group pin notifications:

1. Navigate to **WFM Admin Dashboard**
2. From the menu select **WFM Configuration**
3. Under Configuration Settings, search for and click on the **Kiosk Device Configuration** tile
4. Search for the Kiosk (device group) you wish to send pins for
5. Using the 3-dot menu click **Generate Kiosk Pins**
6. You will receive a message, click **YES** to confirm

Generate Pins

Would you like to generate pins for this kiosk? Only employees assigned to this kiosk who don't already have pins will get pins generated. Are you sure you want to proceed?

NO YES

7. Emails are now generated and will be sent to all employees with a valid badge associated with this device

 **Note:** Emails will only be sent to employee with a valid email address on their Employee Record.

2.6.3. Automatic Generation of Pins for New Starter

If the company has a Kiosk Site and a new employee starts, who has been assigned an email address and a badge ID, then the system will automatically generate a Kiosk pin for them which will be sent via email.

2.7. Step 7 - Setup Kiosk device

The final step is to setup your Kiosk device(s) for employees to start using. To do this follow the steps below:

1. **Download** the app from the app store to your device.
2. **Install** the app – **Access PeopleXD Kiosk**

- Once installed **Open** the app. The user will be presented with the Welcome screen where you are required to enter your **Company ID** and the **Application ID and Application Secret**. The Application ID & Application Secret can be found on the Kiosk Summary screen, use the **Unmask Credentials** button to show details.




Note:

- Company ID **MUST** be entered in Lower Case.
- The Application ID and Application Secret must be entered exactly as shown on the Kiosk summary screen for example, 9CBXuvUNYnnuL2sktrM3VQ..


- Once completed you will be presented with the first Kiosk App Screen, where the employees will select their name, number or badge ID depending on how you have set Kiosk setting up.
- Your Kiosk solution and device are now setup and ready to be used.



Note: The tablet **CANNOT** go into sleep mode, the App needs to be **LOCKED** on to the screen.

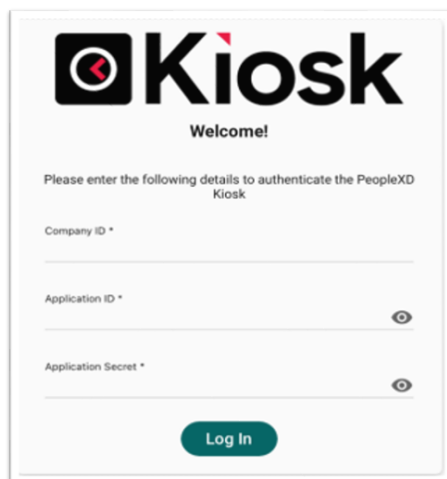


The image shows the 'Welcome!' screen of the Kiosk app. At the top is the Kiosk logo. Below it, the text 'Please enter the following details to authenticate the PeopleXD Kiosk' is displayed. There are three input fields: 'Company ID *', 'Application ID *', and 'Application Secret *'. Each field has a small eye icon to the right, indicating a toggle for visibility. At the bottom, there is a green 'Log In' button.

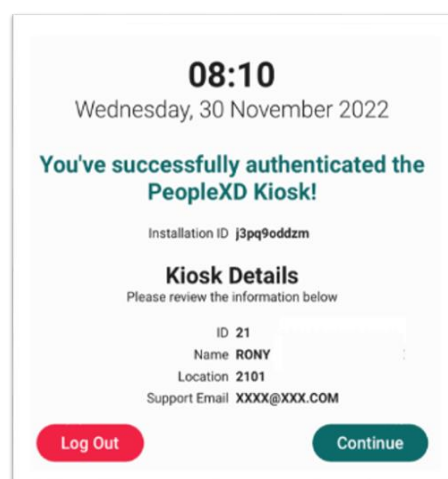

The image shows the 'You've successfully authenticated the PeopleXD Kiosk!' screen. At the top, the time '08:10' and date 'Wednesday, 30 November 2022' are shown. Below this, the text 'You've successfully authenticated the PeopleXD Kiosk!' is displayed in green. Underneath, the 'Installation ID j3pq9oddzm' is shown. The 'Kiosk Details' section follows, with the text 'Please review the information below'. It lists: 'ID 21', 'Name RONY', 'Location 2101', and 'Support Email XXXX@XXX.COM'. At the bottom, there are two buttons: a red 'Log Out' button and a green 'Continue' button.



If a device is offline, it's not possible to setup a Kiosk device. The below error message will display.

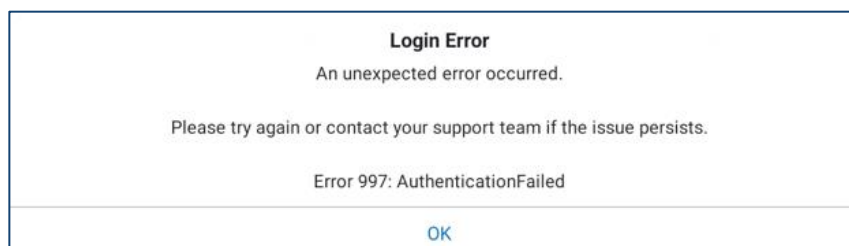


3. Managing Kiosk

Once your Kiosk solution is enabled and setup you can manage your Kiosk(s) from the Kiosk Device Configuration Screen. As you are able to add multiple device(s) to a Kiosk, the table is named Kiosk Device Grouping, and your Kiosk Name falls under the Device Group title. The number of device(s) associated to your Kiosk displays in the Device Count column.

3.1. Kiosk Device Configuration Screen

The Kiosk Device Configuration screen gives an overview of all kiosks (device groups) created.

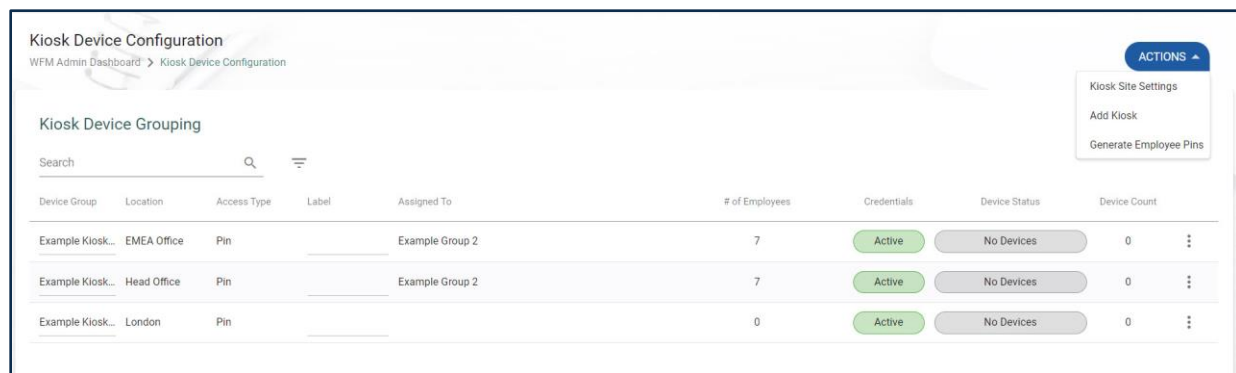

Device Group	Location	Access Type	Label	Assigned To	# of Employees	Credentials	Device Status	Device Count
Example Kiosk...	EMEA Office	Pin		Example Group 2	7	Active	No Devices	0
Example Kiosk...	Head Office	Pin		Example Group 2	7	Active	No Devices	0
Example Kiosk...	London	Pin			0	Active	No Devices	0

The *Kiosk Device Configuration* screen contains the following fields:

Field	Details
Device Group	Name of the Kiosk created.
Location	Location assigned to the Kiosk.
Access Type	This displays the access type.
Label	This will show the label added to the Kiosk when created.
Assigned To	Shows the Criteria Groups assigned to the Kiosk.
# of Employees	Number of Employees assigned, via criteria group(s), to the Kiosk.
Credentials	Shows the status of the Kiosk – Active/Inactive.
Device Status	Show the status of the device - Online/No Devices/Offline.
Device Count	Shows the number of devices associated to the Kiosk (Device Group).

You also have the **Actions** button where the following can be accessed via the drop-down menu:

- Kiosk Site Settings
- Add Kiosk
- Generate Employee Pins



Note: The Kiosk Device Configuration screen, by default, only shows active kiosks. To view deactivated kiosks, you will need to reset the filter to capture Inactive kiosks.

3.1.1. Kiosk 3-Dot Menu Options

Using the associated Kiosk (Device Group) 3-dot menu you can access the following screens:

View/Edit – gives access to the kiosk summary screen where you can:

- Change the location of the kiosk
- Change the Application email
- Unmask & view the Application ID & Application Secret
- Enable/disable employee photos
- Update the kiosk logo/background image

Assign Criteria Group – gives access to manage and assign criteria groups to your kiosk.

Criteria Groups can be created and edited using the **Manage Criteria Groups** button and then assigned to your kiosk using the **Assign New Group** button. Criteria Groups already assigned can also be removed from this screen.

View Employees – returns a list of all employees assigned to the kiosk, drawing from the criteria groups assigned.


This **View Employees** screen contains the following information:

Field	Details
Employee	This lists the employee ID
Employee Email	This lists the email address held on the employee record. When employee pins are generated, this is the email address the notification will be sent to.
Pin Generated	This shows if the pin has been generated.
Job Title	This shows the job title of the employee within the criteria group
Appointment ID	This is the appointment ID of the job title

Field	Details
Work Group	This lists the Work Group the employee is assigned to
Department	This lists the Department the employee is assigned to
Assigned By	This lists the criteria group the employee is assigned by to the kiosk. If the employee is assigned to multiple criteria groups; they will only receive one email notification when the employee pins are generated.

View Devices – returns a list of all devices assigned to the Kiosk. The device count is shown within the Kiosk Device Configuration screen.

It is recommended you create one Kiosk per device however if you have multiple entry points at your kiosk location you may choose to add multiple devices to the same kiosk.

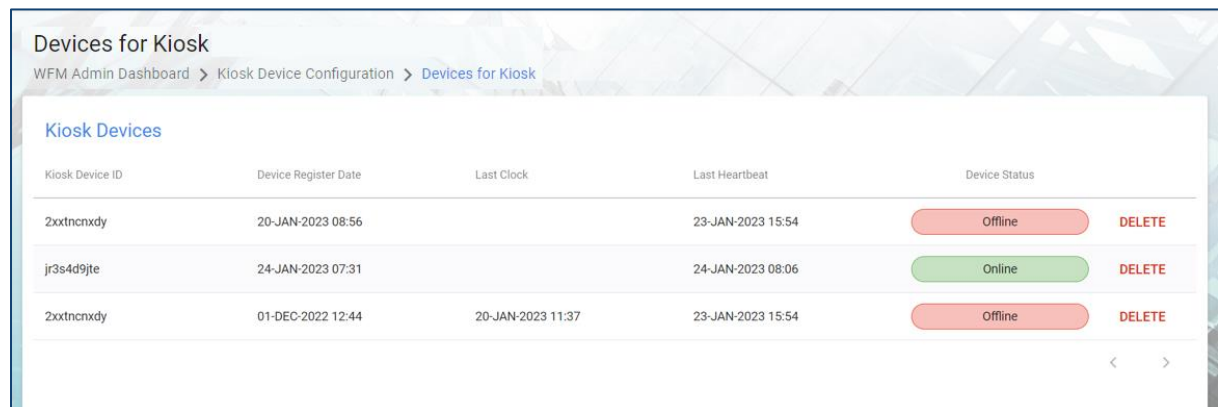

Kiosk Device ID	Device Register Date	Last Clock	Last Heartbeat	Device Status
2xotncnxdy	20-JAN-2023 08:56		23-JAN-2023 15:54	Offline
jr3s4d9jte	24-JAN-2023 07:31		24-JAN-2023 08:06	Online
2xotncnxdy	01-DEC-2022 12:44	20-JAN-2023 11:37	23-JAN-2023 15:54	Offline

The **Devices for Kiosk** screen contains the following information:

Field	Details
Kiosk Device ID	This is the ID created when you have added a new device. Each device added will have a unique ID
Device Registration Date	This lists the date & time the device was created
Last Clock	This lists the last clocking date & time registered on the device
Last Heartbeat	This lists the date & time the last pulse was received
Device Status	This shows the status of your device – Online/Offline Your device will show Offline within 1 hour of connectivity being lost, emails will be sent to notify Admins. Once connectivity is restored the device will show as Online within 10 minutes.

Field	Details
Delete	This can be used to remove the device entry, should the device no longer be active. Hiding the device from the Device Status on the Kiosk Clocking Screen.

Generate Kiosk Pins – allows you to generate kiosk pins for the users assigned to this device via a criteria group and have a valid badge, providing them with their pin to access the kiosk device.

Only employees assigned to this kiosk who don't already have pins will get pins generated. If an employee is assigned to multiple criteria groups, they will only receive one email notification when the employee pins are generated.

A message will be received asking for confirmation you wish to generate pins for this kiosk.

Generate Pins

Would you like to generate pins for this kiosk? Only employees assigned to this kiosk who don't already have pins will get pins generated. Are you sure you want to proceed?

NO YES

Deactivate – allows you to deactivate the kiosk. By selecting this option, a message will return asking you to confirm you want to proceed with deactivating this kiosk and stating the number of employees assigned. Click **YES** to confirm. Once confirmed the kiosk will be removed from the Kiosk Device Configuration screen. The kiosk will retain all settings when deactivated. The filter can be used to view Inactive kiosks and **REINSTATE**, if required.


 **Note:** If a deactivated kiosk is REINSTATED the kiosk device will need to be updated with the new Application ID & Application Secret, criteria groups confirmed, and pins resent.

3.2. HeartBeat

The HeartBeat is a pulse sent from your kiosk device, every 15 minutes, confirming connectivity. The device connectivity status is visible to administrators on the Kiosk Device Configuration screen, this can be shown as:

- **Online** – if all related devices are online.
- **Offline** – if all related devices are offline.
- **2 Online 1 Offline** - if there are multiple devices in different states.
- **No Device** - if no device has been registered to the webservice credentials.

If no reply is received after 2 heartbeats, then the device will show as Offline, on the Kiosk Clocking screen, and an email will be sent to the Administrator.

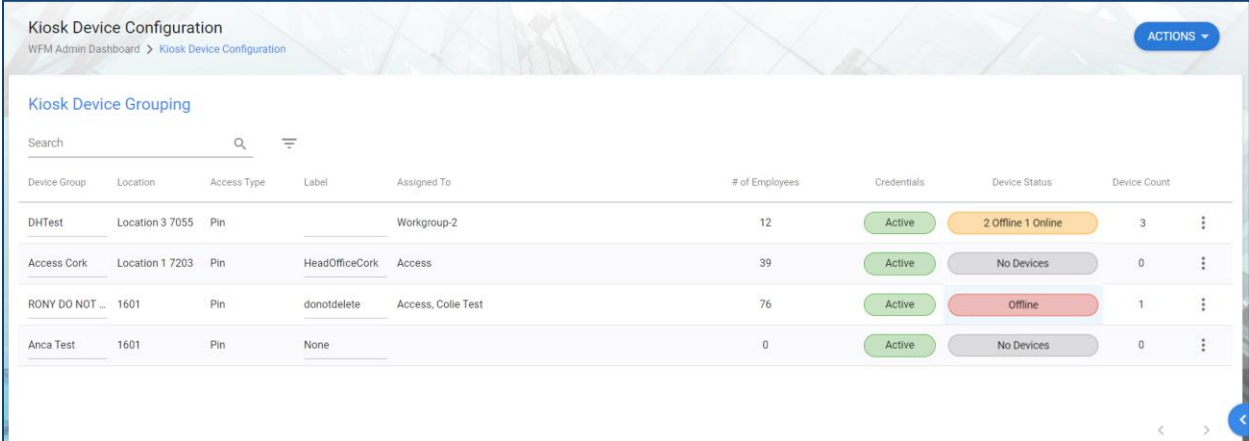

The screenshot shows the 'Kiosk Device Configuration' page. At the top, there's a header with 'Kiosk Device Configuration' and 'WFM Admin Dashboard > Kiosk Device Configuration'. A search bar is present. Below it, a table lists device groups. The table has columns: Device Group, Location, Access Type, Label, Assigned To, # of Employees, Credentials, Device Status, and Device Count. The 'Device Status' column shows colored buttons: green for 'Active', yellow for '2 Offline 1 Online', and red for 'Offline'. The 'Device Count' column shows the number of devices in each state.

Device Group	Location	Access Type	Label	Assigned To	# of Employees	Credentials	Device Status	Device Count
DHTest	Location 3 7055	Pin		Workgroup-2	12	Active	2 Offline 1 Online	3
Access Cork	Location 1 7203	Pin	HeadOfficeCork	Access	39	Active	No Devices	0
RONY DO NOT ...	1601	Pin	donotdelete	Access, Colle Test	76	Active	Offline	1
Anca Test	1601	Pin	None		0	Active	No Devices	0

3.3. Badge Screen

Once the Kiosk Site is enabled in Kiosk Site Setting the Badge Details screen is available for all employees. From here you can manage the employees badge details and unlock or reset their kiosk pin.

To access the Badge Details screen, follow the steps below:


1. From the WFM Admin Dashboard select **Person Maintenance**
2. Click on an Employee and using the 3-dot menu click **VIEW**
3. Select **Badge Details** from the left-hand menu, from here you can:

- **Unlock Kiosk Pin** – this will unlock the pin for an employee. If the pin is not locked and the button is selected a message will return stating the **Pin is Not Locked**
- **Reset Kiosk Pin** – this will reset the employee pin and send an email

For further information see the [Badge Assignment - User Guide](#) on the Knowledge Base.

3.4. Native App – Kiosk settings

Within the Native App employees can reset their kiosk pin via the Kiosk Settings option in the menu. The kiosk settings screen will display the employee Pin Status, Badge Number and allow them to Reset Kiosk Pin.

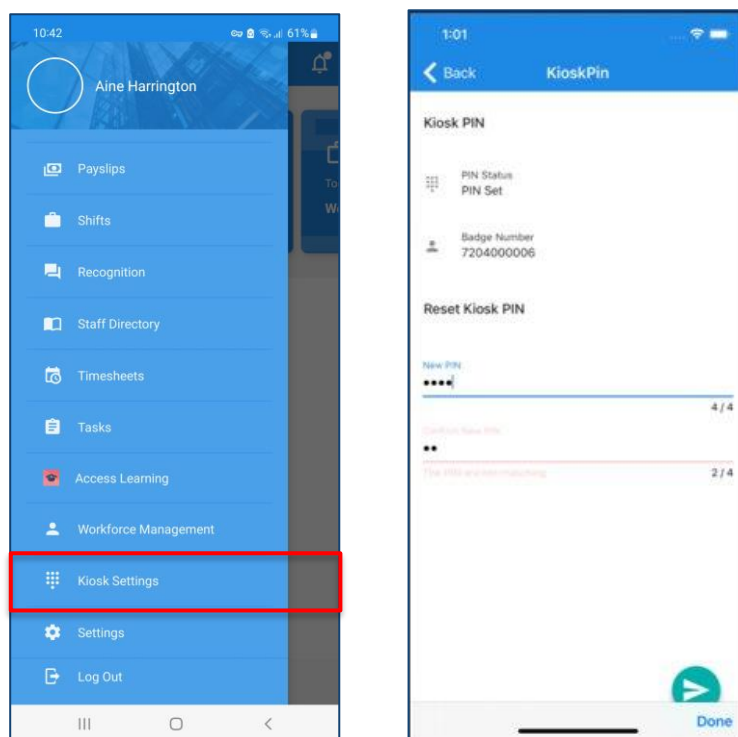

3.5. Kiosk Offline Support

Kiosk supports clocking when tablet devices are offline. A Kiosk device may be offline due to local internet or network issues, or because the PeopleXD is down for scheduled maintenance.

Kiosk Clocking – Configuration Guide

With Kiosk Offline Support, Employees can continue to clock while internet or database connections are down, avoiding a manual process of collecting clocks. The clockings are stored locally on the device and once the connection is re-established with the PeopleXD database, the stored offline clocking records are automatically sent to the PeopleXD database.


The amount of space required for storage of offline clocking records will differ depending on your device. As a guideline 50,000 clocking records will require 2.5-3 MBs of storage on the kiosk device.

3.5.1. To enable Kiosk Offline Support

To enable this functionality, for each kiosk, the following privilege within Web Service Apps will need to be granted: **/v1/kiosk/clocking/batch**.


To do this:

1. Navigate to *Security Dashboard* and select **Web Service Apps**.
2. Search for your Kiosk device.
3. Expand its 3-dot menu and click **Update Privileges**.
4. Search **Kiosk** endpoints.
5. Grant access to the **/v1/kiosk/clocking/batch** web service.
6. Repeat steps 3 to 5 for each kiosk device.

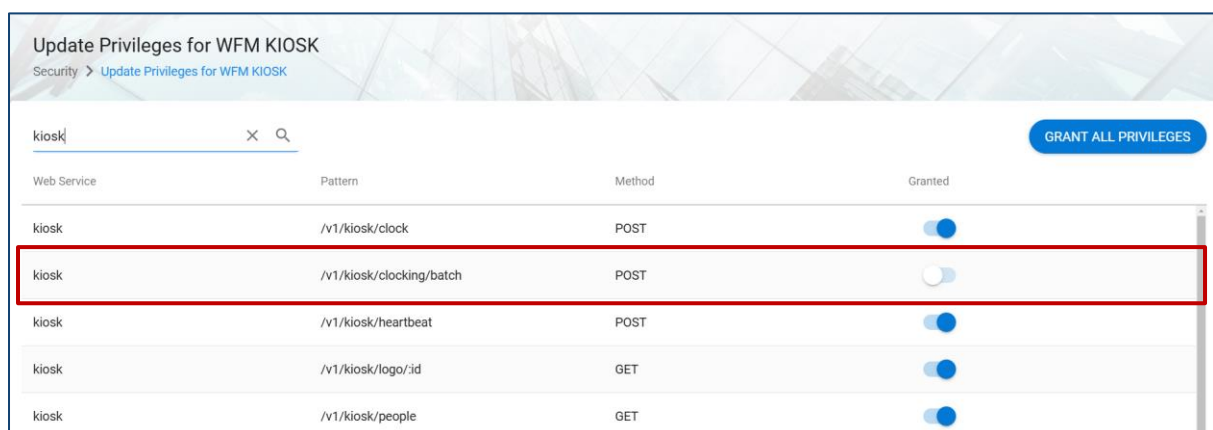

Kiosk Clocking – Configuration Guide

Once enabled, the Kiosk will go into offline mode once a person tries to clock and there is no connection to the database. A banner is displayed showing that the kiosk is offline and the time when the employee list was last updated.

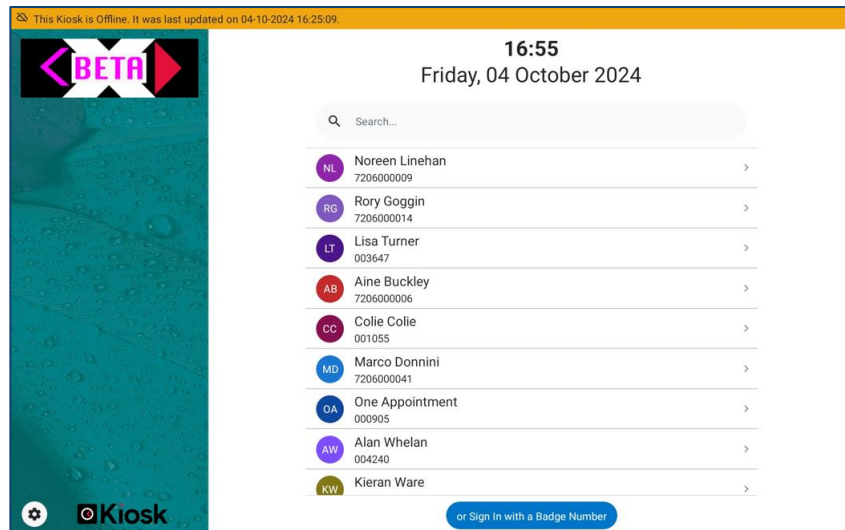

Note: If a user has changed their PIN after the employee list was last updated, they will not be able to clock until the device is back online and the employee list is updated.

When the connection is restored, the next time a person clocks, offline mode is disabled, and the message banner will no longer be displayed. Stored clocks are automatically synced to the PeopleXD database.

Heartbeat will also bring the device back online and sync offline clocks with the PeopleXD database.

4. The Kiosk App

In this section we will look at the Kiosk App, the user experience for clocking in/out, how it supports business absence and what administrators can access.


4.1. Employee Clocking

There are 4 steps required for employee clocking, these are outlined below. The images used show the Employee Name & Number, this view may vary depending on your organisations Kiosk Settings.


1. Use the **Search** field to find their details or select **Sign in with Badge Number**



2. Enter their **Pin**

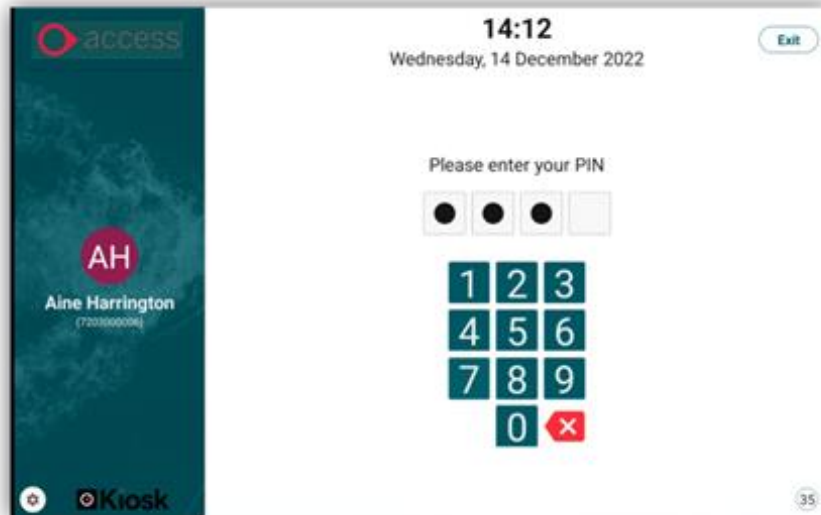

3. If the user has multiple appointments, they will need to **select the role they want to clock in for**, using the drop-down menu

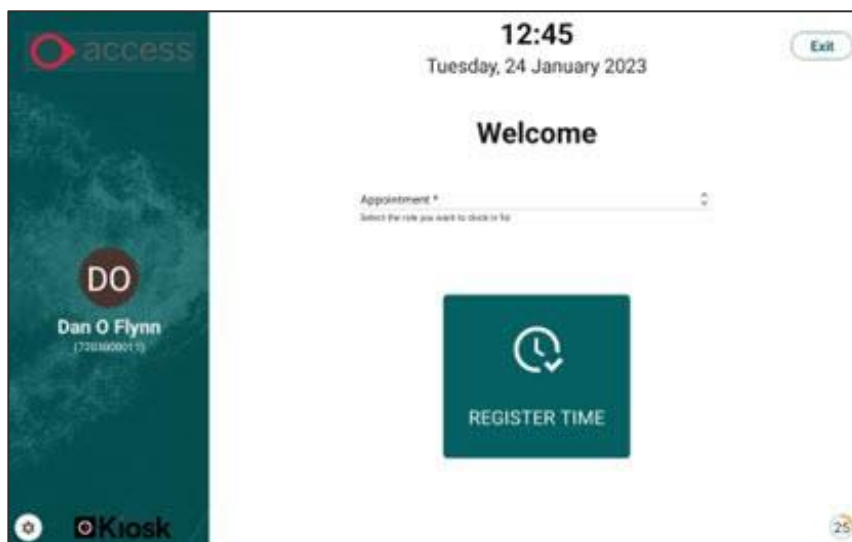

4. Click **Register Time** or **Clock In**, depending on the organisations clocking parameter



5. The employee is now successfully clocked in/registered.
6. The process will need to be repeated to Clock out.


4.1.1. Employee Clocking Offline

For customers that use clock in/clock out configuration, the clock in/clock out options are not displayed in the UI when a kiosk device is in offline mode as when offline the kiosk does not know if the previous clock was in or out as it's disconnected from the database.

When the kiosk is back online, the records are loaded to the database and the in/out movements are applied, at that point, based on the time of the clockings.

If a user enters a valid PIN while the device is in offline mode, they can clock as normal.


Once they have clocked, they get a message to confirm that the clock has been successfully recorded.

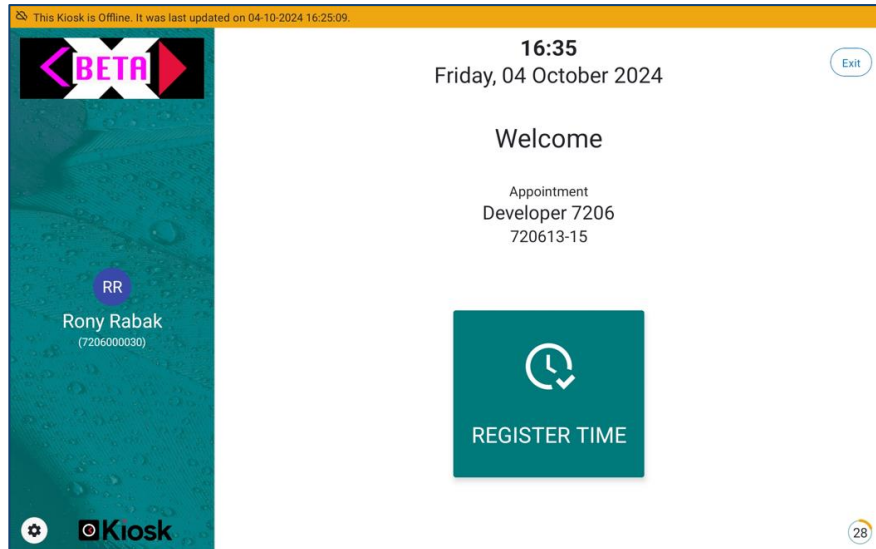

If a user enters their PIN incorrectly, they receive an "Invalid PIN" message as normal. The number of invalid pin attempts is determined by how the Kiosk device has been setup, see [Pin Settings](#), for further details.

4.2. Business Absence

Business Absence is where an employee clocks out, while within the office, to attend an offsite meeting. The Kiosk App supports business absence. When Clocking Out, using the App, the employee will be able to enable the Business Absence toggle.

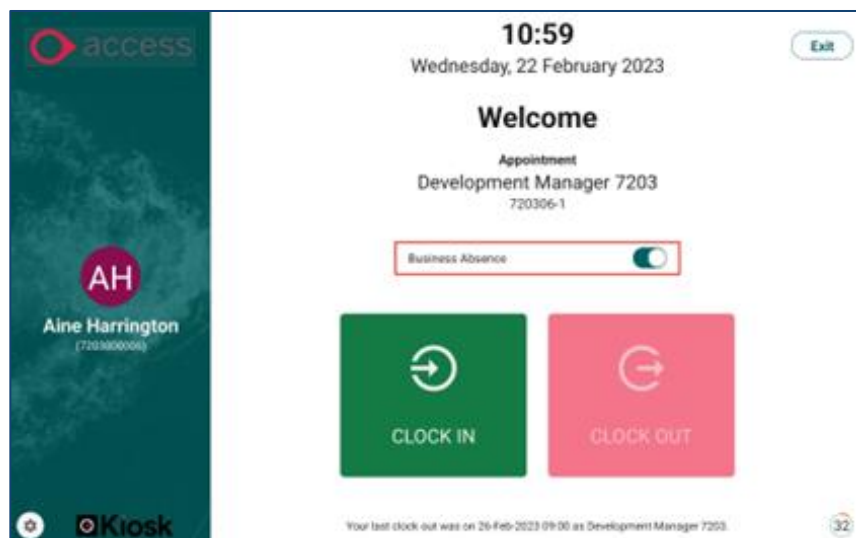

To remove business absence appearing on the kiosk the **ct_bus_abs_narrative_opt** parameter need to be set to N in portal.

To do this:


1. Navigate to **Administrator Dashboard**
2. From **Site Manager** and open **Admin Settings**
3. Search for **ct_bus_abs_narrative_opt**
4. Click **Edit** and update the Value to **N**
5. Click **OK**

4.2.1. Business Absence Clocking Offline

Kiosk offline support does not support Business Absence clockings.

4.3. Admin Tool

Administrators can access the Admin Tool within the Kiosk App where they can update the app and employee list or access key information.

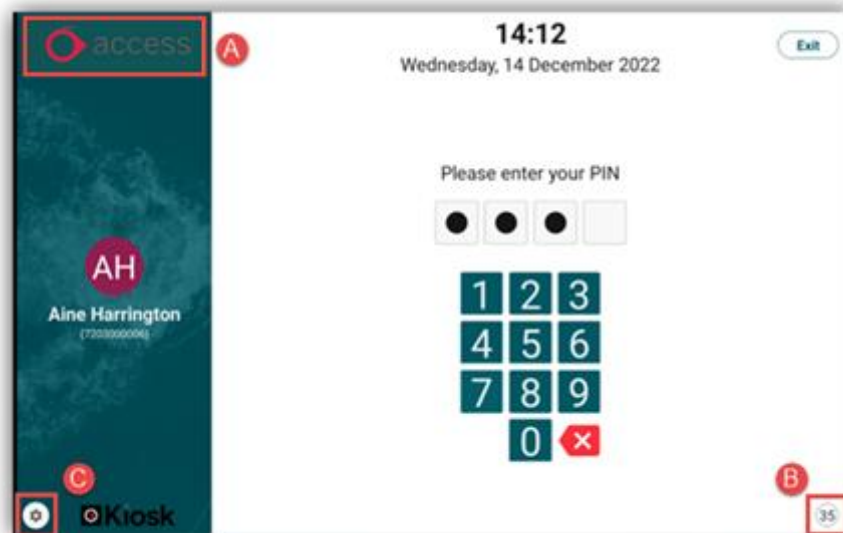


A – Organisation Logo, pulled through from Kiosk Site Settings

B – Auto Log Out countdown, pulled through from Kiosk Site Settings. If the user does not complete the clocking process within the time allowed the Kiosk App will automatically time out, taking the user back to the beginning of the process.

C – Admin Tool, available only to Kiosk Administrators

Clicking on C will take Administrators to the Admin Tool screen:

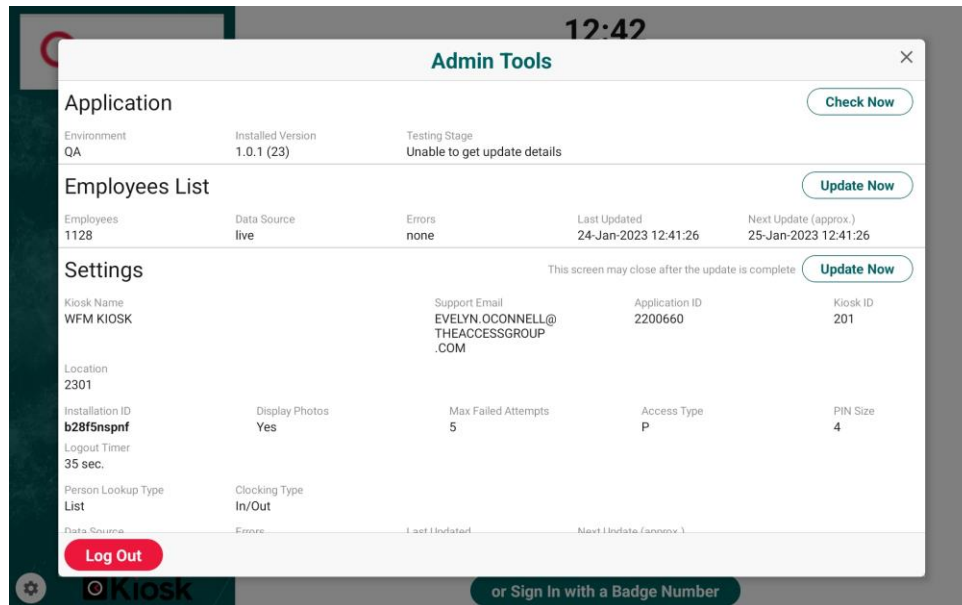


From here you can:


- Update the App via the Application section. Use the **Check Now** button to ensure you have the latest version of software available.
- Update the Employee List via the Employee List section. Use the **Update Now** button to refresh the employee list.
- Update and view the device settings via the Settings section. Use the **Update Now** button to refresh the data shown, if any changes have been made to the Kiosk in Portal.

4.3.1. Admin Tool Offline

The Admin tool screen is unavailable while offline.

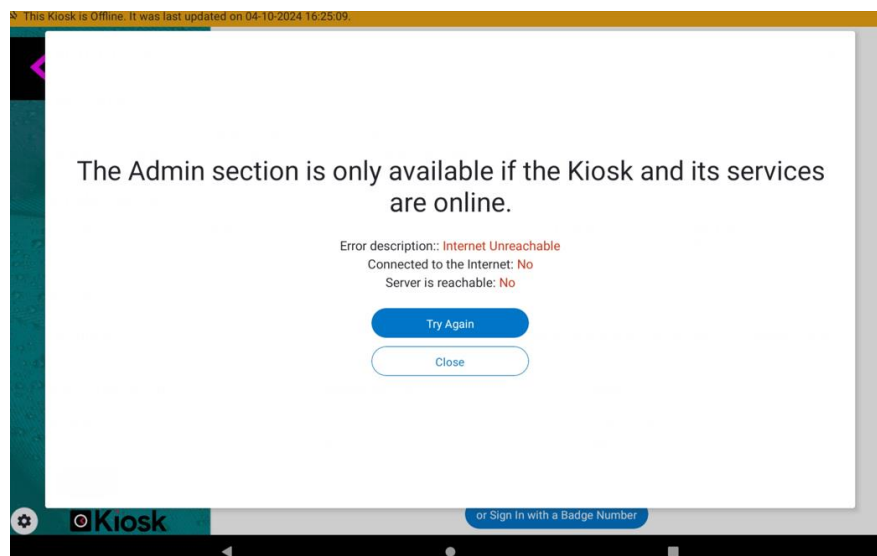

An **Offline Clocking** section can be found on the Admin Tools screen, when reconnected.

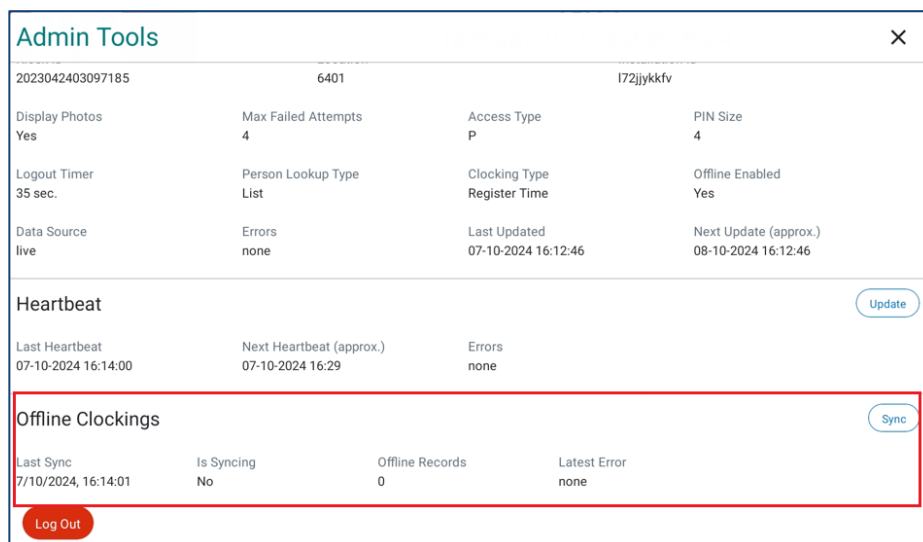

Stored clocks, Offline Records, are automatically synced to the database once the clock is back online, however the Admin can manually run the sync, if required, by selecting the **Sync** button on the Admin Tools screen.

The Offline Clocking section displays:

- **Last Sync:** The date and time of the last sync of offline clocks to the database.
- **Is Syncing:** If there is a sync currently in progress.
- **Offline Records:** If a sync is currently in progress, how many clocks are being sent.
- **Latest Error:** If there was an error syncing clocks with the database.

- **Log:** When the offline sync started/completed and how many records were processed.

If the sync was unsuccessful, the log will show that an error has occurred, and the number of records that were not synced.

The screenshot displays the 'Admin Tools' window of a kiosk application. At the top right, the time '16:38' is shown. The window has a title bar with 'Admin Tools' and a close button. Below the title bar, there are two main sections. The first section, 'Heartbeat', contains a table with three columns: 'Last Heartbeat', 'Next Heartbeat (approx.)', and 'Errors'. The values are '04-10-2024 16:37:09', '04-10-2024 16:52', and 'none' respectively. The second section, 'Offline Clockings', contains a table with four columns: 'Last Sync', 'Is Syncing', 'Offline Records', and 'Latest Error'. The values are '4/10/2024, 16:37:10', 'No', '2', and 'Forbidden (403)' respectively. Below the 'Offline Clockings' table is a 'Log' section with a list of events. At the bottom left of the window is a 'Log Out' button, and at the bottom right is a button labeled 'or Sign In with a Badge Number'.

Last Heartbeat	Next Heartbeat (approx.)	Errors
04-10-2024 16:37:09	04-10-2024 16:52	none

Last Sync	Is Syncing	Offline Records	Latest Error
4/10/2024, 16:37:10	No	2	Forbidden (403)

Log

- Fri Oct 04 2024 16:33:13 GMT+0100: Sync Requested
- Fri Oct 04 2024 16:33:13 GMT+0100: Sync Starting
- Fri Oct 04 2024 16:33:13 GMT+0100: Nothing to sync
- Fri Oct 04 2024 16:37:09 GMT+0100: Sync Requested
- Fri Oct 04 2024 16:37:09 GMT+0100: Sync Starting
- Fri Oct 04 2024 16:37:09 GMT+0100: Syncing 2 record(s)
- Fri Oct 04 2024 16:37:09 GMT+0100: Processing chunk for records 0 to 1,000,000
- Fri Oct 04 2024 16:37:09 GMT+0100: POST begin
- Fri Oct 04 2024 16:37:10 GMT+0100: [ERROR] POST Forbidden
- Fri Oct 04 2024 16:37:10 GMT+0100: Sync Ended

5. Clocking Behaviours

- Kiosk will force the employee to clock out before they can clock into another appointment.
- When an employee clocks in and log back into the app, at the end of their shift, that appointment will display and the clock out button will be enabled.
- An employee can't clock in or out in the same minute.
- The app, portal and mobile all share the same clocking parameters, so if an admin sets the kiosk to register time, then portal and mobile will be set to register time, all three will behave the same and be consistent.
- When the kiosk is in offline mode, it does not support in/out selection. Users can still clock, but only the registered time is recorded, without indicating whether it is an "in" or "out" event. Once the device reconnects and clockings are uploaded to the database, the appropriate in/out status will be automatically assigned in WFM.
- PINs are downloaded from the database to the kiosk once per day. If a user changes their PIN and the kiosk goes offline before the new PINs are downloaded, the user will not be able to clock using their updated PIN. The device must be brought back online and the latest PINs downloaded before the new PIN can be used.

6. Frequently Asked Questions

To support you with the Kiosk feature, we have collated the most common questions you've asked us:

Question	Answer
How will joiner and leavers be picked up?	They are picked up on the nightly job.
Who receives pin request when Generate Employee Pins actioned?	All employees with a valid Badge.
What jobs needs to be done in the background to deactivate a kiosk device?	It deletes privileges of web service app. (delete the token and authentication Key)
What jobs needs to be done in the background to reactivate a kiosk?	New Token and Secret and grand web services privileges required.
How do you make a new Kiosk active?	It is active by default.
Does Kiosk support biometric or Card reader?	No
Can Kiosk record employees clocking when in offline mode (not connected to WIFI)?	Yes, see section 3.5 Kiosk Offline Support .
What happens if I forget my pin?	Employees can reset their pin on the Kiosk Widget on the employee dashboard or on the Native app.
What happen if I forget my admin pin?	Admin can reset their pin within the Kiosk Site Settings.

7. Menu Options

7.1. Menu Options

The following menu options need to be enabled for access to the Kiosk configuration screens.

All menu options are included in the menu profile **WFM_KIOSK_CLOCKING_CONFIG**

Menu Option	Menu ID	System
Admin – Kiosk Pin Reset	MAIN_MENU.KIOSK_PIN_RESET_ADM	CorePortal
Admin – Kiosk Pin Unlock	MAIN_MENU.KIOSK_PIN_UNLOCK_ADM	CorePortal
Coreportal – Kiosk Pin Reset employee widget	MAIN_MENU.KIOSK_PIN_RESET_EMP	CorePortal
Kiosk Clocking	WFM_CONFIG_MENU.KIOSK_CLOCKING	CorePortal
Allow Activate/Deactivate	KIOSK_CLOCKING_MENU.ALLOW_ACTIVATE_DEACTIVATE	CorePortal
Show Kiosk Add Button	KIOSK_CLOCKING_MENU.SHOW_KIOSK_ADD_BUTTON	CorePortal
Show Kiosk Site Settings	KIOSK_CLOCKING_MENU.SHOW_KIOSK_SITE_SETTINGS	CorePortal
Native App - Kiosk PIN Management	MAIN_MENU.KIOSKPINMGMT	Native App
Create kioskclocking	WS_ROSTER_MENU.POST_KIOSKCLOCKING	Web Services
Create kioskclocking admin pin	WS_ROSTER_MENU.POST_KIOSKCLOCKING_ADMIN_PIN	Web Services
Create kioskclocking pin	WS_ROSTER_MENU.POST_KIOSKCLOCKING_PIN	Web Services
Create kioskclocking pin admin	WS_ROSTER_MENU.POST_KIOSKCLOCKING_PIN_ADMIN	Web Services
Delete kioskclocking	WS_ROSTER_MENU.DELETE_KIOSKCLOCKING_ID	Web Services
Get criteriagroup kiosk employee	WS_ROSTER_MENU.GET_CRITERIAGROUP_KIOSK_EMPLOYEE_ID	Web Services
Get kioskclocking	WS_ROSTER_MENU.GET_KIOSKCLOCKING	Web Services
Get kioskclocking devices	WS_ROSTER_MENU.GET_KIOSKCLOCKING_DEVICES	Web Services
Get kioskclocking person	WS_ROSTER_MENU.GET_KIOSKCLOCKING_PERSON	Web Services
Get kioskclocking pin	WS_ROSTER_MENU.GET_KIOSKCLOCKING_PIN	Web Services
Update kioskclocking	WS_ROSTER_MENU.PATCH_KIOSKCLOCKING_ID	Web Services

Menu Option	Menu ID	System
Update kioskclocking admin pin	WS_ROSTER_MENU.PATCH_KIOSKCLOCKING_ADMIN_PIN_ID	Web Services
Update kioskclocking devices	WS_ROSTER_MENU.PATCH_KIOSKCLOCKING_DEVICES_ID	Web Services
Update kioskclocking pin	WS_ROSTER_MENU.PATCH_KIOSKCLOCKING_PIN	Web Services