

How to generate Online Advanced Survey report using Insight Diagnostic Online.

1. Please ensure that HP Insight Diagnostics Online Edition are installed on your system.

You can download and install HP Insight Diagnostics Online Edition on the server download page, please use HP Support Portal and choose right server model and Windows version.

Link to the portal:

<http://www8.hp.com/ru/ru/drivers.html>

Please read installation instruction before installing software.

2. Run HP Insight Diagnostic Online.


In Windows 2003- 2008 R2 link to this tool located at:

Start -> All Programs -> HP System Tools -> HP Insight Diagnostic Online Edition for Windows

In Windows 2012- 2012R2 Use Metro-styled interface to reach HP Insight Diagnostics Online:

Start -> All Programs -> HP System Tools -> HP Insight Diagnostics Online Edition for Windows

3. Login to System Management Homepage with using administrative privileges on your server with ignoring warnings about self-signed certificate.

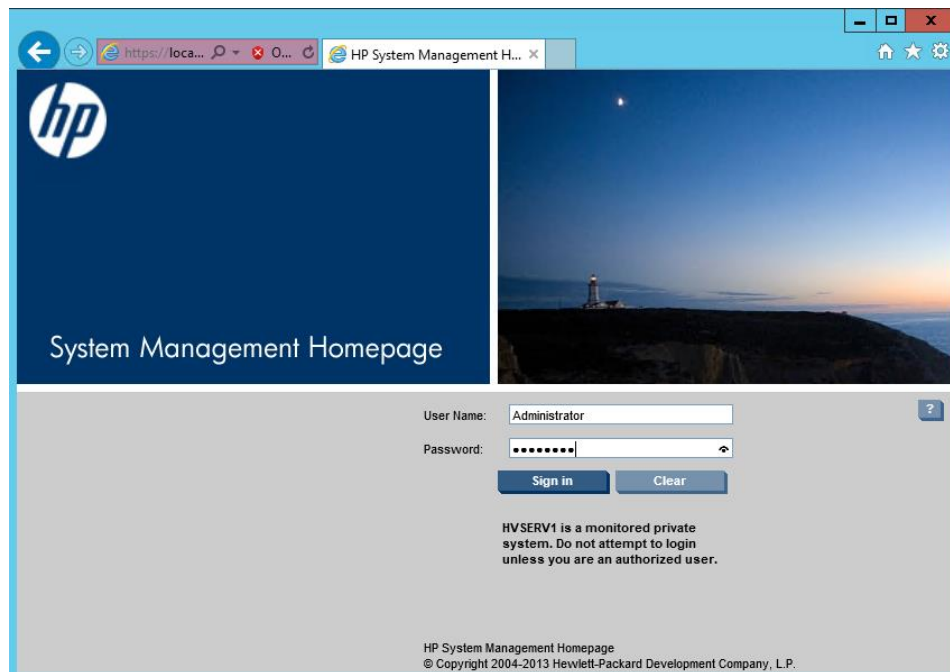

6. Please wait while HP Insight Diagnostics loading on your server.
7. To generate report change View level to **ADVANCED**
8. Also change Categories to **ALL**

HP Insight Diagnostics
System LXA9V1K00H

Survey **Diagnose** Log
1) CHAGNE TO ADVANCED
2) CHANGE TO ALL

Reload
About

View Level: **Summary**
Categories: **Overview**

System	
Product Name	ProLiant DL380p Gen8
Serial Number	LXA9V1K00H
Processor Package 1	Genuine Intel(R) CPU @ 2.40GHz
Total memory - 4096 Mbytes	
Board 1	
Card 1 Status	Online
DIMM 1	Not Installed
DIMM 2	Not Installed
DIMM 3	Not Installed
DIMM 4	Not Installed
DIMM 5	Not Installed
DIMM 6	Not Installed
DIMM 7	Not Installed
DIMM 8	Not Installed
DIMM 9	Not Installed
DIMM 10	Not Installed
DIMM 11	Not Installed
DIMM 12 (DDR3)	4096 Mbytes
Board 2	
Card 2 Status	Offline
DIMM 1	Not Installed
DIMM 2	Not Installed
DIMM 3	Not Installed
DIMM 4	Not Installed
DIMM 5	Not Installed
DIMM 6	Not Installed
DIMM 7	Not Installed
DIMM 8	Not Installed
DIMM 9	Not Installed
DIMM 10	Not Installed
DIMM 11	Not Installed
DIMM 12	Not Installed
ECC memory installed	Yes
Serial presence detect (SPD) information - DIMM 12, Card 1	

Exit Diagnostics
3) CLICK SAVE
Save

Note: If you are accessing the server from remote location, then you can make use of Virtual media feature of iLO. First you need to connect a USB key to your computer, then launch iLO of your Gen8 Server from the same computer.

From iLO, launch Remote Console, click Virtual Media, then select Floppy/USB key and select the drive letter of the USB key connected.

7. Save report to appropriate location and send to **HP Support**

Permanent link to the instruction:

ftp://iss_tool:{IU7yy+Q@ftp.usa.hp.com/AdvancedSurveyOnline.pdf