

---

# **salabim Documentation**

***Release 2.3.3***

**Ruud van der Ham**

**Aug 22, 2018**



## CONTENTS

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Requirements . . . . .	1
1.2	Installation . . . . .	2
1.3	Python . . . . .	3
<b>2</b>	<b>Modeling</b>	<b>5</b>
2.1	A simple model . . . . .	5
2.2	A bank example . . . . .	7
2.3	A bank office example with resources . . . . .	13
2.4	The bank office example with balking and reneging . . . . .	14
2.5	The bank office example with balking and reneging (resources) . . . . .	16
2.6	The bank office example with states . . . . .	18
2.7	The bank office example with standby . . . . .	19
<b>3</b>	<b>Component</b>	<b>21</b>
3.1	Process interaction . . . . .	23
3.2	Usage of process interaction methods within a function or method . . . . .	27
<b>4</b>	<b>Queue</b>	<b>29</b>
<b>5</b>	<b>Resource</b>	<b>33</b>
<b>6</b>	<b>State</b>	<b>39</b>
6.1	Process interaction with wait() . . . . .	40
<b>7</b>	<b>Monitor and MonitorTimestamp</b>	<b>43</b>

7.1	Monitor . . . . .	43
7.2	MonitorTimestamp . . . . .	47
<b>8</b>	<b>Distributions</b>	<b>53</b>
8.1	Beta . . . . .	54
8.2	Constant . . . . .	54
8.3	Erlang . . . . .	55
8.4	Gamma . . . . .	55
8.5	Exponential . . . . .	55
8.6	IntUniform . . . . .	55
8.7	Normal . . . . .	56
8.8	Poisson . . . . .	56
8.9	Triangular . . . . .	56
8.10	Uniform . . . . .	57
8.11	Weibull . . . . .	57
8.12	Cdf . . . . .	57
8.13	Pdf . . . . .	58
8.14	CumPdf . . . . .	59
8.15	Distribution . . . . .	60
<b>9</b>	<b>Animation</b>	<b>63</b>
9.1	Advanced . . . . .	69
9.2	Class Animate . . . . .	69
9.3	Video production and snapshots . . . . .	74
<b>10</b>	<b>Reading items from a file</b>	<b>75</b>
<b>11</b>	<b>Reference</b>	<b>77</b>
11.1	Animation . . . . .	77
11.2	Distributions . . . . .	103
11.3	Component . . . . .	115
11.4	Environment . . . . .	130
11.5	ItemFile . . . . .	141
11.6	Monitor . . . . .	142
11.7	MonitorTimestamp . . . . .	152
11.8	Queue . . . . .	161
11.9	Resource . . . . .	171
11.10	State . . . . .	174
11.11	Miscellaneous . . . . .	179

<b>12 About</b>	<b>183</b>
12.1 Who is behind salabim? . . . . .	183
12.2 Why is the package called salabim? . . . . .	183
12.3 Contributing and reporting issues . . . . .	184
12.4 Support . . . . .	184
12.5 License . . . . .	184
<b>13 Indices and tables</b>	<b>187</b>



## INTRODUCTION

Salabim is a package for discrete event simulation in Python. It follows the methodology of process description as originally demonstrated in *Simula* and later in *Prosim*, *Must* and *Tomas*. The process interaction methods are also quite similar to *SimPy 2*.

The package comprises discrete event simulation, queue handling, resources, statistical sampling and monitoring. On top of that real time animation is built in.

The package comes with a number of sample models.

### 1.1 Requirements

Salabim runs on

- CPython
- PyPy platform
- Pythonista (iOS)

The package runs under Python 2.7 or 3.x.

The following packages are required:

Platform	Base functionality	Animation	Video (mp4, avi)	Animated GIF
CPython	•	Pillow, tkinter	opencv, numpy	Pillow
PyPy	•	Pillow, tkinter	N/A	Pillow
Pythonista	•	Pillow	N/A	Pillow

Several CPython packages, like *WinPython* support Pillow out of the box. If not, install with: `pip install Pillow`

Under Linux, Pillow can be installed with: `sudo apt-get purge python3-pil sudo apt-get install python3-pil python3-pil.imagetk`

For, video production, installation of opencv and numpy may be required with `pip install opencv-python pip install numpy`

Running models under PyPy is highly recommended for production runs, where run time is important. We have found 6 to 7 times faster execution compared to CPython. However, for development, nothing can beat CPython or Pythonista.

## 1.2 Installation

The preferred way to install salabim is from PyPI with: `pip install salabim`

or to upgrade to a new version: `pip install salabim --upgrade`

You can find the package along with some support files and sample models on [www.github.com/salabim/salabim](http://www.github.com/salabim/salabim). From there you can directly download as a zip file and next extract all files. Alternatively the repository can be cloned.

For Pythonista, the easiest way to download salabim is:

- Tap ‘Open in...’.
- Tap ‘Run Pythonista Script’.
- Pick this script and tap the run button
- Import file
- Possibly after short delay, there will be a salabim-master.zip file in the root directory
- Tap this zip file and Extract files
- All files are now in a directory called salabim-master



- Optionally rename this directory to salabim

Salabim itself is provided as one Python script, called `salabim.py`. You may place that file in any directory where your models reside.

If you want salabim to be available from other directories, without copying the `salabim.py` script, either install from PyPI (see above) or run the supplied `install.py` file. In doing so, you will create (or update) a salabim directory in the site-package directory, which will then contain a copy of the salabim package.

## 1.3 Python

Python is a widely used high-level programming language for general-purpose programming, created by Guido van Rossum and first released in 1991. An interpreted language, Python has a design philosophy that emphasizes code readability (notably using whitespace indentation to delimit code blocks rather than curly brackets or keywords), and a syntax that allows programmers to express concepts in fewer lines of code than might be used in languages such as C++ or Java. The language provides constructs intended to enable writing clear programs on both a small and large scale.

A good way to start learning about Python is <https://www.python.org/about/gettingstarted/>



## MODELING

## 2.1 A simple model

Let's start with a very simple model, to demonstrate the basic structure, process interaction, component definition and output:

```
1 # Example - basic.py
2 import salabim as sim
3
4 class Car(sim.Component):
5     def process(self):
6         while True:
7             yield self.hold(1)
8
9 env = sim.Environment(trace=True)
10 Car()
11 env.run(till=5)
```

In basic steps:

We always start by importing salabim

```
import salabim as sim
```

Now we can refer to all salabim classes and function with `sim.`. For convenience, some functions or classes can be imported with, for instance

```
from salabim import now, main, Component
```

It is also possible to import all methods, classes and globals by

```
from salabim import *
```

, but we do not recommend that method.

The main body of every salabim model usually starts with

```
env = sim.Environment(parameters)
```

For each (active) component we define a class as in

```
class Car(sim.Component):
```

The class inherits from `sim.Component`.

Although it is possible to define other processes within a class, the standard way is to define a generator function called `process` in the class. A generator is a function with at least one `yield` statement. These are used in salabim context as a signal to give control to the sequence mechanism.

In this example,

```
yield self.hold(1)
```

gives control to the sequence mechanism and *comes back* after 1 time unit. The `self.` part means that it is this component to be held for some time. We will see later other uses of `yield` like `passivate`, `request`, `wait` and `standby`.

In the main body an instance of a car is created by `Car()`. It automatically gets the name `car.0`. As there is a generator function called `process` in `Car`, this process description will be activated (by default at time now, which is 0 here). It is possible to start a process later, but this is by far the most common way to start a process.

With

```
env.run(till=5)
```

we start the simulation and get back control after 5 time units. A component called *main* is defined under the hood to get access to the main process.

When we run this program, we get the following output

line#	time	current component	action	information
-----	-----	-----	-----	-----
↪-----				
11			line numbers refers to	Example - basic.py
11			default environment initialize	
11	0.000	main	main create	
12			current	
			car.0 create	

12		car.0 activate	scheduled for	0.000 @	6	└
↪process=process						
13		main run	scheduled for	5.000 @	13+	
6	0.000	car.0	current			
8		car.0 hold	scheduled for	1.000 @	8+	
8+	1.000	car.0	current			
8		car.0 hold	scheduled for	2.000 @	8+	
8+	2.000	car.0	current			
8		car.0 hold	scheduled for	3.000 @	8+	
8+	3.000	car.0	current			
8		car.0 hold	scheduled for	4.000 @	8+	
8+	4.000	car.0	current			
8		car.0 hold	scheduled for	5.000 @	8+	
13+	5.000	main	current			

## 2.2 A bank example

Now let's move to a more realistic model. Here customers are arriving in a bank, where there is one clerk. This clerk handles the customers in first in first out (FIFO) order. We see the following processes:

- The customer generator that creates the customers, with an inter arrival time of uniform(5,15)
- The customers
- The clerk, which serves the customers in a constant time of 30 (overloaded and non steady state system)

And we need a queue for the customers to wait for service.

The model code is:

```

1 # Example - bank, 1 clerk.py
2 import salabim as sim
3
4
5 class CustomerGenerator(sim.Component):
6     def process(self):
7         while True:
8             Customer()
9             yield self.hold(sim.Uniform(5, 15).sample())
10
11
```

```
12 class Customer(sim.Component):
13     def process(self):
14         self.enter(waitingline)
15         if clerk.ispassive():
16             clerk.activate()
17         yield self.passivate()
18
19
20 class Clerk(sim.Component):
21     def process(self):
22         while True:
23             while len(waitingline) == 0:
24                 yield self.passivate()
25             self.customer = waitingline.pop()
26             yield self.hold(30)
27             self.customer.activate()
28
29
30 env = sim.Environment(trace=True)
31
32 CustomerGenerator(name='') # using name='' prevents the name customergenerator to be serialized
33 clerk = Clerk()
34 waitingline = sim.Queue('waitingline')
35
36 env.run(till=50)
37 print()
38 waitingline.print_statistics()
```

Let's look at some details

```
yield self.hold(sim.Uniform(5, 15).sample())
```

will do the statistical sampling and wait for that time till the next customer is created.

With

```
self.enter(waitingline)
```

the customer places itself at the tail of the waiting line.

Then, the customer checks whether the clerk is idle, and if so, activates him immediately.

```
if clerk.ispassive():
    clerk.activate()
```

Once the clerk is active (again), it gets the first customer out of the waitingline with

```
self.customer = waitingline.pop()
```

and holds for 30 time units with

```
yield self.hold(30)
```

After that hold the customer is activated and will terminate

```
self.customer.activate()
```

In the main section of the program, we create the CustomerGenerator, the Clerk and a queue called waitingline. After the simulation is finished, the statistics of the queue are presented with

```
waitingline.print_statistics()
```

The output looks like

line#	time	current component	action	information
-----	-----	-----	-----	-----
↪-----			line numbers refers to	Example - bank, 1 clerk.py
30			default environment initialize	
30			main create	
30	0.000	main	current	
32			customergenerator create	
32			customergenerator activate	scheduled for 0.000 @ 6
↪process=process				
33			clerk.0 create	
33			clerk.0 activate	scheduled for 0.000 @ 21
↪process=process				
34			waitingline create	
36			main run	scheduled for 50.000 @ 36+
6	0.000	customergenerator	current	
8			customer.0 create	
8			customer.0 activate	scheduled for 0.000 @ 13
↪process=process				

9		customergenerator hold	scheduled for	14.631 @	9+
21	0.000 clerk.0	current			
24		clerk.0 passivate			
13	0.000 customer.0	current			
14		customer.0	enter waitingline		
16		clerk.0 activate	scheduled for	0.000 @	24+
17		customer.0 passivate			
24+	0.000 clerk.0	current			
25		customer.0	leave waitingline		
26		clerk.0 hold	scheduled for	30.000 @	26+
9+	14.631 customergenerator	current			
8		customer.1 create			
8		customer.1 activate	scheduled for	14.631 @	13
↪process=process					
9		customergenerator hold	scheduled for	21.989 @	9+
13	14.631 customer.1	current			
14		customer.1	enter waitingline		
17		customer.1 passivate			
9+	21.989 customergenerator	current			
8		customer.2 create			
8		customer.2 activate	scheduled for	21.989 @	13
↪process=process					
9		customergenerator hold	scheduled for	32.804 @	9+
13	21.989 customer.2	current			
14		customer.2	enter waitingline		
17		customer.2 passivate			
26+	30.000 clerk.0	current			
27		customer.0 activate	scheduled for	30.000 @	17+
25		customer.1	leave waitingline		
26		clerk.0 hold	scheduled for	60.000 @	26+
17+	30.000 customer.0	current			
		customer.0 ended			
9+	32.804 customergenerator	current			
8		customer.3 create			
8		customer.3 activate	scheduled for	32.804 @	13
↪process=process					
9		customergenerator hold	scheduled for	40.071 @	9+
13	32.804 customer.3	current			
14		customer.3	enter waitingline		
17		customer.3 passivate			
9+	40.071 customergenerator	current			
8		customer.4 create			



```

      8      customer.4 activate      scheduled for      40.071 @      13
↪process=process
      9      customergenerator hold      scheduled for      54.737 @      9+
     13      40.071 customer.4      current
     14      customer.4      enter waitingline
     17      customer.4 passivate
    36+      50.000 main      current

```

Statistics of waitingline at 50

		all	excl.zero	zero
Length of waitingline	duration	50	35.369	14.631
	mean	1.410	1.993	
	std.deviation	1.107	0.754	
	minimum	0	1	
	median	2	2	
	90% percentile	3	3	
	95% percentile	3	3	
	maximum	3	3	
Length of stay in waitingline	entries	2	1	1
	mean	7.684	15.369	
	std.deviation	7.684	0	
	minimum	0	15.369	
	median	15.369	15.369	
	90% percentile	15.369	15.369	
	95% percentile	15.369	15.369	
	maximum	15.369	15.369	

Now, let's add more clerks. Here we have chosen to put the three clerks in a list

```
clerks = [Clerk() for _ in range(3)]
```

although in this case we could have also put them in a salabim queue, like

```
clerks = sim.Queue('clerks')
for _ in range(3):
    Clerk().enter(clerks)
```

And, to restart a clerk

```
for clerk in clerks:
    if clerk.ispassive():
        clerk.activate()
        break # reactivate only one clerk
```

The complete source of a three clerk post office:

```
# Example - bank, 3 clerks.py
import salabim as sim

class CustomerGenerator(sim.Component):
    def process(self):
        while True:
            Customer()
            yield self.hold(sim.Uniform(5, 15).sample())

class Customer(sim.Component):
    def process(self):
        self.enter(waitingline)
        for clerk in clerks:
            if clerk.ispassive():
                clerk.activate()
                break # activate only one clerk
        yield self.passivate()

class Clerk(sim.Component):
    def process(self):
        while True:
            while len(waitingline) == 0:
                yield self.passivate()
            self.customer = waitingline.pop()
            yield self.hold(30)
            self.customer.activate()

env = sim.Environment(trace=False)
CustomerGenerator(name='')
clerks = [Clerk() for _ in range(3)]
```

```
waitingline = sim.Queue('waitingline')

env.run(till=50000)
waitingline.print_histograms()

waitingline.print_info()
```

## 2.3 A bank office example with resources

The salabim package contains another useful concept for modelling: resources. Resources have a limited capacity and can be claimed by components and released later.

In the model of the bank with the same functionality as the above example, the clerks are defined as a resource with capacity 3.

The model code is:

```
# Example - bank, 3 clerks (resources).py
import salabim as sim

class CustomerGenerator(sim.Component):
    def process(self):
        while True:
            Customer()
            yield self.hold(sim.Uniform(5, 15).sample())

class Customer(sim.Component):
    def process(self):
        yield self.request(clerks)
        yield self.hold(30)
        self.release()

env = sim.Environment(trace=False)
CustomerGenerator(name='customergenerator')
clerks = sim.Resource('clerks', capacity=3)

env.run(till=50000)
```

```
clerks.print_histograms()
clerks.print_info()
```

Let's look at some details.

```
clerks = sim.Resource('clerks', capacity=3)
```

This defines a resource with a capacity of 3.

And then, a customer, just tries to claim one unit (=clerk) from the resource with

```
yield self.request(clerks)
```

Here, we use the default of 1 unit. If the resource is not available, the customer just waits for it to become available (in order of arrival).

In contrast with the previous example, the customer now holds itself for 10 time units.

And after these 10 time units, the customer releases the resource with

```
self.release()
```

The effect is that salabim then tries to honor the next pending request, if any.

The statistics are maintained in a system queue, called `clerk.requesters()`.

The output is very similar to the earlier example. The statistics are exactly the same.

## 2.4 The bank office example with balking and reneging

Now, we assume that clients are not going to the queue when there are more than 5 clients waiting (balking). On top of that, if a client is waiting longer than 50, he/she will leave as well (reneging).

The model code is:

```
# Example - bank, 3 clerks, reneging.py
import salabim as sim

class CustomerGenerator(sim.Component):
    def process(self):
        while True:
```

```

    Customer()
    yield self.hold(sim.Uniform(5, 15).sample())

class Customer(sim.Component):
    def process(self):
        if len(waitingline) >= 5:
            env.number_balked += 1
            env.print_trace(' ', ' ', 'balked')
            yield self.cancel()
        self.enter(waitingline)
        for clerk in clerks:
            if clerk.ispassive():
                clerk.activate()
                break # activate only one clerk
        yield self.hold(50) # if not serviced within this time, renege
        if self in waitingline:
            self.leave(waitingline)
            env.number_reneged += 1
            env.print_trace(' ', ' ', 'reneged')
        else:
            yield self.passivate() # wait for service to be completed

class Clerk(sim.Component):
    def process(self):
        while True:
            while len(waitingline) == 0:
                yield self.passivate()
            self.customer = waitingline.pop()
            self.customer.activate() # get the customer out of it's hold(50)
            yield self.hold(30)
            self.customer.activate() # signal the customer that's all's done

env = sim.Environment(trace=False)
CustomerGenerator(name='customergenerator')
env.number_balked = 0
env.number_reneged = 0
clerks = [Clerk() for _ in range(3)]

waitingline = sim.Queue('waitingline')

```

```
waitingline.length.monitor(False)
env.run(duration=1500) # first do a prerun of 1500 time units without collecting data
waitingline.length.monitor(True)
env.run(duration=1500) # now do the actual data collection for 1500 time units
waitingline.length.print_histogram(30, 0, 1)
print()
waitingline.length_of_stay.print_histogram(30, 0, 10)
print('number reneged', env.number_reneged)
print('number balked', env.number_balked)
```

Let's look at some details.

```
yield self.cancel()
```

This makes the current component (a customer) a data component (and be subject to garbage collection), if the queue length is 5 or more.

The reneging is implemented by a hold of 50. If a clerk can service a customer, it will take the customer out of the waitingline and will activate it at that moment. The customer just has to check whether he/she is still in the waiting line. If so, he/she has been serviced in time and thus will renege.

```
yield self.hold(50)
if self in waitingline:
    self.leave(waitingline)
    env.number_reneged += 1
else:
    self.passivate()
```

All the clerk has to do when starting servicing a client is to get the next customer in line out of the queue (as before) and activate this customer (at time now). The effect is that the hold of the customer will end.

```
self.customer = waitingline.pop()
self.customer.activate()
```

## 2.5 The bank office example with balking and reneging (resources)

Now we show how the balking and reneging is implemented with resources.

The model code is:

```

# Example - bank, 3 clerks, reneging (resources).py
import salabim as sim

class CustomerGenerator(sim.Component):
    def process(self):
        while True:
            Customer()
            yield self.hold(sim.Uniform(5, 15).sample())

class Customer(sim.Component):
    def process(self):
        if len(clerks.requesters()) >= 5:
            env.number_balked += 1
            env.print_trace(' ', ' ', 'balked')
            yield self.cancel()
        yield self.request(clerks, fail_delay=50)
        if self.failed():
            env.number_reneged += 1
            env.print_trace(' ', ' ', 'reneged')
        else:
            yield self.hold(30)
            self.release()

env = sim.Environment(trace=False)
CustomerGenerator(name='customergenerator')
env.number_balked = 0
env.number_reneged = 0
clerks = sim.Resource('clerk', 3)

env.run(till=50000)

clerks.requesters().length.print_histogram(30, 0, 1)
print()
clerks.requesters().length_of_stay.print_histogram(30, 0, 10)
print('number reneged', env.number_reneged)
print('number balked', env.number_balked)

```

As you can see, the balking part is exactly the same as in the example without resources.

For the renenging, all we have to do is add a fail\_delay

```
yield self.request(clerks, fail_delay=50)
```

If the request is not honored within 50 time units, the process continues after that request statement. And then, we just check whether the request has failed

```
if self.failed():
    env.number_reneged += 1
```

This example shows clearly the advantage of the resource solution over the passivate/activate method, in this example.

## 2.6 The bank office example with states

The salabim package contains yet another useful concept for modelling: states. In this case, we define a state called worktodo.

The model code is:

```
# Example - bank, 3 clerks (state).py
import salabim as sim

class CustomerGenerator(sim.Component):
    def process(self):
        while True:
            Customer()
            yield self.hold(sim.Uniform(5, 15).sample())

class Customer(sim.Component):
    def process(self):
        self.enter(waitingline)
        worktodo.trigger(max=1)
        yield self.passivate()

class Clerk(sim.Component):
    def process(self):
        while True:
            if len(waitingline) == 0:
                yield self.wait(worktodo)
```



```

        self.customer = waitingline.pop()
        yield self.hold(30)
        self.customer.activate()

env = sim.Environment(trace=False)
CustomerGenerator(name='customergenerator')
for i in range(3):
    Clerk()
waitingline = sim.Queue('waitingline')
worktodo = sim.State('worktodo')

env.run(till=50000)
waitingline.print_histograms()
worktodo.print_histograms()

```

Let's look at some details.

```
worktodo = sim.State('worktodo')
```

This defines a state with an initial value False.

In the code of the customer, the customer tries to trigger one clerk with

```
worktodo.trigger(max=1)
```

The effect is that if there are clerks waiting for worktodo, the first clerk's wait is honored and that clerk continues its process after

```
yield self.wait(worktodo)
```

Note that the clerk is only going to wait for worktodo after completion of a job if there are no customers waiting.

## 2.7 The bank office example with standby

The salabim package contains yet another powerful process mechanism, called standby. When a component is in standby mode, it will become current after *each* event. Normally, the standby will be used in a while loop where at every event one or more conditions are checked.

The model with standby is

```
.. literalinclude:: ../../\Example - bank, 3 clerks (standby.py)
```

In this case, the condition is checked frequently with

```
while len(waitingline) == 0:  
    yield self.standby()
```

The rest of the code is very similar to the version with states.

**Warning:** It is very important to realize that this mechanism can have significant impact on the performance, as after EACH event, the component becomes current and has to be checked. In general it is recommended to try and use states or a more straightforward passivate/activate construction.

## COMPONENT

Components are the key elements of salabim simulations.

Components can be either data or active. An active component has one or more process descriptions and is activated at some point of time. You can make a data component active with `activate`. And an active component can become data either with a `cancel` or by reaching the end of its process method.

It is easy to create a data component by:

```
data_component = sim.Component()
```

Data components may be placed in a queue. You can't activate this component as such as there is no associated process method.

In order to make an active component it is necessary to first define a class:

```
class Ship(sim.Component):
```

And then there has to be at least one generator method, normally called `process`:

```
class Ship(sim.Component):
    def process(self):
        ....
        yield ...
        ....
```

The process has to have at least one `yield` (or `yield from`) statement!

Creation and activation can be combined by making a new instance of the class:

```
ship1 = Ship()
ship2 = Ship()
ship3 = Ship()
```

---

This causes three Ships to be created and to start them at `Sim.process()`. The ships will automatically get the name `ship.0`, etc., unless a name is given explicitly. If no process method is found for Ship, the ship will be a data component. In that case, it becomes active by means of an activate statement:

```
class Crane(sim.Component):
    def unload(self):
        ....
        yield ...
        ....

crane1 = Crane()
crane1.activate(process='unload')

crane2 = Crane(process='unload')
```

Effectively, creation and start of `crane1` and `crane2` is the same.

Although not very common, it is possible to activate a component at a certain time or with a specified delay:

```
ship1.activate(at=100)
ship2.activate(delay=50)
```

At time of creation it is sometimes useful to be able to set attributes, prepare for actions, etc. This is possible in salabim by defining an `__init__` and/or a `setup` method:

If the `__init__` method is used, it is required to call the `Component.__init__` method from within the overridden method:

```
class Ship(sim.Component):
    def __init__(self, length, *args, **kwargs):
        sim.Component.__init__(self, *args, **kwargs)
        self.length = length

ship = Ship(length=250)
```

This sets `ship.length` to 250.

In most cases, the `setup` method is preferred, however. This method is called after ALL initialization code of `Component` is executed.

```
class Ship(sim.Component):
    def setup(self, length):
        self.length = length
```

```
ship = Ship(length=250)
```

Now, `ship.length` will be 250.

Note that `setup` gets all arguments and keyword arguments, that are not ‘consumed’ by `__init__` and/or the process call.

Only in very specific cases, `__init__` will be necessary.

Note that the `setup` code can be used for data components as well.

## 3.1 Process interaction

A component may be in one of the following states:

- data
- current
- scheduled
- passive
- requesting
- waiting
- standby
- interrupted

The scheme below shows how components can go from state to state.

from/to	data	current	scheduled	passive	requesting	waiting	standby	interrupted
data		activate[1]	activate					
current	process end		yield hold	yield passivate	yield request	yield wait	yield standby	
.	yield cancel		yield activate					
scheduled	cancel	next event	hold	passivate	request	wait	standby	interrupt
.			activate					
passive	cancel	activate[1]	activate		request	wait	standby	interrupt
.			hold[2]					
requesting	cancel	claim honor	activate[3]	passivate	request	wait	standby	interrupt
.		time out			activate[4]			
waiting	cancel	wait honor	activate[5]	passivate	wait	wait	standby	interrupt
.		timeout				activate[6]		
standby	cancel	next event	activate	passivate	request	wait		interrupt
interrupted	cancel		resume[7]	resume[7]	resume[7]	resume[7]	resume[7]	interrupt[8]
.			activate	passivate	request	wait	standby	

[1] via scheduled [2] not recommended [3] with keep\_request=False (default) [4] with keep\_request=True. This allows to set a new time out [5] with keep\_wait=False (default) [6] with keep\_wait=True. This allows to set a new time out [7] state at time of interrupt [8] increases the interrupt\_level

### 3.1.1 Creation of a component

Although it is possible to create a component directly with `x=sim.Component()`, this makes it very hard to make that component into an active component, because there's no process method. So, nearly always we define a class based on `sim.Component`

```
def Car(sim.Component):
    def process(self):
        ...
```

If we then say `car=Car()`, a component is created and it activated from process. This process has to be a generator function, so needs to contain at least one `yield` (or `yield from`) statement.

The result is that `car` is put on the future event list (for time now) and when it's its turn, the component becomes current.

It is also possible to set a time at which the component (`car`) becomes active, like `car=Car(at=10)`.

And instead of starting at process, the component may be initialized to start at another generation function, like `car=Car(process='wash')`.

And, finally, if there is a process method, you can disable the automatic activation (i.e. make it a data component), by specifying `process=''`.

If there is no process method, and `process=` is not given, the component becomes a data component.

### 3.1.2 activate

Activate is the way to turn a data component into a live component. If you do not specify a process, the generator function process is assumed. So you can say

```
car0 = Car(process='') # data component
car0.activate() # activate @ process if exists, otherwise error
car1 = Car(process='') # data component
car1.activate(process='wash') # activate @ wash
```

- If the component to be activated is current, always use `yield self.activate`. The effect is that the component becomes scheduled, thus this is essentially equivalent to the preferred `hold` method.
- If the component to be activated is passive, the component will be activated at the specified time.
- If the component to be activated is scheduled, the component will get a new scheduled time.
- If the component to be activated is requesting, the request will be terminated, the attribute `failed` set and the component will become scheduled. If `keep_request=True` is specified, only the `fail_at` will be updated and the component will stay requesting.
- If the component to be activated is waiting, the wait will be terminated, the attribute `failed` set and the component will become scheduled. If `keep_wait=True` is specified, only the `fail_at` will be updated and the component will stay waiting.
- If the component to be activated is standby, the component will get a new scheduled time and become scheduled.
- If the component is interrupted, the component will be activated at the specified time.

### 3.1.3 hold

Hold is the way to make a, usually current, component scheduled.

- If the component to be held is current, the component becomes scheduled for the specified time. Always use `yield self.hold()` in this case.
- If the component to be held is passive, the component becomes scheduled for the specified time.
- If the component to be held is scheduled, the component will be rescheduled for the specified time, thus essentially the same as `activate`.
- If the component to be held is standby, the component becomes scheduled for the specified time.
- If the component to be activated is requesting, the request will be terminated, the attribute `failed` set and the component will become scheduled. It is recommended to use the more versatile `activate` method.
- If the component to be activated is waiting, the wait will be terminated, the attribute `failed` set and the component will become scheduled. It is recommended to use the more versatile `activate` method.
- If the component is interrupted, the component will be activated at the specified time.

### 3.1.4 passivate

Passivate is the way to make a, usually current, component passive. This is actually the same as scheduling for `time=inf`.

- If the component to be passivated is current, the component becomes passive. Always use `yield self.passivate()` in this case.
- If the component to be passivated is passive, the component remains passive.
- If the component to be passivated is scheduled, the component becomes passive.
- If the component to be held is standby, the component becomes passive.
- If the component to be activated is requesting, the request will be terminated, the attribute failed set and the component becomes passive. It is recommended to use the more versatile `activate` method.
- If the component to be activated is waiting, the wait will be terminated, the attribute failed set and the component becomes passive. It is recommended to use the more versatile `activate` method.
- If the component is interrupted, the component becomes passive.

### 3.1.5 cancel

Cancel has the effect that the component becomes a data component.

- If the component to be cancelled is current, always use `yield self.cancel()`.
- If the component to be cancelled is passive, scheduled, interrupted or standby, the component becomes a data component.
- If the component to be cancelled is requesting, the request will be terminated, the attribute failed set and the component becomes a data component.
- If the component to be cancelled is waiting, the wait will be terminated, the attribute failed set and the component becomes a data component.

### 3.1.6 standby

Standby has the effect that the component will be triggered on the next simulation event.

- If the component is current, use always `yield self.standby()`
- Although theoretically possible it is not recommended to use `standby` for non current components.



### 3.1.7 request

Request has the effect that the component will check whether the requested quantity from a resource is available. It is possible to check for multiple availability of a certain quantity from several resources. By default, there is no limit on the time to wait for the resource(s) to become available. But, it is possible to set a time with `fail_at` at which the condition has to be met. If that failed, the component becomes current at the given point of time. The code should then check whether the request had failed. That can be checked with the `Component.failed()` method.

If the component is canceled, activated, passivated, interrupted or held the failed flag will be set as well.

- If the component is current, use always `yield self.request()`
- Although theoretically possible it is not recommended to use `request` for non current components.

### 3.1.8 wait

Wait has the effect that the component will check whether the value of a state meets a given condition. available. It is possible to check for multiple states. By default, there is no limit on the time to wait for the condition(s) to be met. But, it is possible to set a time with `fail_at` at which the condition has to be met. If that failed, the component becomes current at the given point of time. The code should then check whether the wait had failed. That can be checked with the `Component.failed()` method.

If the component is canceled, activated, passivated, interrupted or held the failed flag will be set as well.

- If the component is current, use always `yield self.wait()`
- Although theoretically possible it is not recommended to use `wait` for non current components.

### 3.1.9 interrupt

With interrupt components that are not current or data can be temporarily be interrupted. Once a `resume` is called for the component, the component will continue (for scheduled with the remaining time, for waiting or requesting possibly with the remaining `fail_at` duration).

## 3.2 Usage of process interaction methods within a function or method

There is a way to put process interaction statement in another function or method. This requires a slightly different way than just calling the method.

As an example, let's assume that we want a method that holds a component for a number of minutes and that the time unit is actually seconds. So we need a method to wait 60 times the given parameter

We start with a not so nice solution:

```
class X(sim.Component):
    def process(self):
        yield self.hold(60 * 2)
        yield self.hold(60 * 5)
```

Now we just add a method `hold_minutes`:

```
def hold_minutes(self, minutes):
    yield self.hold(60 * minutes)
```

Direct calling `hold_minutes` is not possible. Instead we have to say:

```
class X(sim.Component):
    def hold_minutes(self, minutes):
        yield self.hold(60 * minutes)

    def process(self):
        yield from self.hold_minutes(2)
        yield from self.hold_minutes(5)
```

All process interaction statements including `passivate`, `request` and `wait` can be used that way!

So remember if the method contains a `yield` statement (technically speaking that's a generator function), it should be called with `yield from`.

**QUEUE**

Salabim has a class Queue for queue handling of components. The advantage over the standard list and deque are:

- double linked, resulting in easy and efficient insertion and deletion at any place
- builtin data collection and statistics
- priority sorting

Salabim uses queues internally for resources and states as well.

Definition of a queue is simple:

```
waitingline=sim.Queue('waitingline')
```

The name of a queue can retrieved with `q.name()`.

There is a set of methods for components to enter and leave a queue and retrieval:

Component	Queue	Description
c.enter(q)	q.add(c) or q.append(c)	c enters q at the tail
c.enter_to_head(q)	q.add_at_head(c)	c enters q at the head
c.enter_in_front_of(c1)	q.add_in_front_of(c, c1)	c enters q in front of c1
c.enter_behind(c1)	q.add_behind(c, c1)	c enters q behind c1
c.enter_sorted(q, p)	q.add_sorted(c, p)	c enters q according to priority p
c.leave(q)	q.remove(c) q.insert(c,i) q.pop() q.pop(i) q.head() or q[0] q.tail() or q[-1] q.index(c) q.component_with_name(n)	c leaves q insert c just before the i-th component in q removes head of q and returns it removes i-th component in q and returns it returns head of q returns tail of q returns the position of c in q returns the component with name n in q
c.successor(q)	q.successor(c)	successor of c in q
c.predecessor(q)	q.predecessor(c)	predecessor of c in q
c.count(q)	q.count(c)	returns 1 if c in q, 0 otherwise
c.queuees()		returns a set with all queues where c is in
c.count()	returns number of queues c is in	

Queue is a standard ABC class, which means that the following methods are supported:

- `len(q)` to retrieve the length of a queue, alternatively via the timestamped monitor with `q.length()`
- `c in q` to check whether a component is in a queue
- `for c in q:` to traverse a queue (Note that it is even possible to remove and add components in the for body).
- `reversed(q)` for the components in the queue in reverse order
- slicing is supported, so it is possible to get the 2nd, 3rd and 4th component in a queue with `q[1:4]` or `q[: -1]` for all elements in reverse order.
- `del q[i]` removes the i'th component. Also slicing is supported, so e.g. to delete the last three elements from queue, `del q[-1:-4:-1]`
- `q.append(c)` is equivalent to `q.add(c)`

It is possible to do a number of operations that work on the queues:

- `q.intersection(q1)` or `q & q1` returns a new queue with components that are both in q and q1
- `q.difference(q1)` or `q - q1` returns a new queue with components that are in q1 but not in q2
- `q.union(q1)` or `q | q1` returns a new queue with components that are in q or q1
- `q.symmetric_difference(q1)` or `q ^ q1` returns a queue with components that are in q or q1, but not both

- `q.clear()` empties a queue
- `q.copy()` copies all components in `q` to a new queue. The queue `q` is untouched.
- `q.move()` copies all components in `q` to a new queue. The queue `q` is emptied.
- `q.extend(q1)` extends the `q` with elements in `q1`, that are not yet in `q`

Salabim keeps track of the enter time in a queue: `c.enter_time(q)`

Unless disabled explicitly, the length of the queue and length of stay of components are monitored in `q.length` and `q.length_of_stay`. It is possible to obtain a number of statistics on these monitors (cf. `Monitor` and `MonitorTimestamp`).

With `q.print_statistics()` the key statistics of these two monitors are printed.

E.g.:

-----				
Length of waitingline	duration	50000	48499.381	1500.619
	mean	8.427	8.687	
	std.deviation	4.852	4.691	
	minimum	0	1	
	median	9	10	
	90% percentile	14	14	
	95% percentile	16	16	
	maximum	21	21	
Length of stay in waitingline	entries	4995	4933	62
	mean	84.345	85.405	
	std.deviation	48.309	47.672	
	minimum	0	0.006	
	median	94.843	95.411	
	90% percentile	142.751	142.975	
	95% percentile	157.467	157.611	
	maximum	202.153	202.153	

With `q.print_info()` a summary of the contents of a queue can be printed.

E.g.

```
Queue 0x20e116153c8
  name=waitingline
  component(s):
```

customer.4995	enter_time 49978.472 priority=0
customer.4996	enter_time 49991.298 priority=0

## RESOURCE

Resources are a powerful way of process interaction.

A resource has always a capacity (which can be zero and even negative). This capacity will be specified at time of creation, but may change over time. There are two of types resources:

- standard resources, where each claim is associated with a component (the claimer). It is not necessary that the claimed quantities are integer.
- anonymous resources, where only the claimed quantity is registered. This is most useful for dealing with levels, lengths, etc.

Resources are defined like

```
clerks = Resource('clerks', capacity=3)
```

And then a component can request a clerk

```
yield self.request(clerks)  # request 1 from clerks
```

It is also possible to request for more resources at once

```
yield self.request(clerks, (assistance, 2))  # request 1 from clerks AND 2 from assistance
```

Resources have a queue `requesters` containing all components trying to claim from the resource. And a queue `claimers` containing all components claiming from the resource (not for anonymous resources).

It is possible to release a quantity from a resource with `c.release()`, e.g.

```
self.release(r)  # releases all claimed quantity from r  
self.release((r, 2))  # release quantity 2 from r
```

Alternatively, it is possible to release from a resource directly, e.g.

```
r.release()  # releases the total quantity from all claiming components
r.release(10) # releases 10 from the resource; only valid for anonymous resources
```

After a release, all requesting components will be checked whether their claim can be honored.

Resources have a number of monitors and timestamped monitors:

- `claimers().length`
- `claimers().length_of_stay`
- `requesters().length`
- `requesters().length_of_stay`
- `claimed_quantity`
- `available_quantity`
- `capacity`
- `occupancy`

By default, all monitors are enabled.

With `r.print_statistics()` the key statistics of these all monitors are printed.

E.g.:

```
Statistics of clerk at      50000.000
                                     all      excl.zero      zero
-----
Length of requesters of clerk
    duration      50000      48499.381      1500.619
    mean           8.427        8.687
    std.deviation   4.852        4.691
    minimum         0           1
    median          9           10
    90% percentile  14          14
    95% percentile  16          16
    maximum        21          21
Length of stay in requesters of clerk
    entries      4995      4933      62
    mean         84.345      85.405
    std.deviation 48.309      47.672
```



	minimum	0	0.006	
	median	94.843	95.411	
	90% percentile	142.751	142.975	
	95% percentile	157.467	157.611	
	maximum	202.153	202.153	
Length of claimers of clerk	duration	50000	50000	0
	mean	2.996	2.996	
	std.deviation	0.068	0.068	
	minimum	1	1	
	median	3	3	
	90% percentile	3	3	
	95% percentile	3	3	
	maximum	3	3	
Length of stay in claimers of clerk	entries	4992	4992	0
	mean	30	30	
	std.deviation	0.000	0.000	
	minimum	30.000	30.000	
	median	30	30	
	90% percentile	30	30	
	95% percentile	30	30	
	maximum	30.000	30.000	
Capacity of clerk	duration	50000	50000	0
	mean	3	3	
	std.deviation	0	0	
	minimum	3	3	
	median	3	3	
	90% percentile	3	3	
	95% percentile	3	3	
	maximum	3	3	
Available quantity of clerk	duration	50000	187.145	49812.855
	mean	0.004	1.078	
	std.deviation	0.068	0.268	
	minimum	0	1	

	median	0	1	
	90% percentile	0	1	
	95% percentile	0	2	
	maximum	2	2	
Claimed quantity of clerk	duration	50000	50000	0
	mean	2.996	2.996	
	std.deviation	0.068	0.068	
	minimum	1	1	
	median	3	3	
	90% percentile	3	3	
	95% percentile	3	3	
	maximum	3	3	

With `r.print_info()` a summary of the contents of the queues can be printed.

E.g.

```
Resource 0x112e8f0b8
name=clerk
capacity=3
requesting component(s):
  customer.4995      quantity=1
  customer.4996      quantity=1
claimed_quantity=3
claimed by:
  customer.4992      quantity=1
  customer.4993      quantity=1
  customer.4994      quantity=1
```

The capacity may be changed with `r.set_capacity(x)`. Note that this may lead to requesting components to be honored.

Querying of the capacity, claimed quantity and available quantity can be done via the timestamped monitors: `r.capacity()`, `r.claimed_quantity()` and `r.available_quantity()`

It is possible to calculate the occupancy of a resource with

```
occupancy = r.claimed_quantity().mean / r.capacity().mean
```

or, by tallying at each change:

```
r.occupancy.mean()
```

Note that these two methods do not return the same result.



## STATE

States together with the `Component.wait()` method provide a powerful way of process interaction.

A state will have a certain value at a given time. In its simplest form a component can then wait for a specific value of a state. Once that value is reached, the component will be resumed.

Definition is simple, like `dooropen=sim.State('dooropen')`. The default initial value is `False`, meaning the door is closed.

Now we can say

```
dooropen.set()
```

to open the door.

If we want a person to wait for an open door, we could say

```
yield self.wait(dooropen)
```

If we just want at most one person to enter, we say `dooropen.trigger(max=1)`.

We can obtain the current value by just calling the state, like in

```
print('door is ', ('open' if dooropen() else 'closed'))
```

Alternatively, we can get the current value with the `get` method

```
print('door is ', ('open' if dooropen.get() else 'closed'))
```

The value of a state is automatically monitored in the `state.value` timestamped monitor.

All components waiting for a state are in a salabim queue, called `waiters()`.

States can be used also for non values other than bool type. E.g.

```
light=sim.State('light', value='red')
...
light.state.set('green')
```

Or define a int/float state

```
level=sim.State('level', value=0)
...
level.set(level()+10)
```

States have a number of monitors and timestamped monitors:

- value, where all the values are collected over time
- waiters().length
- waiters().length\_of\_stay

## 6.1 Process interaction with wait()

A component can wait for a state to get a certain value. In its most simple form

```
yield self.wait(dooropen)
```

Once the dooropen state is True, the component will continue.

As with request() it is possible to set a timeout with fail\_at or fail\_delay

```
yield self.wait(dooropen, fail_delay=10)
if self.failed:
    print('impatient ...')
```

In the above example we tested for a state to be True.

There are three ways to test for a value:

### 6.1.1 Scalar testing

It is possible to test for a certain value

```
yield self.wait((light, 'green'))
```

Or more states at once

```
yield self.wait((light, 'green'), night) # honored as soon as light is green OR it's night
yield self.wait((light, 'green'), (light, 'yellow')) # honored as soon as light is green OR yellow
```

It is also possible to wait for all conditions to be satisfied, by adding `all=True`:

```
yield self.wait((light, 'green'), engine_running, all=True) # honored as soon as light is green AND engine is running
```

### 6.1.2 Evaluation testing

Here, we use a string containing an expression that can evaluate to True or False. This is done by specifying at least one `$` in the test-string. This `$` will be replaced at run time by `state.value()`, where `state` is the state under test. Here are some examples

```
yield self.wait((light, '$ in ("green","yellow")'))
# if at run time light.value() is 'green', test for eval(state.value() in ("green","yellow")) ==> True
yield self.wait((level, '$ < 30'))
# if at run time level.value() is 50, test for eval(state.value() < 30) ==> False
```

During the evaluation, `self` refers to the component under test and `state` to the state under test. E.g.

```
self.limit = 30
yield self.wait((level, 'self.limit >= $'))
# if at run time level.value() is 10, test for eval(self.limit >= state.get()) ==> True, so honored
```

### 6.1.3 Function testing

This is a more complicated but also more versatile way of specifying the honor-condition. In that case, a function is required to specify the condition. The function needs to accept three arguments:

- `x = state.get()`
- component component under test
- state under test

E.g.:

```
yield self.wait((light, lambda x, _, _ : x in ('green', 'yellow'))
    # x is light.get()
yield self.wait((level, lambda x, _, _ : x >= 30))
    # x is level.get()
```

And, of course, it is possible to define a function

```
def levelreached(x):
    value, component, _ = x
    return value < component.limit

...

self.limit = 30
yield self.wait((level, levelreached))
```

### 6.1.4 Combination of testing methods

It is possible to mix scalar, evaluation and function testing. And it's also possible to specify `all=True` in any case.



## **MONITOR AND MONITORTIMESTAMP**

Monitors and timestamped monitors are a way to collect data from the simulation. They are automatically collected for resources, queues and states. On top of that the user can define its own (timestamped) monitors.

Monitors can be used to get statistics and as a feed for graphical tools, like matplotlib.

### **7.1 Monitor**

The Monitor class collects values which do not have a direct relation with the current time, e.g. the processing time of a part.

We define the monitor with `processingtime=sim.Monitor('processingtime')` and then collect values by `processingtime.tally(this_duration)`

By default, the collected values are stored in a list. Alternatively, it is possible to store the values in an array of one of the following types:

type	stored as	lowerbound	upperbound	number of bytes
'any'	list	N/A	N/A	depends on data
'bool'	integer	False	True	1
'int8'	integer	-128	127	1
'uint8'	integer	0	255	1
'int16'	integer	-32768	32767	2
'uint16'	integer	0	65535	2
'int32'	integer	2147483648	2147483647	4
'uint32'	integer	0	4294967295	4
'int64'	integer	-9223372036854775808	9223372036854775807	8
'uint64'	integer	0	18446744073709551615	8
'float'	float	-inf	inf	8

Monitoring with arrays takes up less space. Particularly when tallying a large number of values, this is strongly advised.

Note that if non numeric values are stored (only possible with the default setting ('any')), a tallied value is converted, if required, to a numeric value if possible, or 0 if not.

It is possible to use monitors with weighted data. In that case, the monitor has to be defined with `weighted=True`. For those weighted monitors, the tally method has an additional parameter `weight` which defaults to 0. All statistics will take the weights into account.

There is set of statistical data available:

- `number_of_entries`
- `number_of_entries_zero`
- `weight`
- `weight_zero`
- `mean`
- `std`
- `minimum`
- `median`
- `maximum`
- `percentile`
- `bin_number_of_entries` (number of entries between two given values)

- `bin_weight` (total weight of entries between two given values)
- `value_number_of_entries` (number of entries equal to a given value or set of values)
- `value_weight` (total weight of entries equal to a given value or set of values)

For all these statistics, it is possible to exclude zero entries, e.g. `m.mean(ex0=True)` returns the mean, excluding zero entries.

Besides, it is possible to get all collected values as an array with `x()`. In that case of ‘any’ monitors, the values might be converted. By specifying `force_numeric=False` the collected values will be returned as stored.

With the `monitor` method, the monitor can be enabled or disabled. Note that a tally is just ignored when the monitor is disabled.

Also, the current status (enabled/disabled) can be retrieved.

```
proctime.monitor(False) # disable monitoring
proctime.monitor(True)  # enable monitoring
if proctime.monitor():
    print('proctime is enabled')
```

Calling `m.reset()` will clear all tallied values.

The statistics of a monitor can be printed with `print_statistics()`. E.g: `waitingline.length_of_stay.print_statistics()`:

	all	excl.zero	zero
entries	4995	4933	62
mean	84.345	85.405	
std.deviation	48.309	47.672	
minimum	0	0.006	
median	94.843	95.411	
90% percentile	142.751	142.975	
95% percentile	157.467	157.611	
maximum	202.153	202.153	

And, a histogram can be printed with `print_histogram()`. E.g. `waitingline.length_of_stay.print_histogram(30, 0, 10)`:

	all	excl.zero	zero
entries	4995	4933	62
mean	84.345	85.405	
std.deviation	48.309	47.672	

```

minimum          0          0.006
median           94.843     95.411
90% percentile   142.751    142.975
95% percentile   157.467    157.611
maximum          202.153    202.153

```

```

      <=  entries    %  cum%
0         62      1.2   1.2 |
10        169      3.4   4.6 ** |
20        284      5.7  10.3 **** |
30        424      8.5  18.8 ***** |
40        372      7.4  26.2 ***** |
50        296      5.9  32.2 ***** |
60        231      4.6  36.8 *** |
70        192      3.8  40.6 *** |
80        188      3.8  44.4 *** |
90        136      2.7  47.1 ** |
100       352      7.0  54.2 ***** |
110       491      9.8  64.0 ***** |
120       414      8.3  72.3 ***** |
130       467      9.3  81.6 ***** |
140       351      7.0  88.7 ***** |
150       224      4.5  93.2 *** |
160       127      2.5  95.7 ** |
170        67      1.3  97.0 * |
180        59      1.2  98.2 |
190        61      1.2  99.4 |
200        24      0.5  99.9 |
210         4      0.1 100 |
↪ |
220         0      0   100 |
↪ |
230         0      0   100 |
↪ |
240         0      0   100 |
↪ |
250         0      0   100 |
↪ |
260         0      0   100 |
↪ |
270         0      0   100 |
↪ |

```

↩	280	0	0	100	↩
↩	290	0	0	100	↩
↩	300	0	0	100	↩
↩	inf	0	0	100	

If neither `number_of_bins`, nor `lowerbound` nor `bin_width` are specified, the histogram will be autoscaled.

Histograms can be printed with their values, instead of bins. This is particularly useful for non numeric tallied values, like names:

```
import salabim as sim

env = sim.Environment()

monitor_names= sim.Monitor(name='names')
for _ in range(10000):
    name = sim.Pdf(('John', 30, 'Peter', 20, 'Mike', 20, 'Andrew', 20, 'Ruud', 5, 'Jan', 5)).sample()
    monitor_names.tally(name)

monitor_names.print_histograms(values=True)
```

The output of this:

```
Histogram of names
entries      10000

value      entries
Andrew      2031 ( 20.3%) *****
Jan          495 (  5.0%) ***
John        2961 ( 29.6%) *****
Mike        1989 ( 19.9%) *****
Peter       2048 ( 20.5%) *****
Ruud         476 (  4.8%) ***
```

## 7.2 MonitorTimestamp

The `MonitorTimestamp` class collects tallied values along with the current (simulation) time. e.g. the number of parts a machine is working on.

By default, the collected x-values are stored in a list. Alternatively, it is possible to store the x-values in an array of one of the following types:

type	stored as	lowerbound	upperbound	number of bytes	do not tally (=off)
'any'	list	N/A	N/A	depends on data	N/A
'bool'	integer	False	True	1	255
'int8'	integer	-127	127	1	-128
'uint8'	integer	0	254	1	255
'int16'	integer	-32767	32767	2	-32768
'uint16'	integer	0	65534	2	65535
'int32'	integer	2147483647	2147483647	4	2147483648
'uint32'	integer	0	4294967294	4	4294967295
'int64'	integer	-9223372036854775807	9223372036854775807	8	-9223372036854775808
'uint64'	integer	0	18446744073709551614	8	18446744073709551615
'float'	float	-inf	inf	8	-inf

Monitoring with arrays takes up less space. Particularly when tallying a large number of values, this is strongly advised.

Note that if non numeric x-values are stored (only possible with the default setting ('any')), a tallied values is converted, if required, to a numeric value if possible, or 0 if not.

During the simulation run, it is possible to retrieve the last tallied value (which represents the 'current' value) by calling `Monitor.tally()` without arguments. It's even possible to directly call the timestamped monitor to get the current value, e.g.

```
level = sim.MonitorTimestamp('level')
...
level.tally(10)
...
print (level()) # will print 10
```

For the same reason, the standard length monitor of a queue can be used to get the current length of a queue: `q.length()` although the more Pythonic `len(q)` is preferred.

There is whole set of statistical data available, which are all weighted with their duration:

- duration
- duration\_zero (time that the value was zero)
- number\_of\_entries
- number\_of\_entries\_zero
- mean

- std
- minimum
- median
- maximum
- percentile
- bin\_number\_of\_entries (number of entries between two given values)
- bin\_duration (total duration of entries between two given values)
- value\_number\_of\_entries (number of entries equal to a given value or set of values)
- value\_duration (total duration of entries equal to a given value or set of values)

For all these statistics, it is possible to exclude zero entries, e.g. `m.mean(ex0=True)` returns the mean, excluding zero entries.

The individual x-values and their duration can be retrieved `xduration()`. By default, the x-values will be returned as an array, even if the type is 'any'. In case the type is 'any' (stored as a list), the tallied x-values will be converted to a numeric value or 0 if that's not possible. By specifying `force_numeric=False` the collected x-values will be returned as stored.

The individual x-values and the associated timestamps can be retrieved with `xt()` or `tx()`. By default, the x-values will be returned as an array, even if the type is 'any'. In case the type is 'any' (stored as a list), the tallied x-values will be converted to a numeric value or 0 if that's not possible. By specifying `force_numeric=False` the collected x-values will be returned as stored.

When monitoring is disabled, an off value (see table above) will be tallied. All statistics will ignore the periods from this off to a non-off value. This also holds for the `xduration()` method, but NOT for `xt()` and `tx()`. Thus, the x-arrays of `xduration()` are not necessarily the same as the x-arrays in `xt()` and `tx()`. This is the reason why there's no `x()` or `t()` method. It is easy to get just the x-array with `xduration()[0]` or `xt()[0]`.

With the `monitor` method, the timestamped monitor can be enabled or disabled.

Also, the current status (enabled/disabled) can be retrieved.

```
level.monitor(False)  # disable monitoring
level.monitor(True)   # enable monitoring
if level.monitor():
    print('level is enabled')
```

It is strongly advised to keep tallying when monitoring is off, in order to be able to access the current value at any time. The values tallied when monitoring is off are not stored.

Calling `m.reset()` will clear all tallied values and timestamps.

The statistics of a timestamped monitor can be printed with `print_statistics()`. E.g: `waitingline.length.print_statistics()`:

```

Statistics of Length of waitingline at      50000
              all      excl.zero      zero
-----
duration      50000      48499.381      1500.619
mean           8.427           8.687
std.deviation   4.852           4.691

minimum         0             1
median          9            10
90% percentile  14            14
95% percentile  16            16
maximum         21            21

```

And, a histogram can be printed with `print_histogram()`. E.g.

```
waitingline.length.print_histogram(30, 0, 1)
```

```

Histogram of Length of waitingline
              all      excl.zero      zero
-----
duration      50000      48499.381      1500.619
mean           8.427           8.687
std.deviation   4.852           4.691

minimum         0             1
median          9            10
90% percentile  14            14
95% percentile  16            16
maximum         21            21

      <=      duration      %      cum%
0      1500.619      3.0      3.0  **|
1      2111.284      4.2      7.2  *** |
2      3528.851      7.1     14.3  ***** |
3      4319.406      8.6     22.9  ***** |
4      3354.732      6.7     29.6  ***** |
5      2445.603      4.9     34.5  ***   |
6      2090.759      4.2     38.7  ***    |
7      2046.126      4.1     42.8  ***     |
8      1486.956      3.0     45.8  **      |
9      2328.863      4.7     50.4  ***       |

```



10	4337.502	8.7	59.1	*****	
11	4546.145	9.1	68.2	*****	
12	4484.405	9.0	77.2	*****	
13	4134.094	8.3	85.4	*****	
14	2813.860	5.6	91.1	****	
15	1714.894	3.4	94.5	**	
16	992.690	2.0	96.5	*	
17	541.546	1.1	97.6		
18	625.048	1.3	98.8	*	
19	502.291	1.0	99.8		
20	86.168	0.2	100.0		
21	8.162	0.0	100		
↪					
22	0	0	100		
↪					
23	0	0	100		
↪					
24	0	0	100		
↪					
25	0	0	100		
↪					
26	0	0	100		
↪					
27	0	0	100		
↪					
28	0	0	100		
↪					
29	0	0	100		
↪					
30	0	0	100		
↪					
inf	0	0	100		

If neither `number_of_bins`, nor `lowerbound` nor `bin_width` are specified, the histogram will be autoscaled.

Histograms can be printed with their values, instead of bins. This is particularly useful for non numeric tallied values, like names.



## DISTRIBUTIONS

Salabim can be used with the standard random module, but it is easier to use the salabim distributions.

Internally, salabim uses the random module. There is always a seed associated with each distribution, which is normally `random.random`.

When a new environment is created, the random seed 1234567 will be set by default. However, it is possible to override this behaviour with the `random_seed` parameter:

- any hashable value, to set another seed
- null string (''): no reseeding
- None: true random, non reproducible (based on current time)

As a distribution is an instance of a class, it can be used in assignment, parameters, etc. E.g.

```
inter_arrival_time = sim.Uniform(10,15)
```

And then, to wait for a time sampled from this distribution

```
yield self.hold(inter_arrival_time.sample())
```

or :: `yield self.hold(inter_arrival_time())`

or

```
yield self.hold(sim.Uniform(10,15).sample())
```

or

```
yield self.hold(sim.Uniform(10,15)())
```

All distributions are a subclass of `_Distribution` which supports the following methods:

- `mean()`
- `sample()`
- direct calling as an alternative to `sample`, like `Uniform(12,15)()`
- `bounded_sample()` # see below

For each distribution it is possible to limit the sampled values between a lowerbound and an upperbound, by using the method `bounded_sample()`. This is particularly useful when a duration is required, which has to be positive, but the distribution it self does not guarantee a positive value, e.g.

```
duration = sim.Normal(5,5).bounded_sample(lowerbound=0)
```

Salabim provides the following distribution classes:

## 8.1 Beta

Beta distribution with a given

- `alpha` (shape)
- `beta` (shape)

E.g.

```
processing_time = sim.Beta(2,4) # Beta with alpha=2, beta=4`
```

## 8.2 Constant

No sampling is required for this distribution, as it always returns the same value. E.g.

```
processing_time = sim.Constant(10)
```

## 8.3 Erlang

Erlang distribution with a given

- shape (k)
- rate (lambda) or scale (mu)

E.g.

```
inter_arrival_time = sim.Erlang(2, rate=2)  # Erlang-2, with lambda = 2
```

## 8.4 Gamma

Gamma distribution with given

- shape (k)
- scale (teta) or rate (beta)

E.g.

```
processing_time = sim.Gamma(2,3)  # Gamma with k=2, teta=3
```

## 8.5 Exponential

Exponential distribution with a given

- mean or rate (lambda)

E.g.

```
inter_arrival_time = sim.Exponential(10)  # on an average every 10 time units
```

## 8.6 IntUniform

Integer uniform distribution between a given

- lowerbound
- upperbound (inclusive)

E.g.

```
die = sim.IntUniform(1, 6)
```

## 8.7 Normal

Normal distribution with a given

- mean
- standard deviation

E.g.

```
processing_time = sim.Normal(10, 2)  # Normal with mean=10, standard deviation=2
```

Note that this might result in negative values, which might not correct if it is a duration. In that case, use `bounded_sample` like

```
yield self.hold(processing_time.bounded_sample())
```

Normally, sampling is done with the `random.normalvariate` method. Alternatively, the `random.gauss` method can be used.

## 8.8 Poisson

Poisson distribution with a lambda

E.g.

```
occurences_in_one_hour = sim.Poisson(10)  # Poisson distribution with lambda (and thus mean) = 10
```

## 8.9 Triangular

Triangular distribution with a given

- lowerbound
- upperbound
- median

E.g.

```
processing_time = sim.Triangular(5, 15, 8)
```

## 8.10 Uniform

Uniform distribution between a given

- lowerbound
- upperbound

E.g.

```
processing_time = sim.Uniform(5, 15)
```

## 8.11 Weibull

Weibull distribution with given

- scale (alpha or k)
- shape (beta or lambda)

E.g.

```
time_between_failure = sim.Weibull(2, 5)  # Weibull with k=2. lambda=5
```

## 8.12 Cdf

Cumulative distribution function, specified as a list or tuple with  $x[i], p[i]$  values, where  $p[i]$  is the cumulative probability that  $x_n \leq p_n$ . E.g.

```
processingtime = sim.Cdf((5, 0, 10, 50, 15, 90, 30, 95, 60, 100))
```

This means that 0% is <5, 50% is < 10, 90% is < 15, 95% is < 30 and 100% is <60.

---

**Note:** It is required that  $p[0]$  is 0 and that  $p[i] \leq p[i+1]$  and that  $x[i] \leq x[i+1]$ .

---

It is not required that the last  $p[]$  is 100, as all  $p[]$ 's are automatically scaled. This means that the two distributions below are identical to the first example

```
processingtime = sim.Cdf((5, 0.00, 10, 0.50, 15, 0.90, 30, 0.95, 60, 1.00))  
processingtime = sim.Cdf((5, 0, 10, 10, 15, 18, 30, 19, 60, 20))
```

## 8.13 Pdf

Probability density function, specified as:

1. list or tuple of  $x[i]$ ,  $p[i]$  where  $p[i]$  is the probability (density)
2. list or tuple of  $x[i]$  followed by a list or tuple  $p[i]$
3. list or tuple of  $x[i]$  followed by a scalar (value not important)

---

**Note:** It is required that the sum of  $p[i]$ 's is **greater than 0**.

---

E.g.

```
processingtime = sim.Pdf((5, 10, 10, 50, 15, 40))
```

This means that 10% is 5, 50% is 10 and 40% is 15.

It is not required that the sum of the  $p[i]$ 's is 100, as all  $p[i]$ 's are automatically scaled. This means that the two distributions below are identical to the first example

```
processingtime = sim.Pdf((5, 0.10, 10, 0.50, 15, 0.40))  
processingtime = sim.Pdf((5, 2, 10, 10, 15, 8))
```

And the same with the second form



```
processingtime = sim.Pdf((5, 10, 15), (10, 50, 40))
```

If all  $x[i]$ 's have the same probability, the third form is very useful

```
dice = sim.Pdf((1,2,3,4,5,6),1)  # the distribution IntUniform(1,6) does the job as well
dice = sim.Pdf(range(1,7),1)  # same as above
```

$x[i]$  may be of any type, so it possible to use

```
color = sim.Pdf(('Green', 45, 'Yellow', 10, 'Red', 45))
cartype = sim.Pdf(ordertypes,1)
```

If the  $x$ -value is a salabim distribution, not the distribution but a sample of that distribution is returned when sampling

```
processingtime = sim.Pdf((sim.Uniform(5, 10), 50, sim.Uniform(10, 15), 40, sim.Uniform(15, 20), 10))
proctime=processingtime.sample()
```

Here proctime will have a probability of 50% being between 5 and 10, 40% between 10 and 15 and 10% between 15 and 20.

## 8.14 CumPdf

Probability density function, specified as:

1. list or tuple of  $x[i]$ ,  $p[i]$  where  $p[i]$  is the cumulative probability (density)
2. list or tuple of  $x[i]$  followed by a list or tuple  $p[i]$

---

**Note:** It is required that  $p[i] \leq p[i+1]$ .

---

E.g.

```
processingtime = sim.CumPdf((5, 10, 10, 60, 15, 100))
```

This means that 10% is 5, 50% is 10 and 40% is 15.

It is not required that the sum of the  $p[i]$ 's is 100, as all  $p[i]$ 's are automatically scaled. This means that the two distributions below are identical to the first example

```
processingtime = sim.CumPdf((5, 0.10, 10, 0.60, 15, 1.00))
processingtime = sim.CumPdf((5, 2, 10, 12, 15, 20))
```

And the same with the second form

```
processingtime = sim.CumPdf((5, 10, 15), (10, 60, 100))
```

x[i] may be of any type, so it possible to use

```
color = sim.CumPdf(('Green', 45, 'Red', 100))
```

If the x-value is a salabim distribution, not the distribution but a sample of that distribution is returned when sampling

```
processingtime = sim.CumPdf((sim.Uniform(5, 10), 50, sim.Uniform(10, 15), 90, sim.Uniform(15, 20), 100))
proctime=processingtime.sample()
```

Here proctime will have a probability of 50% being between 5 and 10, 40% between 10 and 15 and 10% between 15 and 20.

## 8.15 Distribution

A special distribution is the Distribution class. Here, a string will contain the specification of the distribution. This is particularly useful when the distributions are specified in an external file. E.g.

```
with open('experiment1.txt', 'r') as f:
    interarrivalttime = sim.Distribution(read(f))
    processingtime = sim.Distribution(read(f))
    numberofparcels = sim.Distribution(read(f))
```

With a file experiment.txt

```
Uniform(10,15)
Triangular(1,5,2)
IntUniform(10,20)
```

or with abbreviation

```
Uni(10,15)
Tri(1,5,2)
Int(10,20)
```

or even

```
U(10, 15)  
T(1, 5, 2)  
I(10, 20)
```



## ANIMATION

Animation is a powerful tool to debug, test and demonstrate simulations.

It is possible to show a number of shapes (lines, rectangles, circles, etc), texts as well (images) in a window. These objects can be dynamically updated. (Times-tamped) monitors may be animated by showing the current value against the time or index. Furthermore the components in a queue may be shown in a highly customizable way. As text animation may be dynamically updated, it is even possible to show the current state, (monitor) statistics, etc. in the animation windows.

Salabim's animation engine also allows some user input.

It is important to realize that animation calls can be still given when animation is actually off. In that case, there is hardly any impact on the performance.

Salabim animations can be

- synchronized with the simulation clock and run in real time (synchronized)
- advance per simulation event (non synchronized)

In synchronized mode, one time unit in the simulation can correspond to any period in real time, e.g.

- 1 time unit in simulation time → 1 second real time (speed = 1) (default)
- 1 time unit in simulation time → 4 seconds real time (speed = 0.25)
- 4 time units in simulation time → 1 second real time (speed = 4)

The most common way to start an animation is by calling `env.animate(True)` or with a call to `animation_parameters`.

Animations can be started en stopped during execution (i.e. run). When main is active, the animation is always stopped.

The animation uses a coordinate system that -by default- is in screen pixels. The lower left corner is (0,0). But, the user can change both the coordinate of the lower left corner (translation) as well as set the x-coordinate of the lower right hand corner (scaling). Note that x- and y-scaling are always the same. Furthermore, it is possible to specify the colour of the background with `animation_parameters`.

Prior to version 2.3.0 there was actually just one animation object class: `Animate`. This interface is described later as the new animation classes are easier to use and even offer some additional functionality.

New style animation classes can be used to put texts, rectangles, polygon, lines, series of points, circles or images on the screen. All types can be connected to an optional text.

Here is a sample program to show of all the new style animation classes

```
env=sim.Environment(trace=False)
env.animate(True)
env.background_color('20%gray')

sim.AnimatePolygon(spec=(100, 100, 300, 100, 200,190), text='This is\na polygon')
sim.AnimateLine(spec=(100, 200, 300, 300), text='This is a line')
sim.AnimateRectangle(spec=(100, 10, 300, 30), text='This is a rectangle')
sim.AnimateCircle(radius=60, x=100, y=400, text='This is a cicle')
sim.AnimateCircle(radius=60, radius1=30, x=300, y=400, text='This is an ellipse')
sim.AnimatePoints(spec=(100,500, 150, 550, 180, 570, 250, 500, 300, 500), text='These are points')
sim.AnimateText(text='This is a one-line text', x=100, y=600)
sim.AnimateText(text=''\n
Multi line text
-----
Lorem ipsum dolor sit amet, consectetur
adipiscing elit, sed do eiusmod tempor
incididunt ut labore et dolore magna aliqua.
Ut enim ad minim veniam, quis nostrud
exercitation ullamco laboris nisi ut
aliquip ex ea commodo consequat. Duis aute
irure dolor in reprehenderit in voluptate
velit esse cillum dolore eu fugiat nulla
pariatur.

Excepteur sint occaecat cupidatat non
proident, sunt in culpa qui officia
deserunt mollit anim id est laborum.
'', x=500, y=100)

sim.AnimateImage('Pas un pipe.jpg', x=500, y=400)
env.run(100)
```

Resulting in:

t=1.000

This is a one-line text

These are points

This is a circle

This is an ellipse

This is a line

This is  
a polygon

This is a rectangle



Multi line text

-----  
 Lorem ipsum dolor sit amet, consectetur  
 adipiscing elit, sed do eiusmod tempor  
 incididunt ut labore et dolore magna aliqua.  
 Ut enim ad minim veniam, quis nostrud  
 exercitation ullamco laboris nisi ut  
 aliquip ex ea commodo consequat. Duis aute  
 irure dolor in reprehenderit in voluptate  
 velit esse cillum dolore eu fugiat nulla  
 pariatur.

Excepteur sint occaecat cupidatat non  
 proident, sunt in culpa qui officia  
 deserunt mollit anim id est laborum.

Animation of the components of a queue is accomplished with `AnimateQueue()`. It is possible to use the standard shape of components, which is a rectangle with the sequence number or define your own shape(s). The queue can be build up in west, east, north or south directions. It is possible to limit the number of component shown.

Monitors and timestamped monitors can be visualized dynamically with `AnimateMonitor()`.

These features are demonstrated in *Demo queue animation.py*

```
import salabim as sim

'''
This us a demonstration of several ways to show queues dynamically and the corresponding statistics
The model simply generates components that enter a queue and leave after a certain time.

Note that the actual model code (in the process description of X does not contain any reference
to the animation!
'''

class X(sim.Component):
    def setup(self, i):
        self.i = i

    def animation_objects(self, id):
        '''
        the way the component is determined by the id, specified in AnimateQueue
        'text' means just the name
        any other value represents the colour
        '''
        if id == 'text':
            ao0 = sim.AnimateText(text=self.name(), textcolor='fg', text_anchor='nw')
            return 0, 16, ao0
        else:
            ao0 = sim.AnimateRectangle((-20, 0, 20, 20),
                                       text=self.name(), fillcolor=id, textcolor='white', arg=self)
            return 45, 0, ao0

    def process(self):
        while True:
            yield self.hold(sim.Uniform(0, 20)())
            self.enter(q)
            yield self.hold(sim.Uniform(0, 20)())
            self.leave()
```



```
env = sim.Environment(trace=False)
env.background_color('20%gray')

q = sim.Queue('queue')

qa0 = sim.AnimateQueue(q, x=100, y=50, title='queue, normal', direction='e', id='blue')
qa1 = sim.AnimateQueue(q, x=100, y=250, title='queue, maximum 6 components', direction='e', max_length=6, id='red')
qa2 = sim.AnimateQueue(q, x=100, y=150, title='queue, reversed', direction='e', reverse=True, id='green')
qa3 = sim.AnimateQueue(q, x=100, y=440, title='queue, text only', direction='s', id='text')

sim.AnimateMonitor(q.length, x=10, y=450, width=480, height=100, horizontal_scale=5, vertical_scale=5)


sim.AnimateMonitor(q.length_of_stay, x=10, y=570, width=480, height=100, horizontal_scale=5, vertical_scale=5)

sim.AnimateText(text=lambda: q.length.print_histogram(as_str=True), x=500, y=700,
               text_anchor='nw', font='narrow', fontsize=10)

sim.AnimateText(text=lambda: q.print_info(as_str=True), x=500, y=340,
               text_anchor='nw', font='narrow', fontsize=10)

[X(i=i) for i in range(15)]
env.animate(True)
env.modelname('Demo queue animation')
env.run()
```

Here is snapshot of this powerful, dynamics (including the histogram!):

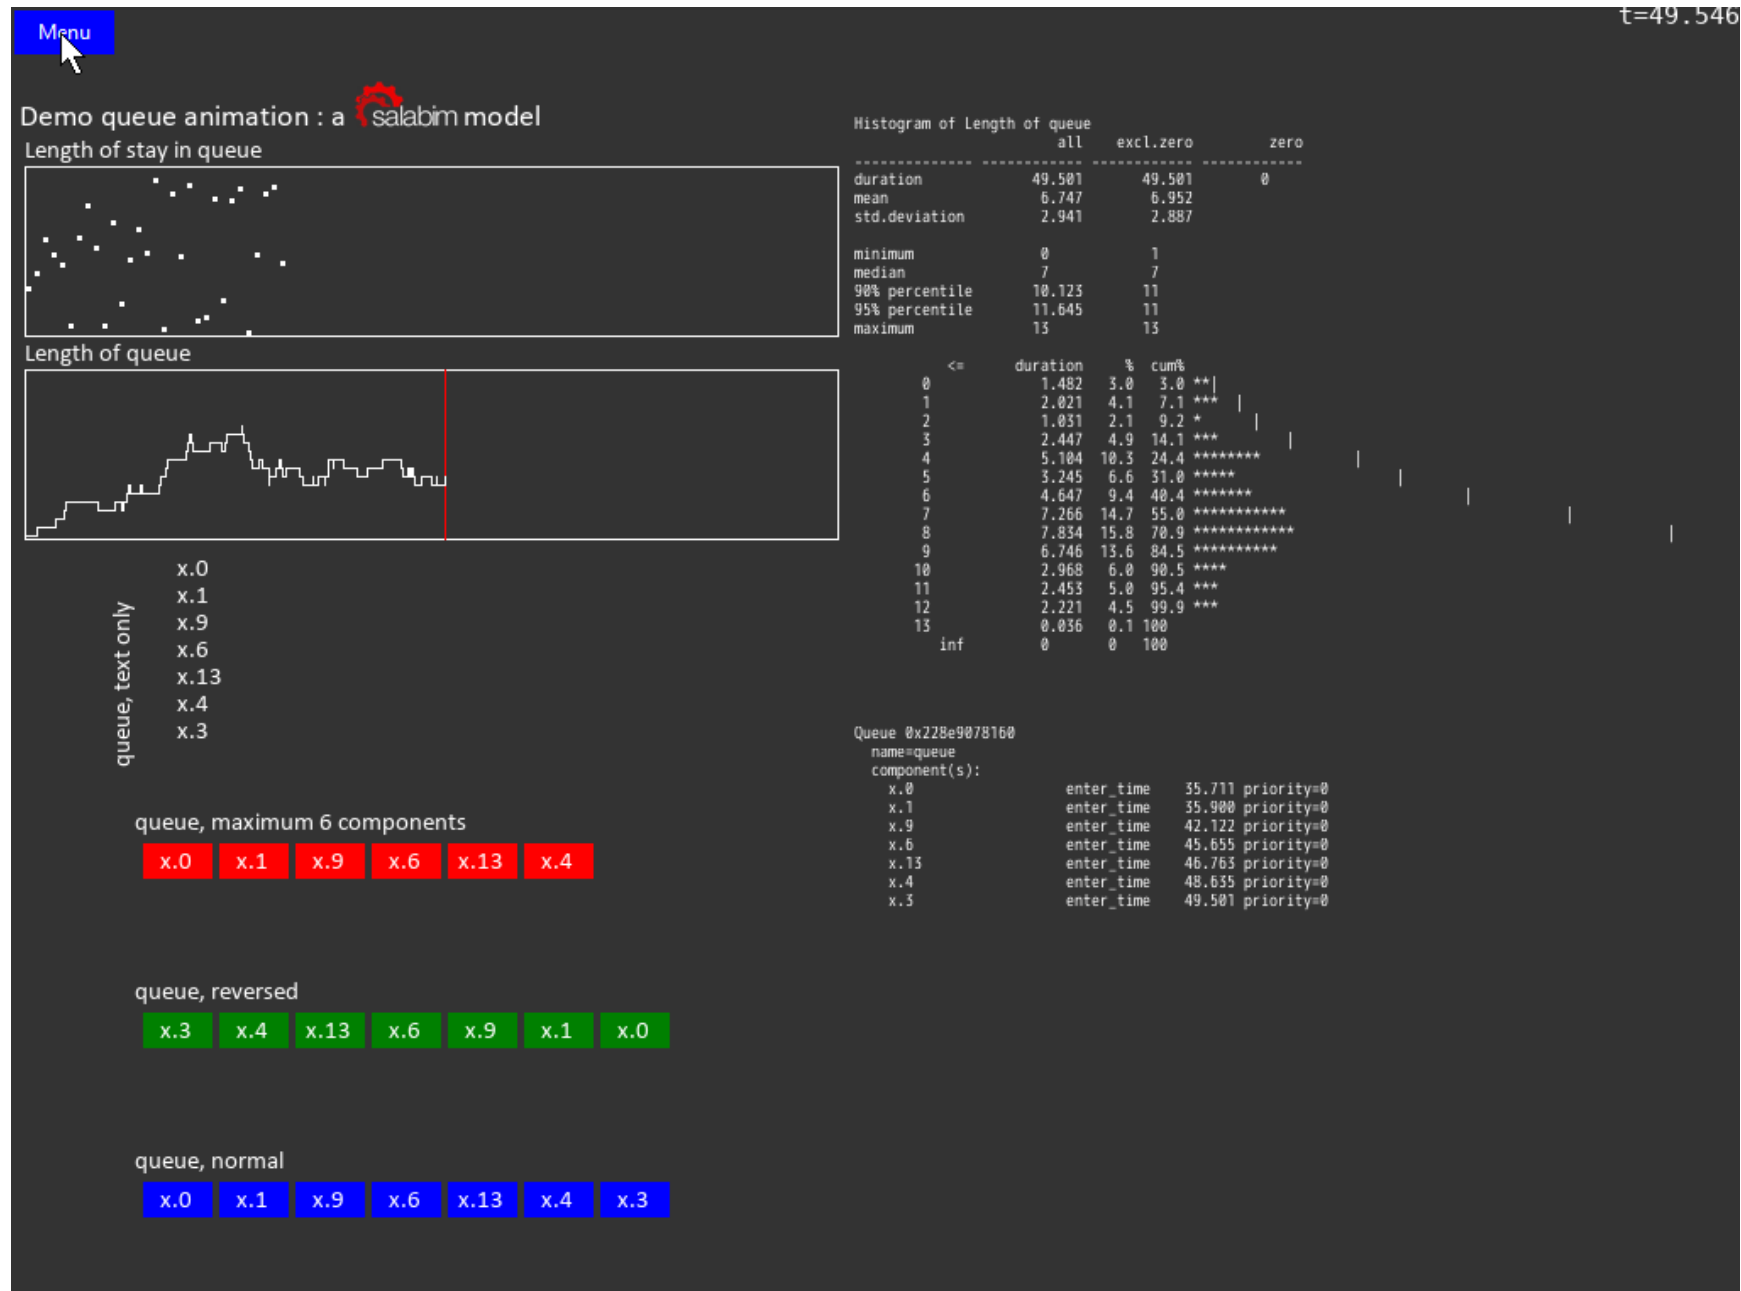

## 9.1 Advanced

The various classes have a lot of parameters, like color, line width, font, etc.

These parameters can be given just as a scalar, like:

```
sim.AnimateText(text='Hello world', x=200, y=300, textcolor='red')
```

But each of these parameters may also be a:

- function with zero arguments
- function with one argument being the time  $t$
- function with two arguments being 'arg' and the time  $t$
- a method with instance 'arg' and the time  $t$

The function or method is called at each animation frame update (maximum of 30 frames per second).

This makes it for instance possible to show dynamically the mean of monitor  $m$ , like in

```
sim.AnimateRectangle(spec=(10, 10, 200, 30), text=lambda: str(m.mean()))
```

## 9.2 Class Animate

This class can be used to show:

- line (if line0 is specified)
- rectangle (if rectangle0 is specified)
- polygon (if polygon0 is specified)
- circle (if circle0 is specified)
- text (if text is specified)
- image (if image is specified)

Note that only one type is allowed per instance of Animate.

Nearly all attributes of an Animate object are interpolated between time  $t_0$  and  $t_1$ . If  $t_0$  is not specified, `now()` is assumed. If  $t_1$  is not specified `inf` is assumed, which means that the attribute will be the '0' attribute.

E.g.:

`Animate(x0=100,y0=100,rectangle0=(-10,-10,10,10))` will show a square around (100,100) for ever `Animate(x0=100,y0=100,x1=200,y1=0,rectangle0=(-10,-10,10,10))` will still show the same square around (100,100) as `t1` is not specified `Animate(t1=env.now()+10,x0=100,y0=100,x1=200,y1=0,rectangle0=(-10,-10,10,10))` will show a square moving from (100,100) to (200,0) in 10 units of time.

It also possible to let the rectangle change shape over time:

`Animate(t1=env.now(),x0=100,y0=100,x1=200,y1=0,rectangle0=(-10,-10,10,10),rectangle1=(-20,-20,20,20))` will show a moving and growing rectangle.

By default, the animation object will not change anymore after `t1`, but will remain visible. Alternatively, if `keep=False` is specified, the object will disappear at time `t1`.

Also, colors, fontsizes, angles can be changed in a linear way over time.

E.g.:

`Animate(t1=env.now()+10,text='Test',textcolor0='red',textcolor1='blue',angle0=0,angle1=360)` will show a rotating text changing from red to blue in 10 units of time.

The animation object can be updated with the `update` method. Here, once again, all the attributes can be specified to change over time. Note that the defaults for the '0' values are the actual values at `t=now()`.

Thus,

`an=Animate(t0=0,t1=10,x0=0,x1=100,y0=0,circle0=(10,),circle1=(20,))` will show a horizontally moving, growing circle.

Now, at time `t=5`, we issue `an.update(t1=10,y1=50,circle1=(10,))` Then `x0` will be set 50 (halfway 0 and 100) and `cicle0` to (15,) (halfway 10 and 20). Thus the circle will shrink to its original size and move vertically from (50,0) to (50,50). This concept is very useful for moving objects whose position and orientation are controlled by the simulation.

Here we explain how an attribute changes during time. We use `x` as an example. Normally, `x=x0` at `t=t0` and `x=x1` at `t>=t1`. between `t=t0` and `t=t1`, `x` is linearly interpolated. An application can however override the `x` method. The preferred way is to subclass the `Animate` class:

```
# Demo animate 1
import salabim as sim

class AnimateMovingText(sim.Animate):
    def __init__(self):
        sim.Animate.__init__(self, text='', x0=100, x1=1000, y0=100, t1=env.now() + 10)

    def x(self, t):
        return sim.interpolate(sim.interpolate(t, self.t0, self.t1, 0, 1)**2, 0, 1, self.x0, self.x1)
```

```
def y(self, t):  
    return int(t) * 50  
  
def text(self, t):  
    return '{:0.1f}'.format(t)  
  
env = sim.Environment()  
  
env.animation_parameters()  
  
AnimateMovingText()  
  
env.run()
```

This code will show the current simulation time moving from left to right, uniformly accelerated. And the text will be shown a bit higher up, every second. It is not necessary to use `t0`, `t1`, `x0`, `x1`, but is a convenient way of setting attributes.

The following methods may be overridden:

method	circle	image	line	polygon	rectangle	text
anchor		•				
angle	•	•	•	•	•	•
circle	•					
fillcolor	•			•	•	
fontsize						•
image		•				
layer	•	•	•	•	•	•
line			•			
linecolor	•		•	•	•	
linewidth	•		•	•	•	
max_lines						•
offsetx	•	•	•	•	•	•
offsety	•	•	•	•	•	•
polygon				•		
rectangle					•	
text						•
text_anchor						
textcolor						•

*Dashboard animation*

Here we present an example model where the simulation code is completely separated from the animation code. This makes communication and debugging and switching off animation much easier.

The example below generates 15 persons starting at time 0, 1, ... . These persons enter a queue called `q` and stay there 15 time units.

The animation dashboard shows the first 10 persons in the queue `q`, along with the length of that `q`.

```
# Demo animate 2.py
import salabim as sim

class AnimateWaitSquare(sim.Animate):
    def __init__(self, i):
        self.i = i
        sim.Animate.__init__(self,
            rectangle0=(-10, -10, 10, 10), x0=300 - 30 * i, y0=100, fillcolor0='red', linewidth0=0)

    def visible(self, t):
        return q[self.i] is not None

class AnimateWaitText(sim.Animate):
    def __init__(self, i):
        self.i = i
        sim.Animate.__init__(self, text='', x0=300 - 30 * i, y0=100, textcolor0='white')

    def text(self, t):
        component_i = q[self.i]

        if component_i is None:
            return ''
        else:
            return component_i.name()

def do_animation():
    env.animation_parameters()
    for i in range(10):
        AnimateWaitSquare(i)
        AnimateWaitText(i)
    show_length = sim.Animate(text='', x0=330, y0=100, textcolor0='black', anchor='w')
```

```
show_length.text = lambda t: 'Length= ' + str(len(q))

class Person(sim.Component):
    def process(self):
        self.enter(q)
        yield self.hold(15)
        self.leave(q)

env = sim.Environment(trace=True)

q = sim.Queue('q')
for i in range(15):
    Person(name='{0:02d}'.format(i), at=i)

do_animation()

env.run()
```

All animation initialization is in `do_animation`, where first 10 rectangle and text `Animate` objects are created. These are classes that are inherited from `sim.Animate`.

The `AnimateWaitSquare` defines a red rectangle at a specific position in the `sim.Animate.__init__()` call. Note that normally these squares should be displayed. But, here we have overridden the `visible` method. If there is no *i*-th component in the `q`, the square will be made invisible. Otherwise, it is visible.

The `AnimateWaitText` is more or less defined in a similar way. It defines a text in white at a specific position. Only the `text` method is overridden and will return the name of the *i*-th component in the queue, if any. Otherwise the null string will be returned.

The length of the queue `q` could be defined also by subclassing `sim.Animate`, but here we just make a direct instance of `Animate` with the null string as the text to be displayed. And then we immediately override the `text` method with a lambda function. Note that in this case, `self` is not available!

## 9.3 Video production and snapshots

An animation can be recorded as an `.mp4` video by specifying `video=filename` in the call to `animation_parameters`. The effect is that 30 time per second (scaled animation time) a frame is written. In this case, the animation does not run synchronized with the wall clock anymore. Depending on the complexity of the animation, the simulation might run faster or slower than real time. Other than with an ordinary animation, frames are never skipped.

Once control is given back to main, the `.mp4` file is closed.

Salabim also supports taking a snapshot of an animated screen with `Environment.snapshot()`.



## READING ITEMS FROM A FILE

Salabim models often need to read input values from a file.

As these data are quite often quite unstructured, using the standard read facilities of text files can be rather tedious.

Therefore, salabim offers the possibility to read a file item by item.

Example usage

```
with sim.ItemFile(filename) as f:
    run_length = f.read_item_float()
    run_name = f.read_item()
```

Or (not recommended)

```
f = sim.InputFile(filename)
run_length = f.read_item_float()
run_name = f.read_item()
f.close()
```

The input file is read per item, where blanks, linefeeds, tabs are treated as separators. Any text on a line after a # character is ignored. Any text within curly brackets ( { } ) is ignored (and treated as an item separator). Note that this strictly on a per line basis. If a blank or tab is to be included in a string, use single or double quotes. The recommended way to end a list of values is //

So, a typical input file is

```
# Typical experiment file for a salabim model
1000          # run length
'Experiment 2.0' # run name
```

```
#Model          speed color
#-----
'Peugeot 208'    150 red
'Peugeot 3008'   175 orange
'Citroen C5'     160 blue
'Renault "Twingo"' 165 green
//

France {country} Europe {continent}

#end of file
```

Instead of the filename as a parameter to `ItemFile`, also a string with the content can be given. In that case, at least one linefeed has to be in the content string. Usually, the content string will be triple quoted. This can be very useful during testing as the input is part of the source file and not external, e.g.

```
test_input = '''
one two
three four
five
'''
with sim.ItemFile(test_input) as f:
    while True:
        try:
            print(f.read_item())
        except EOFError:
            break
```

## 11.1 Animation

**class** salabim.**Animate** (*parent=None, layer=0, keep=True, visible=True, screen\_coordinates=False, t0=None, x0=0, y0=0, offsetx0=0, offsety0=0, circle0=None, line0=None, polygon0=None, rectangle0=None, points0=None, image=None, text=None, font="", anchor='c', as\_points=False, max\_lines=0, text\_anchor=None, linewidth0=None, fillcolor0=None, linecolor0='fg', textcolor0='fg', angle0=0, fontsize0=20, width0=None, t1=None, x1=None, y1=None, offsetx1=None, offsety1=None, circle1=None, line1=None, polygon1=None, rectangle1=None, points1=None, linewidth1=None, fillcolor1=None, linecolor1=None, textcolor1=None, angle1=None, fontsize1=None, width1=None, xy\_anchor="", env=None*)

defines an animation object

### Parameters

- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent
- **layer** (*int*) – layer value lower layer values are on top of higher layer values (default 0)
- **keep** (*bool*) – keep if False, animation object is hidden after t1, shown otherwise (default True)
- **visible** (*bool*) – visible if False, animation object is not shown, shown otherwise (default True)
- **screen\_coordinates** (*bool*) – use screen\_coordinates normally, the scale parameters are use for positioning and scaling objects. if True, screen\_coordinates will be used instead.
- **xy\_anchor** (*str*) – specifies where x and y (i.e. x0, y0, x1 and y1) are relative to possible values are (default: sw) : nw n new c  
e sw s se If ‘’, the given coordimates are used untranslated
- **t0** (*float*) – time of start of the animation (default: now)
- **x0** (*float*) – x-coordinate of the origin at time t0 (default 0)

- **y0** (*float*) – y-coordinate of the origin at time t0 (default 0)
- **offsetx0** (*float*) – offsets the x-coordinate of the object at time t0 (default 0)
- **offsety0** (*float*) – offsets the y-coordinate of the object at time t0 (default 0)
- **circle0** (*float or tuple/list*) – the circle spec of the circle at time t0 - radius - one item tuple/list containing the radius - five items tuple/list containing radius, radius1, arc\_angle0, arc\_angle1 and draw\_arc (see class AnimateCircle for details)
- **line0** (*tuple*) – the line(s) (xa,ya,xb,yb,xc,yc, ...) at time t0
- **polygon0** (*tuple*) – the polygon (xa,ya,xb,yb,xc,yc, ...) at time t0 the last point will be auto connected to the start
- **rectangle0** (*tuple*) – the rectangle (xlowerleft,ylowerleft,xupperright,yupperright) at time t0
- **image** (*str or PIL image*) – the image to be displayed This may be either a filename or a PIL image
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the first -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **anchor** (*str*) – anchor position specifies where to put images or texts relative to the anchor point possible values are (default: c): nw  
n new c e sw s se
- **as\_points** (*bool*) – if False (default), lines in line, rectangle and polygon are drawn if True, only the end points are shown in line, rectangle and polygon
- **linewidth0** (*float*) – linewidth of the contour at time t0 (default 0 for polygon, rectangle and circle, 1 for line) if as\_point is True, the default size is 3
- **fillcolor0** (*colorspec*) – color of interior at time t0 (default foreground\_color) if as\_points is True, fillcolor0 defaults to transparent
- **linecolor0** (*colorspec*) – color of the contour at time t0 (default foreground\_color)
- **textcolor0** (*colorspec*) – color of the text at time 0 (default foreground\_color)
- **angle0** (*float*) – angle of the polygon at time t0 (in degrees) (default 0)
- **fontsize0** (*float*) – fontsize of text at time t0 (default 20)
- **width0** (*float*) – width of the image to be displayed at time t0 if omitted or None, no scaling
- **t1** (*float*) – time of end of the animation (default inf) if keep=True, the animation will continue (frozen) after t1

- **x1** (*float*) – x-coordinate of the origin at time t1 (default x0)
- **y1** (*float*) – y-coordinate of the origin at time t1 (default y0)
- **offsetx1** (*float*) – offsets the x-coordinate of the object at time t1 (default offsetx0)
- **offsety1** (*float*) – offsets the y-coordinate of the object at time t1 (default offsety0)
- **circle1** (*float or tuple/list*) – the circle spec of the circle at time t1 (default: circle0) - radius - one item tuple/list containing the radius - five items tuple/list containing radius, radius1, arc\_angle0, arc\_angle1 and draw\_arc (see class AnimateCircle for details)
- **line1** (*tuple*) – the line(s) at time t1 (xa,ya,xb,yb,xc,yc, ...) (default: line0) should have the same number of elements as line0
- **polygon1** (*tuple*) – the polygon at time t1 (xa,ya,xb,yb,xc,yc, ...) (default: polygon0) should have the same number of elements as polygon0
- **rectangle1** (*tuple*) – the rectangle (xlowerleft,ylowerleft,xupperright,yupperright) at time t1 (default: rectangle0)
- **linewidth1** (*float*) – linewidth of the contour at time t1 (default linewidth0)
- **fillcolor1** (*colorspec*) – color of interior at time t1 (default fillcolor0)
- **linecolor1** (*colorspec*) – color of the contour at time t1 (default linecolor0)
- **textcolor1** (*colorspec*) – color of text at time t1 (default textcolor0)
- **angle1** (*float*) – angle of the polygon at time t1 (in degrees) (default angle0)
- **fontsize1** (*float*) – fontsize of text at time t1 (default: fontsize0)
- **width1** (*float*) – width of the image to be displayed at time t1 (default: width0)

---

**Note:**

**one (and only one) of the following parameters is required:**

- circle0
- image
- line0
- polygon0
- rectangle0
- text

colors may be specified as a

- valid colorname
- hexname
- tuple (R,G,B) or (R,G,B,A)
- 'fg' or 'bg'

colornames may contain an additional alpha, like `red#7f` hexnames may be either 3 or 4 bytes long (`#rrggbb` or `#rrggbbaa`) both colornames and hexnames may be given as a tuple with an additional alpha between 0 and 255, e.g. `(255,0,255,128)`, `('red',127)` or `('ff00ff',128)` fg is the foreground color bg is the background color

Permitted parameters

parameter	circle	image	line	polygon	rectangle	text
parent	•	•	•	•	•	•
layer	•	•	•	•	•	•
keep	•	•	•	•	•	•
screen_coordinates	•	•	•	•	•	•
xy_anchor	•	•	•	•	•	•
t0,t1	•	•	•	•	•	•
x0,x1	•	•	•	•	•	•
y0,y1	•	•	•	•	•	•
offsetx0,offsetx1	•	•	•	•	•	•
offsety0,offsety1	•	•	•	•	•	•
circle0,circle1	•					
image		•				
line0,line1			•			
polygon0,polygon1						
<b>11.1. Animation</b>				•		<b>81</b>
rectangle0,rectangle1					•	

---

**anchor** (*t=None*)

anchor of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **anchor** – default behaviour: self.anchor0 (anchor given at creation or update)

**Return type** str

**angle** (*t=None*)

angle of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **angle** – default behaviour: linear interpolation between self.angle0 and self.angle1

**Return type** float

**as\_points** (*t=None*)

as\_points of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **as\_points** – default behaviour: self.as\_points (text given at creation or update)

**Return type** bool

**circle** (*t=None*)

circle of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **circle** – either - radius - one item tuple/list containing the radius - five items tuple/list containing radius, radius1, arc\_angle0, arc\_angle1 and draw\_arc (see class AnimateCircle for details) default behaviour: linear interpolation between self.circle0 and self.circle1

**Return type** float or tuple/list

**fillcolor** (*t=None*)

fillcolor of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **fillcolor** – default behaviour: linear interpolation between self.fillcolor0 and self.fillcolor1

**Return type** colorspec



**font** (*t=None*)

font of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **font** – default behaviour: self.font0 (font given at creation or update)

**Return type** str

**fontsize** (*t=None*)

fontsize of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **fontsize** – default behaviour: linear interpolation between self.fontsize0 and self.fontsize1

**Return type** float

**image** (*t=None*)

image of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **image** – use function spec\_to\_image to load a file default behaviour: self.image0 (image given at creation or update)

**Return type** PIL.Image.Image

**layer** (*t=None*)

layer of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **layer** – default behaviour: self.layer0 (layer given at creation or update)

**Return type** int or float

**line** (*t=None*)

line of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **line** – series of x- and y-coordinates (xa,ya,xb,yb,xc,yc, ...) default behaviour: linear interpolation between self.line0 and self.line1

**Return type** tuple

**linecolor** (*t=None*)

linecolor of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** `linecolor` – default behaviour: linear interpolation between `self.linecolor0` and `self.linecolor1`

**Return type** `colormap`

**linewidth** (*t=None*)

linewidth of an animate object. May be overridden.

**Parameters** `t` (*float*) – current time

**Returns** `linewidth` – default behaviour: linear interpolation between `self.linewidth0` and `self.linewidth1`

**Return type** `float`

**max\_lines** (*t=None*)

maximum number of lines to be displayed of text. May be overridden.

**Parameters** `t` (*float*) – current time

**Returns** `max_lines` – default behaviour: `self.max_lines0` (`max_lines` given at creation or update)

**Return type** `int`

**offsetx** (*t=None*)

offsetx of an animate object. May be overridden.

**Parameters** `t` (*float*) – current time

**Returns** `offsetx` – default behaviour: linear interpolation between `self.offsetx0` and `self.offsetx1`

**Return type** `float`

**offsety** (*t=None*)

offsety of an animate object. May be overridden.

**Parameters** `t` (*float*) – current time

**Returns** `offsety` – default behaviour: linear interpolation between `self.offsety0` and `self.offsety1`

**Return type** `float`

**points** (*t=None*)

points of an animate object. May be overridden.

**Parameters** `t` (*float*) – current time

**Returns** `points` – series of x- and y-coordinates (`xa,ya,xb,yb,xc,yc, ...`) default behaviour: linear interpolation between `self.points0` and `self.points1`

**Return type** `tuple`

**polygon** (*t=None*)

polygon of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **polygon** – series of x- and y-coordinates describing the polygon (xa,ya,xb,yb,xc,yc, ...) default behaviour: linear interpolation between self.polygon0 and self.polygon1

**Return type** tuple

**rectangle** (*t=None*)

rectangle of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **rectangle** – (xlowerleft,ylowerlef,xupperright,yupperright) default behaviour: linear interpolation between self.rectangle0 and self.rectangle1

**Return type** tuple

**remove** ()

removes the animation object from the animation queue, so effectively ending this animation.

---

**Note:** The animation object might be still updated, if required

---

**text** (*t=None*)

text of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **text** – default behaviour: self.text0 (text given at creation or update)

**Return type** str

**text\_anchor** (*t=None*)

text\_anchor of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **text\_anchor** – default behaviour: self.text\_anchor0 (text\_anchor given at creation or update)

**Return type** str

**textcolor** (*t=None*)

textcolor of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** *textcolor* – default behaviour: linear interpolation between *self.textcolor0* and *self.textcolor1*

**Return type** *colourspec*

**update** (*layer=None, keep=None, visible=None, t0=None, x0=None, y0=None, offsetx0=None, offsety0=None, circle0=None, line0=None, polygon0=None, rectangle0=None, points0=None, image=None, text=None, font=None, anchor=None, max\_lines=None, text\_anchor=None, linewidth0=None, fillcolor0=None, linecolor0=None, textcolor0=None, angle0=None, fontsize0=None, width0=None, as\_points=None, t1=None, x1=None, y1=None, offsetx1=None, offsety1=None, circle1=None, line1=None, polygon1=None, rectangle1=None, points1=None, linewidth1=None, fillcolor1=None, linecolor1=None, textcolor1=None, angle1=None, fontsize1=None, width1=None, xy\_anchor=None*)

updates an animation object

**Parameters**

- **layer** (*int*) – layer value lower layer values are on top of higher layer values (default see below)
- **keep** (*bool*) – keep if False, animation object is hidden after *t1*, shown otherwise (default see below)
- **visible** (*bool*) – visible if False, animation object is not shown, shown otherwise (default see below)
- **xy\_anchor** (*str*) – specifies where x and y (i.e. *x0*, *y0*, *x1* and *y1*) are relative to possible values are: *nw n new c esw s se*. If ‘’, the given coordinates are used untranslated default see below
- **t0** (*float*) – time of start of the animation (default: now)
- **x0** (*float*) – x-coordinate of the origin at time *t0* (default see below)
- **y0** (*float*) – y-coordinate of the origin at time *t0* (default see below)
- **offsetx0** (*float*) – offsets the x-coordinate of the object at time *t0* (default see below)
- **offsety0** (*float*) – offsets the y-coordinate of the object at time *t0* (default see below)
- **circle0** (*float or tuple/list*) – the circle spec of the circle at time *t0* - radius - one item tuple/list containing the radius - five items tuple/list containing radius, radius1, arc\_angle0, arc\_angle1 and draw\_arc (see class *AnimateCircle* for details)
- **line0** (*tuple*) – the line(s) at time *t0* (*xa,ya,xb,yb,xc,yc, ...*) (default see below)
- **polygon0** (*tuple*) – the polygon at time *t0* (*xa,ya,xb,yb,xc,yc, ...*) the last point will be auto connected to the start (default see below)
- **rectangle0** (*tuple*) – the rectangle at time *t0* (*xlowerleft,ylowerlef,xupperright,yupperright*) (default see below)
- **points0** (*tuple*) – the points(s) at time *t0* (*xa,ya,xb,yb,xc,yc, ...*) (default see below)
- **image** (*str or PIL image*) – the image to be displayed This may be either a filename or a PIL image (default see below)

- **text** (*str*) – the text to be displayed (default see below)
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. (default see below) If not found, uses calibri or arial
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the first -max\_lines lines if zero (default), all lines will be displayed
- **anchor** (*str*) – anchor position specifies where to put images or texts relative to the anchor point (default see below) possible values are (default: c): nw n new c esw s se
- **linewidth0** (*float*) – linewidth of the contour at time t0 (default see below)
- **fillcolor0** (*colorspec*) – color of interior/text at time t0 (default see below)
- **linecolor0** (*colorspec*) – color of the contour at time t0 (default see below)
- **angle0** (*float*) – angle of the polygon at time t0 (in degrees) (default see below)
- **fontsize0** (*float*) – fontsize of text at time t0 (default see below)
- **width0** (*float*) – width of the image to be displayed at time t0 (default see below) if None, the original width of the image will be used
- **t1** (*float*) – time of end of the animation (default: inf) if keep=True, the animation will continue (frozen) after t1
- **x1** (*float*) – x-coordinate of the origin at time t1 (default x0)
- **y1** (*float*) – y-coordinate of the origin at time t1 (default y0)
- **offsetx1** (*float*) – offsets the x-coordinate of the object at time t1 (default offsetx0)
- **offsety1** (*float*) – offsets the y-coordinate of the object at time t1 (default offset0)
- **circle1** (*float or tuple/list*) – the circle spec of the circle at time t1 - radius - one item tuple/list containing the radius - five items tuple/list containing radius, radius1, arc\_angle0, arc\_angle1 and draw\_arc (see class AnimateCircle for details)
- **line1** (*tuple*) – the line(s) at time t1 (xa,ya,xb,yb,xc,yc, ...) (default: line0) should have the same number of elements as line0
- **polygon1** (*tuple*) – the polygon at time t1 (xa,ya,xb,yb,xc,yc, ...) (default: polygon0) should have the same number of elements as polygon0
- **rectangle1** (*tuple*) – the rectangle at time t (xlowerleft,ylowerleft,xupperright,yupperright) (default: rectangle0)
- **points1** (*tuple*) – the points(s) at time t1 (xa,ya,xb,yb,xc,yc, ...) (default: points0) should have the same number of elements as points1
- **linewidth1** (*float*) – linewidth of the contour at time t1 (default linewidth0)

- **fillcolor1** (*colourspec*) – color of interior/text at time t1 (default fillcolor0)
- **linecolor1** (*colourspec*) – color of the contour at time t1 (default linecolor0)
- **angle1** (*float*) – angle of the polygon at time t1 (in degrees) (default angle0)
- **fontsize1** (*float*) – fontsize of text at time t1 (default: fontsize0)
- **width1** (*float*) – width of the image to be displayed at time t1 (default: width0)

---

**Note:** The type of the animation cannot be changed with this method. The default value of most of the parameters is the current value (at time now)

---

**visible** (*t=None*)

visible attribute of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **visible** – default behaviour: self.visible0 (visible given at creation or update)

**Return type** bool

**width** (*t=None*)

width position of an animated image object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **width** – default behaviour: linear interpolation between self.width0 and self.width1 if None, the original width of the image will be used

**Return type** float

**x** (*t=None*)

x-position of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **x** – default behaviour: linear interpolation between self.x0 and self.x1

**Return type** float

**xy\_anchor** (*t=None*)

xy\_anchor attribute of an animate object. May be overridden.

**Parameters** *t* (*float*) – current time

**Returns** **xy\_anchor** – default behaviour: self.xy\_anchor0 (xy\_anchor given at creation or update)

**Return type** str

**y** (*t=None*)

y-position of an animate object. May be overridden.

**Parameters** **t** (*float*) – current time

**Returns** **y** – default behaviour: linear interpolation between self.y0 and self.y1

**Return type** float

**class** salabim.**AnimateButton** (*x=0, y=0, width=80, height=30, linewidth=0, fillcolor='fg', linecolor='fg', color='bg', text="", font="", font-size=15, action=None, env=None, xy\_anchor='sw'*)

defines a button

**Parameters**

- **x** (*int*) – x-coordinate of centre of the button in screen coordinates (default 0)
- **y** (*int*) – y-coordinate of centre of the button in screen coordinates (default 0)
- **width** (*int*) – width of button in screen coordinates (default 80)
- **height** (*int*) – height of button in screen coordinates (default 30)
- **linewidth** (*int*) – width of contour in screen coordinates (default 0=no contour)
- **fillcolor** (*colourspec*) – color of the interior (foreground\_color)
- **linecolor** (*colourspec*) – color of contour (default foreground\_color)
- **color** (*colourspec*) – color of the text (default background\_color)
- **text** (*str or function*) – text of the button (default null string) if text is an argumentless function, this will be called each time; the button is shown/updated
- **font** (*str*) – font of the text (default Helvetica)
- **fontsize** (*int*) – fontsize of the text (default 15)
- **action** (*function*) – action to take when button is pressed executed when the button is pressed (default None) the function should have no arguments
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **env** (*Environment*) – environment where the component is defined if omitted, default\_env will be used

---

**Note:** On CPython/PyPy platforms, the tkinter functionality is used. On Pythonista, this is emulated by salabim

---

**remove()**

removes the button object. the ui object is removed from the ui queue, so effectively ending this ui

**class** salabim.**AnimateCircle**(*radius=100, radius1=None, arc\_angle0=0, arc\_angle1=360, draw\_arc=False, x=0, y=0, fillcolor='fg', linecolor="", linewidth=1, text="", fontsize=15, textcolor='bg', font="", angle=0, xy\_anchor="", layer=0, max\_lines=0, offsetx=0, offsety=0, text\_anchor='c', text\_offsetx=0, text\_offsety=0, arg=None, parent=None, visible=True, env=None, screen\_coordinates=False*)

Displays a (partial) circle or (partial) ellipse , optionally with a text

#### Parameters

- **radius** (*float*) – radius of the circle
- **radius1** (*float*) – the ‘height of the ellipse. If None (default), a circle will be drawn
- **arc\_angle0** (*float*) – start angle of the circle (default 0)
- **arc\_angle1** (*float*) – end angle of the circle (default 360) when arc\_angle1 > arc\_angle0 + 360, only 360 degrees will be shown
- **draw\_arc** (*bool*) – if False (default), no arcs will be drawn if True, the arcs from and to the center will be drawn
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw) : nw n new c e sw s se If ‘’, the given coordinates are used untranslated The positions corresponds to a full circle even if arc\_angle0 and/or arc\_angle1 are specified.
- **offsetx** (*float*) – offsets the x-coordinate of the circle (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the circle (default 0)
- **linewidth** (*float*) – linewidth of the contour default 1
- **fillcolor** (*colourspec*) – color of interior (default foreground\_color) default transparent
- **linecolor** (*colourspec*) – color of the contour (default transparent)
- **angle** (*float*) – angle of the circle/ellipse and/or text (in degrees) default: 0
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed



- **font** (*str* or *list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of textInl specifies where to texts relative to the polygon point possible values are (default: c):  
nw n new c e sw s se
- **textcolor** (*colorespec*) – color of the text (default foreground\_color)
- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

```
class salabim.AnimateEntry (x=0, y=0, number_of_chars=20, value="", fillcolor='fg', color='bg', text="", action=None, env=None,
                             xy_anchor='sw')
```

defines a button

#### Parameters

- **x** (*int*) – x-coordinate of centre of the button in screen coordinates (default 0)
- **y** (*int*) – y-coordinate of centre of the button in screen coordinates (default 0)
- **number\_of\_chars** (*int*) – number of characters displayed in the entry field (default 20)
- **fillcolor** (*colorespec*) – color of the entry background (default foreground\_color)
- **color** (*colorespec*) – color of the text (default background\_color)
- **value** (*str*) – initial value of the text of the entry (default null string)
- **action** (*function*) – action to take when the Enter-key is pressed the function should have no arguments
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se

- **env** (*Environment*) – environment where the component is defined if omitted, `default_env` will be used

---

**Note:** This class is not available under Pythonista.

---

**get** ()

get the current value of the entry

**Returns** Current value of the entry

**Return type** str

**remove** ()

removes the entry object. the ui object is removed from the ui queue, so effectively ending this ui

**class** `salabim.AnimateImage` (*spec=""*, *x=0*, *y=0*, *width=None*, *text=""*, *fontsize=15*, *textcolor='bg'*, *font=""*, *angle=0*, *xy\_anchor=""*, *layer=0*, *max\_lines=0*, *offsetx=0*, *offsety=0*, *text\_anchor='c'*, *text\_offsetx=0*, *text\_offsety=0*, *arg=None*, *parent=None*, *anchor='sw'*, *visible=True*, *env=None*, *screen\_coordinates=False*)

Displays an image, optionally with a text

#### Parameters

- **image** (*str*) – image to be displayed if used as function or method or in direct assignment, the image should be a PIL image (most likely via `spec_to_image`)
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: `sw`): `nw n new c e sw s se` If “”, the given coordinates are used untranslated
- **anchor** (*str*) – specifies where the x and refer to possible values are (default: `sw`): `nw n new c e sw s se`
- **offsetx** (*float*) – offsets the x-coordinate of the circle (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the circle (default 0)
- **angle** (*float*) – angle of the text (in degrees) default: 0
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first `max_lines` lines if negative, it refers to the last `-max_lines` lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses `calibri` or `arial`

- **text\_anchor** (*str*) – anchor position of textInl specifies where to texts relative to the polygon point possible values are (default: c):  
nw n new c e sw s se
- **textcolor** (*colorespec*) – color of the text (default foreground\_color)
- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

```
class salabim.AnimateLine (spec=(), x=0, y=0, linecolor='fg', linewidth=1, text="", fontsize=15, textcolor='fg', font="", angle=0, xy_anchor="",  
                           layer=0, max_lines=0, offsetx=0, offsety=0, as_points=False, text_anchor='c', text_offsetx=0, text_offsety=0,  
                           arg=None, parent=None, visible=True, env=None, screen_coordinates=False)
```

Displays a line, optionally with a text

#### Parameters

- **spec** (*tuple or list*) – should specify x0, y0, x1, y1, ...
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se If “”, the given coordinates are used untranslated
- **offsetx** (*float*) – offsets the x-coordinate of the line (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the line (default 0)
- **linewidth** (*float*) – linewidth of the contour default 1
- **linecolor** (*colorespec*) – color of the contour (default foreground\_color)

- **angle** (*float*) – angle of the line (in degrees) default: 0
- **as\_points** (*bool*) – if False (default), the contour lines are drawn if True, only the corner points are shown
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of textInl specifies where to texts relative to the polygon point possible values are (default: c):  
nw n new c e sw s se
- **textcolor** (*colorespec*) – color of the text (default foreground\_color)
- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

```
class salabim.AnimateMonitor(monitor, linecolor='fg', linewidth=None, fillcolor="", bordercolor='fg', borderlinewidth=1, titlecolor='fg',  
                             nowcolor='red', titlefont="", titlefontsize=15, as_points=None, as_level=None, title=None, x=0, y=0, verti-  
                             cal_offset=2, parent=None, vertical_scale=5, horizontal_scale=None, width=200, height=75, xy_anchor='sw',  
                             layer=0)
```

animates a (timestamped) monitor in a panel

#### Parameters

- **linecolor** (*colorespec*) – color of the line or points (default foreground color)

- **linewidth** (*int*) – width of the line or points (default 1 for line, 3 for points)
- **fillcolor** (*colourspec*) – color of the panel (default transparent)
- **bordercolor** (*colourspec*) – color of the border (default foreground color)
- **borderlinewidth** (*int*) – width of the line around the panel (default 1)
- **nowcolor** (*colourspec*) – color of the line indicating now (default red)
- **titlecolor** (*colourspec*) – color of the title (default foreground color)
- **titlefont** (*font*) – font of the title (default ‘’)
- **titlefontsize** (*int*) – size of the font of the title (default 15)
- **as\_points** (*bool*) – if False (default for timestamped monitors), lines will be drawn between the points if True (default for non timestamped monitors), only the points will be shown
- **as\_level** (*bool*) – if True (default for lines), the timestamped monitor is considered to be a level if False (default for points), just the tallied values will be shown, and connected (for lines)
- **title** (*str*) – title to be shown above panel default: name of the monitor
- **x** (*int*) – x-coordinate of panel, relative to xy\_anchor, default 0
- **y** (*int*) – y-coordinate of panel, relative to xy\_anchor. default 0
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **vertical\_offset** (*float*) –  
the vertical position of x within the panel is  $\text{vertical\_offset} + x * \text{vertical\_scale}$  (default 0)
- **vertical\_scale** (*float*) – the vertical position of x within the panel is  $\text{vertical\_offset} + x * \text{vertical\_scale}$  (default 5)
- **horizontal\_scale** (*float*) – for timescaled monitors the relative horizontal position of time t within the panel is on  $t * \text{horizontal\_scale}$ , possibly shifted (default 1)|n| for non timescaled monitors, the relative horizontal position of index i within the panel is on  $i * \text{horizontal\_scale}$ , possibly shifted (default 5)|n|
- **width** (*int*) – width of the panel (default 200)
- **height** (*int*) – height of the panel (default 75)
- **layer** (*int*) – layer (default 0)
- **parent** (*Component*) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

---

**remove ()**

removes the animate object and thus closes this animation

**class** salabim.**AnimatePoints** (*spec=()*, *x=0*, *y=0*, *linecolor='fg'*, *linewidth=4*, *text=""*, *fontsize=15*, *textcolor='fg'*, *font=""*, *angle=0*, *xy\_anchor=""*, *layer=0*, *max\_lines=0*, *offsetx=0*, *offsety=0*, *text\_anchor='c'*, *text\_offsetx=0*, *text\_offsety=0*, *arg=None*, *parent=None*, *visible=True*, *env=None*, *screen\_coordinates=False*)

Displays a series of points, optionally with a text

#### Parameters

- **spec** (*tuple or list*) – should specify *x0*, *y0*, *x1*, *y1*, ...
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where *x* and *y* are relative to possible values are (default: sw) : nw n new c e sw s se If “”, the given coordinates are used untranslated
- **offsetx** (*float*) – offsets the *x*-coordinate of the points (default 0)
- **offsety** (*float*) – offsets the *y*-coordinate of the points (default 0)
- **linewidth** (*float*) – width of the points default 1
- **linecolor** (*colourspec*) – color of the points (default foreground\_color)
- **angle** (*float*) – angle of the points (in degrees) default: 0
- **as\_points** (*bool*) – if False (default), the contour lines are drawn if True, only the corner points are shown
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of textInl specifies where to texts relative to the polygon point possible values are (default: c): nw n new c e sw s se
- **textcolor** (*colourspec*) – color of the text (default foreground\_color)

- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

```
class salabim.AnimatePolygon (spec=(), x=0, y=0, fillcolor='fg', linecolor="", linewidth=1, text="", fontsize=15, textcolor='bg', font="",
                                angle=0, xy_anchor="", layer=0, max_lines=0, offsetx=0, offsety=0, as_points=False, text_anchor='c',
                                text_offsetx=0, text_offsety=0, arg=None, parent=None, visible=True, env=None, screen_coordinates=False)
```

Displays a polygon, optionally with a text

#### Parameters

- **spec** (*tuple or list*) – should specify x0, y0, x1, y1, ...
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw) : nw n new c e sw s se If “”, the given coordinates are used untranslated
- **offsetx** (*float*) – offsets the x-coordinate of the polygon (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the polygon (default 0)
- **linewidth** (*float*) – linewidth of the contour default 1
- **fillcolor** (*colourspec*) – color of interior (default foreground\_color) default transparent
- **linecolor** (*colourspec*) – color of the contour (default transparent)
- **angle** (*float*) – angle of the polygon (in degrees) default: 0

- **as\_points** (*bool*) – if False (default), the contour lines are drawn if True, only the corner points are shown
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of textInl specifies where to texts relative to the polygon point possible values are (default: c):  
nw n new c e sw s se
- **textcolor** (*colorespec*) – color of the text (default foreground\_color)
- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** (*Component*) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

**class** salabim.**AnimateQueue** (*queue, x=50, y=50, direction='w', max\_length=None, xy\_anchor='sw', reverse=False, title=None, titlecolor='fg', titlefontsize=15, titlefont="", titleoffsetx=None, titleoffsety=None, layer=0, id=None, arg=None, parent=None*)  
Animates the component in a queue.

#### Parameters

- **queue** (*Queue*) –
- **x** (*float*) – x-position of the first component in the queue default: 50
- **y** (*float*) – y-position of the first component in the queue default: 50



- **direction** (*str*) – if ‘w’, waiting line runs westwards (i.e. from right to left) if ‘n’, waiting line runs northwards (i.e. from bottom to top) if ‘e’, waiting line runs eastwards (i.e. from left to right) (default) if ‘s’, waiting line runs southwards (i.e. from top to bottom)
- **reverse** (*bool*) – if False (default), display in normal order. If True, reversed.
- **max\_length** (*int*) – maximum number of components to be displayed
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **titlecolor** (*colorspec*) – color of the title (default foreground color)
- **titlefont** (*font*) – font of the title (default ‘’)
- **titlefontsize** (*int*) – size of the font of the title (default 15)
- **title** (*str*) – title to be shown above queue default: name of the queue
- **titleoffsetx** (*float*) – x-offset of the title relative to the start of the queue default: 25 if direction is w, -25 otherwise
- **titleoffsety** (*float*) – y-offset of the title relative to the start of the queue default: -25 if direction is s, -25 otherwise
- **layer** (*int*) – layer (default 0)
- **id** (*any*) – the animation works by calling the animation\_objects method of each component, optionally with id. By default, this is self, but can be overridden, particularly with the queue
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** (*Component*) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue, id, arg and parent can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

```
class salabim.AnimateRectangle(spec=(), x=0, y=0, fillcolor='fg', linecolor="", linewidth=1, text="", fontsize=15, textcolor='bg',
                               font="", angle=0, xy_anchor="", layer=0, max_lines=0, offsetx=0, offsety=0, as_points=False,
                               text_anchor='c', text_offsetx=0, text_offsety=0, arg=None, parent=None, visible=True, env=None,
                               screen_coordinates=False)
```

Displays a rectangle, optionally with a text

#### Parameters

- **spec** (*four item tuple or list*) – should specify xlowerleft, ylowerleft, xupperright, yupperright
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw) : nw n new c e sw s se If “”, the given coordinates are used untranslated
- **offsetx** (*float*) – offsets the x-coordinate of the rectangle (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the rectangle (default 0)
- **linewidth** (*float*) – linewidth of the contour default 1
- **fillcolor** (*colorspec*) – color of interior (default foreground\_color) default transparent
- **linecolor** (*colorspec*) – color of the contour (default transparent)
- **angle** (*float*) – angle of the rectangle (in degrees) default: 0
- **as\_points** (*bool*) – if False (default), the contour lines are drawn if True, only the corner points are shown
- **text** (*str, tuple or list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str or list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of textnl specifies where to texts relative to the rectangle point possible values are (default: c): nw n new c e sw s se
- **textcolor** (*colorspec*) – color of the text (default foreground\_color)
- **textoffsetx** (*float*) – extra x offset to the text\_anchor point
- **textoffsety** (*float*) – extra y offset to the text\_anchor point
- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** ([Component](#)) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

**class** salabim.**AnimateSlider** (*layer=0, x=0, y=0, width=100, height=20, vmin=0, vmax=10, v=None, resolution=1, linecolor='fg', labelcolor='fg', label="", font="", fontsize=12, action=None, xy\_anchor='sw', env=None*)

defines a slider

#### Parameters

- **x** (*int*) – x-coordinate of centre of the slider in screen coordinates (default 0)
- **y** (*int*) – y-coordinate of centre of the slider in screen coordinates (default 0)
- **vmin** (*float*) – minimum value of the slider (default 0)
- **vmax** (*float*) – maximum value of the slider (default 0)
- **v** (*float*) – initial value of the slider (default 0) should be between vmin and vmax
- **resolution** (*float*) – step size of value (default 1)
- **width** (*float*) – width of slider in screen coordinates (default 100)
- **height** (*float*) – height of slider in screen coordinates (default 20)
- **linewidth** (*float*) – width of contour in screen coordinate (default 0 = no contour)
- **linecolor** (*colourspec*) – color of contour (default foreground\_color)
- **labelcolor** (*colourspec*) – color of the label (default foreground\_color)
- **label** (*str*) – label if the slider (default null string) if label is an argumentless function, this function will be used to display as label, otherwise the label plus the current value of the slider will be shown
- **font** (*str*) – font of the text (default Helvetica)
- **fontsize** (*int*) – fontsize of the text (default 12)
- **action** (*function*) – function executed when the slider value is changed (default None) the function should one arguments, being the new value if None (default), no action
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **env** (*Environment*) – environment where the component is defined if omitted, default\_env will be used

---

**Note:** The current value of the slider is the `v` attribute of the slider. On CPython/PyPy platforms, the tkinter functionality is used. On Pythonista, this is emulated by salabim

---

**remove** ()

removes the slider object The ui object is removed from the ui queue, so effectively ending this ui

**v** (*value=None*)

value

**Parameters** **value** (*float*) – new value if omitted, no change

**Returns** Current value of the slider

**Return type** float

**class** salabim.**AnimateText** (*text=*”, *x=0*, *y=0*, *fontsize=15*, *textcolor=’fg’*, *font=*”, *text\_anchor=’sw’*, *angle=0*, *visible=True*, *xy\_anchor=*”, *layer=0*, *env=None*, *screen\_coordinates=False*, *arg=None*, *parent=None*, *offsetx=0*, *offsety=0*, *max\_lines=0*)

Displays a text

**Parameters**

- **text** (*str*, *tuple* or *list*) – the text to be displayed if text is str, the text may contain linefeeds, which are shown as individual lines if text is tple or list, each item is displayed on a separate line
- **x** (*float*) – position of anchor point (default 0)
- **y** (*float*) – position of anchor point (default 0)
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw) : nw n new c e sw s se If “”, the given coordinates are used untranslated
- **offsetx** (*float*) – offsets the x-coordinate of the rectangle (default 0)
- **offsety** (*float*) – offsets the y-coordinate of the rectangle (default 0)
- **angle** (*float*) – angle of the text (in degrees) default: 0
- **max\_lines** (*int*) – the maximum of lines of text to be displayed if positive, it refers to the first max\_lines lines if negative, it refers to the last -max\_lines lines if zero (default), all lines will be displayed
- **font** (*str* or *list/tuple*) – font to be used for texts Either a string or a list/tuple of fontnames. If not found, uses calibri or arial
- **text\_anchor** (*str*) – anchor position of text\nl specifies where to texts relative to the rectangle point possible values are (default: c): nw n new c e sw s se
- **textcolor** (*colorspec*) – color of the text (default foreground\_color)

- **fontsize** (*float*) – fontsize of text (default 15)
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)
- **parent** (*Component*) – component where this animation object belongs to (default None) if given, the animation object will be removed automatically upon termination of the parent

---

**Note:** All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

## 11.2 Distributions

**class** salabim.\_Distribution

**bounded\_sample** (*lowerbound=-inf, upperbound=inf, fail\_value=None, number\_of\_retries=100*)

### Parameters

- **lowerbound** (*float*) – sample values < lowerbound will be rejected (at most 100 retries) if omitted, no lowerbound check
- **upperbound** (*float*) – sample values > upperbound will be rejected (at most 100 retries) if omitted, no upperbound check
- **fail\_value** (*float*) – value to be used if. after number\_of\_tries retries, sample is still not within bounds default: lowerbound, if specified, otherwise upperbound
- **number\_of\_tries** (*int*) – number of tries before fail\_value is returned default: 100

**Returns** Bounded sample of a distribution

**Return type** depending on distribution type (usually float)

---

**Note:** If, after number\_of\_tries retries, the sampled value is still not within the given bounds, fail\_value will be returned Samples that cannot be converted (only possible with Pdf) to float are assumed to be within the bounds.

---

**class** salabim.**Beta** (*alpha, beta, randomstream=None*)  
beta distribution

**Parameters**

- **alpha** (*float*) – alpha shape of the distribution should be >0
- **beta** (*float*) – beta shape of the distribution should be >0
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**sample** ()

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Cdf** (*spec, randomstream=None*)  
Cumulative distribution function

**Parameters**

- **spec** (*list or tuple*) – list with x-values and corresponding cumulative density (x1,c1,x2,c2, ... xn,cn) Requirements:  
x1<=x2<= ... <=xn c1<=c2<=cn c1=0 cn>0 all cumulative densities are auto scaled according to cn, so no need to set cn to 1 or 100.
- **randomstream** (*randomstream*) – if omitted, random will be used if used as random.Random(12299) it defines a new stream with the specified seed

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample** ()

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Constant** (*value, randomstream=None*)  
constant distribution

**Parameters**

- **value** (*float*) – value to be returned in sample
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed Note that this is only for compatibility with other distributions

**mean** ()

**Returns** mean of the distribution (= the specified constant)

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample** ()

**Returns** sample of the distribution (= the specified constant)

**Return type** float

**class** salabim.Distribution (*spec, randomstream=None*)

Generate a distribution from a string

**Parameters**

- **spec** (*str*) –
  - string containing a valid salabim distribution, where only the first letters are relevant and casing is not important. Note that Erlang, Cdf, CumPdf and Poisson require at least two letters (Er, Cd, Cu and Po)
  - string containing one float (*c1*), resulting in Constant(*c1*)
  - string containing two floats separated by a comma (*c1,c2*), resulting in a Uniform(*c1,c2*)
  - string containing three floats, separated by commas (*c1,c2,c3*), resulting in a Triangular(*c1,c2,c3*)
- **randomstream** (*randomstream*) – if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:** The randomstream in the specifying string is ignored. It is possible to use expressions in the specification, as long these are valid within the context of the salabim module, which usually implies a global variable of the salabim package.

---

## Examples

Uniform(13) ==> Uniform(13) Uni(12,15) ==> Uniform(12,15) UNIF(12,15) ==> Uniform(12,15) N(12,3) ==> Normal(12,3) Tri(10,20). ==> Triangular(10,20,15) 10. ==> Constant(10) 12,15 ==> Uniform(12,15) (12,15) ==> Uniform(12,15) Exp(a) ==> Exponential(100), provided sim.a=100 E(2) ==> Exponential(2) Er(2,3) ==> Erlang(2,3)

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)

prints information about the distribution



**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)**Return type** str**sample** ()**Returns** Sample of the distribution**Return type** any (usually float)

**class** salabim.**Erlang** (*shape*, *rate=None*, *scale=None*, *randomstream=None*)  
 erlang distribution

**Parameters**

- **shape** (*int*) – shape of the distribution (k) should be >0
- **rate** (*float*) – rate parameter (lambda) if omitted, the scale is used should be >0
- **scale** (*float*) – scale of the distribution (mu) if omitted, the rate is used should be >0
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:** Either rate or scale has to be specified, not both.

---

**mean** ()**Returns** Mean of the distribution**Return type** float

**print\_info** (*as\_str=False*, *file=None*)  
 prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Exponential** (*mean=None, rate=None, randomstream=None*)  
exponential distribution

**Parameters**

- **mean** (*float*) – mean of the distribution (beta)|nl if omitted, the rate is used must be >0
- **rate** (*float*) – rate of the distribution (lambda)|nl if omitted, the mean is used must be >0
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:** Either mean or rate has to be specified, not both

---

**mean()**

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Gamma** (*shape, scale=None, rate=None, randomstream=None*)  
 gamma distribution

**Parameters**

- **shape** (*float*) – shape of the distribution (k) should be >0
- **scale** (*float*) – scale of the distribution (teta) should be >0
- **rate** (*float*) – rate of the distribution (beta) should be >0
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:** Either scale or rate has to be specified, not both.

---

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
 prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**sample** ()

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Normal** (*mean, standard\_deviation=None, coefficient\_of\_variation=None, use\_gauss=False, randomstream=None*)  
 normal distribution

**Parameters**

- **mean** (*float*) – mean of the distribution

- **standard\_deviation** (*float*) – standard deviation of the distribution if omitted, coefficient\_of\_variation, is used to specify the variation if neither standard\_deviation nor coefficient\_of\_variation is given, 0 is used, thus effectively a constant distribution must be  $\geq 0$
- **coefficient\_of\_variation** (*float*) – coefficient of variation of the distribution if omitted, standard\_deviation is used to specify variation the resulting standard\_deviation must be  $\geq 0$
- **use\_gauss** (*bool*) – if False (default), use the random.normalvariate method if True, use the random.gauss method the documentation for random states that the gauss method should be slightly faster, although that statement is doubtful.
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None (default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**sample** ()

**Returns** Sample of the distribution

**Return type** float

**class** salabim.Pdf (*spec, probabilities=None, randomstream=None*)  
Probability distribution function

**Parameters**

- **spec** (*list or tuple*) – either
  - if no probabilities specified: list with x-values and corresponding probability ( $x_0, p_0, x_1, p_1, \dots, x_n, p_n$ )
  - if probabilities is specified: list with x-values

- **probabilities** (*list, tuple or float*) – if omitted, spec contains the probabilities the list (p0, p1, ...pn) contains the probabilities of the corresponding x-values from spec. alternatively, if a float is given (e.g. 1), all x-values have equal probability. The value is not important.
- **randomstream** (*randomstream*) – if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:**  $p_0+p_1+\dots+p_n>0$  all densities are auto scaled according to the sum of p0 to pn, so no need to have p0 to pn add up to 1 or 100. The x-values can be any type. If it is a salabim distribution, not the distribution, but a sample will be returned when calling sample.

---

**mean()**

**Returns** mean of the distribution – if the mean can't be calculated (if not all x-values are scalars or distributions), nan will be returned.

**Return type** float

**print\_info** (*as\_str=False, file=None*)

prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** any (usually float)

**class** salabim.Poisson (*mean, randomstream=None*)

Poisson distribution

**Parameters**

- **mean** (*float*) – mean (lambda) of the distribution
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

---

**Note:** The run time of this function increases when mean (lambda) increases. It is not recommended to use mean (lambda) > 100

---

**mean()**

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if *as\_str* is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** int

**class** salabim.Triangular (*low, high=None, mode=None, randomstream=None*)  
triangular distribution

**Parameters**

- **low** (*float*) – lowerbound of the distribution
- **high** (*float*) – upperbound of the distribution if omitted, low will be used, thus effectively a constant distribution high must be >= low
- **mode** (*float*) – mode of the distribution if omitted, the average of low and high will be used, thus a symmetric triangular distribution mode must be between low and high
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

**mean()**

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample** ()

**Returns** Sample of the distribution

**Return type** float

**class** salabim.Uniform (*lowerbound, upperbound=None, randomstream=None*)  
uniform distribution

**Parameters**

- **lowerbound** (*float*) – lowerbound of the distribution
- **upperbound** (*float*) – upperbound of the distribution if omitted, lowerbound will be used must be  $\geq$  lowerbound
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

**mean** ()

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** float

**class** salabim.**Weibull** (*scale, shape, randomstream=None*)  
weibull distribution

**Parameters**

- **scale** (*float*) – scale of the distribution (alpha or k)
- **shape** (*float*) – shape of the distribution (beta or lambda)lnl should be >0
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used if used as random.Random(12299) it assigns a new stream with the specified seed

**mean()**

**Returns** Mean of the distribution

**Return type** float

**print\_info** (*as\_str=False, file=None*)  
prints information about the distribution

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is True)

**Return type** str

**sample()**

**Returns** Sample of the distribution

**Return type** float



## 11.3 Component

```
class salabim.Component (name=None, at=None, delay=None, urgent=None, process=None, suppress_trace=False, suppress_pause_at_step=False, mode=None, env=None, **kwargs)
```

Component object

A salabim component is used as component (primarily for queueing) or as a component with a process. Usually, a component will be defined as a subclass of Component.

### Parameters

- **name** (*str*) – name of the component. if the name ends with a period (.), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)
- **at** (*float*) – schedule time if omitted, now is used
- **delay** (*float*) – schedule with a delay if omitted, no delay
- **urgent** (*bool*) – urgency indicator if False (default), the component will be scheduled behind all other components scheduled for the same time if True, the component will be scheduled in front of all components scheduled for the same time
- **process** (*str*) – name of process to be started. if None (default), it will try to start self.process() if ‘’, no process will be started even if self.process() exists, i.e. become a data component. note that the function *must* be a generator, i.e. contains at least one yield.
- **suppress\_trace** (*bool*) – suppress\_trace indicator if True, this component will be excluded from the trace. If False (default), the component will be traced. Can be queried or set later with the suppress\_trace method.
- **suppress\_pause\_at\_step** (*bool*) – suppress\_pause\_at\_step indicator if True, if this component becomes current, do not pause when stepping. If False (default), the component will be paused when stepping. Can be queried or set later with the suppress\_pause\_at\_step method.
- **mode** (*str preferred*) – mode will be used in trace and can be used in animations if omitted, the mode will be None. also mode\_time will be set to now.
- **env** (*Environment*) – environment where the component is defined if omitted, default\_env will be used

```
activate (at=None, delay=0, urgent=False, process=None, keep_request=False, keep_wait=False, mode=None, **kwargs)
```

activate component

### Parameters

- **at** (*float*) – schedule time if omitted, now is used inf is allowed
- **delay** (*float*) – schedule with a delay if omitted, no delay

- **urgent** (*bool*) – urgency indicator if False (default), the component will be scheduled behind all other components scheduled for the same time if True, the component will be scheduled in front of all components scheduled for the same time
- **process** (*str*) – name of process to be started. if None (default), process will not be changed if the component is a data component, the generator function process will be used as the default process. note that the function *must* be a generator, i.e. contains at least one yield.
- **keep\_request** (*bool*) – this affects only components that are requesting. if True, the requests will be kept and thus the status will remain requesting if False (the default), the request(s) will be canceled and the status will become scheduled
- **keep\_wait** (*bool*) – this affects only components that are waiting. if True, the waits will be kept and thus the status will remain waiting if False (the default), the wait(s) will be canceled and the status will become scheduled
- **mode** (*str preferred*) – mode will be used in the trace and can be used in animations if nothing specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** if to be applied to the current component, use `yield self.activate()`. if both at and delay are specified, the component becomes current at the sum of the two values.

---

#### **animation\_objects** (*id*)

defines how to display a component in AnimateQueue

**Parameters** **id** (*any*) – id as given by AnimateQueue. Note that by default this the reference to the AnimateQueue object.

**Returns** **size\_x** : how much to displace the next component in x-direction, if applicable **size\_y** : how much to displace the next component in y-direction, if applicable **animation objects** : instances of Animate class default behaviour: square of size 40 (displacements 50), with the sequence number centered.

**Return type** List or tuple containing

---

**Note:** If you override this method, be sure to use the same header, either with or without the id parameter.

---

#### **base\_name** ()

**Returns** base name of the component (the name used at initialization)

**Return type** str

#### **cancel** (*mode=None*)

cancel component (makes the component data)

**Parameters** `mode` (*str preferred*) – mode will be used in trace and can be used in animations if nothing specified, the mode will be unchanged. also `mode_time` will be set to now, if mode is set.

---

**Note:** if to be used for the current component, use `yield self.cancel()`.

---

**claimed\_quantity** (*resource*)

**Parameters** `resource` (*Resource*) – resource to be queried

**Returns** the claimed quantity from a resource – if the resource is not claimed, 0 will be returned

**Return type** float or int

**claimed\_resources** ()

**Returns** list of claimed resources

**Return type** list

**count** (*q=None*)

queue count

**Parameters** `q` (*Queue*) – queue to check or if omitted, the number of queues where the component is in

**Returns** 1 if component is in q, 0 otherwise – if q is omitted, the number of queues where the component is in

**Return type** int

**creation\_time** ()

**Returns** time the component was created

**Return type** float

**deregister** (*registry*)

deregisters the component in the registry

**Parameters** `registry` (*list*) – list of registered components

**Returns** component (self)

**Return type** *Component*

**enter** (*q*)

enters a queue at the tail

**Parameters** `q` (*Queue*) – queue to enter

---

**Note:** the priority will be set to the priority of the tail component of the queue, if any or 0 if queue is empty

---

**enter\_at\_head** (*q*)  
enters a queue at the head

**Parameters** **q** ([Queue](#)) – queue to enter

---

**Note:** the priority will be set to the priority of the head component of the queue, if any or 0 if queue is empty

---

**enter\_behind** (*q, poscomponent*)  
enters a queue behind a component

**Parameters**

- **q** ([Queue](#)) – queue to enter
- **poscomponent** ([Component](#)) – component to be entered behind

---

**Note:** the priority will be set to the priority of poscomponent

---

**enter\_in\_front\_of** (*q, poscomponent*)  
enters a queue in front of a component

**Parameters**

- **q** ([Queue](#)) – queue to enter
- **poscomponent** ([Component](#)) – component to be entered in front of

---

**Note:** the priority will be set to the priority of poscomponent

---

**enter\_sorted** (*q, priority*)  
enters a queue, according to the priority

**Parameters**

- **q** ([Queue](#)) – queue to enter
- **priority** (*type that can be compared with other priorities in the queue*) – priority in the queue

---

**Note:** The component is placed just before the first component with a priority > given priority

---

**enter\_time** (*q*)

**Parameters** *q* (*Queue*) – queue where component belongs to

**Returns** time the component entered the queue

**Return type** float

**failed** ()

**Returns**

- **True, if the latest request/wait has failed (either by timeout or external)** (*bool*)
- *False, otherwise*

**hold** (*duration=None, till=None, urgent=False, mode=None*)

hold the component

**Parameters**

- **duration** (*float*) – specifies the duration if omitted, 0 is used inf is allowed
- **till** (*float*) – specifies at what time the component will become current if omitted, now is used inf is allowed
- **urgent** (*bool*) – urgency indicator if False (default), the component will be scheduled behind all other components scheduled for the same time if True, the component will be scheduled in front of all components scheduled for the same time
- **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** if to be used for the current component, use `yield self.hold(...)`.

if both duration and till are specified, the component will become current at the sum of these two.

---

**index** (*q*)

**Parameters** *q* (*Queue*) – queue to be queried

**Returns** index of component in *q* – if component belongs to *q* -1 if component does not belong to *q*

**Return type** int

**interrupt** (*mode=None*)  
interrupt the component

**Parameters** **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing is specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** Cannot be applied on the current component. Use resume() to resume

---

**interrupt\_level** ()  
returns interrupt level of an interrupted component non interrupted components return 0

**interrupted\_status** ()  
returns the original status of an interrupted component

**possible values are**

- passive
- scheduled
- requesting
- waiting
- standby

**iscurrent** ()

**Returns** True if status is current, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**isdata** ()

**Returns** True if status is data, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**isinterrupted()**

**Returns** True if status is interrupted, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**ispassive()**

**Returns** True if status is passive, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**isrequesting()**

**Returns** True if status is requesting, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**isscheduled()**

**Returns** True if status is scheduled, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**isstandby()**

**Returns** True if status is standby, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True

---

**iswaiting** ()

**Returns** True if status is waiting, False otherwise

**Return type** bool

---

**Note:** Be sure to always include the parentheses, otherwise the result will be always True!

---

**leave** (*q=None*)

leave queue

**Parameters** *q* ([Queue](#)) – queue to leave

---

**Note:** statistics are updated accordingly

---

**mode** (*value=None*)

**Parameters** **value** (*any, str recommended*) – new mode if omitted, no change mode\_time will be set if a new mode is specified

**Returns** **mode of the component** – the mode is useful for tracing and animations. Usually the mode will be set in a call to passivate, hold, activate, request or standby.

**Return type** any, usually str

**mode\_time** ()

**Returns** **time the component got it's latest mode** – For a new component this is the time the component was created. this function is particularly useful for animations.

**Return type** float

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the component if omitted, no change

**Returns** **Name of the component**

**Return type** str



---

**Note:** `base_name` and `sequence_number` are not affected if the name is changed

---

**passivate** (*mode=None*)  
passivate the component

**Parameters** **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing is specified, the mode will be unchanged. also `mode_time` will be set to now, if mode is set.

---

**Note:** if to be used for the current component (nearly always the case), use `yield self.passivate()`.

---

**predecessor** (*q*)

**Parameters**

- **q** (*Queue*) – queue where the component belongs to
- **Returns** (*Component*) – predecessor of the component in the queue if component is not at the head. returns None if component is at the head.

**print\_info** (*as\_str=False, file=None*)  
prints information about the component

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None (default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** **info** (if **as\_str** is **True**)

**Return type** `str`

**priority** (*q, priority=None*)  
gets/sets the priority of a component in a queue

**Parameters**

- **q** (*Queue*) – queue where the component belongs to
- **priority** (*type that can be compared with other priorities in the queue*) – priority in queue if omitted, no change

**Returns** the priority of the component in the queue

**Return type** float

---

**Note:** if you change the priority, the order of the queue may change

---

**queues** ()

**Returns** set of queues where the component belongs to

**Return type** *set*

**register** (*registry*)

registers the component in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects

**Returns** component (self)

**Return type** *Component*

---

**Note:** Use Component.deregister if component does not longer need to be registered.

---

**release** (*\*args*)

release a quantity from a resource or resources

**Parameters** **args** (*sequence of items, where each items can be*) –

- a resources, where quantity=current claimed quantity
- a tuple/list containing a resource and the quantity to be released

---

**Note:** It is not possible to release from an anonymous resource, this way. Use Resource.release() in that case.

---

## Example

yield self.request(r1,(r2,2),(r3,3,100)) → requests 1 from r1, 2 from r2 and 3 from r3 with priority 100

c1.release → releases 1 from r1, 2 from r2 and 3 from r3

yield self.request(r1,(r2,2),(r3,3,100)) c1.release((r2,1)) → releases 1 from r2

yield self.request(r1,(r2,2),(r3,3,100)) c1.release((r2,1),r3) -> releases 2 from r2,and 3 from r3

**remaining\_duration** (*value=None, urgent=False*)

#### Parameters

- **value** (*float*) – set the remaining\_duration The action depends on the status where the component is in: - passive: the remaining duration is update according to the given value - standby and current: not allowed - scheduled: the component is rescheduled according to the given value - waiting or requesting: the fail\_at is set according to the given value - interrupted: the remaining\_duration is updated according to the given value
- **urgent** (*bool*) – urgency indicator if False (default), the component will be scheduled behind all other components scheduled for the same time if True, the component will be scheduled in front of all components scheduled for the same time

**Returns remaining duration** – if passive, remaining time at time of passivate if scheduled, remaing time till scheduled time if requesting or waiting, time till fail\_at time else: 0

**Return type** float

---

**Note:** This method is usefu for interrupting a process and then resuming it, after some (breakdown) time

---

**request** (*\*args, \*\*kwargs*)

request from a resource or resources

#### Parameters

- **args** (*sequence of items where each item can be:*) –
  - resource, where quantity=1, priority=tail of requesters queue
  - **tuples/list containing a resource, a quantity and optionally a priority.** if the priority is not specified, the request for the resource be added to the tail of the requesters queue
- **fail\_at** (*float*) – time out if the request is not honored before fail\_at, the request will be cancelled and the parameter failed will be set. if not specified, the request will not time out.
- **fail\_delay** (*float*) – time out if the request is not honored before now+fail\_delay, the request will be cancelled and the parameter failed will be set. if not specified, the request will not time out.
- **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** Not allowed for data components or main.

---

If to be used for the current component (which will be nearly always the case), use `yield self.request(...)`.

If the same resource is specified more that once, the quantities are summed

The requested quantity may exceed the current capacity of a resource

The parameter failed will be reset by a calling request or wait

---

### Example

```
yield self.request(r1) -> requests 1 from r1
yield self.request(r1,r2) -> requests 1 from r1 and 1 from r2
yield self.request(r1,(r2,2),(r3,3,100)) -> requests 1 from r1, 2 from r2 and 3 from r3 with priority 100
yield self.request((r1,1),(r2,2)) -> requests 1 from r1, 2 from r2
```

**requested\_quantity** (*resource*)

**Parameters** **resource** (*Resoure*) – resource to be queried

**Returns** the requested (not yet honored) quantity from a resource – if there is no request for the resource, 0 will be returned

**Return type** float or int

**requested\_resources** ()

**Returns** list of requested resources

**Return type** list

**resume** (*all=False, mode=None, urgent=False*)

resumes an interrupted component

**Parameters**

- **all** (*bool*) – if True, the component returns to the original status, regardless of the number of interrupt levels if False (default), the interrupt level will be decremented and if the level reaches 0, the component will return to the original status.
- **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing is specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.
- **urgent** (*bool*) – urgency indicator if False (default), the component will be scheduled behind all other components scheduled for the same time if True, the component will be scheduled in front of all components scheduled for the same time

---

**Note:** Can be only applied to interrupted components.

---

**running\_process()**

**Returns** name of the running process – if data component, None

**Return type** str

**scheduled\_time()**

**Returns** time the component scheduled for, if it is scheduled – returns inf otherwise

**Return type** float

**sequence\_number()**

**Returns** sequence\_number of the component – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dotcomma at the end) will be numbered)

**Return type** int

**setup()**

called immediately after initialization of a component.

by default this is a dummy method, but it can be overridden.

only keyword arguments will be passed

### Example

```
class Car(sim.Component):
```

```
    def setup(self, color): self.color = color
```

```
    def process(self): ...
```

```
redcar=Car(color='red') bluecar=Car(color='blue')
```

**standby** (*mode=None*)

puts the component in standby mode

**Parameters** **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** Not allowed for data components or main.

if to be used for the current component (which will be nearly always the case), use `yield self.standby()`.

---

**status()**

returns the status of a component

**possible values are**

- data
- passive
- scheduled
- requesting
- waiting
- current
- standby
- interrupted

**successor(*q*)**

**Parameters** *q* (*Queue*) – queue where the component belongs to

**Returns** the successor of the component in the queue – if component is not at the tail. returns None if component is at the tail.

**Return type** *Component*

**suppress\_pause\_at\_step** (*value=None*)

**Parameters** *value* (*bool*) – new suppress\_trace value if omitted, no change

**Returns** **suppress\_pause\_at\_step** – components with the suppress\_pause\_at\_step of True, will be ignored in a step

**Return type** *bool*

**suppress\_trace** (*value=None*)

**Parameters** *value* (*bool*) – new suppress\_trace value if omitted, no change

**Returns** **suppress\_trace** – components with the suppress\_status of True, will be ignored in the trace

**Return type** *bool*

**wait** (*\*args, \*\*kwargs*)

wait for any or all of the given state values are met

### Parameters

- **args** (*sequence of items, where each item can be*) –
  - a state, where value=True, priority=tail of waiters queue)
  - a **tuple/list containing** state, a value and optionally a priority. if the priority is not specified, this component will be added to the tail of the waiters queue
- **fail\_at** (*float*) – time out if the wait is not honored before fail\_at, the wait will be cancelled and the parameter failed will be set. if not specified, the wait will not time out.
- **fail\_delay** (*float*) – time out if the wait is not honored before now+fail\_delay, the request will be cancelled and the parameter failed will be set. if not specified, the wait will not time out.
- **all** (*bool*) – if False (default), continue, if any of the given state/values is met if True, continue if all of the given state/values are met
- **mode** (*str preferred*) – mode will be used in trace and can be used in animations if nothing specified, the mode will be unchanged. also mode\_time will be set to now, if mode is set.

---

**Note:** Not allowed for data components or main.

If to be used for the current component (which will be nearly always the case), use `yield self.wait(...)`.

It is allowed to wait for more than one value of a state the parameter failed will be reset by a calling wait

If you want to check for all components to meet a value (and clause), use `Component.wait(..., all=True)`

The value may be specified in three different ways:

- constant, that value is just compared to `state.value()` `yield self.wait((light,'red'))`
  - an expression, containing one or more `$`-signs the `$` is replaced by `state.value()`, each time the condition is tested. `self` refers to the component under test, `state` refers to the state under test. `yield self.wait((light,'$ in ("red","yellow")'))` `yield self.wait((level,'$<30'))`
  - a function. In that case the parameter should function that should accept three arguments: the value, the component under test and the state under test. usually the function will be a lambda function, but that's not a requirement. `yield self.wait((light,lambda t, comp, state: t in ('red','yellow')))` `yield self.wait((level,lambda t, comp, state: t < 30))`
- 

### Example

```
yield self.wait(s1) -> waits for s1.value()==True
yield self.wait(s1, s2) -> waits for s1.value()==True or s2.value()==True
yield
```

`self.wait((s1,False,100),(s2,'on'),s3) -> waits for s1.value()==False or s2.value=='on' or s3.value()==True s1 is at the tail of waiters, because of the set priority yield` `self.wait(s1,s2,all=True) -> waits for s1.value()==True and s2.value==True`

## 11.4 Environment

**class** `salabim.Environment` (*trace=False, random\_seed=None, name=None, print\_trace\_header=True, isdefault\_env=True, \*args, \*\*kwargs*)  
environment object

### Parameters

- **trace** (*bool*) – defines whether to trace or not if omitted, False
- **random\_seed** (*hashable object, usually int*) – the seed for random, equivalent to `random.seed()` if `'*'`, a purely random value (based on the current time) will be used (not reproducible) if the null string (`''`), no action on random is taken if `None` (the default), 1234567 will be used.
- **name** (*str*) – name of the environment if the name ends with a period (`.`), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class (lowercased) or 'default environment' if `isdefault_env` is `True`.
- **print\_trace\_header** (*bool*) – if `True` (default) print a (two line) header line as a legend if `False`, do not print a header note that the header is only printed if `trace=True`
- **isdefault\_env** (*bool*) – if `True` (default), this environment becomes the default environment if `False`, this environment will not be the default environment if omitted, this environment becomes the default environment

---

**Note:** The trace may be switched on/off later with `trace` The seed may be later set with `random_seed()` Initially, the random stream will be seeded with the value 1234567. If required to be purely, not not reproducible, values, use `random_seed='*'`.

---

**an\_clocktext** ()

function to initialize the system clocktext called by `run()`, if `animation` is `True`. may be overridden to change the standard behaviour.

**an\_menu\_buttons** ()

function to initialize the menu buttons may be overridden to change the standard behaviour.

**an\_modelname** ()

function to show the modelname called by `run()`, if `animation` is `True`. may be overridden to change the standard behaviour.

**an\_synced\_buttons** ()

function to initialize the synced buttons may be overridden to change the standard behaviour.



**an\_unsynced\_buttons()**

function to initialize the unsynced buttons may be overridden to change the standard behaviour.

**animate** (*value=None*)

animate indicator

**Parameters** **value** (*bool*) – new animate indicator if not specified, no change

**Returns** **animate status**

**Return type** **bool**

---

**Note:** When the run is not issued, no action will be taken.

---

**animation\_parameters** (*animate=True, synced=None, speed=None, width=None, height=None, x0=None, y0=None, x1=None, background\_color=None, foreground\_color=None, fps=None, modelname=None, use\_toplevel=None, tkinter\_init=None, tkinter\_exit=None, show\_fps=None, show\_time=None, video=None, video\_repeat=None, video\_pingpong=None*)

set animation parameters

**Parameters**

- **animate** (*bool*) – animate indicator if not specified, set animate on
- **synced** (*bool*) – specifies whether animation is synced if omitted, no change. At init of the environment synced will be set to True
- **speed** (*float*) – speed specifies how much faster or slower than real time the animation will run. e.g. if 2, 2 simulation time units will be displayed per second.
- **width** (*int*) – width of the animation in screen coordinates if omitted, no change. At init of the environment, the width will be set to 1024 for CPython and the current screen width for Pythonista.
- **height** (*int*) – height of the animation in screen coordinates if omitted, no change. At init of the environment, the height will be set to 768 for CPython and the current screen height for Pythonista.
- **x0** (*float*) – user x-coordinate of the lower left corner if omitted, no change. At init of the environment, x0 will be set to 0.
- **y0** (*float*) – user y-coordinate of the lower left corner if omitted, no change. At init of the environment, y0 will be set to 0.
- **x1** (*float*) – user x-coordinate of the lower right corner if omitted, no change. At init of the environment, x1 will be set to 1024 for CPython and the current screen width for Pythonista.
- **background\_color** (*colorspec*) – color of the background if omitted, no change. At init of the environment, this will be set to white.

- **foreground\_color** (*colorespec*) – color of foreground (texts) if omitted and background\_color is specified, either white of black will be used, in order to get a good contrast with the background color. if omitted and background\_color is also omitted, no change. At init of the environment, this will be set to black.
- **fps** (*float*) – number of frames per second
- **modelname** (*str*) – name of model to be shown in upper left corner, along with text ‘a salabim model’ if omitted, no change. At init of the environment, this will be set to the null string, which implies suppression of this feature.
- **use\_toplevel** (*bool*) – if salabim animation is used in parallel with other modules using tkinter, it might be necessary to initialize the root with tkinter.TopLevel(). In that case, set this parameter to True. if False (default), the root will be initialized with tkinter.Tk()
- **tkinter\_init** (*function or method (with parameter self=env)*) – if specified and not run under Pythonista, this function will be called immediately after the setup of tkinter. The function gets one parameter, the root. With this, the animation can use more UI elements and then salabim provides. The name of root can be retrieved with self.root
- **tkinter\_exit** (*function or method (with parameter self=env)*) – if specified and not run under Pythonista, this function will be called immediately before the destruction tkinter. The function gets one parameter, the environment. With this, the animation can use more UI elements and then salabim provides. The name of root can be retrieved with self.root
- **show\_fps** (*bool*) – if True, show the number of frames per second if False, do not show the number of frames per second (default)
- **show\_time** (*bool*) – if True, show the time (default) if False, do not show the time
- **video** (*str*) – if video is not omitted, a video with the name video will be created. If the video extension is not .gif, a codec may be added by appending a plus sign and the four letter code name, like ‘myvideo.avi+DIVX’. If no codec is given, MP4V will be used.
- **video\_repeat** (*int*) – number of times gif should be repeated 0 means infinite at init of the environment video\_repeat is 1 this only applies to gif files production.
- **video\_pingpong** (*bool*) – if True, all frames will be added reversed at the end of the video (useful for smooth loops) at init of the environment video\_pingpong is False this only applies to gif files production.

---

**Note:** The y-coordinate of the upper right corner is determined automatically in such a way that the x and scaling are the same.

---

**animation\_post\_tick** (*t*)

called just after the animation object loop. Default behaviour: just return

**Parameters** *t* (*float*) – Current (animation) time.

**animation\_pre\_tick** (*t*)

called just before the animation object loop. Default behaviour: just return

**Parameters** *t* (*float*) – Current (animation) time.

**background\_color** (*value=None*)

background\_color of the animation

**Parameters** *value* (*colormap*) – new background\_color if not specified, no change

**Returns** background\_color of animation

**Return type** colormap

**base\_name** ()

returns the base name of the environment (the name used at initialization)

**beep** ()

Beeps

Works only on Windows and iOS (Pythonista). For other platforms this is just a dummy method.

**colorinterpolate** (*t, t0, t1, v0, v1*)

does linear interpolation of colormaps

**Parameters**

- *t* (*float*) – value to be interpolated from
- *t0* (*float*) –  $f(t_0)=v_0$
- *t1* (*float*) –  $f(t_1)=v_1$
- *v0* (*colormap*) –  $f(t_0)=v_0$
- *v1* (*colormap*) –  $f(t_1)=v_1$

**Returns** linear interpolation between *v0* and *v1* based on *t* between *t0* and *t*

**Return type** colormap

---

**Note:** Note that no extrapolation is done, so if  $t < t_0 \implies v_0$  and  $t > t_1 \implies v_1$  This function is heavily used during animation

---

**colormap\_to\_tuple** (*colormap*)

translates a colormap to a tuple

**Parameters** **colorspec** (*tuple, list or str*) – #rrggbb ==> alpha = 255 (rr, gg, bb in hex) #rrggbbaa ==> alpha = aa (rr, gg, bb, aa in hex) colorname ==> alpha = 255 (colorname, alpha) (r, g, b) ==> alpha = 255 (r, g, b, alpha) 'fg' ==> foreground\_color 'bg' ==> background\_color

**Returns**

**Return type** (r, g, b, a)

**current\_component** ()

**Returns** the current\_component

**Return type** *Component*

**foreground\_color** (*value=None*)

foreground\_color of the animation

**Parameters** **value** (*colorspec*) – new foreground\_color if not specified, no change

**Returns** foreground\_color of animation

**Return type** colorspec

**fps** (*value=None*)

**Parameters** **value** (*int*) – new fps if not specified, no change

**Returns** fps

**Return type** bool

**height** (*value=None*)

height of the animation in screen coordinates

**Parameters** **value** (*int*) – new height if not specified, no change

**Returns** height of animation

**Return type** int

**is\_dark** (*colorspec*)

**Parameters** **colorspec** (*colorspec*) – color to check

**Returns** True, if the colorspec is dark (rather black than white) False, if the colorspec is light (rather white than black if colorspec has alpha=0 (total transparent), the background\_color will be tested

**Return type** bool

**main** ()

**Returns** the main component

**Return type** *Component*

**modelname** (*value=None*)

**Parameters** **value** (*str*) – new modelname if not specified, no change

**Returns** modelname

**Return type** str

---

**Note:** If modelname is the null string, nothing will be displayed.

---

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the environment if omitted, no change

**Returns** Name of the environment

**Return type** str

---

**Note:** base\_name and sequence\_number are not affected if the name is changed

---

**now** ()

**Returns** the current simulation time

**Return type** float

**peek** ()

returns the time of the next component to become current if there are no more events, peek will return inf Only for advance use with animation / GUI event loops

**print\_info** (*as\_str=False, file=None*)

prints information about the environment

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if as\_str is True)

**Return type** str

**print\_trace** (*s1*=", *s2*=", *s3*=", *s4*=", *s0*=None, *\_optional*=False)

prints a trace line

**Parameters**

- **s1** (*str*) – part 1 (usually formatted now), padded to 10 characters
- **s2** (*str*) – part 2 (usually only used for the component that gets current), padded to 20 characters
- **s3** (*str*) – part 3, padded to 35 characters
- **s4** (*str*) – part 4
- **s0** (*str*) – part 0. if omitted, the line number from where the call was given will be used at the start of the line. Otherwise s0, left padded to 7 characters will be used at the start of the line.
- **\_optional** (*bool*) – for internal use only. Do not set this flag!

---

**Note:** if self.trace is False, nothing is printed if the current component's suppress\_trace is True, nothing is printed

---

**print\_trace\_header** ()

print a (two line) header line as a legend also the legend for line numbers will be printed not that the header is only printed if trace=True

**reset\_now** (*new\_now*=0)

reset the current time

**Parameters** **new\_now** (*float*) – now will be set to new\_now default: 0

---

**Note:** Internally, salabim still works with the 'old' time. Only in the interface from and to the user program, a correction will be applied.

The registered time in timestamped monitors will be always is the 'old' time. This is only relevant when using the time value in MonitorTimestamp.tx() or MonitorTimestamp.tx().

---

**run** (*duration*=None, *till*=None, *urgent*=False)

start execution of the simulation

**Parameters**

- **duration** (*float*) – schedule with a delay of duration if 0, now is used
- **till** (*float*) – schedule time if omitted, inf is assumed

- **urgent** (*bool*) – urgency indicator if False (default), main will be scheduled behind all other components scheduled for the same time if True, main will be scheduled in front of all components scheduled for the same time

---

**Note:** only issue run() from the main level

---

**scale** ()

scale of the animation, i.e. width / (x1 - x0)

**Returns** **scale**

**Return type** float

---

**Note:** It is not possible to set this value explicitly.

---

**sequence\_number** ()

**Returns** **sequence\_number of the environment** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** int

**setup** ()

called immediately after initialization of an environment.

by default this is a dummy method, but it can be overridden.

only keyword arguments are passed

**show\_fps** (*value=None*)

**Parameters** **value** (*bool*) – new show\_fps if not specified, no change

**Returns** **show\_fps**

**Return type** bool

**show\_time** (*value=None*)

**Parameters** **value** (*bool*) – new show\_time if not specified, no change

**Returns** **show\_time**

**Return type** bool

**snapshot** (*filename*)

Takes a snapshot of the current animated frame (at time = now()) and saves it to a file

**Parameters** **filename** (*str*) – file to save the current animated frame to. The following formats are accepted: .PNG, .JPG, .BMP, .GIF and .TIFF are supported. Other formats are not possible. Note that, apart from .JPG files. the background may be semi transparent by setting the alpha value to something else than 255.

**speed** (*value=None*)

**Parameters** **value** (*float*) – new speed if not specified, no change

**Returns** **speed**

**Return type** float

**step** ()

executes the next step of the future event list

for advanced use with animation / GUI loops

**suppress\_trace\_standby** (*value=None*)

suppress\_trace\_standby status

**Parameters** **value** (*bool*) – new suppress\_trace\_standby status if omitted, no change

**Returns** **suppress trace status**

**Return type** bool

---

**Note:** By default, suppress\_trace\_standby is True, meaning that standby components are (apart from when they become non standby) suppressed from the trace. If you set suppress\_trace\_standby to False, standby components are fully traced.

---

**synced** (*value=None*)

**Parameters** **value** (*bool*) – new synced if not specified, no change

**Returns** **synced**

**Return type** bool

**trace** (*value=None*)

trace status

**Parameters** **value** (*bool*) – new trace status if omitted, no change

**Returns** **trace status**



**Return type** bool

---

**Note:** If you want to test the status, always include parentheses, like

```
if env.trace():
```

---

**video** (*value=None*)

video name

**Parameters** **value** (*str, list or tuple*) – new video name if not specified, no change for explanation see animation\_parameters()

**Returns** **video**

**Return type** str, list or tuple

---

**Note:** If video is the null string, the video (if any) will be closed.

---

**video\_close** ()

closes the current animation video recording, if any.

**video\_pingpong** (*value=None*)

video pingpong

**Parameters** **value** (*bool*) – new video pingpong if not specified, no change

**Returns** **video pingpong**

**Return type** bool

---

**Note:** Applies only to gif animation.

---

**video\_repeat** (*value=None*)

video repeat

**Parameters** **value** (*int*) – new video repeat if not specified, no change

**Returns** **video repeat**

**Return type** int

---

**Note:** Applies only to gif animation.

---

**width** (*value=None*)

width of the animation in screen coordinates

**Parameters** **value** (*int*) – new width if not specified, no change

**Returns** width of animation

**Return type** int

**x0** (*value=None*)

x coordinate of lower left corner of animation

**Parameters** **value** (*float*) – new x coordinate

**Returns** x coordinate of lower left corner of animation

**Return type** float

**x1** (*value=None*)

x coordinate of upper right corner of animation : float

**Parameters** **value** (*float*) – new x coordinate if not specified, no change

**Returns** x coordinate of upper right corner of animation

**Return type** float

**y0** (*value=None*)

y coordinate of lower left corner of animation

**Parameters** **value** (*float*) – new y coordinate if not specified, no change

**Returns** y coordinate of lower left corner of animation

**Return type** float

**y1** ()

y coordinate of upper right corner of animation

**Returns** y coordinate of upper right corner of animation

**Return type** float

---

**Note:** It is not possible to set this value explicitly.

---

## 11.5 ItemFile

**class** salabim.ItemFile(*filename*)

define an item file to be used with read\_item, read\_item\_int, read\_item\_float and read\_item\_bool

**Parameters** *filename* (*str*) – file to be used for subsequent read\_item, read\_item\_int, read\_item\_float and read\_item\_bool calls or content to be interpreted used in subsequent read\_item calls. The content should have at least one linefeed character and will be usually triple quoted.

---

**Note:** It is advised to use ItemFile with a context manager, like

```
with sim.ItemFile('experiment0.txt') as f:
    run_length = f.read_item_float() |n|
    run_name = f.read_item() |n|
```

Alternatively, the file can be opened and closed explicitly, like

```
f = sim.ItemFile('experiment0.txt')
run_length = f.read_item_float()
run_name = f.read_item()
f.close()
```

Item files consists of individual items separated by whitespace (blank or tab)!\n! If a blank or tab is required in an item, use single or double quotes All text following # on a line is ignored All texts on a line within curly brackets {} is ignored and considered white space. Curly braces cannot spawn multiple lines and cannot be nested.

Example

```
Item1
'Item 2'
    Item3 Item4 # comment
Item5 {five} Item6 {six}
'Double quote' in item'
"Single quote" in item"
True
```

**read\_item()**

read next item from the ItemFile

if the end of file is reached, EOFError is raised

**read\_item\_bool()**

read next item from the ItemFile as bool

A value of False (not case sensitive) will return False A value of 0 will return False The null string will return False Any other value will return True

if the end of file is reached, EOFError is raised

**read\_item\_float()**

read next item from the ItemFile as float

if the end of file is reached, EOFError is raised

**read\_item\_int()**

read next field from the ItemFile as int.

if the end of file is reached, EOFError is raised

## 11.6 Monitor

```
class salabim.Monitor(name=None, monitor=True, type=None, merge=None, weighted=False, weight_legend='weight', env=None, *args,  
                      **kwargs)
```

Monitor object

**Parameters**

- **name** (*str*) – name of the monitor if the name ends with a period (.), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)
- **monitor** (*bool*) – if True (default), monitoring will be on. if False, monitoring is disabled it is possible to control monitoring later, with the monitor method
- **type** (*str*) –  
specifies how tallied values are to be stored
  - **'any' (default)** stores values in a list. This allows non numeric values. In calculations the values are forced to a numeric value (0 if not possible)

- 'bool' (True, False) Actually integer  $\geq 0 \leq 255$  1 byte
- 'int8' integer  $\geq -128 \leq 127$  1 byte
- 'uint8' integer  $\geq 0 \leq 255$  1 byte
- 'int16' integer  $\geq -32768 \leq 32767$  2 bytes
- 'uint16' integer  $\geq 0 \leq 65535$  2 bytes
- 'int32' integer  $\geq -2147483648 \leq 2147483647$  4 bytes
- 'uint32' integer  $\geq 0 \leq 4294967295$  4 bytes
- 'int64' integer  $\geq -9223372036854775808 \leq 9223372036854775807$  8 bytes
- 'uint64' integer  $\geq 0 \leq 18446744073709551615$  8 bytes
- 'float' float 8 bytes

- **weighted** (*bool*) – if True, tallied values may be given weight. if False (default), weights are not allowed
- **weight\_legend** (*str*) – used in print\_statistics and print\_histogram to indicate the dimension of weight, e.g. duration or minutes. Default: weight.
- **merge** (*list, tuple or set*) – the monitor will be created by merging the monitors mentioned in the list note that the types of all to be merged monitors should be the same. default: no merge
- **env** (*Environment*) – environment where the monitor is defined if omitted, default\_env will be used

**animate** (*\*args, \*\*kwargs*)

animates the monitor in a panel

#### Parameters

- **linecolor** (*colourspec*) – color of the line or points (default foreground color)
- **linewidth** (*int*) – width of the line or points (default 1 for line, 3 for points)
- **fillcolor** (*colourspec*) – color of the panel (default transparent)
- **bordercolor** (*colourspec*) – color of the border (default foreground color)
- **borderlinewidth** (*int*) – width of the line around the panel (default 1)
- **nowcolor** (*colourspec*) – color of the line indicating now (default red)
- **titlecolor** (*colourspec*) – color of the title (default foreground color)
- **titlefont** (*font*) – font of the title (default '')

- **titlefontsize** (*int*) – size of the font of the title (default 15)
- **as\_points** (*bool*) – if False, lines will be drawn between the points if True (default), only the points will be shown
- **as\_level** (*bool*) – if True (default for lines), the timestamped monitor is considered to be a level if False (default for points), just the tallied values will be shown, and connected (for lines)
- **title** (*str*) – title to be shown above panel default: name of the monitor
- **x** (*int*) – x-coordinate of panel, relative to xy\_anchor, default 0
- **y** (*int*) – y-coordinate of panel, relative to xy\_anchor. default 0
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **vertical\_offset** (*float*) –  
the vertical position of x within the panel is vertical\_offset + x \* vertical\_scale (default 0)
- **vertical\_scale** (*float*) – the vertical position of x within the panel is vertical\_offset + x \* vertical\_scale (default 5)
- **horizontal\_scale** (*float*) – for timescaled monitors the relative horizontal position of time t within the panel is on t \* horizontal\_scale, possibly shifted (default 1)\n for non timescaled monitors, the relative horizontal position of index i within the panel is on i \* horizontal\_scale, possibly shifted (default 5)\n
- **width** (*int*) – width of the panel (default 200)
- **height** (*int*) – height of the panel (default 75)
- **layer** (*int*) – layer (default 0)

**Returns** reference to `AnimateMonitor` object

**Return type** *AnimateMonitor*

---

**Note:** It is recommended to use `sim.AnimateMonitor` instead

All measures are in screen coordinates

---

**base\_name** ()

**Returns** base name of the monitor (the name used at initialization)

**Return type** str

**bin\_number\_of\_entries** (*lowerbound, upperbound, ex0=False*)

count of the number of tallied values in range (lowerbound,upperbound]

**Parameters**

- **lowerbound** (*float*) – non inclusive lowerbound
- **upperbound** (*float*) – inclusive upperbound
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** number of values >lowerbound and <=upperbound

**Return type** int

**bin\_weight** (*lowerbound, upperbound*)

total weight of tallied values in range (lowerbound,upperbound]

**Parameters**

- **lowerbound** (*float*) – non inclusive lowerbound
- **upperbound** (*float*) – inclusive upperbound
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** total weight of values >lowerbound and <=upperbound

**Return type** int

**deregister** (*registry*)

deregisters the monitor in the registry

**Parameters** **registry** (*list*) – list of registered objects

**Returns** monitor (self)

**Return type** *Monitor*

**histogram\_autoscale** (*ex0=False*)

used by histogram\_print to autoscale may be overridden.

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** bin\_width, lowerbound, number\_of\_bins

**Return type** tuple

**maximum** (*ex0=False*)

maximum of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns maximum**

**Return type** float

**mean** (*ex0=False*)

mean of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns mean**

**Return type** float

---

**Note:** For weighted monitors, the weighted mean is returned

---

**median** (*ex0=False*)

median of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns median**

**Return type** float

---

**Note:** For weighted monitors, the weighted median is returned

---

**minimum** (*ex0=False*)

minimum of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns minimum**

**Return type** float

**monitor** (*value=None*)

enables/disables monitor

**Parameters** **value** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change

**Returns True, if monitoring enabled. False, if not**

**Return type** bool

**name** (*value=None*)



**Parameters** **value** (*str*) – new name of the monitor if omitted, no change

**Returns** Name of the monitor

**Return type** *str*

---

**Note:** *base\_name* and *sequence\_number* are not affected if the name is changed

---

**number\_of\_entries** (*ex0=False*)

count of the number of entries

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** number of entries

**Return type** *int*

**number\_of\_entries\_zero** ()

count of the number of zero entries

**Returns** number of zero entries

**Return type** *int*

**percentile** (*q, ex0=False*)

q-th percentile of tallied values

**Parameters**

- **q** (*float*) – percentage of the distribution values <0 are treated a 0 values >100 are treated as 100
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** q-th percentile 0 returns the minimum, 50 the median and 100 the maximum

**Return type** *float*

---

**Note:** For weighted monitors, the weighted percentile is returned

---

**print\_histogram** (*number\_of\_bins=None, lowerbound=None, bin\_width=None, values=False, ex0=False, as\_str=False, file=None*)

print monitor statistics and histogram

**Parameters**

- **number\_of\_bins** (*int*) – number of bins default: 30 if <0, also the header of the histogram will be suppressed

- **lowerbound** (*float*) – first bin default: 0
- **bin\_width** (*float*) – width of the bins default: 1
- **values** (*bool*) – if False (default), bins will be used if True, the individual values will be shown (in the right order). in that case, no cumulative values will be given
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**as\_str:** *bool* if False (default), print the histogram if True, return a string containing the histogram

**file:** *file* if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** histogram (if *as\_str* is True)

**Return type** *str*

---

**Note:** If *number\_of\_bins*, *lowerbound* and *bin\_width* are omitted, the histogram will be autoscaled, with a maximum of 30 classes.

---

**print\_histograms** (*number\_of\_bins=None, lowerbound=None, bin\_width=None, values=False, ex0=False, as\_str=False, file=None*)  
print monitor statistics and histogram

#### Parameters

- **number\_of\_bins** (*int*) – number of bins default: 30 if <0, also the header of the histogram will be suppressed
- **lowerbound** (*float*) – first bin default: 0
- **bin\_width** (*float*) – width of the bins default: 1
- **values** (*bool*) – if False (default), bins will be used if True, the individual values will be shown (sorted on the value). in that case, no cumulative values will be given
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **as\_str** (*bool*) – if False (default), print the histogram if True, return a string containing the histogram
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** histogram (if *as\_str* is True)

**Return type** *str*

---

**Note:** If `number_of_bins`, `lowerbound` and `bin_width` are omitted, the histogram will be autoscaled, with a maximum of 30 classes. Exactly same functionality as `Monitor.print_histogram()`

---

**print\_statistics** (*show\_header=True, show\_legend=True, do\_indent=False, as\_str=False, file=None*)  
 print monitor statistics

**Parameters**

- **show\_header** (*bool*) – primarily for internal use
- **show\_legend** (*bool*) – primarily for internal use
- **do\_indent** (*bool*) – primarily for internal use
- **as\_str** (*bool*) – if False (default), print the statistics if True, return a string containing the statistics
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** statistics (if `as_str` is True)

**Return type** str

**register** (*registry*)  
 registers the monitor in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects

**Returns** monitor (self)

**Return type** *Monitor*

---

**Note:** Use `Monitor.deregister` if monitor does not longer need to be registered.

---

**reset** (*monitor=None*)  
 resets monitor

**Parameters** **monitor** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change of monitoring state

**reset\_monitors** (*monitor=None*)  
 resets monitor

**Parameters** **monitor** (*bool*) – if True (default), monitoring will be on. if False, monitoring is disabled if omitted, the monitor state remains unchanged

---

**Note:** Exactly same functionality as Monitor.reset()

---

**sequence\_number** ( )

**Returns** **sequence\_number of the monitor** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** int

**setup** ( )

called immediately after initialization of a monitor.

by default this is a dummy method, but it can be overridden.

only keyword arguments are passed

**std** (*ex0=False*)

standard deviation of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** **standard deviation**

**Return type** float

---

**Note:** For weighted monitors, the weighted standard deviation is returned

---

**tally** (*x, weight=1*)

**Parameters** **x** (*any, preferably int, float or translatable into int or float*) – value to be tallied

**value\_number\_of\_entries** (*value*)

count of the number of tallied values equal to value or in value

**Parameters** **value** (*any*) – if list, tuple or set, check whether the tallied value is in value otherwise, check whether the tallied value equals the given value

**Returns** **number of tallied values in value or equal to value**

**Return type** int

**value\_weight** (*value*)

total weight of tallied values equal to value or in value

**Parameters** **value** (*any*) – if list, tuple or set, check whether the tallied value is in value otherwise, check whether the tallied value equals the given value

**Returns** total of weights of tallied values in value or equal to value

**Return type** int

**weight** (*ex0=False*)

sum of weights

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** sum of weights

**Return type** float

**weight\_zero** ()

sum of weights of zero entries

**Returns** sum of weights of zero entries

**Return type** float

**x** (*ex0=False, force\_numeric=True*)

array/list of tallied values

**Parameters**

- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **force\_numeric** (*bool*) – if True (default), convert non numeric tallied values numeric if possible, otherwise assume 0 if False, do not interpret x-values, return as list if type is any (list)

**Returns** all tallied values

**Return type** array/list

**xweight** (*ex0=False, force\_numeric=True*)

array/list of tallied values

**Parameters**

- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **force\_numeric** (*bool*) – if True (default), convert non numeric tallied values numeric if possible, otherwise assume 0 if False, do not interpret x-values, return as list if type is list

**Returns** all tallied values

**Return type** array/list

## 11.7 MonitorTimestamp

**class** `salabim.MonitorTimestamp` (*name=None, initial\_tally=None, monitor=True, type=None, merge=None, env=None, \*args, \*\*kwargs*)  
monitortimestamp object

### Parameters

- **name** (*str*) – name of the timestamped monitor if the name ends with a period (`.`), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)
- **initial\_tally** (*any, usually float*) – initial value to be tallied (default 0) if it important to provide the value at time=now
- **monitor** (*bool*) – if True (default), monitoring will be on. if False, monitoring is disabled it is possible to control monitoring later, with the monitor method
- **type** (*str*) – specifies how tallied values are to be stored Using a int, uint or float type results in less memory usage and better performance. Note that the getter should never return the number not to use as this is used to indicate ‘off’
  - ‘any’ (default) stores values in a list. This allows for non numeric values. In calculations the values are forced to a numeric value (0 if not possible) do not use -inf
  - ‘bool’ bool (False, True). Actually integer  $\geq 0 \leq 254$  1 byte do not use 255
  - ‘int8’ integer  $\geq -127 \leq 127$  1 byte do not use -128
  - ‘uint8’ integer  $\geq 0 \leq 254$  1 byte do not use 255
  - ‘int16’ integer  $\geq -32767 \leq 32767$  2 bytes do not use -32768
  - ‘uint16’ integer  $\geq 0 \leq 65534$  2 bytes do not use 65535
  - ‘int32’ integer  $\geq -2147483647 \leq 2147483647$  4 bytes do not use -2147483648
  - ‘uint32’ integer  $\geq 0 \leq 4294967294$  4 bytes do not use 4294967295
  - ‘int64’ integer  $\geq -9223372036854775807 \leq 9223372036854775807$  8 bytes do not use -9223372036854775808
  - ‘uint64’ integer  $\geq 0 \leq 18446744073709551614$  8 bytes do not use 18446744073709551615
  - ‘float’ float 8 bytes do not use -inf
- **merge** (*list, tuple or set*) – the monitor will be created by merging the monitors mentioned in the list merging means summing the available x-values! note that the types of all to be merged monitors should be the same. initial\_tally may not be specified when merge is specified. default: no merge

- **env** (*Environment*) – environment where the monitor is defined if omitted, default\_env will be used

---

**Note:** A MonitorTimestamp collects both the value and the time. All statistics are based on the durations as weights.

---

### Example

Tallied at time 0: 10 (xnow in definition of monitortimestamp) Tallied at time 50: 11 Tallied at time 70: 12 Tallied at time 80: 10 Now = 100

This results in: x= 10 duration 50 x= 11 duration 20 x= 12 duration 10 x= 10 duration 20

And thus a mean of  $(10*50+11*20+12*10+10*20)/(50+20+10+20)$

**animate** (*\*args, \*\*kwargs*)

animates the timestamed monitor in a panel

#### Parameters

- **linecolor** (*colourspec*) – color of the line or points (default foreground color)
- **linewidth** (*int*) – width of the line or points (default 1 for line, 3 for points)
- **fillcolor** (*colourspec*) – color of the panel (default transparent)
- **bordercolor** (*colourspec*) – color of the border (default foreground color)
- **borderlinewidth** (*int*) – width of the line around the panel (default 1)
- **nowcolor** (*colourspec*) – color of the line indicating now (default red)
- **titlecolor** (*colourspec*) – color of the title (default foreground color)
- **titlefont** (*font*) – font of the title (default ‘')
- **titlefontsize** (*int*) – size of the font of the title (default 15)
- **as\_points** (*bool*) – if False (default), lines will be drawn between the points if True, only the points will be shown
- **title** (*str*) – title to be shown above panel default: name of the monitor
- **x** (*int*) – x-coordinate of panel, relative to xy\_anchor, default 0
- **y** (*int*) – y-coordinate of panel, relative to xy\_anchor. default 0
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c e sw s se
- **vertical\_offset** (*float*) –

the vertical position of x within the panel is  $\text{vertical\_offset} + x * \text{vertical\_scale}$  (default 0)

- **vertical\_scale** (*float*) – the vertical position of x within the panel is  $\text{vertical\_offset} + x * \text{vertical\_scale}$  (default 5)
- **horizontal\_scale** (*float*) – for timescaled monitors the relative horizontal position of time t within the panel is on  $t * \text{horizontal\_scale}$ , possibly shifted (default 1)\n\nfor non timescaled monitors, the relative horizontal position of index i within the panel is on  $i * \text{horizontal\_scale}$ , possibly shifted (default 5)\n\n
- **width** (*int*) – width of the panel (default 200)
- **height** (*int*) – height of the panel (default 75)
- **layer** (*int*) – layer (default 0)

**Returns** reference to `AnimateMonitor` object

**Return type** *AnimateMonitor*

---

**Note:** It is recommended to use `sim.AnimateMonitor` instead

All measures are in screen coordinates

---

**base\_name** ()

**Returns** base name of the monitor (the name used at initialization)

**Return type** str

**bin\_duration** (\*args, \*\*kwargs)

duration of tallied values with the value in range (lowerbound,upperbound]

**Parameters**

- **lowerbound** (*float*) – non inclusive lowerbound
- **upperbound** (*float*) – inclusive upperbound
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** duration of values >lowerbound and <=upperbound

**Return type** float

**deregister** (\*args, \*\*kwargs)

deregisters the timestamped monitor in the registry

**Parameters** **registry** (*list*) – list of registered objects



**Returns** timestamped monitor (self)

**Return type** MonitorTimestamped

**duration** (\*args, \*\*kwargs)  
total duration

**Parameters** **ex0** (*bool*) – if False (default), include samples with value 0. if True, exclude zero samples.

**Returns** total duration

**Return type** float

**duration\_zero** (\*args, \*\*kwargs)  
total duration of samples with value 0

**Returns** total duration of zero samples

**Return type** float

**get** ()

**Returns**

**last tallied value** – Instead of this method, the timestamped monitor can also be called directly, like  
level = sim.MonitorTimestamp('level') ... print(level()) print(level.get()) # identical

**Return type** any, usually float

**maximum** (\*args, \*\*kwargs)  
maximum of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** maximum

**Return type** float

**mean** (\*args, \*\*kwargs)  
mean of tallied values, weighted with their durations

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** mean

**Return type** float

**median** (\*args, \*\*kwargs)  
median of tallied values weighted with their durations

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** **median**

**Return type** float

**minimum** (*\*args, \*\*kwargs*)  
minimum of tallied values

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** **minimum**

**Return type** float

**monitor** (*value=None*)  
enables/disabled timestamped monitor

**Parameters** **value** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change

**Returns** **True, if monitoring enabled. False, if not**

**Return type** bool

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the monitor if omitted, no change

**Returns** **Name of the monitor**

**Return type** str

---

**Note:** base\_name and sequence\_number are not affected if the name is changed

---

**number\_of\_entries** (*\*args, \*\*kwargs*)  
count of the number of entries (duration type)

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** **number of entries**

**Return type** int

**number\_of\_entries\_zero** (*\*args, \*\*kwargs*)  
count of the number of zero entries (duration type)

**Returns** **number of zero entries**

**Return type** int

**percentile** (*\*args, \*\*kwargs*)

q-th percentile of tallied values, weighted with their durations

**Parameters**

- **q** (*float*) – percentage of the distribution values <0 are treated a 0 values >100 are treated as 100
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** q-th percentile – 0 returns the minimum, 50 the median and 100 the maximum

**Return type** float

**print\_histogram** (*number\_of\_bins=None, lowerbound=None, bin\_width=None, values=False, ex0=False, as\_str=False, file=None*)

print timestamped monitor statistics and histogram

**Parameters**

- **number\_of\_bins** (*int*) – number of bins default: 30 if <0, also the header of the histogram will be suppressed
- **lowerbound** (*float*) – first bin default: 0
- **bin\_width** (*float*) – width of the bins default: 1
- **values** (*bool*) – if False (default), bins will be used if True, the individual values will be shown (in the right order). in that case, nu cumulative values will be given
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **as\_str** (*bool*) – if False (default), print the histogram if True, return a string containing the histogram
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** histogram (if **as\_str** is True)

**Return type** str

---

**Note:** If **number\_of\_bins**, **lowerbound** and **bin\_width** are omitted, the histogram will be autoscaled, with a maximum of 30 classes.

---

**print\_histograms** (*number\_of\_bins=None, lowerbound=None, bin\_width=None, values=False, ex0=False, as\_str=False, file=None*)

print timestamped monitor statistics and histogram

**Parameters**

- **number\_of\_bins** (*int*) – number of bins default: 30 if <0, also the header of the histogram will be suppressed

- **lowerbound** (*float*) – first bin default: 0
- **bin\_width** (*float*) – width of the bins default: 1
- **values** (*bool*) – if False (default), bins will be used if True, the individual values will be shown (in the right order). in that case, no cumulative values will be given
- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**as\_str**: *bool* if False (default), print the histogram if True, return a string containing the histogram

**file**: *file* if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** histogram (if **as\_str** is True)

**Return type** *str*

---

**Note:** If **number\_of\_bins**, **lowerbound** and **bin\_width** are omitted, the histogram will be autoscaled, with a maximum of 30 classes. Exactly same functionality as `MonitorTimestamped.print_histogram()`

---

**print\_statistics** (*show\_header=True, show\_legend=True, do\_indent=False, as\_str=False, file=None*)  
print timestamped monitor statistics

**Parameters**

- **show\_header** (*bool*) – primarily for internal use
- **show\_legend** (*bool*) – primarily for internal use
- **do\_indent** (*bool*) – primarily for internal use
- **as\_str** (*bool*) – if False (default), print the statistics if True, return a string containing the statistics
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** statistics (if **as\_str** is True)

**Return type** *str*

**register** (*\*args, \*\*kwargs*)  
registers the timestamped monitor in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects

**Returns** timestamped monitor (self)

**Return type** MonitorTimestamped

---

**Note:** Use MonitorTimestamped.deregister if timestamped monitor does not longer need to be registered.

---

**reset** (*monitor=None*)

resets timestamped monitor

**Parameters** **monitor** (*bool*) – if True (default), monitoring will be on. if False, monitoring is disabled if omitted, the monitor state remains unchanged

**reset\_monitors** (*monitor=None*)

resets timestamped monitor

**Parameters** **monitor** (*bool*) – if True (default), monitoring will be on. if False, monitoring is disabled if omitted, the monitor state remains unchanged

---

**Note:** Exactly same functionality as MonitorTimestamped.reset()

---

**sequence\_number** ()

**Returns** **sequence\_number of the monitortimestamp** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** int

**setup** ()

called immediately after initialization of a monitortimestamp.

by default this is a dummy method, but it can be overridden.

only keyword arguments are passed

**std** (*\*args, \*\*kwargs*)

standard deviation of tallied values, weighted with their durations

**Parameters** **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes

**Returns** **standard deviation**

**Return type** float

**tally** (*value*)

tally value

**Parameters** **value** (*any, usually float*) –

**tx** (*ex0=False, exoff=False, force\_numeric=False, add\_now=True*)  
tuple of array with timestamps and array/list with x-values

**Parameters**

- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **exoff** (*bool*) – if False (default), include self.off. if True, exclude self.off's
- **force\_numeric** (*bool*) – if True (default), convert non numeric tallied values numeric if possible, otherwise assume 0 if False, do not interpret x-values, return as list if type is list
- **add\_now** (*bool*) – if True (default), the current time and the last tallied x-value added to the result if False, the result ends with the time of the last tally and the last tallied x-value

**Returns** array with timestamps and array/list with x-values

**Return type** tuple

---

**Note:** The value self.off is stored when monitoring is turned off The timestamps are not corrected for any reset\_now() adjustment.

---

**value\_duration** (*\*args, \*\*kwargs*)

duration of tallied values equal to value or in value

**Parameters** **value** (*any*) – if list, tuple or set, check whether the tallied value is in value otherwise, check whether the tallied value equals the given value

**Returns** duration of tallied values in value or equal to value

**Return type** float

**value\_number\_of\_entries** (*\*args, \*\*kwargs*)

count of tallied values equal to value or in value

**Parameters** **value** (*any*) – if list, tuple or set, check whether the tallied value is in value otherwise, check whether the tallied value equals the given value

**Returns** count of tallied values in value or equal to value

**Return type** float

**xduration** (*\*args, \*\*kwargs*)

tuple of array with x-values and array with durations

**Parameters**

- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **force\_numeric** (*bool*) – if True (default), convert non numeric tallied values numeric if possible, otherwise assume 0 if False, do not interpret x-values, return as list if type is list

**Returns** array/list with x-values and array with durations**Return type** tuple

**xt** (*ex0=False, exoff=False, force\_numeric=True, add\_now=True*)  
 tuple of array/list with x-values and array with timestamp

**Parameters**

- **ex0** (*bool*) – if False (default), include zeroes. if True, exclude zeroes
- **exoff** (*bool*) – if False (default), include self.off. if True, exclude self.off's
- **force\_numeric** (*bool*) – if True (default), convert non numeric tallied values numeric if possible, otherwise assume 0 if False, do not interpret x-values, return as list if type is list
- **add\_now** (*bool*) – if True (default), the last tallied x-value and the current time is added to the result if False, the result ends with the last tallied value and the time that was tallied

**Returns** array/list with x-values and array with timestamps**Return type** tuple

---

**Note:** The value self.off is stored when monitoring is turned off The timestamps are not corrected for any reset\_now() adjustment.

---

## 11.8 Queue

**class** salabim.Queue (*name=None, monitor=True, fill=None, env=None, \*args, \*\*kwargs*)  
 Queue object

**Parameters**

- **fill** (*Queue, list or tuple*) – fill the queue with the components in fill if omitted, the queue will be empty at initialization
- **name** (*str*) – name of the queue if the name ends with a period (.), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)

- **monitor** (*bool*) – if True (default) , both length and length\_of\_stay are monitored if False, monitoring is disabled.
- **env** (*Environment*) – environment where the queue is defined if omitted, default\_env will be used

**add** (*component*)

adds a component to the tail of a queue

**Parameters** **component** (*Component*) – component to be added to the tail of the queue may not be member of the queue yet

---

**Note:** the priority will be set to the priority of the tail of the queue, if any or 0 if queue is empty This method is equivalent to append()

---

**add\_at\_head** (*component*)

adds a component to the head of a queue

**Parameters** **component** (*Component*) – component to be added to the head of the queue may not be member of the queue yet

---

**Note:** the priority will be set to the priority of the head of the queue, if any or 0 if queue is empty

---

**add\_behind** (*component, poscomponent*)

adds a component to a queue, just behind a component

**Parameters**

- **component** (*Component*) – component to be added to the queue may not be member of the queue yet
- **poscomponent** (*Component*) – component behind which component will be inserted must be member of the queue

---

**Note:** the priority of component will be set to the priority of poscomponent

---

**add\_in\_front\_of** (*component, poscomponent*)

adds a component to a queue, just in front of a component

**Parameters**

- **component** (*Component*) – component to be added to the queue may not be member of the queue yet
- **poscomponent** (*Component*) – component in front of which component will be inserted must be member of the queue

---

**Note:** the priority of component will be set to the priority of poscomponent

---



**add\_sorted** (*component, priority*)

adds a component to a queue, according to the priority

#### Parameters

- **component** (*Component*) – component to be added to the queue may not be member of the queue yet
- **priority** (*type that can be compared with other priorities in the queue*) – priority in the queue

---

**Note:** The component is placed just before the first component with a priority > given priority

---

**animate** (*\*args, \*\*kwargs*)

Animates the components in the queue.

#### Parameters

- **x** (*float*) – x-position of the first component in the queue default: 50
- **y** (*float*) – y-position of the first component in the queue default: 50
- **direction** (*str*) – if ‘w’, waiting line runs westwards (i.e. from right to left) if ‘n’, waiting line runs northwards (i.e. from bottom to top) if ‘e’, waiting line runs eastwards (i.e. from left to right) (default) if ‘s’, waiting line runs southwards (i.e. from top to bottom)
- **reverse** (*bool*) – if False (default), display in normal order. If True, reversed.
- **max\_length** (*int*) – maximum number of components to be displayed
- **xy\_anchor** (*str*) – specifies where x and y are relative to possible values are (default: sw): nw n new c esw s se
- **id** (*any*) – the animation works by calling the animation\_objects method of each component, optionally with id. By default, this is self, but can be overridden, particularly with the queue
- **arg** (*any*) – this is used when a parameter is a function with two parameters, as the first argument or if a parameter is a method as the instance default: self (instance itself)

**Returns** reference to AnimationQueue object

**Return type** AnimationQueue

---

**Note:** It is recommended to use sim.AnimateQueue instead

All measures are in screen coordinates

All parameters, apart from queue and arg can be specified as: - a scalar, like 10 - a function with zero arguments, like lambda: title - a function with one argument, being the time t, like lambda t: t + 10 - a function with two parameters, being arg (as given) and the time, like lambda comp, t: comp.state - a method instance arg for time t, like self.state, actually leading to arg.state(t) to be called

---

**append** (*component*)

appends a component to the tail of a queue

**Parameters** **component** (*Component*) – component to be appened to the tail of the queue may not be member of the queue yet

---

**Note:** the priority will be set to the priority of the tail of the queue, if any or 0 if queue is empty This method is equivalent to add()

---

**base\_name** ()

**Returns** base name of the queue (the name used at initialization)

**Return type** str

**clear** ()

empties a queue

removes all components from a queue

**component\_with\_name** (*txt*)

returns a component in the queue according to its name

**Parameters** **txt** (*str*) – name of component to be retrieved

**Returns** the first component in the queue with name txt – returns None if not found

**Return type** Component

**copy** (*name=None, monitor=<function Queue.monitor>*)

returns a copy of two queues

**Parameters**

- **name** (*str*) – name of the new queue if omitted, 'copy of ' + self.name()
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the queue

**Returns** queue with all elements of self

**Return type** *Queue*

---

**Note:** The priority will be copied from original queue. Also, the order will be maintained.

---

**count** (*component*)  
component count

**Parameters** **component** (*Component*) – component to count

**Returns**

**Return type** number of occurrences of component in the queue

---

**Note:** The result can only be 0 or 1

---

**deregister** (*registry*)  
deregisters the queue in the registry

**Parameters** **registry** (*list*) – list of registered queues

**Returns** **queue** (*self*)

**Return type** *Queue*

**difference** (*q, name=None, monitor=<function Queue.monitor>*)  
returns the difference of two queues

**Parameters**

- **q** (*Queue*) – queue to be ‘subtracted’ from self
- **name** (*str*) – name of the new queue if omitted, self.name() - q.name()
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the queue

**Returns**

**Return type** queue containing all elements of self that are not in q

---

**Note:** the priority will be copied from the original queue. Also, the order will be maintained. Alternatively, the more pythonic - operator is also supported, e.g. q1 - q2

---

**extend** (*q*)  
extends the queue with components of q that are not already in self

**Parameters** *q* (*queue*, *list* or *tuple*) –

---

**Note:** The components added to the queue will get the priority of the tail of self.

---

**head** ()

**Returns** the head component of the queue, if any. None otherwise

**Return type** *Component*

---

**Note:** *q[0]* is a more Pythonic way to access the head of the queue

---

**index** (*component*)

get the index of a component in the queue

**Parameters** **component** (*Component*) – component to be queried does not need to be in the queue

**Returns** index of component in the queue – 0 denotes the head, returns -1 if component is not in the queue

**Return type** *int*

**insert** (*index*, *component*)

Insert component before index-th element of the queue

**Parameters**

- **index** (*int*) – component to be added just before index'th element should be  $\geq 0$  and  $\leq \text{len}(\text{self})$
- **component** (*Component*) – component to be added to the queue

---

**Note:** the priority of component will be set to the priority of the index'th component, or 0 if the queue is empty

---

**intersection** (*q*, *name=None*, *monitor=False*)

returns the intersect of two queues

**Parameters**

- **q** (*Queue*) – queue to be intersected with self
- **name** (*str*) – name of the new queue if omitted, *self.name()* + *q.name()*
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the queue

**Returns** queue with all elements that are in self and q

**Return type** *Queue*

---

**Note:** the priority will be set to 0 for all components in the resulting queue the order of the resulting queue is as follows: in the same order as in self. Alternatively, the more pythonic & operator is also supported, e.g. q1 & q2

---

**monitor** (*value*)

enables/disables monitoring of length\_of\_stay and length

**Parameters** **value** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled

---

**Note:** it is possible to individually control monitoring with length\_of\_stay.monitor() and length.monitor()

---

**move** (*name=None, monitor=<function Queue.monitor>*)

makes a copy of a queue and empties the original

**Parameters**

- **name** (*str*) – name of the new queue
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the yqueue

**Returns** queue containing all elements of self

**Return type** *Queue*

---

**Note:** Priorities will be kept self will be emptied

---

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the queue if omitted, no change

**Returns** Name of the queue

**Return type** str

---

**Note:** base\_name and sequence\_number are not affected if the name is changed All derived named are updated as well.

---

**pop** (*index=None*)

removes a component by its position (or head)

**Parameters** **index** (*int*) – index-th element to remove, if any if omitted, return the head of the queue, if any

**Returns** **The i-th component or head** – None if not existing

**Return type** *Component*

**predecessor** (*component*)

predecessor in queue

**Parameters** **component** (*Component*) – component whose predecessor to return must be member of the queue

**Returns** **predecessor of component, if any** – None otherwise.

**Return type** *Component*

**print\_histograms** (*exclude=()*, *as\_str=False*, *file=None*)

prints the histograms of the length timestamped and length\_of\_stay monitor of the queue

**Parameters**

- **exclude** (*tuple or list*) – specifies which monitors to exclude default: ()
- **as\_str** (*bool*) – if False (default), print the histograms if True, return a string containing the histograms
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** **histograms (if as\_str is True)**

**Return type** *str*

**print\_info** (*as\_str=False*, *file=None*)

prints information about the queue

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** **info (if as\_str is True)**

**Return type** *str*

**print\_statistics** (*as\_str=False*, *file=None*)

prints a summary of statistics of a queue

**Parameters**

- **as\_str** (*bool*) – if False (default), print the statistics if True, return a string containing the statistics
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** statistics (if **as\_str** is True)

**Return type** str

**register** (*registry*)

registers the queue in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects

**Returns** queue (self)

**Return type** *Queue*

---

**Note:** Use Queue.deregister if queue does not longer need to be registered.

---

**remove** (*component=None*)

removes component from the queue

**Parameters** **component** (*Component*) – component to be removed if omitted, all components will be removed.

---

**Note:** component must be member of the queue

---

**reset\_monitors** (*monitor=None*)

resets queue monitor length\_of\_stay and timestamped monitor length

**Parameters** **monitor** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change of monitoring state

---

**Note:** it is possible to reset individual monitoring with length\_of\_stay.reset() and length.reset()

---

**sequence\_number** ()

**Returns** **sequence\_number of the queue** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** int

**setup** ()

called immediately after initialization of a queue.

by default this is a dummy method, but it can be overridden.

only keyword arguments are passed

**successor** (*component*)

successor in queue

**Parameters** **component** (*Component*) – component whose successor to return must be member of the queue

**Returns** **successor of component, if any** – None otherwise

**Return type** *Component*

**symmetric\_difference** (*q, name=None, monitor=<function Queue.monitor>*)

returns the symmetric difference of two queues

**Parameters**

- **q** (*Queue*) – queue to be ‘subtracted’ from self
- **name** (*str*) – name of the new queue if omitted, self.name() - q.name()
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the queue

**Returns**

**Return type** queue containing all elements that are either in self or q, but not in both

---

**Note:** the priority of all elements will be set to 0 for all components in the new queue. Order: First, elements in self (in that order), then elements in q (in that order) Alternatively, the more pythonic ^ operator is also supported, e.g. q1 ^ q2

---

**tail** ()

**Returns** **the tail component of the queue, if any. None otherwise**

**Return type** *Component*

---

**Note:** q[-1] is a more Pythonic way to access the tail of the queue

---

**union** (*q, name=None, monitor=False*)

**Parameters**

- **q** (*Queue*) – queue to be unioned with self



- **name** (*str*) – name of the new queue if omitted, `self.name() + q.name()`
- **monitor** (*bool*) – if True, monitor the queue if False (default), do not monitor the queue

**Returns** queue containing all elements of self and q

**Return type** *Queue*

---

**Note:** the priority will be set to 0 for all components in the resulting queue the order of the resulting queue is as follows: first all components of self, in that order, followed by all components in q that are not in self, in that order. Alternatively, the more pythonic `|` operator is also supported, e.g. `q1 | q2`

---

## 11.9 Resource

**class** `salabim.Resource` (*name=None, capacity=1, anonymous=False, monitor=True, env=None, \*args, \*\*kwargs*)

### Parameters

- **name** (*str*) – name of the resource if the name ends with a period (`.`), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)
- **capacity** (*float*) – capacity of the resource if omitted, 1
- **anonymous** (*bool*) – anonymous specifier if True, claims are not related to any component. This is useful if the resource is actually just a level. if False, claims belong to a component.
- **monitor** (*bool*) – if True (default) , the requesters queue, the claimers queue, the capacity, the available\_quantity and the claimed\_quantity are monitored if False, monitoring is disabled.
- **env** (*Environment*) – environment to be used if omitted, `default_env` is used

**base\_name** ()

**Returns** base name of the resource (the name used at initialization)

**Return type** *str*

**claimers** ()

**Returns** queue with all components claiming from the resource – will be an empty queue for an anonymous resource

**Return type** *Queue*

**deregister** (*registry*)

deregisters the resource in the registry

**Parameters** **registry** (*list*) – list of registered components

**Returns** **resource** (**self**)

**Return type** *Resource*

**monitor** (*value*)

enables/disables the resource monitors and timestamped monitors

**Parameters** **value** (*bool*) – if True, monitoring is enabled if False, monitoring is disabled

---

**Note:** it is possible to individually control monitoring with `claimers().monitor()` and `requesters().monitor()`, `capacity.monitor()`, `available_quantity.monitor()`, `claimed_quantity.monitor()` or `occupancy.monitor()`

---

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the resource if omitted, no change

**Returns** **Name of the resource**

**Return type** *str*

---

**Note:** `base_name` and `sequence_number` are not affected if the name is changed All derived named are updated as well.

---

**print\_histograms** (*exclude=()*, *as\_str=False*, *file=None*)

prints histograms of the requesters and claimers queue as well as the capacity, available\_quantity and claimed\_quantity timestamped monitors of the resource

**Parameters**

- **exclude** (*tuple or list*) – specifies which queues or monitors to exclude default: `()`
- **as\_str** (*bool*) – if False (default), print the histograms if True, return a string containing the histograms
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** **histograms (if as\_str is True)**

**Return type** *str*

**print\_info** (*as\_str=False*, *file=None*)

prints info about the resource

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns info (if as\_str is True)**

**Return type** *str*

**print\_statistics** (*as\_str=False, file=None*)

prints a summary of statistics of a resource

**Parameters**

- **as\_str** (*bool*) – if False (default), print the statistics if True, return a string containing the statistics
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns statistics (if as\_str is True)**

**Return type** *str*

**register** (*registry*)

registers the resource in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects

**Returns resource (self)**

**Return type** *Resource*

---

**Note:** Use `Resource.deregister` if resource does not longer need to be registered.

---

**release** (*quantity=None*)

releases all claims or a specified quantity

**Parameters** **quantity** (*float*) – quantity to be released if not specified, the resource will be emptied completely for non-anonymous resources, all components claiming from this resource will be released.

---

**Note:** quantity may not be specified for a non-anonymous resource

---

**requesters** ()

**Returns** queue containing all components with not yet honored requests

**Return type** *Queue*

**reset\_monitors** (*monitor=None*)

resets the resource monitors and timestamped monitors

**Parameters** **monitor** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change of monitoring state

---

**Note:** it is possible to reset individual monitoring with `claimers().reset_monitors()`, `requesters().reset_monitors`, `capacity.reset()`, `available_quantity.reset()` or `claimed_quantity.reset()` or `occupancy.reset()`

---

**sequence\_number** ()

**Returns** **sequence\_number of the resource** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** `int`

**set\_capacity** (*cap*)

**Parameters** **cap** (*float or int*) – capacity of the resource this may lead to honoring one or more requests. if omitted, no change

**setup** ()

called immediately after initialization of a resource.

by default this is a dummy method, but it can be overridden.

only keyword arguments are passed

## 11.10 State

**class** `salabim.State` (*name=None, value=False, type='any', monitor=True, animation\_objects=None, env=None, \*args, \*\*kwargs*)

**Parameters**

- **name** (*str*) – name of the state if the name ends with a period (.), auto serializing will be applied if the name end with a comma, auto serializing starting at 1 will be applied if omitted, the name will be derived from the class it is defined in (lowercased)
- **value** (*any, preferably printable*) – initial value of the state if omitted, False
- **monitor** (*bool*) – if True (default) , the waiters queue and the value are monitored if False, monitoring is disabled.
- **type** (*str*) – specifies how the state values are monitored. Using a `int`, `uint` or `float` type results in less memory usage and better performance. Note that you should avoid the number `not` to use as this is used to indicate ‘off’

- 'any' (default) stores values in a list. This allows for non numeric values. In calculations the values are forced to a numeric value (0 if not possible) do not use -inf
- 'bool' bool (False, True). Actually integer  $\geq 0 \leq 254$  1 byte do not use 255
- 'int8' integer  $\geq -127 \leq 127$  1 byte do not use -128
- 'uint8' integer  $\geq 0 \leq 254$  1 byte do not use 255
- 'int16' integer  $\geq -32767 \leq 32767$  2 bytes do not use -32768
- 'uint16' integer  $\geq 0 \leq 65534$  2 bytes do not use 65535
- 'int32' integer  $\geq -2147483647 \leq 2147483647$  4 bytes do not use -2147483648
- 'uint32' integer  $\geq 0 \leq 4294967294$  4 bytes do not use 4294967295
- 'int64' integer  $\geq -9223372036854775807 \leq 9223372036854775807$  8 bytes do not use -9223372036854775808
- 'uint64' integer  $\geq 0 \leq 18446744073709551614$  8 bytes do not use 18446744073709551615
- 'float' float 8 bytes do not use -inf
- **animation\_objects** (*list or tuple*) – overrides the default animation\_object method the method should have a header like `def animation_objects(self, value):` and should return a list or tuple of animation objects, which will be used when the state changes value. The default method displays a square of size 40. If the value is a valid color, that will be the color of the square. Otherwise, the square will be black with the value displayed in white in the centre.
- **env** (*Environment*) – environment to be used if omitted, default\_env is used

**base\_name** ()

**Returns** base name of the state (the name used at initialization)

**Return type** str

**deregister** (*registry*)

deregisters the state in the registry

**Parameters** **registry** (*list*) – list of registered states

**Returns** state (self)

**Return type** *State*

**get** ()

get value of the state

**Returns**

**value of the state** – Instead of this method, the state can also be called directly, like

```
level = sim.State('level') ... print(level()) print(level.get()) # identical
```

**Return type** any

**monitor** (*value=None*)

enables/disables the state monitors and timestamped monitors

**Parameters** **value** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if not specified, no change

---

**Note:**

it is possible to individually control `requesters().monitor()`, `value.monitor()`

---

**name** (*value=None*)

**Parameters** **value** (*str*) – new name of the state if omitted, no change

**Returns** Name of the state

**Return type** str

---

**Note:** `base_name` and `sequence_number` are not affected if the name is changed All derived named are updated as well.

---

**print\_histograms** (*exclude=()*, *as\_str=False*, *file=None*)

print histograms of the waiters queue and the value timestamped monitor

**Parameters**

- **exclude** (*tuple or list*) – specifies which queues or monitors to exclude default: ()
- **as\_str** (*bool*) – if False (default), print the histograms if True, return a string containing the histograms
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** histograms (if `as_str` is True)

**Return type** str

**print\_info** (*as\_str=False*, *file=None*)

prints info about the state

**Parameters**

- **as\_str** (*bool*) – if False (default), print the info if True, return a string containing the info
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** info (if **as\_str** is **True**)**Return type** str**print\_statistics** (*as\_str=False, file=None*)

prints a summary of statistics of the state

**Parameters**

- **as\_str** (*bool*) – if False (default), print the statistics if True, return a string containing the statistics
- **file** (*file*) – if None(default), all output is directed to stdout otherwise, the output is directed to the file

**Returns** statistics (if **as\_str** is **True**)**Return type** str**register** (*registry*)

registers the state in the registry

**Parameters** **registry** (*list*) – list of (to be) registered objects**Returns** state (self)**Return type** *State*


---

**Note:** Use `State.deregister` if state does not longer need to be registered.

---

**reset** (*value=False*)

reset the value of the state

**Parameters** **value** (*any (preferably printable)*) – if omitted, False if there is a change, the waiters queue will be checked to see whether there are waiting components to be honored

---

**Note:** This method is identical to `set`, except the default value is False.

---

**reset\_monitors** (*monitor=None*)

resets the timestamped monitor for the state's value and the monitors of the waiters queue

**Parameters** **monitor** (*bool*) – if True, monitoring will be on. if False, monitoring is disabled if omitted, no change of monitoring state

**sequence\_number** ()

**Returns** **sequence\_number of the state** – (the sequence number at initialization) normally this will be the integer value of a serialized name, but also non serialized names (without a dot or a comma at the end) will be numbered)

**Return type** `int`

**set** (*value=True*)

set the value of the state

**Parameters** **value** (*any (preferably printable)*) – if omitted, True if there is a change, the waiters queue will be checked to see whether there are waiting components to be honored

---

**Note:** This method is identical to reset, except the default value is True.

---

**setup** ()

called immediately after initialization of a state.

by default this is a dummy method, but it can be overridden.

only keyword arguments will be passed

**trigger** (*value=True, value\_after=None, max=inf*)

triggers the value of the state

**Parameters**

- **value** (*any (preferably printable)*) – if omitted, True
- **value\_after** (*any (preferably printable)*) – after the trigger, this will be the new value. if omitted, return to the the before the trigger.
- **max** (*int*) – maximum number of components to be honored for the trigger value default: `inf`

---

**Note:** The value of the state will be set to value, then at most max waiting components for this state will be honored and next the value will be set to value\_after and again checked for possible honors.

---

**waiters** ()

**Returns** queue containing all components waiting for this state

**Return type** *Queue*



## 11.11 Miscellaneous

`salabim.arrow_polygon(size)`

creates a polygon tuple with a centered arrow for use with `sim.Animate`

**Parameters** `size (float)` – length of the arrow

`salabim.can_animate(try_only=True)`

Tests whether animation is supported.

**Parameters** `try_only (bool)` – if True (default), the function does not raise an error when the required modules cannot be imported if False, the function will only return if the required modules could be imported.

**Returns** True, if required modules could be imported, False otherwise

**Return type** bool

`salabim.can_video(try_only=True)`

Tests whether video is supported.

**Parameters** `try_only (bool)` – if True (default), the function does not raise an error when the required modules cannot be imported if False, the function will only return if the required modules could be imported.

**Returns** True, if required modules could be imported, False otherwise

**Return type** bool

`salabim.centered_rectangle(width, height)`

creates a rectangle tuple with a centered rectangle for use with `sim.Animate`

**Parameters**

- **width (float)** – width of the rectangle
- **height (float)** – height of the rectangle

`salabim.colornames()`

available colornames

**Returns** dict with name of color as key, `#rrggbb` or `#rrggbbaa` as value

**Return type** dict

`salabim.default_env()`

**Returns** default environment

**Return type** *Environment*

`salabim.interpolate(t, t0, t1, v0, v1)`  
 does linear interpolation

**Parameters**

- **t** (*float*) – value to be interpolated from
- **t0** (*float*) –  $f(t_0)=v_0$
- **t1** (*float*) –  $f(t_1)=v_1$
- **v0** (*float, list or tuple*) –  $f(t_0)=v_0$
- **v1** (*float, list or tuple*) –  $f(t_1)=v_1$  if list or tuple,  $\text{len}(v_0)$  should equal  $\text{len}(v_1)$

**Returns** linear interpolation between v0 and v1 based on t between t0 and t1

**Return type** float or tuple

---

**Note:** Note that no extrapolation is done, so if  $t < t_0 \implies v_0$  and  $t > t_1 \implies v_1$  This function is heavily used during animation.

---

`salabim.random_seed(seed, randomstream=None)`  
 Reseeds a randomstream

**Parameters**

- **seed** (*hashable object, usually int*) – the seed for random, equivalent to `random.seed()` if None or `*`, a purely random value (based on the current time) will be used (not reproducible)
- **randomstream** (*randomstream*) – randomstream to be used if omitted, random will be used

`salabim.regular_polygon(radius=1, number_of_sides=3, initial_angle=0)`  
 creates a polygon tuple with a regular polygon (within a circle) for use with `sim.Animate`

**Parameters**

- **radius** (*float*) – radius of the corner points of the polygon default : 1
- **number\_of\_sides** (*int*) – number of sides (corners) must be  $\geq 3$  default : 3
- **initial\_angle** (*float*) – angle of the first corner point, relative to the origin default : 0

`salabim.reset()`  
 resets global variables  
 used internally at import of salabim

might be useful for REPLs or for Pythonista

`salabim.show_colornames()`

show (print) all available color names and their value.

`salabim.show_fonts()`

show (print) all available fonts on this machine

`salabim.spec_to_image(spec)`

convert an image specification to an image

**Parameters** `image` (*str or PIL.Image.Image*) – if *str*: filename of file to be loaded if ‘’: dummy image will be returned if *PIL.Image.Image*: return this image untranslated

**Returns** `image`

**Return type** *PIL.Image.Image*



## 12.1 Who is behind salabim?

I, Ruud van der Ham, am the sole developer of salabim. I have a long history in simulation, both in applications and tool building.

It all started in the mid 70's when modeling container terminals in Prosim, a package in PL/1 that was inspired by Simula and run on big IBM 360/370 mainframes. In the eighties, Prosim was ported to smaller computers, but at the same time I developed a discrete event simulation tool called Must to run on CP/M machines, later on MSDOS machines, again under PL/1. A bit later, Must was ported to Pascal and was used in many projects. Must was never ported to Windows. Instead, Hans Veeke (Delft University) came with Tomas, a package that is still available and runs under Delphi. End 2016, I wanted an easy to use and open source package for a project, preferably in Python. Unfortunately, Simpy (particularly version 3) does not support the essential process interaction methods activate, hold, passivate and standby. First I tried to build a wrapper around Simpy 3, but that didn't work too well.

That was the start of a new package, called salabim. One of the key features of salabim is the powerful animation engine that is heavily inspired by some more creative projects where every animation object can change position, shape, colour, orientation over time. Although rarely used in normal simulation models, all that functionality is available in salabim. Over the year 2017, a lot of functionality was added as well bugs were fixed. During that year the package became available on PyPI and GitHub and the documentation was made available. Large parts of salabim were actually developed on an iPad on the excellent Pythonista platform. The full functionality is thus available under iOS as well.

## 12.2 Why is the package called salabim?

```
s = 'sim ulation'
print(s)
s = s[:4]
print(s)
s += 'salabim'
```

```
print(s)
s = ' ' * 4 + s[4:]
print(s)
```

```
simulation
sim
sim salabim
    salabim
```

## 12.3 Contributing and reporting issues

It is very much appreciated to contribute to the salabim, by issuing a pull request or issue on GitHub.

Also, issues can be reported this way.

Alternatively, the Google group can be used for this.

## 12.4 Support

Ruud van der Ham is able and willing to help users with issues with the package or modelling in general.

He is also available for consultancy and or trainings.

Contact him or other users via the Google group or [info@salabim.org](mailto:info@salabim.org).

## 12.5 License

The MIT License (MIT)

Copyright (c) 2016, 2017, 2018 Ruud van der Ham, [ruud@salabim.org](mailto:ruud@salabim.org)

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the “Software”), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED “AS IS”, WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.





## INDICES AND TABLES

- genindex
- search

## INDEX

- \_Distribution (class in salabim), 103
- activate() (salabim.Component method), 115
- add() (salabim.Queue method), 162
- add\_at\_head() (salabim.Queue method), 162
- add\_behind() (salabim.Queue method), 162
- add\_in\_front\_of() (salabim.Queue method), 162
- add\_sorted() (salabim.Queue method), 162
- an\_clocktext() (salabim.Environment method), 130
- an\_menu\_buttons() (salabim.Environment method), 130
- an\_modelname() (salabim.Environment method), 130
- an\_synced\_buttons() (salabim.Environment method), 130
- an\_unsynced\_buttons() (salabim.Environment method), 130
- anchor() (salabim.Animate method), 82
- angle() (salabim.Animate method), 82
- Animate (class in salabim), 77
- animate() (salabim.Environment method), 131
- animate() (salabim.Monitor method), 143
- animate() (salabim.MonitorTimestamp method), 153
- animate() (salabim.Queue method), 163
- AnimateButton (class in salabim), 89
- AnimateCircle (class in salabim), 90
- AnimateEntry (class in salabim), 91
- AnimateImage (class in salabim), 92
- AnimateLine (class in salabim), 93
- AnimateMonitor (class in salabim), 94
- AnimatePoints (class in salabim), 96
- AnimatePolygon (class in salabim), 97
- AnimateQueue (class in salabim), 98
- AnimateRectangle (class in salabim), 99
- AnimateSlider (class in salabim), 101
- AnimateText (class in salabim), 102
- animation\_objects() (salabim.Component method), 116
- animation\_parameters() (salabim.Environment method), 131
- animation\_post\_tick() (salabim.Environment method), 132
- animation\_pre\_tick() (salabim.Environment method), 132
- append() (salabim.Queue method), 164
- arrow\_polygon() (in module salabim), 179
- as\_points() (salabim.Animate method), 82
- background\_color() (salabim.Environment method), 133
- base\_name() (salabim.Component method), 116
- base\_name() (salabim.Environment method), 133
- base\_name() (salabim.Monitor method), 144
- base\_name() (salabim.MonitorTimestamp method), 154
- base\_name() (salabim.Queue method), 164
- base\_name() (salabim.Resource method), 171
- base\_name() (salabim.State method), 175
- beep() (salabim.Environment method), 133
- Beta (class in salabim), 103
- bin\_duration() (salabim.MonitorTimestamp method), 154
- bin\_number\_of\_entries() (salabim.Monitor method), 144
- bin\_weight() (salabim.Monitor method), 145
- bounded\_sample() (salabim.\_Distribution method), 103

[can\\_animate\(\)](#) (in module salabim), 179  
[can\\_video\(\)](#) (in module salabim), 179  
[cancel\(\)](#) (salabim.Component method), 116  
[Cdf](#) (class in salabim), 104  
[centered\\_rectangle\(\)](#) (in module salabim), 179  
[circle\(\)](#) (salabim.Animate method), 82  
[claimed\\_quantity\(\)](#) (salabim.Component method), 117  
[claimed\\_resources\(\)](#) (salabim.Component method), 117  
[claimers\(\)](#) (salabim.Resource method), 171  
[clear\(\)](#) (salabim.Queue method), 164  
[colorinterpolate\(\)](#) (salabim.Environment method), 133  
[colornames\(\)](#) (in module salabim), 179  
[colorspec\\_to\\_tuple\(\)](#) (salabim.Environment method), 133  
[Component](#) (class in salabim), 115  
[component\\_with\\_name\(\)](#) (salabim.Queue method), 164  
[Constant](#) (class in salabim), 105  
[copy\(\)](#) (salabim.Queue method), 164  
[count\(\)](#) (salabim.Component method), 117  
[count\(\)](#) (salabim.Queue method), 165  
[creation\\_time\(\)](#) (salabim.Component method), 117  
[current\\_component\(\)](#) (salabim.Environment method), 134  
  
[default\\_env\(\)](#) (in module salabim), 179  
[deregister\(\)](#) (salabim.Component method), 117  
[deregister\(\)](#) (salabim.Monitor method), 145  
[deregister\(\)](#) (salabim.MonitorTimestamp method), 154  
[deregister\(\)](#) (salabim.Queue method), 165  
[deregister\(\)](#) (salabim.Resource method), 171  
[deregister\(\)](#) (salabim.State method), 175  
[difference\(\)](#) (salabim.Queue method), 165  
[Distribution](#) (class in salabim), 106  
[duration\(\)](#) (salabim.MonitorTimestamp method), 155  
[duration\\_zero\(\)](#) (salabim.MonitorTimestamp method), 155  
  
[enter\(\)](#) (salabim.Component method), 117  
[enter\\_at\\_head\(\)](#) (salabim.Component method), 118  
[enter\\_behind\(\)](#) (salabim.Component method), 118  
[enter\\_in\\_front\\_of\(\)](#) (salabim.Component method), 118  
[enter\\_sorted\(\)](#) (salabim.Component method), 118

[enter\\_time\(\)](#) (salabim.Component method), 119  
[Environment](#) (class in salabim), 130  
[Erlang](#) (class in salabim), 107  
[Exponential](#) (class in salabim), 108  
[extend\(\)](#) (salabim.Queue method), 165  
  
[failed\(\)](#) (salabim.Component method), 119  
[fillcolor\(\)](#) (salabim.Animate method), 82  
[font\(\)](#) (salabim.Animate method), 82  
[fontsize\(\)](#) (salabim.Animate method), 83  
[foreground\\_color\(\)](#) (salabim.Environment method), 134  
[fps\(\)](#) (salabim.Environment method), 134  
  
[Gamma](#) (class in salabim), 108  
[get\(\)](#) (salabim.AnimateEntry method), 92  
[get\(\)](#) (salabim.MonitorTimestamp method), 155  
[get\(\)](#) (salabim.State method), 175  
  
[head\(\)](#) (salabim.Queue method), 166  
[height\(\)](#) (salabim.Environment method), 134  
[histogram\\_autoscale\(\)](#) (salabim.Monitor method), 145  
[hold\(\)](#) (salabim.Component method), 119  
  
[image\(\)](#) (salabim.Animate method), 83  
[index\(\)](#) (salabim.Component method), 119  
[index\(\)](#) (salabim.Queue method), 166  
[insert\(\)](#) (salabim.Queue method), 166  
[interpolate\(\)](#) (in module salabim), 179  
[interrupt\(\)](#) (salabim.Component method), 119  
[interrupt\\_level\(\)](#) (salabim.Component method), 120  
[interrupted\\_status\(\)](#) (salabim.Component method), 120  
[intersection\(\)](#) (salabim.Queue method), 166  
[is\\_dark\(\)](#) (salabim.Environment method), 134  
[iscurrent\(\)](#) (salabim.Component method), 120  
[isdata\(\)](#) (salabim.Component method), 120  
[isinterrupted\(\)](#) (salabim.Component method), 120  
[ispassive\(\)](#) (salabim.Component method), 121  
[isrequesting\(\)](#) (salabim.Component method), 121  
[isscheduled\(\)](#) (salabim.Component method), 121  
[isstandby\(\)](#) (salabim.Component method), 121

iswaiting() (salabim.Component method), 122  
 ItemFile (class in salabim), 141

layer() (salabim.Animate method), 83  
 leave() (salabim.Component method), 122  
 line() (salabim.Animate method), 83  
 linecolor() (salabim.Animate method), 83  
 linewidth() (salabim.Animate method), 84

main() (salabim.Environment method), 134  
 max\_lines() (salabim.Animate method), 84  
 maximum() (salabim.Monitor method), 145  
 maximum() (salabim.MonitorTimestamp method), 155  
 mean() (salabim.Beta method), 104  
 mean() (salabim.Cdf method), 104  
 mean() (salabim.Constant method), 105  
 mean() (salabim.Distribution method), 106  
 mean() (salabim.Erlang method), 107  
 mean() (salabim.Exponential method), 108  
 mean() (salabim.Gamma method), 109  
 mean() (salabim.Monitor method), 146  
 mean() (salabim.MonitorTimestamp method), 155  
 mean() (salabim.Normal method), 110  
 mean() (salabim.Pdf method), 111  
 mean() (salabim.Poisson method), 112  
 mean() (salabim.Triangular method), 112  
 mean() (salabim.Uniform method), 113  
 mean() (salabim.Weibull method), 114  
 median() (salabim.Monitor method), 146  
 median() (salabim.MonitorTimestamp method), 155  
 minimum() (salabim.Monitor method), 146  
 minimum() (salabim.MonitorTimestamp method), 156  
 mode() (salabim.Component method), 122  
 mode\_time() (salabim.Component method), 122  
 modelname() (salabim.Environment method), 135  
 Monitor (class in salabim), 142  
 monitor() (salabim.Monitor method), 146  
 monitor() (salabim.MonitorTimestamp method), 156  
 monitor() (salabim.Queue method), 167

monitor() (salabim.Resource method), 172  
 monitor() (salabim.State method), 176  
 MonitorTimestamp (class in salabim), 152  
 move() (salabim.Queue method), 167  
 name() (salabim.Component method), 122  
 name() (salabim.Environment method), 135  
 name() (salabim.Monitor method), 146  
 name() (salabim.MonitorTimestamp method), 156  
 name() (salabim.Queue method), 167  
 name() (salabim.Resource method), 172  
 name() (salabim.State method), 176  
 Normal (class in salabim), 109  
 now() (salabim.Environment method), 135  
 number\_of\_entries() (salabim.Monitor method), 147  
 number\_of\_entries() (salabim.MonitorTimestamp method), 156  
 number\_of\_entries\_zero() (salabim.Monitor method), 147  
 number\_of\_entries\_zero() (salabim.MonitorTimestamp method), 156

offsetx() (salabim.Animate method), 84  
 offsety() (salabim.Animate method), 84

passivate() (salabim.Component method), 123  
 Pdf (class in salabim), 110  
 peek() (salabim.Environment method), 135  
 percentile() (salabim.Monitor method), 147  
 percentile() (salabim.MonitorTimestamp method), 157  
 points() (salabim.Animate method), 84  
 Poisson (class in salabim), 111  
 polygon() (salabim.Animate method), 84  
 pop() (salabim.Queue method), 167  
 predecessor() (salabim.Component method), 123  
 predecessor() (salabim.Queue method), 168  
 print\_histogram() (salabim.Monitor method), 147  
 print\_histogram() (salabim.MonitorTimestamp method), 157  
 print\_histograms() (salabim.Monitor method), 148  
 print\_histograms() (salabim.MonitorTimestamp method), 157  
 print\_histograms() (salabim.Queue method), 168  
 print\_histograms() (salabim.Resource method), 172  
 print\_histograms() (salabim.State method), 176

[print\\_info\(\) \(salabim.Beta method\), 104](#)  
[print\\_info\(\) \(salabim.Cdf method\), 105](#)  
[print\\_info\(\) \(salabim.Component method\), 123](#)  
[print\\_info\(\) \(salabim.Constant method\), 105](#)  
[print\\_info\(\) \(salabim.Distribution method\), 106](#)  
[print\\_info\(\) \(salabim.Environment method\), 135](#)  
[print\\_info\(\) \(salabim.Erlang method\), 107](#)  
[print\\_info\(\) \(salabim.Exponential method\), 108](#)  
[print\\_info\(\) \(salabim.Gamma method\), 109](#)  
[print\\_info\(\) \(salabim.Normal method\), 110](#)  
[print\\_info\(\) \(salabim.Pdf method\), 111](#)  
[print\\_info\(\) \(salabim.Poisson method\), 112](#)  
[print\\_info\(\) \(salabim.Queue method\), 168](#)  
[print\\_info\(\) \(salabim.Resource method\), 172](#)  
[print\\_info\(\) \(salabim.State method\), 176](#)  
[print\\_info\(\) \(salabim.Triangular method\), 112](#)  
[print\\_info\(\) \(salabim.Uniform method\), 113](#)  
[print\\_info\(\) \(salabim.Weibull method\), 114](#)  
[print\\_statistics\(\) \(salabim.Monitor method\), 149](#)  
[print\\_statistics\(\) \(salabim.MonitorTimestamp method\), 158](#)  
[print\\_statistics\(\) \(salabim.Queue method\), 168](#)  
[print\\_statistics\(\) \(salabim.Resource method\), 173](#)  
[print\\_statistics\(\) \(salabim.State method\), 177](#)  
[print\\_trace\(\) \(salabim.Environment method\), 136](#)  
[print\\_trace\\_header\(\) \(salabim.Environment method\), 136](#)  
[priority\(\) \(salabim.Component method\), 123](#)  
  
[Queue \(class in salabim\), 161](#)  
[queues\(\) \(salabim.Component method\), 124](#)  
  
[random\\_seed\(\) \(in module salabim\), 180](#)  
[read\\_item\(\) \(salabim.ItemFile method\), 142](#)  
[read\\_item\\_bool\(\) \(salabim.ItemFile method\), 142](#)  
[read\\_item\\_float\(\) \(salabim.ItemFile method\), 142](#)  
[read\\_item\\_int\(\) \(salabim.ItemFile method\), 142](#)  
[rectangle\(\) \(salabim.Animate method\), 85](#)  
[register\(\) \(salabim.Component method\), 124](#)  
[register\(\) \(salabim.Monitor method\), 149](#)  
[register\(\) \(salabim.MonitorTimestamp method\), 158](#)

[register\(\) \(salabim.Queue method\), 169](#)  
[register\(\) \(salabim.Resource method\), 173](#)  
[register\(\) \(salabim.State method\), 177](#)  
[regular\\_polygon\(\) \(in module salabim\), 180](#)  
[release\(\) \(salabim.Component method\), 124](#)  
[release\(\) \(salabim.Resource method\), 173](#)  
[remaining\\_duration\(\) \(salabim.Component method\), 125](#)  
[remove\(\) \(salabim.Animate method\), 85](#)  
[remove\(\) \(salabim.AnimateButton method\), 90](#)  
[remove\(\) \(salabim.AnimateEntry method\), 92](#)  
[remove\(\) \(salabim.AnimateMonitor method\), 96](#)  
[remove\(\) \(salabim.AnimateSlider method\), 102](#)  
[remove\(\) \(salabim.Queue method\), 169](#)  
[request\(\) \(salabim.Component method\), 125](#)  
[requested\\_quantity\(\) \(salabim.Component method\), 126](#)  
[requested\\_resources\(\) \(salabim.Component method\), 126](#)  
[requesters\(\) \(salabim.Resource method\), 173](#)  
[reset\(\) \(in module salabim\), 180](#)  
[reset\(\) \(salabim.Monitor method\), 149](#)  
[reset\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[reset\(\) \(salabim.State method\), 177](#)  
[reset\\_monitors\(\) \(salabim.Monitor method\), 149](#)  
[reset\\_monitors\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[reset\\_monitors\(\) \(salabim.Queue method\), 169](#)  
[reset\\_monitors\(\) \(salabim.Resource method\), 173](#)  
[reset\\_monitors\(\) \(salabim.State method\), 177](#)  
[reset\\_now\(\) \(salabim.Environment method\), 136](#)  
[Resource \(class in salabim\), 171](#)  
[resume\(\) \(salabim.Component method\), 126](#)  
[run\(\) \(salabim.Environment method\), 136](#)  
[running\\_process\(\) \(salabim.Component method\), 126](#)  
  
[sample\(\) \(salabim.Beta method\), 104](#)  
[sample\(\) \(salabim.Cdf method\), 105](#)  
[sample\(\) \(salabim.Constant method\), 106](#)  
[sample\(\) \(salabim.Distribution method\), 107](#)  
[sample\(\) \(salabim.Erlang method\), 108](#)  
[sample\(\) \(salabim.Exponential method\), 108](#)  
[sample\(\) \(salabim.Gamma method\), 109](#)

[sample\(\) \(salabim.Normal method\), 110](#)  
[sample\(\) \(salabim.Pdf method\), 111](#)  
[sample\(\) \(salabim.Poisson method\), 112](#)  
[sample\(\) \(salabim.Triangular method\), 113](#)  
[sample\(\) \(salabim.Uniform method\), 113](#)  
[sample\(\) \(salabim.Weibull method\), 114](#)  
[scale\(\) \(salabim.Environment method\), 137](#)  
[scheduled\\_time\(\) \(salabim.Component method\), 127](#)  
[sequence\\_number\(\) \(salabim.Component method\), 127](#)  
[sequence\\_number\(\) \(salabim.Environment method\), 137](#)  
[sequence\\_number\(\) \(salabim.Monitor method\), 150](#)  
[sequence\\_number\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[sequence\\_number\(\) \(salabim.Queue method\), 169](#)  
[sequence\\_number\(\) \(salabim.Resource method\), 174](#)  
[sequence\\_number\(\) \(salabim.State method\), 178](#)  
[set\(\) \(salabim.State method\), 178](#)  
[set\\_capacity\(\) \(salabim.Resource method\), 174](#)  
[setup\(\) \(salabim.Component method\), 127](#)  
[setup\(\) \(salabim.Environment method\), 137](#)  
[setup\(\) \(salabim.Monitor method\), 150](#)  
[setup\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[setup\(\) \(salabim.Queue method\), 169](#)  
[setup\(\) \(salabim.Resource method\), 174](#)  
[setup\(\) \(salabim.State method\), 178](#)  
[show\\_colornames\(\) \(in module salabim\), 181](#)  
[show\\_fonts\(\) \(in module salabim\), 181](#)  
[show\\_fps\(\) \(salabim.Environment method\), 137](#)  
[show\\_time\(\) \(salabim.Environment method\), 137](#)  
[snapshot\(\) \(salabim.Environment method\), 137](#)  
[spec\\_to\\_image\(\) \(in module salabim\), 181](#)  
[speed\(\) \(salabim.Environment method\), 138](#)  
[standby\(\) \(salabim.Component method\), 127](#)  
[State \(class in salabim\), 174](#)  
[status\(\) \(salabim.Component method\), 128](#)  
[std\(\) \(salabim.Monitor method\), 150](#)  
[std\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[step\(\) \(salabim.Environment method\), 138](#)  
[successor\(\) \(salabim.Component method\), 128](#)  
[successor\(\) \(salabim.Queue method\), 170](#)

[suppress\\_pause\\_at\\_step\(\) \(salabim.Component method\), 128](#)  
[suppress\\_trace\(\) \(salabim.Component method\), 128](#)  
[suppress\\_trace\\_standby\(\) \(salabim.Environment method\), 138](#)  
[symmetric\\_difference\(\) \(salabim.Queue method\), 170](#)  
[synced\(\) \(salabim.Environment method\), 138](#)

[tail\(\) \(salabim.Queue method\), 170](#)  
[tally\(\) \(salabim.Monitor method\), 150](#)  
[tally\(\) \(salabim.MonitorTimestamp method\), 159](#)  
[text\(\) \(salabim.Animate method\), 85](#)  
[text\\_anchor\(\) \(salabim.Animate method\), 85](#)  
[textcolor\(\) \(salabim.Animate method\), 85](#)  
[trace\(\) \(salabim.Environment method\), 138](#)  
[Triangular \(class in salabim\), 112](#)  
[trigger\(\) \(salabim.State method\), 178](#)  
[tx\(\) \(salabim.MonitorTimestamp method\), 160](#)

[Uniform \(class in salabim\), 113](#)  
[union\(\) \(salabim.Queue method\), 170](#)  
[update\(\) \(salabim.Animate method\), 86](#)

[v\(\) \(salabim.AnimateSlider method\), 102](#)  
[value\\_duration\(\) \(salabim.MonitorTimestamp method\), 160](#)  
[value\\_number\\_of\\_entries\(\) \(salabim.Monitor method\), 150](#)  
[value\\_number\\_of\\_entries\(\) \(salabim.MonitorTimestamp method\), 160](#)  
[value\\_weight\(\) \(salabim.Monitor method\), 150](#)  
[video\(\) \(salabim.Environment method\), 139](#)  
[video\\_close\(\) \(salabim.Environment method\), 139](#)  
[video\\_pingpong\(\) \(salabim.Environment method\), 139](#)  
[video\\_repeat\(\) \(salabim.Environment method\), 139](#)  
[visible\(\) \(salabim.Animate method\), 88](#)

[wait\(\) \(salabim.Component method\), 128](#)  
[waiters\(\) \(salabim.State method\), 178](#)  
[Weibull \(class in salabim\), 114](#)  
[weight\(\) \(salabim.Monitor method\), 151](#)  
[weight\\_zero\(\) \(salabim.Monitor method\), 151](#)  
[width\(\) \(salabim.Animate method\), 88](#)  
[width\(\) \(salabim.Environment method\), 140](#)

`x()` (salabim.Animate method), 88  
`x()` (salabim.Monitor method), 151  
`x0()` (salabim.Environment method), 140  
`x1()` (salabim.Environment method), 140  
`xduration()` (salabim.MonitorTimestamp method), 160  
`xt()` (salabim.MonitorTimestamp method), 161  
`xweight()` (salabim.Monitor method), 151  
`xy_anchor()` (salabim.Animate method), 88

`y()` (salabim.Animate method), 89  
`y0()` (salabim.Environment method), 140  
`y1()` (salabim.Environment method), 140