# Documenting Architecture

DevOps, Maintenance, and Evolution @ ITU

The ideal development environment is one for which the documentation is available for essentially free with the push of a button

Len Bass

**Architectural Viewpoints** has an **Architecture** System Perspectives on a system 1..\* described by has identifies is important to has **Architectural** Stakeholder Concern Description 1..\* organized by selects A viewpoint can h conforms to Viewpoint **View** multiple views Component & Module **Deployment** Connector Viewpoint Viewpoint Viewpoint

## Viewpoints

Popular as "catalogues"

- 4+1 by Kruchten
- 3+1 by Christensen
- ...\*

## An Approach to Software Architecture Description Using UML Revision 2.0

Henrik Bærbak Christensen, Aino Corry, and Klaus Marius Hansen Department of Computer Science, University of Aarhus Aabogade 34, 8200 Århus N, Denmark {hbc,apaipi,marius}@daimi.au.dk

June 2007

#### Abstract

This document presents a practical way of describing software architectures using the Unified Modeling Language. The approach is based on a "3+1" structure in which three viewpoints on the described system are used – module, component & connector, and allocation – are used to describe a solution for a set of architectural requirements.

### 1 Introduction

Software architecture represents an appropriate level of abstraction for many system development activitites [Bass et al., 2003]. Consequently and correspondingly, appropriate software architectural descriptions may support, e.g., stakeholder communication, iterative and incremental architectural design, or evaluation of architectures [Bass et al., 2003], [Clements et al., 2002b], [Clements et al., 2002a].

This document represents a practical basis for architectural description and in doing so, we follow the IEEE recommended practice for architectural description of software-intensive systems [Software Engineering Standards Committee, 2000]. Central to this recommended practice is the concept of a viewpoint through which the software architecture of a system is described (see Figure 1). A concrete architectural description consists of a set of views corresponding to a chosen set of viewpoints. This document recommends the use of three viewpoints (in accordance with the recommendations of [Clements et al., 2002a]):


- A *Module viewpoint* concerned with how functionality of the system maps to static development units,
- $\bullet$  a Component~ & ~Connector~viewpoint concerned with the runtime mapping of functionality to components of the architecture, and
- $\bullet\,$  an  $Allocation\,\,viewpoint\,$  concerned with how software entities are mapped to environmental entities

1

<sup>\*</sup> remember the "7 minute abs" scene from There's Something About Mary?

## Viewpoints

- 1. Concern what is it presenting?
- 2. Elements what does it depict?
- 3. Relationships relationships between elements?
- 4. Representation

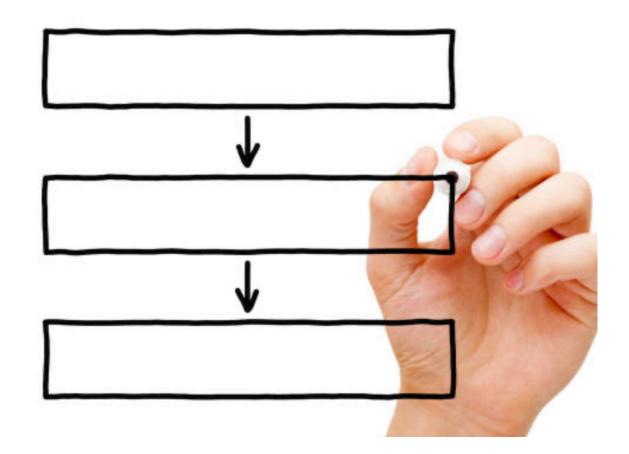

## Module Viewpoint


How is the functionality organized in code?

Elements

Packages, Modules

Relationships

**Compile-time Dependencies** 

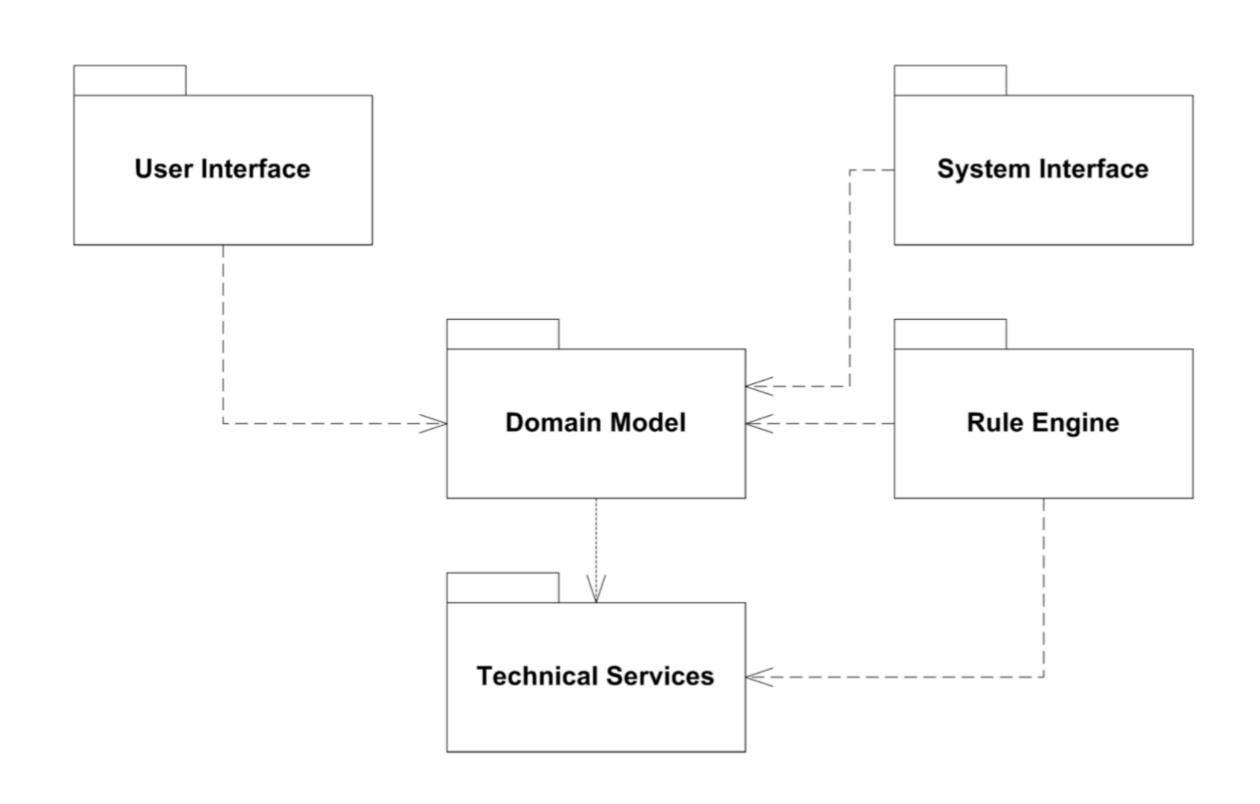

## Components And Connectors


How does the system achieve its functionality at runtime?

Elements

Units of functionality

Relationships

**Communication channels** 

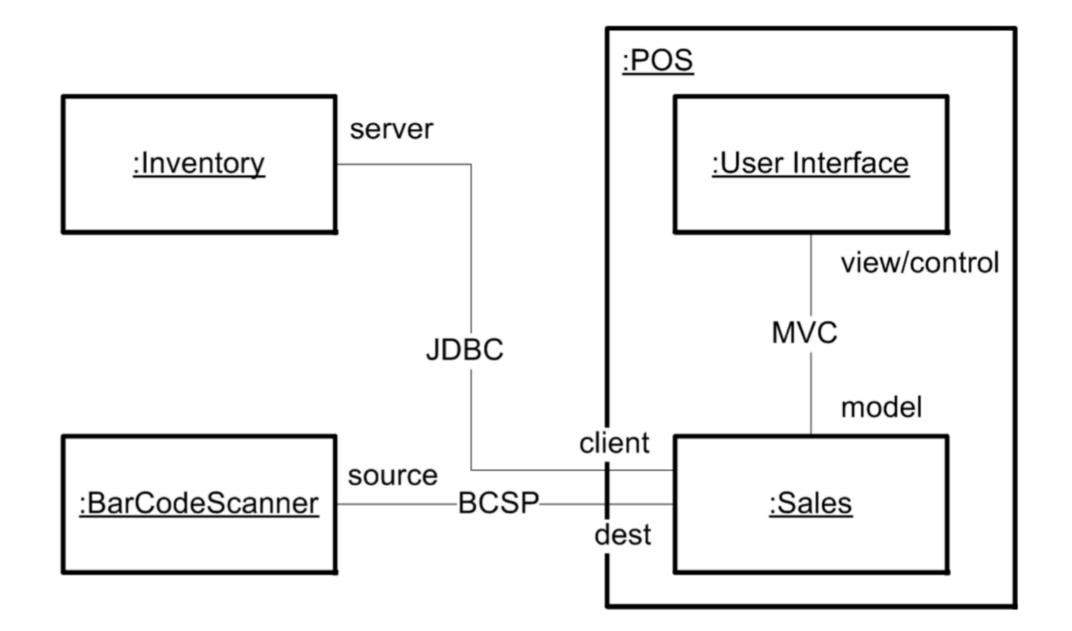

## Deployment


How are elements mapped on the infrastructure?

Elements

Processes, Infrastructure

Relationships

Depends-on, Protocol links, Allocated-to

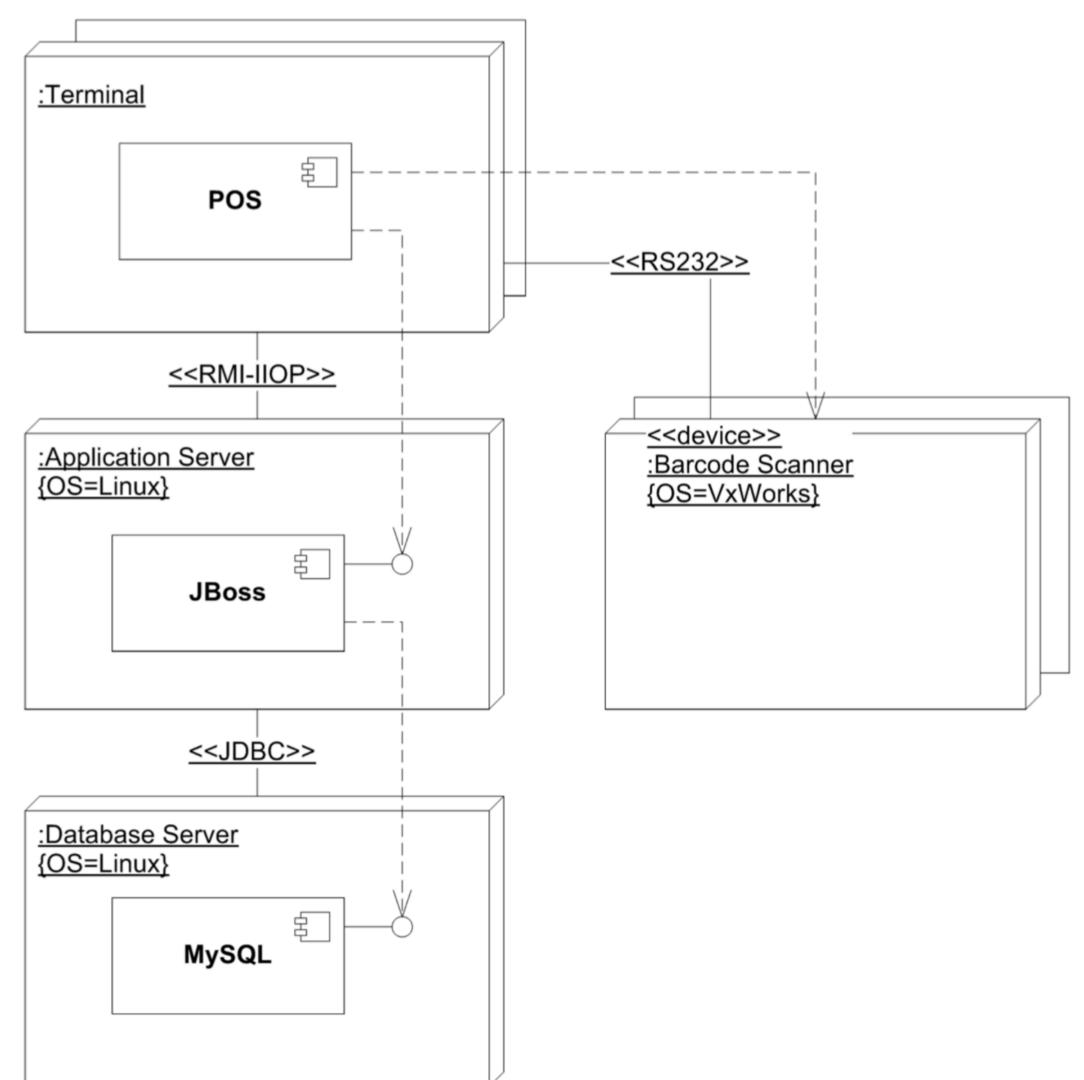

## Visual Representation

### Prefer standard notation when available


- UML Deployment Diagrams
- UML Component Diagrams

## Create your own if you need to, but ...

- Ensure consistency in visual language
- Add a legend for non-standard elements

## Custom Visual Notation Example


Highlighting Swarm Nodes and Clusters

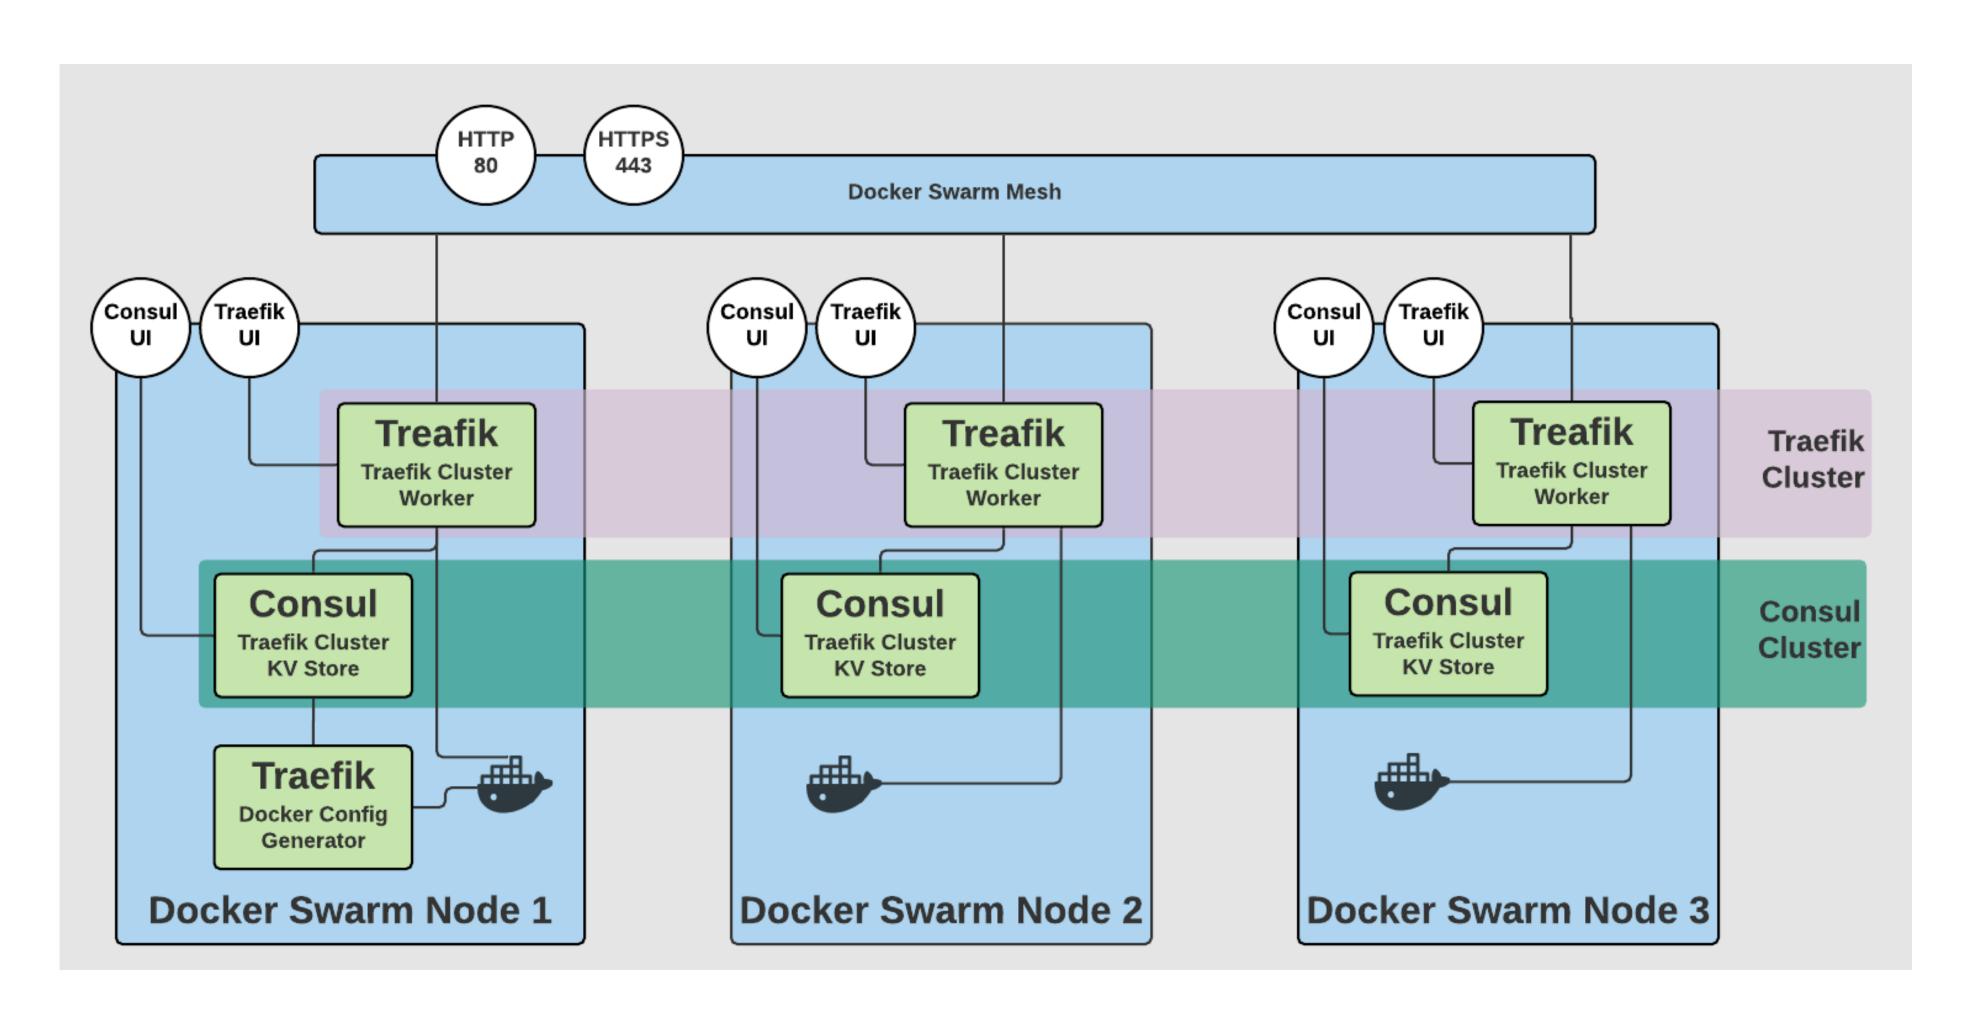

# Formatting Your Report

Make it as readable as possible

## A Report Has a Title and Authors

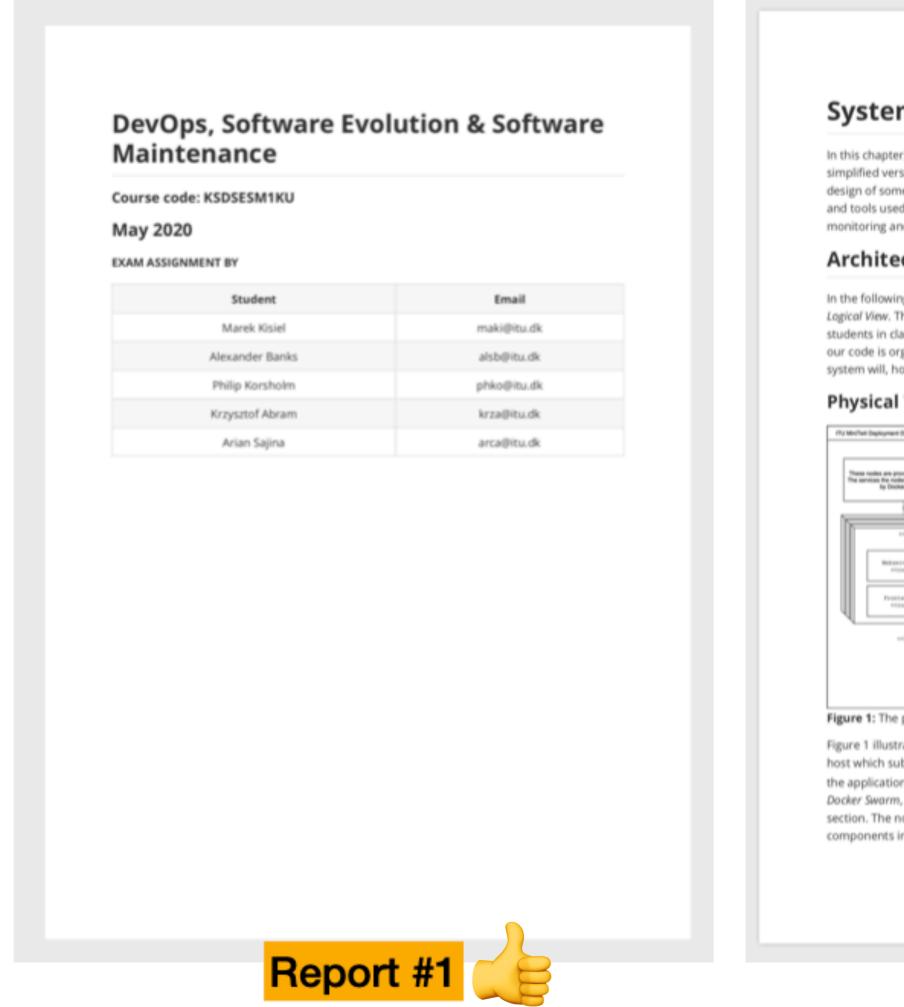

### **System Perspective** In this chapter, we will first present a high-level overview of the system architecture using a simplified version of the 4+1 Architectural model by P.B. Kruchten. Then, we will present the design of some core components of the system, followed by a complete listing of dependencies and tools used for development, maintenance, and monitoring. Next, we will describe our monitoring and logging setup. Lastly, we will comment on the current state of our system. Architecture In the following 4+1 Architectural model, we have omitted two views: the Use Case View and the Logical View. The Use Case View is omitted as the use cases for MiniTwit were presented to all students in class and were required to remain unchanged. The Lagical View is omitted as most of our code is organized as a set of functions and not as objects/classes. The concrete design of the system will, however, be elaborated upon in the Design section. Physical View Figure 1: The physical view of the MiniTwit system illustrated with an UML deployment diagram. Figure 1 illustrates the physical view of the MiniTwit system, i.e., which nodes/virtual machines host which subsystems. We see that the webserver and Frontend subsystems, which make up the application, have been replicated across several nodes by the cluster management tool, Docker Swarm, which we will elaborate on in the Docker Swarm - Scaling and Load Balancing section. The nodes themselves are provisioned by Terraform. It should be noted that the different components in every subsystem is encapsulated in separate Docker containers. Report #2

## A Report Has a Structure

### DevOps - MinitwitTDB

- Lasse Felskov Agersten, lage@itu.dk
- Niclas Valentiner, niva@itu.dk
- Philip Bernth Johansen, phij@itu.dk
- Mikkel Østergaard Madsen, miom@itu.dk

### Systems perspective

### Architecture of our system

In this section we will discuss how our MiniTwit implementation works from a high level perspective, including its overall interaction with different systems.

During the initial refactoring of MiniTwit we opted to use TypeScript as the coding language and Node.JS as an environment to execute the written code on a backend. To store data we have opted for a MariaDB database. The reason we opted for TypeScript in this project was due to two reasons. Firstly, most of our groups members haven't used TypeScript before, but found it interesting to learn a new language. Secondly, TypeScript is strongly typed in contrast to regular JavaScript which we believe would help improve our maintainability and allow other developers to more easily understand each others code.

Our application was then dockerized in order to easily deploy our application on different servers based on the needs. Furthermore, to orchestrate our application we have been using Docker Swarm with five replication.

We are using four different servers hosted on DigitalOcean to run our application, where two of these servers solely function as Worker Nodes (with two replicas each) for our Docker Swarm setup and the third functions as a Manager Node. The final server has been our main server before we introduced our scaling and load-balancing solution, and this is the server that contains our database instance and our logging and monitoring containers.

Please refer to the Deployment diagram below which illustrates the structuring of our system across servers and the overall interactions between different containers. 1

System's Perspective

### 1.1 System Design


Written by Emilie


Our Minitwit application consists of a web app and an API. The web app is a simple version of Twitter where a user can register a profile, log in, and post a message for everyone to see. The users can follow and unfollow each other. The API has endpoints with same functionality as the web app. However the API can only be used with a specific authorization key. The application is developed in JavaScript using Node.js as the run-time environment, Express.js as the web framework and EJS as the view engine.


4



## Text in Figures Should be of Comparable Size to Text in Page

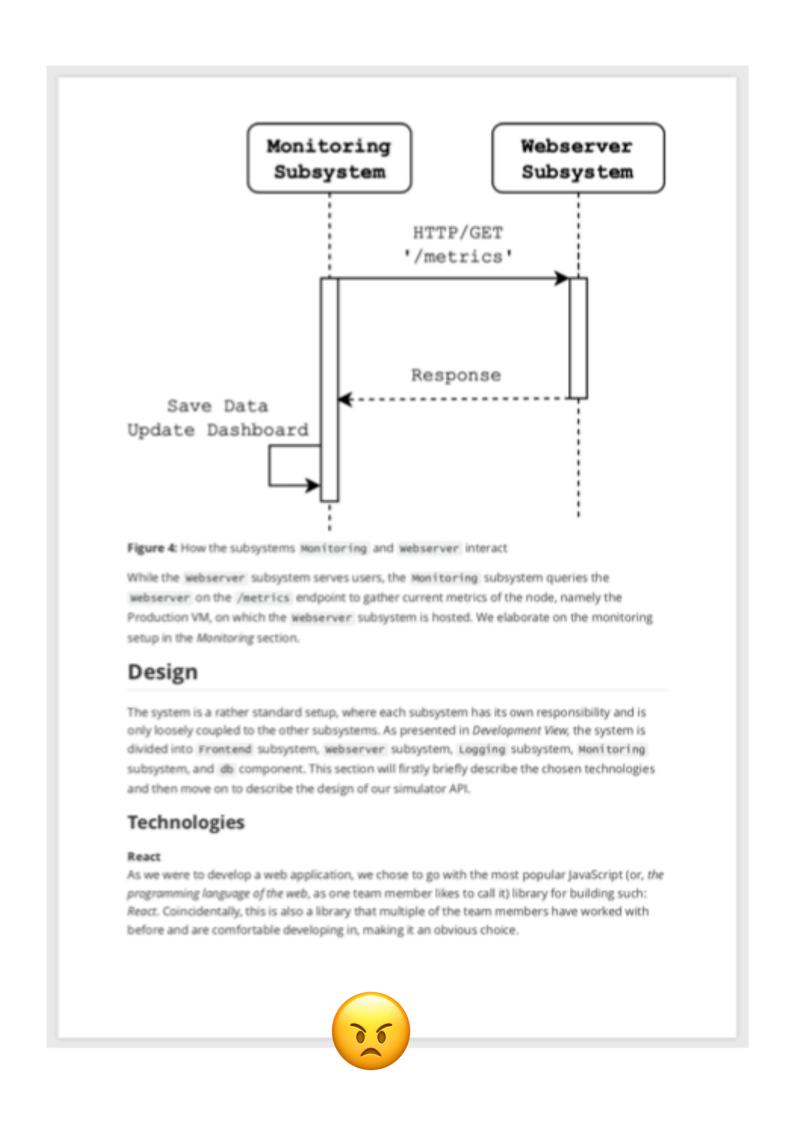


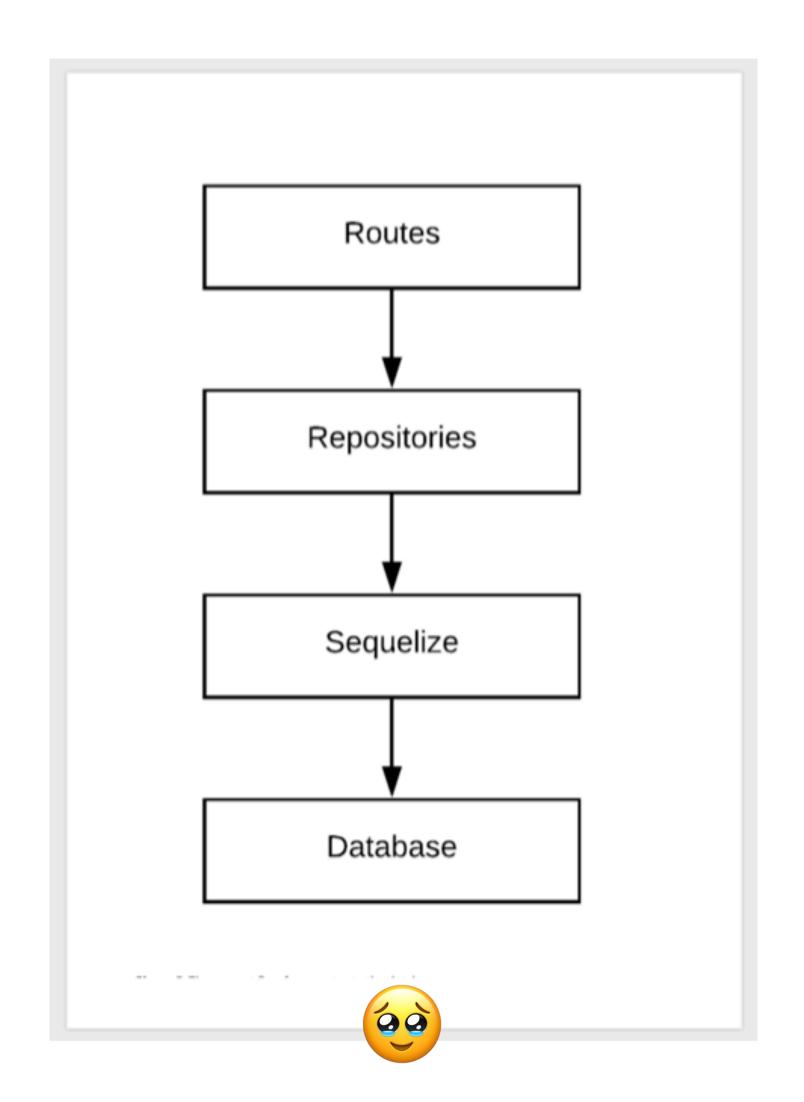


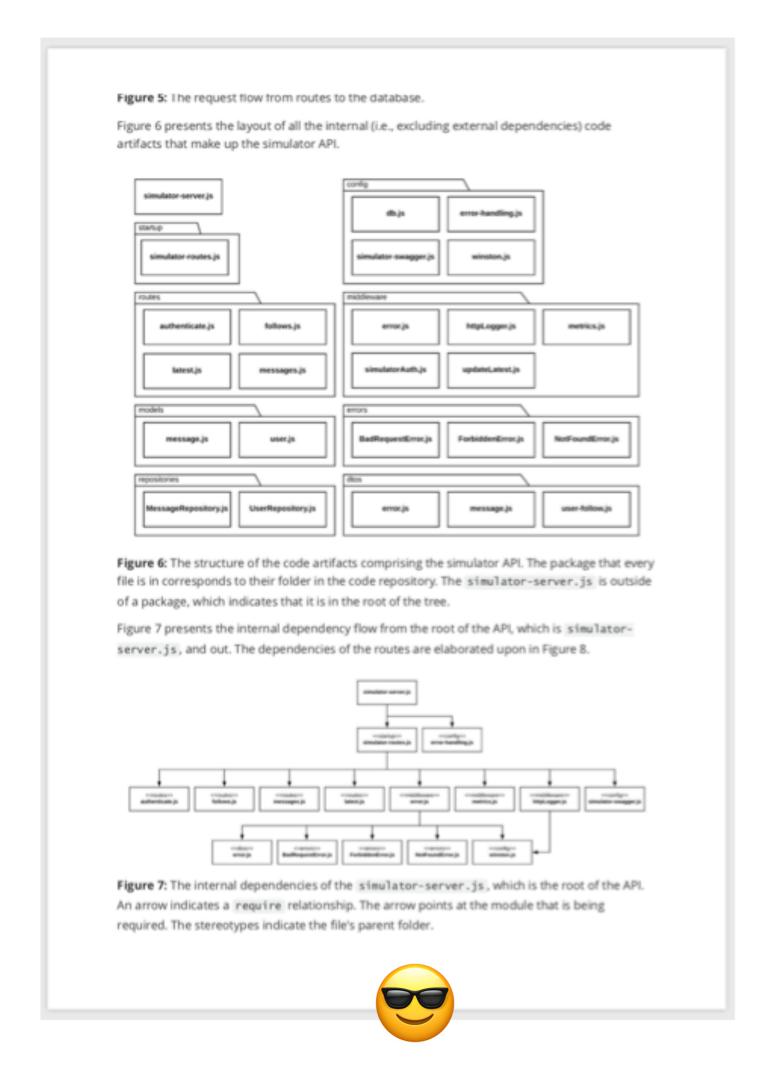

# Use multiple views for the same viewpoint

To make complexity more manageable

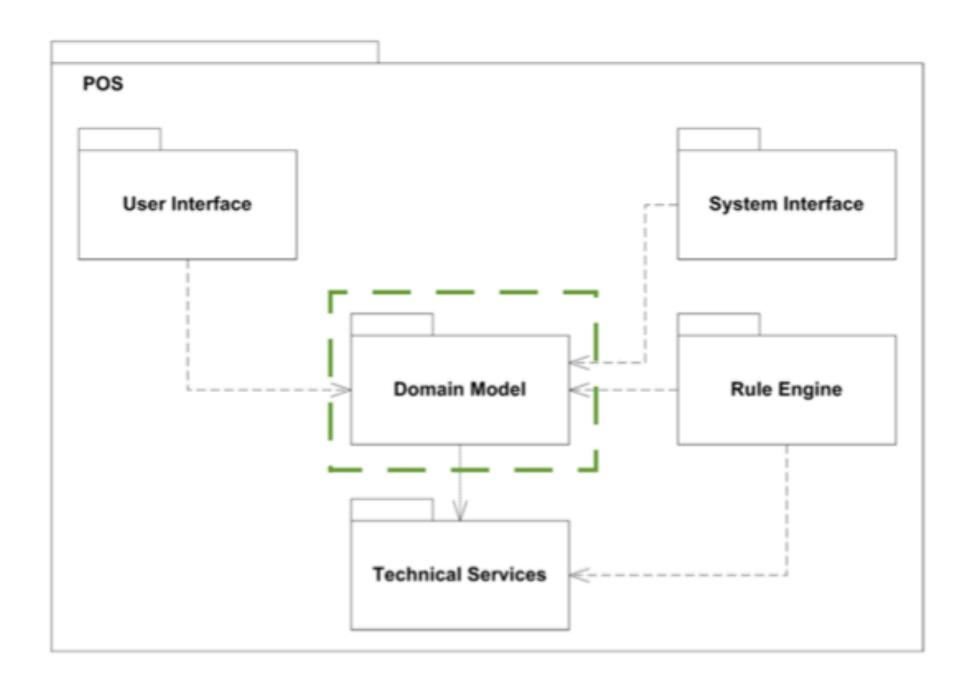

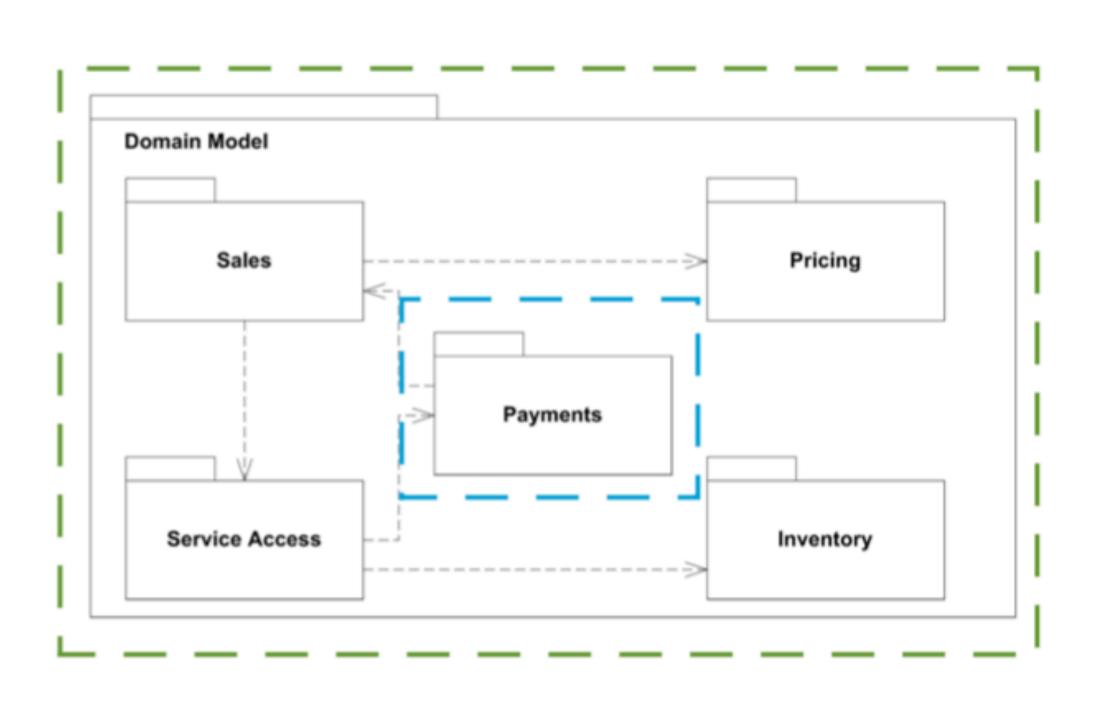

## References

- An Approach to Software Architecture Description Using UML Revision 2.0. Henrik Bærbak Christensen, Aino Corry, and Klaus Marius Hansen
- 2. Architectural Blueprints—The "4+1" View Model of Software Architecture. Philippe Kruchten
- 3. <a href="https://www.uml-diagrams.org">https://www.uml-diagrams.org</a>
  - 1. <u>Deployment Diagrams</u>
  - 2. Component Diagrams
- 4. Writing Guidelines. M. Lungu (Github)

# UML Deployment Diagram

