Hardware Locality (hwloc)

Generated by Doxygen 1.9.4

1 Hardware Locality	1
1.1 Introduction	1
1.2 Installation	1
1.2.1 Basic Installation	1
1.2.2 Installing from a Git clone	2
1.3 Questions and Bugs	2
2 Hardware Locality (hwloc) Introduction	3
2.1 hwloc Summary	3
2.2 hwloc Installation	4
2.3 Command-line Examples	5
2.4 Programming Interface	7
2.4.1 Portability	7
2.4.2 API Example	8
2.5 History / Credits	10
2.6 Further Reading	10
3 Terms and Definitions	13
3.1 Objects	13
3.2 Indexes and Sets	13
3.3 Hierarchy, Tree and Levels	14
4 Command-Line Tools	17
4.1 Istopo and Istopo-no-graphics	17
4.2 hwloc-bind	17
4.3 hwloc-calc	17
4.4 hwloc-info	18
4.5 hwloc-distrib	18
4.6 hwloc-ps	18
4.7 hwloc-annotate	18
4.8 hwloc-diff, hwloc-patch and hwloc-compress-dir	18
4.9 hwloc-dump-hwdata	18
4.10 hwloc-gather-topology and hwloc-gather-cpuid	18
5 Environment Variables	21
6 CPU and Memory Binding Overview	25
6.1 Binding Policies and Portability	25
6.2 Joint CPU and Memory Binding (or not)	25
6.3 Current Memory Binding Policy	
7 I/O Devices	27
7.1 Enabling and requirements	27
7.2 I/O objects	27

7.3 OS devices	27
7.4 PCI devices and bridges	29
7.5 Consulting I/O devices and binding	29
7.6 Examples	29
8 Miscellaneous objects	33
8.1 Misc objects added by hwloc	33
8.2 Annotating topologies with Misc objects	33
9 Object attributes	35
9.1 Normal attributes	35
9.2 Custom string infos	35
9.2.1 Hardware Platform Information	36
9.2.2 Operating System Information	36
9.2.3 hwloc Information	36
9.2.4 CPU Information	36
9.2.5 OS Device Information	37
9.2.6 Other Object-specific Information	38
9.2.7 User-Given Information	38
10 Topology Attributes: Distances, Memory Attributes and CPU Kinds	39
10.1 Distances	39
10.2 Memory Attributes	40
10.3 CPU Kinds	40
11 Importing and exporting topologies from/to XML files	43
11.1 libxml2 and minimalistic XML backends	43
11.2 XML import error management	44
12 Synthetic topologies	45
12.1 Synthetic description string	45
12.2 Loading a synthetic topology	46
12.3 Exporting a topology as a synthetic string	46
13 Interoperability With Other Software	47
14 Thread Safety	49
15 Components and plugins	51
15.1 Components enabled by default	51
15.2 Selecting which components to use	51
15.3 Loading components from plugins	52
15.4 Existing components and plugins	52
16 Embedding hwloc in Other Software	55
16.1 Using hwloc's M4 Embedding Capabilities	55

17.1 Concents	5 :
17.1 Concepts	5
17.1.2 What may I disable to make hwloc faster?	5
17.1.3 Should I use logical or physical/OS indexes? and how?	6
17.1.3 Should ruse logical or physical/OS indexes? and now?	
17.1.4 hwloc is only a structural model, it ignores performance models, memory bandwidth, etc.?	6
17.1.6 What are these Group objects in my topology?	6
17.1.7 What happens if my topology is asymmetric?	6
17.1.8 What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system?	6
17.1.9 How may I ignore symmetric multithreading, hyper-threading, etc. in hwloc?	62
17.2 Advanced	63
17.2.1 I do not want hwloc to rediscover my enormous machine topology every time I rerun a proces	s 6:
17.2.2 How many topologies may I use in my program?	6
17.2.3 How to avoid memory waste when manipulating multiple similar topologies?	6
17.2.4 How do I annotate the topology with private notes?	6
17.2.5 How do I create a custom heterogeneous and asymmetric topology?	6
7.3 Caveats	6
17.3.1 Why is Istopo slow?	6
17.3.2 Does hwloc require privileged access?	6
17.3.3 What should I do when hwloc reports "operating system" warnings?	6
17.3.4 Why does Valgrind complain about hwloc memory leaks?	6
7.4 Platform-specific	6
17.4.1 How do I enable ROCm SMI and select which version to use?	6
17.4.2 How do I enable CUDA and select which CUDA version to use?	6
17.4.3 How do I find the local MCDRAM NUMA node on Intel Xeon Phi processor?	6
17.4.4 Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?	6
17.4.5 How do I build hwloc for BlueGene/Q?	6
17.4.6 How do I build hwloc for Windows?	6
17.4.7 How to get useful topology information on NetBSD?	6
17.4.8 Why does binding fail on AIX?	6
7.5 Compatibility between hwloc versions	6
17.5.1 How do I handle API changes?	6
17.5.2 What is the difference between API and library version numbers?	6
17.5.3 How do I handle ABI breaks?	6
17.5.4 Are XML topology files compatible between hwloc releases?	70
	70
17.5.5 Are synthetic strings compatible between hwloc releases?	• •

18.1 New Organization of NUMA nodes and Memory	71
18.1.1 Memory children	71
18.1.2 Examples	71
18.1.3 NUMA level and depth	72
18.1.4 Finding Local NUMA nodes and looking at Children and Parents	72
18.2 4 Kinds of Objects and Children	73
18.2.1 I/O and Misc children	73
18.2.2 Kinds of objects	73
18.3 HWLOC_OBJ_CACHE replaced	73
18.4 allowed_cpuset and allowed_nodeset only in the main topology	74
18.5 Object depths are now signed int	74
18.6 Memory attributes become NUMANode-specific	74
18.7 Topology configuration changes	74
18.8 XML changes	75
18.9 Distances API totally rewritten	75
18.10 Return values of functions	75
18.11 Misc API changes	75
18.12 API removals and deprecations	76
19 Network Locality (netloc)	77
19.1 Netloc Summary	
19.1.1 Supported Networks	
19.2 Netloc Installation	
19.3 Setup	
19.4 Topology display	79
19.4.1 Generate the JSON file	79
19.4.2 Using netloc_draw	79
20 Netloc with Scotch	81
20.1 Introduction	_
20.2 Setup	
20.3 Tools and API	
20.3.1 Build Scotch architectures	
20.3.2 Build Scotch sub-architectures	_
20.3.3 Mapping of processes	
20.0.0 Mapping of processes	02
21 Module Index	83
21.1 Modules	83
22 Data Structure Index	85
22.1 Data Structures	85
23 Module Documentation	87
23.1 Error reporting in the API	87

23.2 API version	87
23.2.1 Detailed Description	87
23.2.2 Macro Definition Documentation	87
23.2.2.1 HWLOC_API_VERSION	87
23.2.2.2 HWLOC_COMPONENT_ABI	87
23.2.3 Function Documentation	88
23.2.3.1 hwloc_get_api_version()	88
23.3 Object Sets (hwloc_cpuset_t and hwloc_nodeset_t)	88
23.3.1 Detailed Description	88
23.3.2 Typedef Documentation	88
23.3.2.1 hwloc_const_cpuset_t	88
23.3.2.2 hwloc_const_nodeset_t	88
23.3.2.3 hwloc_cpuset_t	88
23.3.2.4 hwloc_nodeset_t	89
23.4 Object Types	89
23.4.1 Detailed Description	89
23.4.2 Macro Definition Documentation	89
23.4.2.1 HWLOC_TYPE_UNORDERED	89
23.4.3 Typedef Documentation	90
23.4.3.1 hwloc_obj_bridge_type_t	90
23.4.3.2 hwloc_obj_cache_type_t	90
23.4.3.3 hwloc_obj_osdev_type_t	90
23.4.4 Enumeration Type Documentation	90
23.4.4.1 hwloc_obj_bridge_type_e	90
23.4.4.2 hwloc_obj_cache_type_e	90
23.4.4.3 hwloc_obj_osdev_type_e	90
23.4.4.4 hwloc_obj_type_t	91
23.4.5 Function Documentation	92
23.4.5.1 hwloc_compare_types()	93
23.5 Object Structure and Attributes	93
23.5.1 Detailed Description	93
23.5.2 Typedef Documentation	93
23.5.2.1 hwloc_obj_t	93
23.6 Topology Creation and Destruction	93
23.6.1 Detailed Description	94
23.6.2 Typedef Documentation	94
23.6.2.1 hwloc_topology_t	94
23.6.3 Function Documentation	94
23.6.3.1 hwloc_topology_abi_check()	94
23.6.3.2 hwloc_topology_check()	94
23.6.3.3 hwloc_topology_destroy()	95
23.6.3.4 hwloc_topology_dup()	95

23.6.3.5 hwloc_topology_init()	95
23.6.3.6 hwloc_topology_load()	95
23.7 Object levels, depths and types	96
23.7.1 Detailed Description	96
23.7.2 Enumeration Type Documentation	97
23.7.2.1 hwloc_get_type_depth_e	97
23.7.3 Function Documentation	97
23.7.3.1 hwloc_get_depth_type()	97
23.7.3.2 hwloc_get_memory_parents_depth()	97
23.7.3.3 hwloc_get_nbobjs_by_depth()	98
23.7.3.4 hwloc_get_nbobjs_by_type()	98
23.7.3.5 hwloc_get_next_obj_by_depth()	98
23.7.3.6 hwloc_get_next_obj_by_type()	98
23.7.3.7 hwloc_get_obj_by_depth()	99
23.7.3.8 hwloc_get_obj_by_type()	99
23.7.3.9 hwloc_get_root_obj()	99
23.7.3.10 hwloc_get_type_depth()	99
23.7.3.11 hwloc_get_type_or_above_depth()	100
23.7.3.12 hwloc_get_type_or_below_depth()	100
23.7.3.13 hwloc_topology_get_depth()	100
23.8 Converting between Object Types and Attributes, and Strings	100
23.8.1 Detailed Description	101
23.8.2 Function Documentation	101
23.8.2.1 hwloc_obj_attr_snprintf()	101
23.8.2.2 hwloc_obj_type_snprintf()	101
23.8.2.3 hwloc_obj_type_string()	101
23.8.2.4 hwloc_type_sscanf()	102
23.8.2.5 hwloc_type_sscanf_as_depth()	102
23.9 Consulting and Adding Info Attributes	102
23.9.1 Detailed Description	103
23.9.2 Function Documentation	103
23.9.2.1 hwloc_obj_add_info()	103
23.9.2.2 hwloc_obj_get_info_by_name()	103
23.10 CPU binding	103
23.10.1 Detailed Description	104
23.10.2 Enumeration Type Documentation	104
23.10.2.1 hwloc_cpubind_flags_t	104
23.10.3 Function Documentation	105
23.10.3.1 hwloc_get_cpubind()	105
23.10.3.2 hwloc_get_last_cpu_location()	105
23.10.3.3 hwloc_get_proc_cpubind()	
23.10.3.4 hwloc_get_proc_last_cpu_location()	

23.10.3.5 hwloc_get_thread_cpubind()	07
23.10.3.6 hwloc_set_cpubind()	07
23.10.3.7 hwloc_set_proc_cpubind()	07
23.10.3.8 hwloc_set_thread_cpubind()	80
23.11 Memory binding	80
23.11.1 Detailed Description	09
23.11.2 Enumeration Type Documentation	09
23.11.2.1 hwloc_membind_flags_t	09
23.11.2.2 hwloc_membind_policy_t	10
23.11.3 Function Documentation	11
23.11.3.1 hwloc_alloc()	11
23.11.3.2 hwloc_alloc_membind()	11
23.11.3.3 hwloc_alloc_membind_policy()	12
23.11.3.4 hwloc_free()	12
23.11.3.5 hwloc_get_area_membind()	12
23.11.3.6 hwloc_get_area_memlocation()	13
23.11.3.7 hwloc_get_membind()	13
23.11.3.8 hwloc_get_proc_membind()	14
23.11.3.9 hwloc_set_area_membind()	14
23.11.3.10 hwloc_set_membind()	15
23.11.3.11 hwloc_set_proc_membind()	15
23.12 Changing the Source of Topology Discovery	15
23.12.1 Detailed Description	16
23.12.2 Enumeration Type Documentation	16
23.12.2.1 hwloc_topology_components_flag_e	16
23.12.3 Function Documentation	16
23.12.3.1 hwloc_topology_set_components()	16
23.12.3.2 hwloc_topology_set_pid()	17
23.12.3.3 hwloc_topology_set_synthetic()	17
23.12.3.4 hwloc_topology_set_xml()	17
23.12.3.5 hwloc_topology_set_xmlbuffer()	18
23.13 Topology Detection Configuration and Query	18
23.13.1 Detailed Description	19
23.13.2 Enumeration Type Documentation	19
23.13.2.1 hwloc_topology_flags_e	19
23.13.2.2 hwloc_type_filter_e	23
23.13.3 Function Documentation	23
23.13.3.1 hwloc_topology_get_flags()	24
23.13.3.2 hwloc_topology_get_support()	24
23.13.3.3 hwloc_topology_get_type_filter()	24
23.13.3.4 hwloc_topology_get_userdata()	25
23.13.3.5 hwloc_topology_is_thissystem()	25

23.13.3.6 hwloc_topology_set_all_types_filter()	125
23.13.3.7 hwloc_topology_set_cache_types_filter()	125
23.13.3.8 hwloc_topology_set_flags()	126
23.13.3.9 hwloc_topology_set_icache_types_filter()	126
23.13.3.10 hwloc_topology_set_io_types_filter()	126
23.13.3.11 hwloc_topology_set_type_filter()	126
23.13.3.12 hwloc_topology_set_userdata()	127
23.14 Modifying a loaded Topology	127
23.14.1 Detailed Description	127
23.14.2 Enumeration Type Documentation	127
23.14.2.1 hwloc_allow_flags_e	127
23.14.2.2 hwloc_restrict_flags_e	128
23.14.3 Function Documentation	128
23.14.3.1 hwloc_obj_add_other_obj_sets()	128
23.14.3.2 hwloc_topology_alloc_group_object()	129
23.14.3.3 hwloc_topology_allow()	129
23.14.3.4 hwloc_topology_insert_group_object()	129
23.14.3.5 hwloc_topology_insert_misc_object()	130
23.14.3.6 hwloc_topology_refresh()	130
23.14.3.7 hwloc_topology_restrict()	131
23.15 Finding Objects inside a CPU set	131
23.15.1 Detailed Description	131
23.15.2 Function Documentation	131
23.15.2.1 hwloc_get_first_largest_obj_inside_cpuset()	132
23.15.2.2 hwloc_get_largest_objs_inside_cpuset()	132
23.15.2.3 hwloc_get_nbobjs_inside_cpuset_by_depth()	132
23.15.2.4 hwloc_get_nbobjs_inside_cpuset_by_type()	132
23.15.2.5 hwloc_get_next_obj_inside_cpuset_by_depth()	133
23.15.2.6 hwloc_get_next_obj_inside_cpuset_by_type()	133
23.15.2.7 hwloc_get_obj_index_inside_cpuset()	134
23.15.2.8 hwloc_get_obj_inside_cpuset_by_depth()	134
23.15.2.9 hwloc_get_obj_inside_cpuset_by_type()	134
23.16 Finding Objects covering at least CPU set	135
23.16.1 Detailed Description	135
23.16.2 Function Documentation	135
23.16.2.1 hwloc_get_child_covering_cpuset()	135
23.16.2.2 hwloc_get_next_obj_covering_cpuset_by_depth()	135
23.16.2.3 hwloc_get_next_obj_covering_cpuset_by_type()	136
23.16.2.4 hwloc_get_obj_covering_cpuset()	136
23.17 Looking at Ancestor and Child Objects	136
23.17.1 Detailed Description	136
23.17.2 Function Documentation	136

23.17.2.1 hwloc_get_and	estor_obj_by_depth()	137
23.17.2.2 hwloc_get_and	estor_obj_by_type()	137
23.17.2.3 hwloc_get_con	nmon_ancestor_obj()	137
23.17.2.4 hwloc_get_nex	t_child()	138
23.17.2.5 hwloc_obj_is_it	n_subtree()	138
23.18 Kinds of object Type		138
23.18.1 Detailed Description		138
23.18.2 Function Documentation		138
23.18.2.1 hwloc_obj_type	e_is_cache()	139
23.18.2.2 hwloc_obj_type	e_is_dcache()	139
23.18.2.3 hwloc_obj_type	e_is_icache()	139
23.18.2.4 hwloc_obj_type	e_is_io()	139
23.18.2.5 hwloc_obj_type	e_is_memory()	139
23.18.2.6 hwloc_obj_type	e_is_normal()	140
23.19 Looking at Cache Objects		140
23.19.1 Detailed Description		140
23.19.2 Function Documentation		140
23.19.2.1 hwloc_get_cac	he_covering_cpuset()	140
23.19.2.2 hwloc_get_cac	he_type_depth()	140
23.19.2.3 hwloc_get_sha	red_cache_covering_obj()	141
23.20 Finding objects, miscellaneous h	elpers	141
23.20.1 Detailed Description		141
23.20.2 Function Documentation		141
23.20.2.1 hwloc_bitmap_	singlify_per_core()	141
23.20.2.2 hwloc_get_clos	sest_objs()	142
23.20.2.3 hwloc_get_nun	nanode_obj_by_os_index()	142
23.20.2.4 hwloc_get_obj_	_below_array_by_type()	142
23.20.2.5 hwloc_get_obj_	_below_by_type()	143
23.20.2.6 hwloc_get_obj_	_with_same_locality()	143
23.20.2.7 hwloc_get_pu_	obj_by_os_index()	144
23.21 Distributing items over a topology	<i>(</i>	144
23.21.1 Detailed Description		144
23.21.2 Enumeration Type Docum	nentation	144
23.21.2.1 hwloc_distrib_f	lags_e	144
23.21.3 Function Documentation		144
23.21.3.1 hwloc_distrib()		144
23.22 CPU and node sets of entire topo	ologies	145
23.22.1 Detailed Description		145
23.22.2 Function Documentation		145
23.22.2.1 hwloc_topology	v_get_allowed_cpuset()	145
23.22.2.2 hwloc_topology	v_get_allowed_nodeset()	146
23.22.2.3 hwloc_topology	v_get_complete_cpuset()	146

23.22.2.4 hwloc_topology_get_complete_nodeset()	146
23.22.2.5 hwloc_topology_get_topology_cpuset()	147
23.22.2.6 hwloc_topology_get_topology_nodeset()	147
23.23 Converting between CPU sets and node sets	147
23.23.1 Detailed Description	147
23.23.2 Function Documentation	147
23.23.2.1 hwloc_cpuset_from_nodeset()	147
23.23.2.2 hwloc_cpuset_to_nodeset()	148
23.24 Finding I/O objects	148
23.24.1 Detailed Description	148
23.24.2 Function Documentation	148
23.24.2.1 hwloc_bridge_covers_pcibus()	148
23.24.2.2 hwloc_get_next_bridge()	149
23.24.2.3 hwloc_get_next_osdev()	149
23.24.2.4 hwloc_get_next_pcidev()	149
23.24.2.5 hwloc_get_non_io_ancestor_obj()	149
23.24.2.6 hwloc_get_pcidev_by_busid()	150
23.24.2.7 hwloc_get_pcidev_by_busidstring()	150
23.25 The bitmap API	150
23.25.1 Detailed Description	151
23.25.2 Macro Definition Documentation	152
23.25.2.1 hwloc_bitmap_foreach_begin	152
23.25.2.2 hwloc_bitmap_foreach_end	152
23.25.3 Typedef Documentation	152
23.25.3.1 hwloc_bitmap_t	152
23.25.3.2 hwloc_const_bitmap_t	152
23.25.4 Function Documentation	152
23.25.4.1 hwloc_bitmap_allbut()	152
23.25.4.2 hwloc_bitmap_alloc()	152
23.25.4.3 hwloc_bitmap_alloc_full()	153
23.25.4.4 hwloc_bitmap_and()	153
23.25.4.5 hwloc_bitmap_andnot()	153
23.25.4.6 hwloc_bitmap_asprintf()	153
23.25.4.7 hwloc_bitmap_clr()	153
23.25.4.8 hwloc_bitmap_clr_range()	153
23.25.4.9 hwloc_bitmap_compare()	154
23.25.4.10 hwloc_bitmap_compare_first()	154
23.25.4.11 hwloc_bitmap_copy()	154
23.25.4.12 hwloc_bitmap_dup()	154
23.25.4.13 hwloc_bitmap_fill()	155
23.25.4.14 hwloc_bitmap_first()	155
23.25.4.15 hwloc_bitmap_first_unset()	155

23.25.4.16 hwloc_bitmap_free()	55
23.25.4.17 hwloc_bitmap_from_ith_ulong()	55
23.25.4.18 hwloc_bitmap_from_ulong()	55
23.25.4.19 hwloc_bitmap_from_ulongs()	56
23.25.4.20 hwloc_bitmap_intersects()	56
23.25.4.21 hwloc_bitmap_isequal()	56
23.25.4.22 hwloc_bitmap_isfull()	56
23.25.4.23 hwloc_bitmap_isincluded()	56
23.25.4.24 hwloc_bitmap_isset()	57
23.25.4.25 hwloc_bitmap_iszero()	
23.25.4.26 hwloc_bitmap_last()	
23.25.4.27 hwloc_bitmap_last_unset()	57
23.25.4.28 hwloc_bitmap_list_asprintf()	58
23.25.4.29 hwloc_bitmap_list_snprintf()	
23.25.4.30 hwloc_bitmap_list_sscanf()	58
23.25.4.31 hwloc_bitmap_next()	
23.25.4.32 hwloc_bitmap_next_unset()	59
23.25.4.33 hwloc_bitmap_not()	
23.25.4.34 hwloc_bitmap_nr_ulongs()	
23.25.4.35 hwloc_bitmap_only()	
23.25.4.36 hwloc_bitmap_or()	
23.25.4.37 hwloc_bitmap_set()	
23.25.4.38 hwloc_bitmap_set_ith_ulong()	
23.25.4.39 hwloc_bitmap_set_range()	
23.25.4.40 hwloc_bitmap_singlify()	
23.25.4.41 hwloc_bitmap_snprintf()	
23.25.4.42 hwloc_bitmap_sscanf()	
23.25.4.43 hwloc_bitmap_taskset_asprintf()	
23.25.4.44 hwloc_bitmap_taskset_snprintf()	
23.25.4.45 hwloc_bitmap_taskset_sscanf()	
23.25.4.46 hwloc_bitmap_to_ith_ulong()	
23.25.4.47 hwloc_bitmap_to_ulong()	
23.25.4.48 hwloc_bitmap_to_ulongs()	
23.25.4.49 hwloc_bitmap_weight()	
23.25.4.50 hwloc_bitmap_xor()	
23.25.4.51 hwloc_bitmap_zero()	
23.26 Exporting Topologies to XML	
23.26.1 Detailed Description	
23.26.2 Enumeration Type Documentation	
23.26.2.1 hwloc_topology_export_xml_flags_e	
23.26.3 Function Documentation	
23.26.3.1 hwloc_export_obj_userdata()	53

23.26.3.2 hwloc_export_obj_userdata_base64()	. 164
23.26.3.3 hwloc_free_xmlbuffer()	. 164
23.26.3.4 hwloc_topology_export_xml()	. 164
23.26.3.5 hwloc_topology_export_xmlbuffer()	. 165
23.26.3.6 hwloc_topology_set_userdata_export_callback()	. 165
23.26.3.7 hwloc_topology_set_userdata_import_callback()	. 165
23.27 Exporting Topologies to Synthetic	. 166
23.27.1 Detailed Description	. 166
23.27.2 Enumeration Type Documentation	. 166
23.27.2.1 hwloc_topology_export_synthetic_flags_e	. 166
23.27.3 Function Documentation	. 167
23.27.3.1 hwloc_topology_export_synthetic()	. 167
23.28 Retrieve distances between objects	. 167
23.28.1 Detailed Description	. 168
23.28.2 Enumeration Type Documentation	. 168
23.28.2.1 hwloc_distances_kind_e	. 168
23.28.2.2 hwloc_distances_transform_e	. 168
23.28.3 Function Documentation	. 169
23.28.3.1 hwloc_distances_get()	. 169
23.28.3.2 hwloc_distances_get_by_depth()	. 169
23.28.3.3 hwloc_distances_get_by_name()	. 170
23.28.3.4 hwloc_distances_get_by_type()	. 170
23.28.3.5 hwloc_distances_get_name()	. 170
23.28.3.6 hwloc_distances_release()	. 171
23.28.3.7 hwloc_distances_transform()	. 171
23.29 Helpers for consulting distance matrices	. 171
23.29.1 Detailed Description	. 171
23.29.2 Function Documentation	. 171
23.29.2.1 hwloc_distances_obj_index()	. 172
23.29.2.2 hwloc_distances_obj_pair_values()	. 172
23.30 Add distances between objects	. 172
23.30.1 Detailed Description	. 172
23.30.2 Typedef Documentation	. 173
23.30.2.1 hwloc_distances_add_handle_t	. 173
23.30.3 Enumeration Type Documentation	. 173
23.30.3.1 hwloc_distances_add_flag_e	. 173
23.30.4 Function Documentation	. 173
23.30.4.1 hwloc_distances_add_commit()	. 173
23.30.4.2 hwloc_distances_add_create()	. 173
23.30.4.3 hwloc_distances_add_values()	. 174
23.31 Remove distances between objects	. 174
23.31.1 Detailed Description	. 174

23.31.2 Function Documentation	74
23.31.2.1 hwloc_distances_release_remove()	75
23.31.2.2 hwloc_distances_remove()	75
23.31.2.3 hwloc_distances_remove_by_depth()	75
23.31.2.4 hwloc_distances_remove_by_type()	75
23.32 Comparing memory node attributes for finding where to allocate on	75
23.32.1 Detailed Description	76
23.32.2 Typedef Documentation	76
23.32.2.1 hwloc_memattr_id_t	77
23.32.3 Enumeration Type Documentation	77
23.32.3.1 hwloc_local_numanode_flag_e	77
23.32.3.2 hwloc_location_type_e	77
23.32.3.3 hwloc_memattr_id_e	77
23.32.4 Function Documentation	79
23.32.4.1 hwloc_get_local_numanode_objs()	79
23.32.4.2 hwloc_memattr_get_best_initiator()	79
23.32.4.3 hwloc_memattr_get_best_target()	30
23.32.4.4 hwloc_memattr_get_by_name()	30
23.32.4.5 hwloc_memattr_get_value()	30
23.33 Managing memory attributes	31
23.33.1 Detailed Description	31
23.33.2 Enumeration Type Documentation	31
23.33.2.1 hwloc_memattr_flag_e	31
23.33.3 Function Documentation	31
23.33.3.1 hwloc_memattr_get_flags()	32
23.33.3.2 hwloc_memattr_get_initiators()	32
23.33.3.3 hwloc_memattr_get_name()	32
23.33.3.4 hwloc_memattr_get_targets()	33
23.33.3.5 hwloc_memattr_register()	33
23.33.3.6 hwloc_memattr_set_value()	34
23.34 Kinds of CPU cores	34
23.34.1 Detailed Description	34
23.34.2 Function Documentation	35
23.34.2.1 hwloc_cpukinds_get_by_cpuset()	35
23.34.2.2 hwloc_cpukinds_get_info()	35
23.34.2.3 hwloc_cpukinds_get_nr()	36
23.34.2.4 hwloc_cpukinds_register()	36
23.35 Linux-specific helpers	36
23.35.1 Detailed Description	36
23.35.2 Function Documentation	37
23.35.2.1 hwloc_linux_get_tid_cpubind()	37
23.35.2.2 hwloc_linux_get_tid_last_cpu_location()	37

23.35.2.3 hwloc_linux_read_path_as_cpumask()	87
23.35.2.4 hwloc_linux_set_tid_cpubind()	88
23.36 Interoperability with Linux libnuma unsigned long masks	88
23.36.1 Detailed Description	88
23.36.2 Function Documentation	88
23.36.2.1 hwloc_cpuset_from_linux_libnuma_ulongs()	88
23.36.2.2 hwloc_cpuset_to_linux_libnuma_ulongs()	89
23.36.2.3 hwloc_nodeset_from_linux_libnuma_ulongs()	89
23.36.2.4 hwloc_nodeset_to_linux_libnuma_ulongs()	89
23.37 Interoperability with Linux libnuma bitmask	90
23.37.1 Detailed Description	90
23.37.2 Function Documentation	90
23.37.2.1 hwloc_cpuset_from_linux_libnuma_bitmask()	90
23.37.2.2 hwloc_cpuset_to_linux_libnuma_bitmask()	90
23.37.2.3 hwloc_nodeset_from_linux_libnuma_bitmask()	91
23.37.2.4 hwloc_nodeset_to_linux_libnuma_bitmask()	91
23.38 Windows-specific helpers	91
23.38.1 Detailed Description	91
23.38.2 Function Documentation	91
23.38.2.1 hwloc_windows_get_nr_processor_groups()	91
23.38.2.2 hwloc_windows_get_processor_group_cpuset()	92
23.39 Interoperability with glibc sched affinity	92
23.39.1 Detailed Description	92
23.39.2 Function Documentation	92
23.39.2.1 hwloc_cpuset_from_glibc_sched_affinity()	92
23.39.2.2 hwloc_cpuset_to_glibc_sched_affinity()	93
23.40 Interoperability with OpenCL	93
23.40.1 Detailed Description	93
23.40.2 Function Documentation	93
23.40.2.1 hwloc_opencl_get_device_cpuset()	93
23.40.2.2 hwloc_opencl_get_device_osdev()	94
23.40.2.3 hwloc_opencl_get_device_osdev_by_index()	94
23.40.2.4 hwloc_opencl_get_device_pci_busid()	95
23.41 Interoperability with the CUDA Driver API	95
23.41.1 Detailed Description	95
23.41.2 Function Documentation	95
23.41.2.1 hwloc_cuda_get_device_cpuset()	95
23.41.2.2 hwloc_cuda_get_device_osdev()	96
23.41.2.3 hwloc_cuda_get_device_osdev_by_index()	96
23.41.2.4 hwloc_cuda_get_device_pci_ids()	96
23.41.2.5 hwloc_cuda_get_device_pcidev()	97
23.42 Interoperability with the CUDA Buntime API	97

23.42.1 Detailed Description
23.42.2 Function Documentation
23.42.2.1 hwloc_cudart_get_device_cpuset()
23.42.2.2 hwloc_cudart_get_device_osdev_by_index()
23.42.2.3 hwloc_cudart_get_device_pci_ids()
23.42.2.4 hwloc_cudart_get_device_pcidev()
23.43 Interoperability with the NVIDIA Management Library
23.43.1 Detailed Description
23.43.2 Function Documentation
23.43.2.1 hwloc_nvml_get_device_cpuset()
23.43.2.2 hwloc_nvml_get_device_osdev()
23.43.2.3 hwloc_nvml_get_device_osdev_by_index()
23.44 Interoperability with the ROCm SMI Management Library
23.44.1 Detailed Description
23.44.2 Function Documentation
23.44.2.1 hwloc_rsmi_get_device_cpuset()
23.44.2.2 hwloc_rsmi_get_device_osdev()
23.44.2.3 hwloc_rsmi_get_device_osdev_by_index()
23.45 Interoperability with the oneAPI Level Zero interface
23.45.1 Detailed Description
23.45.2 Function Documentation
23.45.2.1 hwloc_levelzero_get_device_cpuset()
23.45.2.2 hwloc_levelzero_get_device_osdev()
23.46 Interoperability with OpenGL displays
23.46.1 Detailed Description
23.46.2 Function Documentation
23.46.2.1 hwloc_gl_get_display_by_osdev()
23.46.2.2 hwloc_gl_get_display_osdev_by_name()
23.46.2.3 hwloc_gl_get_display_osdev_by_port_device()
23.47 Interoperability with OpenFabrics
23.47.1 Detailed Description
23.47.2 Function Documentation
23.47.2.1 hwloc_ibv_get_device_cpuset()
23.47.2.2 hwloc_ibv_get_device_osdev()
23.47.2.3 hwloc_ibv_get_device_osdev_by_name()
23.48 Topology differences
23.48.1 Detailed Description
23.48.2 Typedef Documentation
23.48.2.1 hwloc_topology_diff_obj_attr_type_t
23.48.2.2 hwloc_topology_diff_t
23.48.2.3 hwloc_topology_diff_type_t
23 48 3 Enumeration Type Documentation

23.48.3.1 hwloc_topology_diff_apply_flags_e
23.48.3.2 hwloc_topology_diff_obj_attr_type_e
23.48.3.3 hwloc_topology_diff_type_e
23.48.4 Function Documentation
23.48.4.1 hwloc_topology_diff_apply()
23.48.4.2 hwloc_topology_diff_build()
23.48.4.3 hwloc_topology_diff_destroy()
23.48.4.4 hwloc_topology_diff_export_xml()
23.48.4.5 hwloc_topology_diff_export_xmlbuffer()
23.48.4.6 hwloc_topology_diff_load_xml()
23.48.4.7 hwloc_topology_diff_load_xmlbuffer()
23.49 Sharing topologies between processes
23.49.1 Detailed Description
23.49.2 Function Documentation
23.49.2.1 hwloc_shmem_topology_adopt()
23.49.2.2 hwloc_shmem_topology_get_length()
23.49.2.3 hwloc_shmem_topology_write()
23.50 Components and Plugins: Discovery components
23.50.1 Detailed Description
23.51 Components and Plugins: Discovery backends
23.51.1 Detailed Description
23.51.2 Typedef Documentation
23.51.2.1 hwloc_disc_phase_t
23.51.3 Enumeration Type Documentation
23.51.3.1 hwloc_disc_phase_e
23.51.3.2 hwloc_disc_status_flag_e
23.51.4 Function Documentation
23.51.4.1 hwloc_backend_alloc()
23.51.4.2 hwloc_backend_enable()
23.52 Components and Plugins: Generic components
23.52.1 Detailed Description
23.52.2 Typedef Documentation
23.52.2.1 hwloc_component_type_t
23.52.3 Enumeration Type Documentation
23.52.3.1 hwloc_component_type_e
23.53 Components and Plugins: Core functions to be used by components
23.53.1 Detailed Description
23.53.2 Macro Definition Documentation
23.53.2.1 HWLOC_SHOW_ALL_ERRORS
23.53.2.2 HWLOC_SHOW_CRITICAL_ERRORS
23.53.3 Function Documentation
23.53.3.1 hwlocinsert_object_by_cpuset()

23.53.3.2 hwloc_alloc_setup_object()	215
23.53.3.3 hwloc_hide_errors()	215
23.53.3.4 hwloc_insert_object_by_parent()	215
23.53.3.5 hwloc_obj_add_children_sets()	216
23.53.3.6 hwloc_plugin_check_namespace()	216
23.53.3.7 hwloc_topology_reconnect()	216
23.54 Components and Plugins: Filtering objects	216
23.54.1 Detailed Description	217
23.54.2 Function Documentation	217
23.54.2.1 hwloc_filter_check_keep_object()	217
23.54.2.2 hwloc_filter_check_keep_object_type()	217
23.54.2.3 hwloc_filter_check_osdev_subtype_important()	217
23.54.2.4 hwloc_filter_check_pcidev_subtype_important()	217
23.55 Components and Plugins: helpers for PCI discovery	217
23.55.1 Detailed Description	218
23.55.2 Function Documentation	218
23.55.2.1 hwloc_pcidisc_check_bridge_type()	218
23.55.2.2 hwloc_pcidisc_find_bridge_buses()	218
23.55.2.3 hwloc_pcidisc_find_cap()	218
23.55.2.4 hwloc_pcidisc_find_linkspeed()	218
23.55.2.5 hwloc_pcidisc_tree_attach()	219
23.55.2.6 hwloc_pcidisc_tree_insert_by_busid()	219
23.56 Components and Plugins: finding PCI objects during other discoveries	219
23.56.1 Detailed Description	219
23.56.2 Typedef Documentation	219
23.56.2.1 hwloc_backend_distances_add_handle_t	219
23.56.3 Function Documentation	219
23.56.3.1 hwloc_backend_distances_add_commit()	220
23.56.3.2 hwloc_backend_distances_add_create()	220
23.56.3.3 hwloc_backend_distances_add_values()	220
23.56.3.4 hwloc_pci_find_by_busid()	220
23.56.3.5 hwloc_pci_find_parent_by_busid()	220
23.57 Netloc API	221
23.57.1 Detailed Description	221
23.57.2 Enumeration Type Documentation	221
23.57.2.1 anonymous enum	221
24 Data Structure Documentation	223
24.1 hwloc_backend Struct Reference	223
24.1.1 Detailed Description	223
24.1.2 Field Documentation	
24.1.2.1 disable	223

24.1.2.2 discover		 223
24.1.2.3 flags		 224
24.1.2.4 get_pci_busid_cpuset		 224
24.1.2.5 is_thissystem		 224
24.1.2.6 phases		 224
24.1.2.7 private_data		 224
24.2 hwloc_obj_attr_u::hwloc_bridge_attr_s Struct Refere	nce	 224
24.2.1 Detailed Description		 225
24.2.2 Field Documentation		 225
24.2.2.1 depth		 225
24.2.2.2 domain		 225
24.2.2.3		 225
24.2.2.4 downstream_type		 225
24.2.2.5 pci [1/2]		 225
24.2.2.6 [2/2]		 225
24.2.2.7 secondary_bus		 225
24.2.2.8 subordinate_bus		 225
24.2.2.9		 225
24.2.2.10 upstream_type		 225
24.3 hwloc_obj_attr_u::hwloc_cache_attr_s Struct Refere	nce	 226
24.3.1 Detailed Description		 226
24.3.2 Field Documentation		 226
24.3.2.1 associativity		 226
24.3.2.2 depth		 226
24.3.2.3 linesize		 226
24.3.2.4 size		 226
24.3.2.5 type		 226
24.4 hwloc_cl_device_topology_amd Union Reference .		 226
24.4.1 Field Documentation		 227
24.4.1.1 bus		 227
24.4.1.2 data		 227
24.4.1.3 device		 227
24.4.1.4 function		 227
24.4.1.5		 227
24.4.1.6		 227
24.4.1.7 type		 227
24.4.1.8 unused		 227
24.5 hwloc_component Struct Reference		 228
24.5.1 Detailed Description		 228
24.5.2 Field Documentation		 228
24.5.2.1 abi		 228
24 5 2 2 data		228

24.5.2.3 finalize	228
24.5.2.4 flags	228
24.5.2.5 init	229
24.5.2.6 type	229
24.6 hwloc_disc_component Struct Reference	229
24.6.1 Detailed Description	229
24.6.2 Field Documentation	229
24.6.2.1 enabled_by_default	229
24.6.2.2 excluded_phases	230
24.6.2.3 instantiate	230
24.6.2.4 name	230
24.6.2.5 phases	230
24.6.2.6 priority	230
24.7 hwloc_disc_status Struct Reference	230
24.7.1 Detailed Description	230
24.7.2 Field Documentation	230
24.7.2.1 excluded_phases	231
24.7.2.2 flags	231
24.7.2.3 phase	231
24.8 hwloc_distances_s Struct Reference	231
24.8.1 Detailed Description	231
24.8.2 Field Documentation	231
24.8.2.1 kind	231
24.8.2.2 nbobjs	232
24.8.2.3 objs	232
24.8.2.4 values	232
24.9 hwloc_obj_attr_u::hwloc_group_attr_s Struct Reference	232
24.9.1 Detailed Description	232
24.9.2 Field Documentation	232
24.9.2.1 depth	232
24.9.2.2 dont_merge	232
24.9.2.3 kind	232
24.9.2.4 subkind	233
24.10 hwloc_info_s Struct Reference	233
24.10.1 Detailed Description	233
24.10.2 Field Documentation	233
24.10.2.1 name	233
24.10.2.2 value	233
24.11 hwloc_location Struct Reference	233
24.11.1 Detailed Description	233
24.11.2 Field Documentation	234
24 11 2 1 location	23/

24.11.2.2 type	234
24.12 hwloc_location::hwloc_location_u Union Reference	234
24.12.1 Detailed Description	234
24.12.2 Field Documentation	234
24.12.2.1 cpuset	234
24.12.2.2 object	234
24.13 hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s Struct Reference	234
24.13.1 Detailed Description	235
24.13.2 Field Documentation	235
24.13.2.1 count	235
24.13.2.2 size	235
24.14 hwloc_obj_attr_u::hwloc_numanode_attr_s Struct Reference	235
24.14.1 Detailed Description	235
24.14.2 Field Documentation	235
24.14.2.1 local_memory	235
24.14.2.2 page_types	235
24.14.2.3 page_types_len	236
24.15 hwloc_obj Struct Reference	236
24.15.1 Detailed Description	237
24.15.2 Field Documentation	237
24.15.2.1 arity	237
24.15.2.2 attr	237
24.15.2.3 children	237
24.15.2.4 complete_cpuset	237
24.15.2.5 complete_nodeset	237
24.15.2.6 cpuset	238
24.15.2.7 depth	238
24.15.2.8 first_child	238
24.15.2.9 gp_index	238
24.15.2.10 infos	238
24.15.2.11 infos_count	238
24.15.2.12 io_arity	238
24.15.2.13 io_first_child	239
24.15.2.14 last_child	239
24.15.2.15 logical_index	239
24.15.2.16 memory_arity	239
24.15.2.17 memory_first_child	239
24.15.2.18 misc_arity	239
24.15.2.19 misc_first_child	239
24.15.2.20 name	239
24.15.2.21 next_cousin	239
24.15.2.22 next_sibling	240

24.15.2.23 nodeset	240
24.15.2.24 os_index	240
24.15.2.25 parent	240
24.15.2.26 prev_cousin	240
24.15.2.27 prev_sibling	240
24.15.2.28 sibling_rank	240
24.15.2.29 subtype	241
24.15.2.30 symmetric_subtree	241
24.15.2.31 total_memory	241
24.15.2.32 type	241
24.15.2.33 userdata	241
24.16 hwloc_obj_attr_u Union Reference	241
24.16.1 Detailed Description	242
24.16.2 Field Documentation	242
24.16.2.1 bridge	242
24.16.2.2 cache	242
24.16.2.3 group	242
24.16.2.4 numanode	242
24.16.2.5 osdev	242
24.16.2.6 pcidev	242
24.17 hwloc_obj_attr_u::hwloc_osdev_attr_s Struct Reference	242
24.17.1 Detailed Description	242
24.17.2 Field Documentation	242
24.17.2.1 type	243
24.18 hwloc_obj_attr_u::hwloc_pcidev_attr_s Struct Reference	243
24.18.1 Detailed Description	243
24.18.2 Field Documentation	243
24.18.2.1 bus	243
24.18.2.2 class_id	243
24.18.2.3 dev	243
24.18.2.4 device_id	243
24.18.2.5 domain	243
24.18.2.6 func	244
24.18.2.7 linkspeed	244
24.18.2.8 revision	244
24.18.2.9 subdevice_id	244
24.18.2.10 subvendor_id	244
24.18.2.11 vendor_id	244
24.19 hwloc_topology_cpubind_support Struct Reference	244
24.19.1 Detailed Description	244
24.19.2 Field Documentation	244
24.19.2.1 get proc couplind	2/15

24.19.2.2 get_proc_last_cpu_location	 245
24.19.2.3 get_thisproc_cpubind	 245
24.19.2.4 get_thisproc_last_cpu_location	 245
24.19.2.5 get_thisthread_cpubind	 245
24.19.2.6 get_thisthread_last_cpu_location	 245
24.19.2.7 get_thread_cpubind	 245
24.19.2.8 set_proc_cpubind	 245
24.19.2.9 set_thisproc_cpubind	 245
24.19.2.10 set_thisthread_cpubind	 245
24.19.2.11 set_thread_cpubind	 245
24.20 hwloc_topology_diff_u::hwloc_topology_diff_generic_s Struct Reference	 246
24.20.1 Field Documentation	 246
24.20.1.1 next	 246
24.20.1.2 type	 246
24.21 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s Struct Reference	 246
24.21.1 Field Documentation	 246
24.21.1.1 type	 246
24.22 hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s Struct Reference	 246
24.22.1 Field Documentation	 247
24.22.1.1 diff	 247
24.22.1.2 next	 247
24.22.1.3 obj_depth	 247
24.22.1.4 obj_index	 247
24.22.1.5 type	 247
24.23 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s Struct Reference	 247
24.23.1 Detailed Description	 247
24.23.2 Field Documentation	 247
24.23.2.1 name	 248
24.23.2.2 newvalue	 248
24.23.2.3 oldvalue	 248
24.23.2.4 type	 248
24.24 hwloc_topology_diff_obj_attr_u Union Reference	 248
24.24.1 Detailed Description	 248
24.24.2 Field Documentation	 248
24.24.2.1 generic	 248
24.24.2.2 string	 248
24.24.2.3 uint64	 249
24.25 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s Struct Reference	 249
24.25.1 Detailed Description	 249
24.25.2 Field Documentation	 249
24.25.2.1 index	 249
24.25.2.2 newvalue	 249

24.25.2.3 oldvalue
24.25.2.4 type
24.26 hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s Struct Reference
24.26.1 Field Documentation
24.26.1.1 next
24.26.1.2 obj_depth
24.26.1.3 obj_index
24.26.1.4 type
24.27 hwloc_topology_diff_u Union Reference
24.27.1 Detailed Description
24.27.2 Field Documentation
24.27.2.1 generic
24.27.2.2 obj_attr
24.27.2.3 too_complex
24.28 hwloc_topology_discovery_support Struct Reference
24.28.1 Detailed Description
24.28.2 Field Documentation
24.28.2.1 cpukind_efficiency
24.28.2.2 disallowed_numa
24.28.2.3 disallowed_pu
24.28.2.4 numa
24.28.2.5 numa_memory
24.28.2.6 pu
24.29 hwloc_topology_membind_support Struct Reference
24.29.1 Detailed Description
24.29.2 Field Documentation
24.29.2.1 alloc_membind
24.29.2.2 bind_membind
24.29.2.3 firsttouch_membind
24.29.2.4 get_area_membind
24.29.2.5 get_area_memlocation
24.29.2.6 get_proc_membind
24.29.2.7 get_thisproc_membind
24.29.2.8 get_thisthread_membind
24.29.2.9 interleave_membind
24.29.2.10 migrate_membind
24.29.2.11 nexttouch_membind
24.29.2.12 set_area_membind
24.29.2.13 set_proc_membind
24.29.2.14 set_thisproc_membind
24.29.2.15 set_thisthread_membind
24.30 hwloc topology misc support Struct Reference 254

	24.30.1 Detailed Description	54
	24.30.2 Field Documentation	54
	24.30.2.1 imported_support	54
24.31	nwloc_topology_support Struct Reference	54
	24.31.1 Detailed Description	54
	24.31.2 Field Documentation	54
	24.31.2.1 cpubind	55
	24.31.2.2 discovery	55
	24.31.2.3 membind	55
	24 31 2 4 misc 25	55

Chapter 1

Hardware Locality

Portable abstraction of parallel architectures for high-performance computing

1.1 Introduction

The Hardware Locality (hwloc) software project aims at easing the process of discovering hardware resources in parallel architectures. It offers command-line tools and a C API for consulting these resources, their locality, attributes, and interconnection. hwloc primarily aims at helping high-performance computing (HPC) applications, but is also applicable to any project seeking to exploit code and/or data locality on modern computing platforms. hwloc is actually made of two subprojects distributed together:

- The original hwloc project for describing the internals of computing nodes. It is described in details starting at section Hardware Locality (hwloc) Introduction.
- The network-oriented companion called netloc (Network Locality), described in details starting with section Network Locality (netloc).

Netloc may be disabled, but the original hwloc cannot. Both hwloc and netloc APIs are documented after these sections.

1.2 Installation

hwloc (https://www.open-mpi.org/projects/hwloc/) is available under the BSD license. It is hosted as a sub-project of the overall Open MPI project (https://www.open-mpi.org/). Note that hwloc does not require any functionality from Open MPI – it is a wholly separate (and much smaller!) project and code base. It just happens to be hosted as part of the overall Open MPI project.

1.2.1 Basic Installation

Installation is the fairly common GNU-based process:

```
shell$ ./configure --prefix=...
shell$ make
shell$ make install
```

hwloc- and netloc-specific configure options and requirements are documented in sections hwloc Installation and Netloc Installation respectively.

Also note that if you install supplemental libraries in non-standard locations, hwloc's configure script may not be able to find them without some help. You may need to specify additional CPPFLAGS, LDFLAGS, or PKG_CONFIG_PATH values on the configure command line.

For example, if libpciaccess was installed into /opt/pciaccess, hwloc's configure script may not find it by default. Try adding PKG_CONFIG_PATH to the ./configure command line, like this:

2 Hardware Locality

```
./configure PKG_CONFIG_PATH=/opt/pciaccess/lib/pkgconfig ...
```

Running the "Istopo" tool is a good way to check as a graphical output whether hwloc properly detected the architecture of your node. Netloc command-line tools can be used to display the network topology interconnecting your nodes.

1.2.2 Installing from a Git clone

Additionally, the code can be directly cloned from Git:

```
shell$ git clone https://github.com/open-mpi/hwloc.git
shell$ cd hwloc
shell$ ./autogen.sh
```

Note that GNU Autoconf >=2.63, Automake >=1.11 and Libtool >=2.2.6 are required when building from a Git clone.

Nightly development snapshots are available on the web site, they can be configured and built without any need for Git or GNU Autotools.

1.3 Questions and Bugs

Bugs should be reported in the tracker (https://github.com/open-mpi/hwloc/issues). Opening a new issue automatically displays lots of hints about how to debug and report issues.

Questions may be sent to the users or developers mailing lists (https://www.open-mpi.org/community/lists/hwloophp).

There is also a #hwloc IRC channel on Libera Chat (irc.libera.chat).

Chapter 2

Hardware Locality (hwloc) Introduction

Portable abstraction of hierarchical architectures for high-performance computing

See also Further Reading for links to more sections about hwloc concepts.

2.1 hwloc Summary

hwloc provides command line tools and a C API to obtain the hierarchical map of key computing elements within a node, such as: NUMA memory nodes, shared caches, processor packages, dies and cores, processing units (logical processors or "threads") and even I/O devices. hwloc also gathers various attributes such as cache and memory information, and is portable across a variety of different operating systems and platforms.

hwloc primarily aims at helping high-performance computing (HPC) applications, but is also applicable to any project seeking to exploit code and/or data locality on modern computing platforms. hwloc supports the following operating systems:

- Linux (with knowledge of cgroups and cpusets, memory targets/initiators, etc.) on all supported hardware, including Intel Xeon Phi, ScaleMP vSMP, and NumaScale NumaConnect.
- · Solaris (with support for processor sets and logical domains)
- AIX
- · Darwin / OS X
- FreeBSD and its variants (such as kFreeBSD/GNU)
- NetBSD
- HP-UX
- Microsoft Windows
- IBM BlueGene/Q Compute Node Kernel (CNK)

Since it uses standard Operating System information, hwloc's support is mostly independant from the processor type (x86, powerpc, ...) and just relies on the Operating System support. The main exception is BSD operating systems (NetBSD, FreeBSD, etc.) because they do not provide support topology information, hence hwloc uses an x86-only CPUID-based backend (which can be used for other OSes too, see the Components and plugins section). To check whether hwloc works on a particular machine, just try to build it and run lstopoorlstopo-no-graphics. If some things do not look right (e.g. bogus or missing cache information), see Questions and Bugs. hwloc only reports the number of processors on unsupported operating systems; no topology information is available.

For development and debugging purposes, hwloc also offers the ability to work on "fake" topologies:

· Symmetrical tree of resources generated from a list of level arities, see Synthetic topologies.

Remote machine simulation through the gathering of topology as XML files, see Importing and exporting topologies from/to XML

hwloc can display the topology in a human-readable format, either in graphical mode (X11), or by exporting in one of several different formats, including: plain text, LaTeX tikzpicture, PDF, PNG, and FIG (see Command-line Examples below). Note that some of the export formats require additional support libraries.

hwloc offers a programming interface for manipulating topologies and objects. It also brings a powerful CPU bitmap API that is used to describe topology objects location on physical/logical processors. See the Programming Interface below. It may also be used to binding applications onto certain cores or memory nodes. Several utility programs are also provided to ease command-line manipulation of topology objects, binding of processes, and so on. Bindings for several other languages are available from the project website.

2.2 hwloc Installation

The generic installation procedure for both hwloc and netloc is described in Installation.

The hwloc command-line tool "Istopo" produces human-readable topology maps, as mentioned above. It can also export maps to the "fig" file format. Support for PDF, Postscript, and PNG exporting is provided if the "Cairo" development package (usually cairo-devel or libcairo2-dev) can be found in "Istopo" when hwloc is configured and build.

The hwloc core may also benefit from the following development packages:


- libpciaccess for full I/O device discovery (libpciaccess-devel or libpciaccess-dev package). On Linux, PCI discovery may still be performed (without vendor/device names) even if libpciaccess cannot be used.
- AMD or NVIDIA OpenCL implementations for OpenCL device discovery.
- the NVIDIA CUDA Toolkit for CUDA device discovery. See How do I enable CUDA and select which CUDA version to use?.
- the NVIDIA Management Library (NVML) for NVML device discovery. It is included in CUDA since version 8.0. Older NVML releases were available within the NVIDIA GPU Deployment Kit from https://developer.nvidia.com/gpu-deployment-kit.
- the NV-CONTROL X extension library (NVCtrl) for NVIDIA display discovery. The relevant development package is usually libXNVCtrl-devel or libxnvctrl-dev. It is also available within nvidia-settings from ftp://download.nvidia.com/XFree86/nvidia-settings/ and https://github.com/NVIDIA/nvidia-settings/.
- the AMD ROCm SMI library for RSMI device discovery. The relevant development package is usually rocm-smi-lib64 or librocm-smi-dev. See How do I enable ROCm SMI and select which version to use?.
- the oneAPI Level Zero library. The relevant development package is usually level-zero-dev or level-zero-devel.
- libxml2 for full XML import/export support (otherwise, the internal minimalistic parser will only be able to import XML files that were exported by the same hwloc release). See Importing and exporting topologies from/to XML files for details. The relevant development package is usually libxml2-devel or libxml2-dev.
- libudev on Linux for easier discovery of OS device information (otherwise hwloc will try to manually parse udev raw files). The relevant development package is usually libudev-devel or libudev-dev.
- libtool's Itdl library for dynamic plugin loading if the native dlopen cannot be used. The relevant development package is usually libtool-ltdl-devel or libltdl-dev.

PCI and XML support may be statically built inside the main hwloc library, or as separate dynamically-loaded plugins (see the Components and plugins section).

Note that because of the possibility of GPL taint, the pciutils library libpci will not be used (remember that hwloc is BSD-licensed).

2.3 Command-line Examples

On a 4-package 2-core machine with hyper-threading, the 1stopo tool may show the following graphical output:

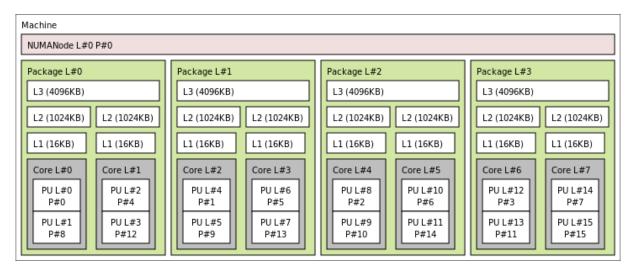


Here's the equivalent output in textual form:

```
Machine
  NUMANode L#0 (P#0)
  Package L#0 + L3 L#0 (4096KB)
   L2 L#0 (1024KB) + L1 L#0 (16KB) + Core L#0
     PU L#0 (P#0)
      PU L#1 (P#8)
    L2 L#1 (1024KB) + L1 L#1 (16KB) + Core L#1
      PU L#2 (P#4)
     PU L#3 (P#12)
  Package L#1 + L3 L#1 (4096KB)
    L2 L#2 (1024KB) + L1 L#2 (16KB) + Core L#2
      PU L#4 (P#1)
     PU L#5 (P#9)
    L2 L#3 (1024KB) + L1 L#3 (16KB) + Core L#3
     PU L#6 (P#5)
      PU L#7 (P#13)
  Package L#2 + L3 L#2 (4096KB)
    L2 L#4 (1024KB) + L1 L#4 (16KB) + Core L#4
      PU L#8 (P#2)
     PU L#9 (P#10)
    L2 L#5 (1024KB) + L1 L#5 (16KB) + Core L#5
     PU L#10 (P#6)
     PU L#11 (P#14)
  Package L#3 + L3 L#3 (4096KB)
    L2 L#6 (1024KB) + L1 L#6 (16KB) + Core L#6
     PU L#12 (P#3)
     PU L#13 (P#11)
    L2 L#7 (1024KB) + L1 L#7 (16KB) + Core L#7
      PU L#14 (P#7)
      PU L#15 (P#15)
```

Note that there is also an equivalent output in XML that is meant for exporting/importing topologies but it is hardly readable to human-beings (see Importing and exporting topologies from/to XML files for details).


On a 4-package 2-core Opteron NUMA machine (with two core cores disallowed by the administrator), the lstopo tool may show the following graphical output (with --disallowed for displaying disallowed objects):

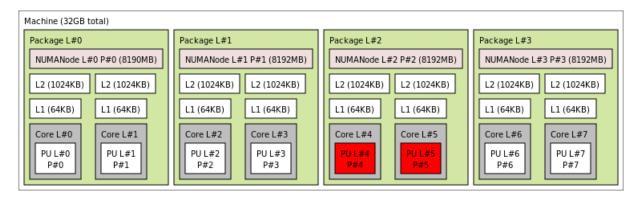

Here's the equivalent output in textual form:

```
Machine (32GB total)
  Package L#0
   NUMANode L#0 (P#0 8190MB)
    L2\ L\#0\ (1024KB)\ +\ L1\ L\#0\ (64KB)\ +\ Core\ L\#0\ +\ PU\ L\#0\ (P\#0)
    L2 L#1 (1024KB) + L1 L#1 (64KB) + Core L#1 + PU L#1 (P#1)
  Package L#1
    NUMANode L#1 (P#1 8192MB)
    L2 L#2 (1024KB) + L1 L#2 (64KB) + Core L#2 + PU L#2 (P#2)
    L2 L#3 (1024KB) + L1 L#3 (64KB) + Core L#3 + PU L#3 (P#3)
  Package L#2
   NUMANode L#2 (P#2 8192MB)
    L2 L#4 (1024KB) + L1 L#4 (64KB) + Core L#4 + PU L#4 (P#4)
    L2 L#5 (1024KB) + L1 L#5 (64KB) + Core L#5 + PU L#5 (P#5)
  Package L#3
    NUMANode L#3 (P#3 8192MB)
    L2 L#6 (1024KB) + L1 L#6 (64KB) + Core L#6 + PU L#6 (P#6)
    L2 L#7 (1024KB) + L1 L#7 (64KB) + Core L#7 + PU L#7 (P#7)
```

On a 2-package quad-core Xeon (pre-Nehalem, with 2 dual-core dies into each package):

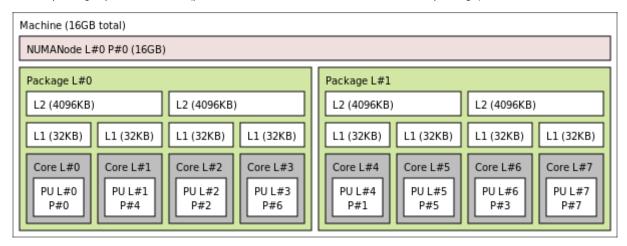

Here's the same output in textual form:

```
Machine (total 16GB)
 NUMANode L#0 (P#0 16GB)
  Package L#0
    T.2 T.#0 (4096KB)
      L1 L\#0 (32KB) + Core L\#0 + PU L\#0 (P\#0)
      L1 L#1 (32KB) + Core L#1 + PU L#1 (P#4)
    L2 L#1 (4096KB)
     L1 L#2 (32KB) + Core L#2 + PU L#2 (P#2)
      L1 L#3 (32KB) + Core L#3 + PU L#3 (P#6)
  Package L#1
    L2 L#2 (4096KB)
      L1 L#4 (32KB) + Core L#4 + PU L#4 (P#1)
      L1 L#5 (32KB) + Core L#5 + PU L#5 (P#5)
    L2 L#3 (4096KB)
     L1 L#6 (32KB) + Core L#6 + PU L#6 (P#3)
      L1 L\#7 (32KB) + Core L\#7 + PU L\#7 (P\#7)
```

2.4 Programming Interface

The basic interface is available in **hwloc.h**. Some higher-level functions are available in **hwloc/helper.h** to reduce the need to manually manipulate objects and follow links between them. Documentation for all these is provided later in this document. Developers may also want to look at hwloc/inlines.h which contains the actual inline code of some **hwloc.h** routines, and at this document, which provides good higher-level topology traversal examples.

To precisely define the vocabulary used by hwloc, a Terms and Definitions section is available and should probably be read first.

Each hwloc object contains a cpuset describing the list of processing units that it contains. These bitmaps may be used for CPU binding and Memory binding. hwloc offers an extensive bitmap manipulation interface in hwloc/bitmap.h.

Moreover, hwloc also comes with additional helpers for interoperability with several commonly used environments. See the Interoperability With Other Software section for details.

The complete API documentation is available in a full set of HTML pages, man pages, and self-contained PDF files (formatted for both both US letter and A4 formats) in the source tarball in doc/doxygen-doc/.


NOTE: If you are building the documentation from a Git clone, you will need to have Doxygen and pdflatex installed – the documentation will be built during the normal "make" process. The documentation is installed during "make install" to \$prefix/share/doc/hwloc/ and your systems default man page tree (under \$prefix, of course).

2.4.1 Portability


Operating System have varying support for CPU and memory binding, e.g. while some Operating Systems provide interfaces for all kinds of CPU and memory bindings, some others provide only interfaces for a limited number of kinds of CPU and memory binding, and some do not provide any binding interface at all. Hwloc's binding functions would then simply return the ENOSYS error (Function not implemented), meaning that the underlying Operating System does not provide any interface for them. CPU binding and Memory binding provide more information on which hwloc binding functions should be preferred because interfaces for them are usually available on the supported Operating Systems.

Similarly, the ability of reporting topology information varies from one platform to another. As shown in Command-line Examples, hwloc can obtain information on a wide variety of hardware topologies. However, some platforms and/or operating system versions will only report a subset of this information. For example, on an PPC64-based system with 8 cores (each with 2 hardware threads) running a default 2.6.18-based kernel from RHEL 5.4, hwloc is only able to glean information about NUMA nodes and processor units (PUs). No information about caches, packages, or cores is available.

Here's the graphical output from Istopo on this platform when Simultaneous Multi-Threading (SMT) is enabled:




And here's the graphical output from Istopo on this platform when SMT is disabled:



Notice that hwloc only sees half the PUs when SMT is disabled. PU L#6, for example, seems to change location from NUMA node #0 to #1. In reality, no PUs "moved" – they were simply re-numbered when hwloc only saw half as many (see also Logical index in Indexes and Sets). Hence, PU L#6 in the SMT-disabled picture probably corresponds to PU L#12 in the SMT-enabled picture.

This same "PUs have disappeared" effect can be seen on other platforms – even platforms / OSs that provide much more information than the above PPC64 system. This is an unfortunate side-effect of how operating systems report information to hwloc.

Note that upgrading the Linux kernel on the same PPC64 system mentioned above to 2.6.34, hwloc is able to discover all the topology information. The following picture shows the entire topology layout when SMT is enabled:

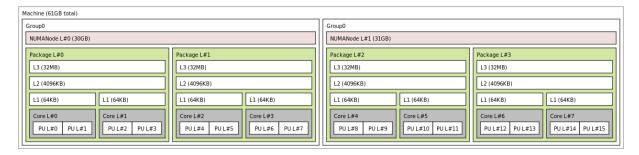

Developers using the hwloc API or XML output for portable applications should therefore be extremely careful to not make any assumptions about the structure of data that is returned. For example, per the above reported PPC topology, it is not safe to assume that PUs will always be descendants of cores.

Additionally, future hardware may insert new topology elements that are not available in this version of hwloc. Long-lived applications that are meant to span multiple different hardware platforms should also be careful about making structure assumptions. For example, a new element may someday exist between a core and a PU.

2.4.2 API Example

The following small C example (available in the source tree as ``doc/examples/hwloc-hello.c") prints the topology of the machine and performs some thread and memory binding. More examples are available in the doc/examples/ directory of the source tree.

```
/* Example hwloc API program.
* See other examples under doc/examples/ in the source tree
* for more details.
* Copyright © 2009-2016 Inria.
                                   All rights reserved.
 Copyright © 2009-2011 Université Bordeaux
* Copyright © 2009-2010 Cisco Systems, Inc.
                                                 All rights reserved.
 See COPYING in top-level directory.
* hwloc-hello.c
#include "hwloc.h"
#include <errno.h>
#include <stdio.h>
#include <string.h>
static void print_children(hwloc_topology_t topology, hwloc_obj_t obj,
                            int depth)
    char type[32], attr[1024];
    unsigned i;
    hwloc_obj_type_snprintf(type, sizeof(type), obj, 0);
    printf("%*s%s", 2*depth, "", type);
    if (obj->os_index != (unsigned) -1)
      printf("#%u", obj->os_index);
    hwloc_obj_attr_snprintf(attr, sizeof(attr), obj, " ", 0);
      printf("(%s)", attr);
    printf("\n");
for (i = 0; i < obj->arity; i++) {
        print_children(topology, obj->children[i], depth + 1);
int main (void)
    int depth;
    unsigned i, n; unsigned long size;
    int levels;
    char string[128];
    int topodepth;
    void *m;
    hwloc_topology_t topology;
    hwloc_cpuset_t cpuset;
    hwloc_obj_t obj;
     /* Allocate and initialize topology object.
    hwloc_topology_init(&topology);
    /\star ... Optionally, put detection configuration here to ignore
some objects types, define a synthetic topology, etc...
The default is to detect all the objects of the machine that
the caller is allowed to access.
                                     See Configure Topology
Detection.
    /\star Perform the topology detection. \star/
    hwloc_topology_load(topology);
```

```
/* Optionally, get some additional topology information
in case we need the topology depth later.
   topodepth = hwloc_topology_get_depth(topology);
/************
* First example:
* Walk the topology with an array style, from level 0 (always * the system level) to the lowest level (always the proc level).
for (depth = 0; depth < topodepth; depth++) {</pre>
       printf("*** Objects at level %d\n", depth);
for (i = 0; i < hwloc_get_nbobjs_by_depth(topology, depth);</pre>
           i++) {
          hwloc_obj_type_snprintf(string, sizeof(string),
                                hwloc_get_obj_by_depth(topology, depth, i), 0);
           printf("Index %u: %s\n", i, string);
       }
   }
/********************
* Second example:
* Walk the topology with a tree style.
   printf("*** Printing overall tree\n");
   print_children(topology, hwloc_get_root_obj(topology), 0);
/********************
* Third example:
* Print the number of packages.
depth = hwloc_get_type_depth(topology, HWLOC_OBJ_PACKAGE);
if (depth == HWLOC_TYPE_DEPTH_UNKNOWN) {
       printf("*** The number of packages is unknown\n");
   } else {
      printf("*** %u package(s)\n",
             hwloc_get_nbobjs_by_depth(topology, depth));
/********************
* Fourth example:
* Compute the amount of cache that the first logical processor
* has above it.
               *****************
   levels = 0;
   size = 0;
   for (obj = hwloc_get_obj_by_type(topology, HWLOC_OBJ_PU, 0);
       obj;
       obj = obj->parent)
     if (hwloc_obj_type_is_cache(obj->type)) {
       levels++;
       size += obj->attr->cache.size;
   printf("*** Logical processor 0 has %d caches totaling %luKB\n",
        levels, size / 1024);
* Fifth example:
\star Bind to only one thread of the last core of the machine.
\star First find out where cores are, or else smaller sets of CPUs if
* the OS doesn't have the notion of a "core".
***********
   depth = hwloc_get_type_or_below_depth(topology, HWLOC_OBJ_CORE);
   /* Get last core. */
   obj = hwloc_get_obj_by_depth(topology, depth,
                hwloc_get_nbobjs_by_depth(topology, depth) - 1);
   if (obj) {
       /* Get a copy of its cpuset that we may modify. */
       cpuset = hwloc_bitmap_dup(obj->cpuset);
       /* Get only one logical processor (in case the core is
SMT/hyper-threaded). */
       hwloc_bitmap_singlify(cpuset);
       /* And try to bind ourself there. */
       if (hwloc_set_cpubind(topology, cpuset, 0)) {
          char *str;
           int error = errno;
          hwloc_bitmap_asprintf(&str, obj->cpuset);
           printf("Couldn't bind to cpuset %s: %s\n", str, strerror(error));
           free(str):
       /* Free our cpuset copy */
       hwloc_bitmap_free(cpuset);
   }
/********************
* Sixth example:
* Allocate some memory on the last NUMA node, bind some existing
* memory to the last NUMA node.
/\star Get last node. There's always at least one. \star/
   n = hwloc_get_nbobjs_by_type(topology, HWLOC_OBJ_NUMANODE);
   obj = hwloc\_get\_obj\_by\_type (topology, HWLOC\_OBJ\_NUMANODE, n - 1);
   size = 1024*1024;
```

hwloc provides a pkg-config executable to obtain relevant compiler and linker flags. For example, it can be used thusly to compile applications that utilize the hwloc library (assuming GNU Make):

On a machine 2 processor packages – each package of which has two processing cores – the output from running hwloc-hello could be something like the following:

```
shell$ ./hwloc-hello
*** Objects at level 0
Index 0: Machine
*** Objects at level 1
Index 0: Package#0
Index 1: Package#1
*** Objects at level 2
Index 0: Core#0
Index 1: Core#1
Index 2: Core#3
Index 3: Core#2
*** Objects at level 3
Index 0: PU#0
Index 1: PU#1
Index 2: PU#2
Index 3: PU#3
*** Printing overall tree
Machine
  Package#0
    Core#0
      PU#0
    Core#1
     PU#1
  Package#1
    Core#3
     PU#2
    Core#2
     PII#3
*** 2 package(s)
*** Logical processor 0 has 0 caches totaling OKB
shell$
```

2.5 History / Credits

hwloc is the evolution and merger of the libtopology project and the Portable Linux Processor Affinity (PLPA) (https://www.open-mpi.org/projects/plpa/) project. Because of functional and ideological overlap, these two code bases and ideas were merged and released under the name "hwloc" as an Open MPI sub-project. libtopology was initially developed by the Inria Runtime Team-Project. PLPA was initially developed by the Open MPI development team as a sub-project. Both are now deprecated in favor of hwloc, which is distributed as an Open MPI sub-project.

2.6 Further Reading

The documentation chapters include

· Terms and Definitions

2.6 Further Reading

- Command-Line Tools
- Environment Variables
- · CPU and Memory Binding Overview
- I/O Devices
- · Miscellaneous objects
- Object attributes
- Topology Attributes: Distances, Memory Attributes and CPU Kinds
- Importing and exporting topologies from/to XML files
- · Synthetic topologies
- Interoperability With Other Software
- Thread Safety
- · Components and plugins
- Embedding hwloc in Other Software
- Frequently Asked Questions (FAQ)
- Upgrading to the hwloc 2.0 API

Make sure to have had a look at those too!

Terms and Definitions

3.1 Objects

Object Interesting kind of part of the system, such as a Core, a L2Cache, a NUMA memory node, etc. The different types detected by hwloc are detailed in the hwloc_obj_type_t enumeration.

There are four kinds of Objects: Memory (NUMA nodes and Memory-side caches), I/O (Bridges, PCI and OS devices), Misc, and Normal (everything else, including Machine, Package, Die, Core, PU, CPU Caches, etc.). Normal and Memory objects have (non-NULL) CPU sets and nodesets, while I/O and Misc don't.

Objects are topologically sorted by locality (CPU and node sets) into a tree (see Hierarchy, Tree and Levels).

- **Processing Unit (PU)** The smallest processing element that can be represented by a hwloc object. It may be a single-core processor, a core of a multicore processor, or a single thread in a SMT processor (also sometimes called "Logical processor", not to be confused with "Logical index of a processor"). hwloc's PU acronym stands for Processing Unit.
- **Package** A processor Package is the physical package that usually gets inserted into a socket on the motherboard. It is also often called a physical processor or a CPU even if these names bring confusion with respect to cores and processing units. A processor package usually contains multiple cores (and may also be composed of multiple dies). hwloc Package objects were called Sockets up to hwloc 1.10.
- **NUMA Node** An object that contains memory that is directly and byte-accessible to the host processors. It is usually close to some cores as specified by its CPU set. Hence it is attached as a memory child of the object that groups those cores together, for instance a Package objects with 4 Core children (see Hierarchy, Tree and Levels).
- Memory-side Cache A cache in front of a specific memory region (e.g. a range of physical addresses). It caches all accesses to that region without caring about which core issued the request. This is the opposite of usual CPU caches where only accesses from the local cores are cached, without caring about the target memory. In hwloc, memory-side caches are memory objects placed between their local CPU objects (parent) and the target NUMA node memory (child).

3.2 Indexes and Sets

- OS or physical index The index that the operating system (OS) uses to identify the object. This may be completely arbitrary, non-unique, non-contiguous, not representative of logical proximity, and may depend on the BIOS configuration. That is why hwloc almost never uses them, only in the default Istopo output (P # x) and cpuset masks. See also Should I use logical or physical/OS indexes? and how?.
- Logical index Index to uniquely identify objects of the same type and depth, automatically computed by hwloc according to the topology. It expresses logical proximity in a generic way, i.e. objects which have adjacent logical indexes are adjacent in the topology. That is why hwloc almost always uses it in its API, since it expresses logical proximity. They can be shown (as L#x) by lstopo thanks to the -l option. This index is always linear and in the range [0, num_objs_same_type_same_level-1]. Think of it as ``cousin rank." The ordering is based on topology first, and then on OS CPU numbers, so it is stable across everything except

14 Terms and Definitions

firmware CPU renumbering. "Logical index" should not be confused with "Logical processor". A "Logical processor" (which in hwloc we rather call "processing unit" to avoid the confusion) has both a physical index (as chosen arbitrarily by BIOS/OS) and a logical index (as computed according to logical proximity by hwloc). See also Should I use logical or physical/OS indexes? and how?.

- **CPU set** The set of processing units (PU) logically included in an object (if it makes sense). They are always expressed using physical processor numbers (as announced by the OS). They are implemented as the hwloc_bitmap_t opaque structure. hwloc CPU sets are just masks, they do *not* have any relation with an operating system actual binding notion like Linux' cpusets. I/O and Misc objects do not have CPU sets while all Normal and Memory objects have non-NULL CPU sets.
- Node set The set of NUMA memory nodes logically included in an object (if it makes sense). They are always expressed using physical node numbers (as announced by the OS). They are implemented with the hwloc_bitmap_t opaque structure. as bitmaps. I/O and Misc objects do not have Node sets while all Normal and Memory objects have non-NULL nodesets.
- **Bitmap** A possibly-infinite set of bits used for describing sets of objects such as CPUs (CPU sets) or memory nodes (Node sets). They are implemented with the <a href="https://hww.nodes.com/hww.nod

3.3 Hierarchy, Tree and Levels


- **Parent object** The object logically containing the current object, for example because its CPU set includes the CPU set of the current object. All objects have a non-NULL parent, except the root of the topology (Machine object).
- Ancestor object The parent object, or its own parent, and so on.
- **Children object(s)** The object (or objects) contained in the current object because their CPU set is included in the CPU set of the current object. Each object may also contain separated lists for Memory, I/O and Misc object children.
- Arity The number of normal children of an object. There are also specific arities for Memory, I/O and Misc children.
- **Sibling objects** Objects in the same children list, which all of them are normal children of the same parent, or all of them are Memory children of the same parent, or I/O children, or Misc. They usually have the same type (and hence are cousins, as well). But they may not if the topology is asymmetric.
- **Sibling rank** Index to uniquely identify objects which have the same parent, and is always in the range [0, arity-1] (respectively memory_arity, io_arity or misc_arity for Memory, I/O and Misc children of a parent).
- **Cousin objects** Objects of the same type (and depth) as the current object, even if they do not have the same parent.
- **Level** Set of objects of the same type and depth. All these objects are cousins.
 - Memory, I/O and Misc objects also have their own specific levels and (virtual) depth.
- **Depth** Nesting level in the object tree, starting from the root object. If the topology is symmetric, the depth of a child is equal to the parent depth plus one, and an object depth is also equal to the number of parent/child links between the root object and the given object. If the topology is asymmetric, the difference between some parent and child depths may be larger than one when some intermediate levels (for instance groups) are missing in only some parts of the machine.
 - The depth of the Machine object is always 0 since it is always the root of the topology. The depth of PU objects is equal to the number of levels in the topology minus one.
 - Memory, I/O and Misc objects also have their own specific levels and depth.

The following diagram can help to understand the vocabulary of the relationships by showing the example of a machine with two dual core packages (with no hardware threads); thus, a topology with 5 levels. Each box with rounded corner corresponds to one hwloc_obj_t, containing the values of the different integer fields (depth, logical—index, etc.), and arrows show to which other hwloc_obj_t pointers point to (first_child, parent, etc.).

The topology always starts with a Machine object as root (depth 0) and ends with PU objects at the bottom (depth 4 here).

Objects of the same level (cousins) are listed in red boxes and linked with red arrows. Children of the same parent (siblings) are linked with blue arrows.

The L2 cache of the last core is intentionally missing to show how asymmetric topologies are handled. See What happens if my topology is asymmetric? for more information about such strange topologies.

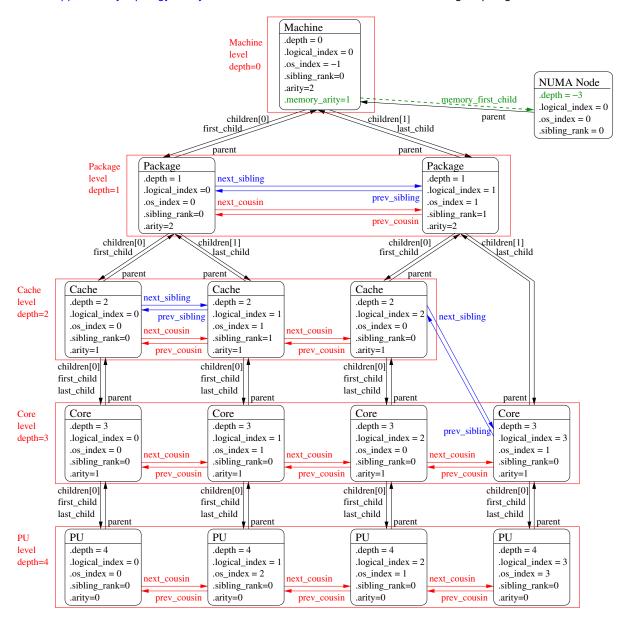

It should be noted that for PU objects, the logical index – as computed linearly by hwloc – is not the same as the OS index.

The NUMA node is on the side because it is not part of the main tree but rather attached to the object that corresponds to its locality (the entire machine here, hence the root object). It is attached as a *Memory* child (in green) and has a virtual depth (negative). It could also have siblings if there were multiple local NUMA nodes, or cousins if other NUMA nodes were attached somewhere else in the machine.

I/O or Misc objects could be attached in a similar manner.

16 Terms and Definitions

Command-Line Tools

hwloc comes with an extensive C programming interface and several command line utilities. Each of them is fully documented in its own manual page; the following is a summary of the available command line tools.

4.1 Istopo and Istopo-no-graphics

Istopo (also known as hwloc-ls) displays the hierarchical topology map of the current system. The output may be graphical, ascii-art or textual, and can also be exported to numerous file formats such as PDF, PNG, XML, and others. Advanced graphical outputs require the "Cairo" development package (usually cairo-devel or libcairo2-dev).

Istopo and Istopo-no-graphics accept the same command-line options. However, graphical outputs are only available in Istopo. Textual outputs (those that do not depend on heavy external libraries such as Cairo) are supported in both Istopo and Istopo-no-graphics.

This command can also display the processes currently bound to a part of the machine (via the --ps option). Note that Istopo can read XML files and/or alternate chroot filesystems and display topological maps representing those systems (e.g., use Istopo to output an XML file on one system, and then use Istopo to read in that XML file and display it on a different system).

4.2 hwloc-bind

hwloc-bind binds processes to specific hardware objects through a flexible syntax. A simple example is binding an executable to specific cores (or packages or bitmaps or ...). The hwloc-bind(1) man page provides much more detail on what is possible.

hwloc-bind can also be used to retrieve the current process' binding, or retrieve the last CPU(s) where a process ran, or operate on memory binding.

Just like hwloc-calc, the input locations given to hwloc-bind may be either objects or cpusets (bitmaps as reported by hwloc-calc or hwloc-distrib).

4.3 hwloc-calc

hwloc-calc is hwloc's Swiss Army Knife command-line tool for converting things. The input may be either objects or cpusets (bitmaps as reported by another hwloc-calc instance or by hwloc-distrib), that may be combined by addition, intersection or subtraction. The output may be expressed as:

- a cpuset bitmap: This compact opaque representation of objects is useful for shell scripts etc. It may passed
 to hwloc command-line tools such as hwloc-calc or hwloc-bind, or to hwloc command-line options such as
 lstopo --restrict.
- a nodeset bitmap: Another opaque representation that represents memory locality more precisely, especially if some NUMA nodes are CPU less or if multiple NUMA nodes are local to the same CPUs.
- the amount of the equivalent hwloc objects from a specific type, or the list of their indexes. This is useful for iterating over all similar objects (for instance all cores) within a given part of a platform.

18 Command-Line Tools

• a hierarchical description of objects, for instance a thread index within a core within a package. This gives a better view of the actual location of an object.

Moreover, input and/or output may be use either physical/OS object indexes or as hwloc's logical object indexes. It eases cooperation with external tools such as taskset or numactl by exporting hwloc specifications into list of processor or NUMA node physical indexes. See also Should I use logical or physical/OS indexes? and how?.

4.4 hwloc-info

hwloc-info dumps information about the given objects, as well as all its specific attributes. It is intended to be used with tools such as grep for filtering certain attribute lines. When no object is specified, or when --topology is passed, hwloc-info prints a summary of the topology. When --support is passed, hwloc-info lists the supported features for the topology.

4.5 hwloc-distrib

hwloc-distrib generates a set of cpuset bitmaps that are uniformly distributed across the machine for the given number of processes. These strings may be used with hwloc-bind to run processes to maximize their memory bandwidth by properly distributing them across the machine.

4.6 hwloc-ps

hwloc-ps is a tool to display the bindings of processes that are currently running on the local machine. By default, hwloc-ps only lists processes that are bound; unbound process (and Linux kernel threads) are not displayed.

4.7 hwloc-annotate

hwloc-annotate may modify object (and topology) attributes such as string information (see Custom string infos for details) or Misc children objects. It may also add distances, memory attributes, etc. to the topology. It reads an input topology from a XML file and outputs the annotated topology as another XML file.

4.8 hwloc-diff, hwloc-patch and hwloc-compress-dir

hwloc-diff computes the difference between two topologies and outputs it to another XML file.

hwloc-patch reads such a difference file and applies to another topology.

hwloc-compress-dir compresses an entire directory of XML files by using hwloc-diff to save the differences between topologies instead of entire topologies.

4.9 hwloc-dump-hwdata

hwloc-dump-hwdata is a Linux and x86-specific tool that dumps (during boot, privileged) some topology and locality information from raw hardware files (SMBIOS and ACPI tables) to human-readable and world-accessible files that the hwloc library will later reuse.

Currently only used on Intel Xeon Phi processor platforms. See Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor platforms. See HWLOC_DUMPED_HWDATA_DIR in Environment Variables for details about the location of dumped files.

4.10 hwloc-gather-topology and hwloc-gather-cpuid

hwloc-gather-topology is a Linux-specific tool that saves the relevant topology files of the current machine into a tarball (and the corresponding Istopo outputs).

hwloc-gather-cpuid is a x86-specific tool that dumps the result of CPUID instructions on the current machine into a directory.

The output of hwloc-gather-cpuid is included in the tarball saved by hwloc-gather-topology when running on Linux/x86.

mis mines game.	topology and	i iiwioo gamei	opula		
These files may be it.					

20 Command-Line Tools

Environment Variables

The behavior of the hwloc library and tools may be tuned thanks to the following environment variables.

- HWLOC_XMLFILE=/path/to/file.xml enforces the discovery from the given XML file as if hwloc_topology_set_xml() had been called. This file may have been generated earlier with Istopo file.xml. For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, HWLOC_THISSYSTEM should be set 1 in the environment too, to assert that the loaded file is really the underlying system. See also Importing and exporting topologies from/to XML files.
- **HWLOC_SYNTHETIC=synthetic_description** enforces the discovery through a synthetic description string as if hwloc_topology_set_synthetic() had been called. For convenience, this backend provides empty binding hooks which just return success. See also <a href="https://synthetic.com/synth

HWLOC_XML_VERBOSE=1

- HWLOC_SYNTHETIC_VERBOSE=1 enables verbose messages in the XML or synthetic topology backends. hwloc XML backends (see Importing and exporting topologies from/to XML files) can emit some error messages to the error output stream. Enabling these verbose messages within hwloc can be useful for understanding failures to parse input XML topologies. Similarly, enabling verbose messages in the synthetic topology backend can help understand why the description string is invalid. See also Synthetic topologies.
- HWLOC_THISSYSTEM=1 enforces the return value of hwloc_topology_is_thissystem(), as if HWLOC_TOPOLOGY_FLAG_IS_THIS was set with hwloc_topology_set_flags(). It means that it makes hwloc assume that the selected backend provides the topology for the system on which we are running, even if it is not the OS-specific backend but the XML backend for instance. This means making the binding functions actually call the OS-specific system calls and really do binding, while the XML backend would otherwise provide empty hooks just returning success. This can be used for efficiency reasons to first detect the topology once, save it to a XML file, and quickly reload it later through the XML backend, but still having binding functions actually do bind. This also enables support for the variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES.
- HWLOC_THISSYSTEM_ALLOWED_RESOURCES=1 Get the set of allowed resources from the native operating system even if the topology was loaded from XML or synthetic description, as if HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES was set with hwloc_topology_set_flags(). This variable requires the topology to match the current system (see the variable HWLOC_THISSYSTEM). This is useful when the topology is not loaded directly from the local machine (e.g. for performance reason) and it comes with all resources, but the running process is restricted to only a part of the machine (for instance because of Linux Cgroup/Cpuset).
- **HWLOC_ALLOW=all** Totally ignore administrative restrictions such as Linux Cgroups and consider all resources (PUs and NUMA nodes) as allowed. This is different from setting HWLOC_TOPOLOGY_FLAG_INCLUDE ← __DISALLOWED which gathers all resources but marks the unavailable ones as disallowed.
- **HWLOC_HIDE_ERRORS=1** enables or disables verbose reporting of errors. The hwloc library may issue warnings to the standard error stream when it detects a problem during topology discovery, for instance if the operating system (or user) gives contradictory topology information.
 - By default (1), hwloc only shows critical errors such as invalid hardware topology information or invalid configuration. If set to 0 (default in Istopo), more errors are displayed, for instance a failure to initialize CUDA or NVML. If set to 2, no hwloc error messages are shown.

22 Environment Variables

Note that additional verbose messages may be enabled with other variables such as HWLOC_GROUPING
_VERBOSE.

- HWLOC_USE_NUMA_DISTANCES=7 enables or disables the use of NUMA distances. NUMA distances and memory target/initiator information may be used to improve the locality of NUMA nodes, especially CPU-less nodes. Bits in the value of this environment variable enable different features: Bit 0 enables the gathering of NUMA distances from the operating system. Bit 1 further enables the use of NUMA distances to improve the locality of CPU-less nodes. Bit 2 enables the use of target/initiator information.
- HWLOC_GROUPING=1 enables or disables objects grouping based on distances. By default, hwloc uses distance matrices between objects (either read from the OS or given by the user) to find groups of close objects. These groups are described by adding intermediate Group objects in the topology. Setting this environment variable to 0 will disable this grouping. This variable supersedes the obsolete HWLOC_IGNORE_← DISTANCES variable.
- HWLOC_GROUPING_ACCURACY=0.05 relaxes distance comparison during grouping. By default, objects may be grouped if their distances form a minimal distance graph. When setting this variable to 0.02, and when HWLOC_DISTANCES_ADD_FLAG_GROUP_INACCURATE is given, these distances do not have to be strictly equal anymore, they may just be equal with a 2% error. If set to try instead of a numerical value, hwloc will try to group with perfect accuracy (0, the default), then with 0.01, 0.02, 0.05 and finally 0.1. Numbers given in this environment variable should always use a dot as a decimal mark (for instance 0.01 instead of 0,01).
- **HWLOC_GROUPING_VERBOSE=0** enables or disables some verbose messages during grouping. If this variable is set to 1, some debug messages will be displayed during distance-based grouping of objects even if debug was not specific at configure time. This is useful when trying to find an interesting distance grouping accuracy.
- **HWLOC_CPUKINDS_RANKING=default** change the ranking policy for CPU kinds. hwloc tries to rank CPU kinds that are energy efficiency first, and then CPUs that are rather high-performance and power hungry. By default, if available, the OS-provided efficiency is used for ranking. Otherwise, the frequency and/or core types are used when available.
 - This environment variable may be set to coretype+frequency, coretype+frequency_strict, coretype, frequency, frequency_base, frequency_max, forced_efficiency, no_ \leftarrow forced_efficiency, default, or none.
- HWLOC_CPUKINDS_MAXFREQ=adjust=10 change the use of the max frequency in the Linux backend. hwloc tries to read the base and max frequencies of each core on Linux. Some hardware features such as Intel Turbo Boost Max 3.0 make some cores report slightly higher max frequencies than others in the same CPU package. Despite having slightly different frequencies, these cores are considered identical instead of exposing an hybrid CPU. Hence, by default, hwloc uniformizes the max frequencies of cores that have the same base frequency (higher values are downgraded by up to 10%).
 - If this environment variable is set to adjust=X, the 10% threshold is replaced with X. If set to 1, max frequencies are not adjusted anymore, some homogeneous processors may appear hybrid because of this. If set to 0, max frequencies are entirely ignored.
- HWLOC_PCI_LOCALITY=<domain/bus> <cpuset>;...
- HWLOC_PCI_LOCALITY=/path/to/pci/locality/file changes the locality of I/O devices behing the specified PCI buses. If no I/O locality information is available or if the BIOS reports incorrect information, it is possible to move a I/O device tree (OS and/or PCI devices with optional bridges) near a custom set of processors. Localities are given either inside the environment variable itself, or in the pointed file. They may be separated either by semi-colons or by line-breaks. Invalid localities are silently ignored, hence it is possible to insert comments between actual localities.

Each locality contains a domain/bus specification (in hexadecimal numbers as usual) followed by a whitespace and a cpuset:

- 0001 <cpuset> specifies the locality of all buses in PCI domain 0000.
- 0000:0f <cpuset> specifies only PCI bus 0f in domain 0000.
- 0002:04-0a <cpuset> specifies a range of buses (from 04 to 0a) within domain 0002.

Domain/bus specifications should usually match entire hierarchies of buses behind a bridge (including primary, secondary and subordinate buses). For instance, if hostbridge 0000:00 is above other bridges/switches with buses 0000:01 to 0000:09, the variable should be HWLOC_PCI_LOCALITY="0000:00-09 <cpuset>". It supersedes the old HWLOC_PCI_0000_00_LOCALCPUS=<cpuset> which only works when hostbridges exist in the topology.

If the variable is defined to empty or invalid, no forced PCI locality is applied but hwloc's internal automatic locality quirks are disabled, which means the exact PCI locality reported by the platform is used.

- HWLOC_X86_TOPOEXT_NUMANODES=0 use AMD topoext CPUID leaf in the x86 backend to detect NUMA nodes. When using the x86 backend, setting this variable to 1 enables the building of NUMA nodes from AMD processor CPUID instructions. However this strategy does not always reflect BIOS configuration such as NUMA interleaving. And node indexes may be different from those of the operating system. Hence this should only be used when OS backends are wrong and the user is sure that CPUID returns correct NUMA information.
- HWLOC_KEEP_NVIDIA_GPU_NUMA_NODES=0 show or hide NUMA nodes that correspond to NVIDIA GPU memory. By default they are ignored to avoid interleaved memory being allocated on GPU by mistake. Setting this environment variable to 1 exposes these NUMA nodes. They may be recognized by the GPUMemory subtype. They also have a PCIBusID info attribute to identify the corresponding GPU.
- **HWLOC_KNL_MSCACHE_L3=0** Expose the KNL MCDRAM in cache mode as a Memory-side Cache instead of a L3. hwloc releases prior to 2.1 exposed the MCDRAM cache as a CPU-side L3 cache. Now that Memory-side caches are supported by hwloc, it is still exposed as a L3 by default to avoid breaking existing applications. Setting this environment variable to 1 will expose it as a proper Memory-side cache.
- **HWLOC_WINDOWS_PROCESSOR_GROUP_OBJS=0** Expose Windows processor groups as hwloc Group objects. By default, these groups are disabled because they may be incompatible with the hierarchy of resources that hwloc builds (leading to warnings). Setting this variable to 1 reenables the addition of these groups to the topology.

This variable does not impact the querying of Windows processor groups using the dedicated API in **hwloc/windows.h**, this feature is always supported.

- HWLOC_ANNOTATE_GLOBAL_COMPONENTS=0 Allow components to annotate the topology even if they are usually excluded by global components by default. Setting this variable to 1 and also setting HWLOC_ COMPONENTS=xml, pci, stop enables the addition of PCI vendor and model info attributes to a XML topology that was generated without those names (if pciaccess was missing).
- **HWLOC_FSROOT=/path/to/linux/filesystem-root/** switches to reading the topology from the specified Linux filesystem root instead of the main file-system root. This directory may have been saved previously from another machine with hwloc-gather-topology.

One should likely also set $\texttt{HWLOC_COMPONENTS=linux}$, stop so that non-Linux backends are disabled (the -i option of command-line tools takes care of both).

Not using the main file-system root causes <a href="https://www.not.gov/hus.not.gov/hus.gov/hu

- HWLOC_CPUID_PATH=/path/to/cpuid/ forces the x86 backend to read dumped CPUIDs from the given directory instead of executing actual x86 CPUID instructions. This directory may have been saved previously from another machine with hwloc-gather-cpuid.
 - One should likely also set $\texttt{HWLOC_COMPONENTS} = x86$, stop so that non-x86 backends are disabled (the -i option of command-line tools takes care of both).
 - It causes <a href="https://www.numer.com/hullows/ball-numer.com/hull
- HWLOC_DUMPED_HWDATA_DIR=/path/to/dumped/files/ loads files dumped by hwloc-dump-hwdata (on Linux) from the given directory. The default dump/load directory is configured during build based on --runstatedir, --localstatedir, and --prefix options. It usually points to /var/run/hwloc/ in Linux distribution packages, but it may also point to \$prefix/var/run/hwloc/ when manually installing and only specifying --prefix.

24 Environment Variables

HWLOC_COMPONENTS=list,of,components forces a list of components to enable or disable. Enable or disable the given comma-separated list of components (if they do not conflict with each other). Component names prefixed with – are disabled (a single phase may also be disabled).

Once the end of the list is reached, hwloc falls back to enabling the remaining components (sorted by priority) that do not conflict with the already enabled ones, and unless explicitly disabled in the list. If stop is met, the enabling loop immediately stops, no more component is enabled.

If xml or synthetic components are selected, the corresponding XML filename or synthetic description string should be pass in HWLOC XMLFILE or HWLOC SYNTHETIC respectively.

Since this variable is the low-level and more generic way to select components, it takes precedence over environment variables for selecting components.

If the variable is set to an empty string (or set to a single comma), no specific component is loaded first, all components are loaded in priority order.

See Selecting which components to use for details.

- **HWLOC_COMPONENTS_VERBOSE=1** displays verbose information about components. Display messages when components are registered or enabled. This is the recommended way to list the available components with their priority (all of them are *registered* at startup).
- **HWLOC_PLUGINS_PATH=/path/to/hwloc/plugins/:...** changes the default search directory for plugins. By default, \$libdir/hwloc is used. The variable may contain several colon-separated directories.
- **HWLOC_PLUGINS_VERBOSE=1** displays verbose information about plugins. List which directories are scanned, which files are loaded, and which components are successfully loaded.
- **HWLOC_PLUGINS_BLACKLIST=filename1,filename2,...** prevents plugins from being loaded if their filename (without path) is listed. Plugin filenames may be found in verbose messages outputted when HWLOC_← PLUGINS VERBOSE=1.
- **HWLOC_DEBUG_VERBOSE=0** disables all verbose messages that are enabled by default when <code>-enable-debug</code> is passed to configure. When set to more than 1, even more verbose messages are displayed. The default is 1.

CPU and Memory Binding Overview

Binding tasks and data buffers is hwloc's second main goal after discovering and exposing the hardware topology. hwloc defines APIs to bind threads and processes to cores and processing units (see CPU binding), and to bind memory buffers to NUMA nodes (see Memory binding). Some examples are available under doc/examples/ in the source tree.

Sections below provide high-level insights on how these APIs work.

6.1 Binding Policies and Portability

hwloc binding APIs are portable to multiple operating systems. However operating systems sometimes define slightly different policies, which means hwloc's behavior might slightly differ.

On the CPU binding side, OSes have different constraints of which sets of PUs can be used for binding (only full cores, random sets of PUs, etc.). Moreover the HWLOC_CPUBIND_STRICT may be given to clarify what to do in some corner cases. It is recommended to read CPU binding for details.

On the memory binding side, things are more complicated. First, there are multiple API for binding existing memory buffers, allocating new ones, etc. Second, multiple policies exist (first-touch, bind, interleave, etc.) but some of them are not implemented by all operating systems. Third, some of these policies have slightly different meanings. For instance, hwloc's **bind** (HWLOC_MEMBIND_BIND) uses Linux' **MPOL_PREFERRED** \leftarrow **_MANY** (or **MPOL_PREFERRED**) by default, but it switches to **MPOL_BIND** when strict binding is requested (HWLOC MEMBIND STRICT). Reading Memory binding is strongly recommended.

6.2 Joint CPU and Memory Binding (or not)

Some operating systems do not systematically provide separate functions for CPU and memory binding. This means that CPU binding functions may have have effects on the memory binding policy. Likewise, changing the memory binding policy may change the CPU binding of the current thread. This is often not a problem for applications, so by default hwloc will make use of these functions when they provide better binding support.

If the application does not want the CPU binding to change when changing the memory policy, it needs to use the HWLOC_MEMBIND_NOCPUBIND flag to prevent hwloc from using OS functions which would change the CPU binding. Additionally, HWLOC_CPUBIND_NOMEMBIND can be passed to CPU binding function to prevent hwloc from using OS functions would change the memory binding policy. Of course, using these flags will reduce hwloc's overall support for binding, so their use is discouraged.

One can avoid using these flags but still closely control both memory and CPU binding by allocating memory, touching each page in the allocated memory, and then changing the CPU binding. The already-really-allocated memory will then be "locked" to physical memory and will not be migrated. Thus, even if the memory binding policy gets changed by the CPU binding order, the already-allocated memory will not change with it. When binding and allocating further memory, the CPU binding should be performed again in case the memory binding altered the previously-selected CPU binding.

6.3 Current Memory Binding Policy

Not all operating systems support the notion of a "current" memory binding policy for the current process, but such operating systems often still provide a way to allocate data on a given node set. Conversely, some operating systems support the notion of a "current" memory binding policy and do not permit allocating data on a specific node set without changing the current policy and allocate the data. To provide the most powerful coverage of these facilities, hwloc provides:

- functions that set/get the current memory binding policies (if supported): hwloc_set_membind(), hwloc get membind(), hwloc set proc membind() and hwloc get proc membind()
- a function that allocates memory bound to specific node set without changing the current memory binding policy (if supported): hwloc alloc membind().
- a helper which, if needed, changes the current memory binding policy of the process in order to obtain memory binding: hwloc_alloc_membind_policy().

An application can thus use the two first sets of functions if it wants to manage separately the global process binding policy and directed allocation, or use the third set of functions if it does not care about the process memory binding policy. Again, reading Memory binding is strongly recommended.

I/O Devices

hwloc usually manipulates processing units and memory but it can also discover I/O devices and report their locality as well. This is useful for placing I/O intensive applications on cores near the I/O devices they use, or for gathering information about all platform components.

7.1 Enabling and requirements

I/O discovery is disabled by default (except in Istopo) for performance reasons. It can be enabled by changing the filtering of I/O object types to $\verb|HWLOC_TYPE_FILTER_KEEP_IMPORTANT|$ or $\verb|HWLOC_TYPE_FILTER_KEEP_ALL|$ before loading the topology, for instance with $\verb|hwloc_topology_set_io_types_filter()|$.

Note that I/O discovery requires significant help from the operating system. The pciaccess library (the development package is usually libpciaccess-devel or libpciaccess-dev) is needed to fully detect PCI devices and bridges/switches. On Linux, PCI discovery may still be performed even if libpciaccess cannot be used. But it misses PCI device names. Moreover, some operating systems require privileges for probing PCI devices, see Does hwloc require privileged access? for details.

The actual locality of I/O devices is only currently detected on Linux. Other operating system will just report I/O devices as being attached to the topology root object.

7.2 I/O objects

When I/O discovery is enabled and supported, some additional objects are added to the topology. The corresponding I/O object types are:

- HWLOC_OBJ_OS_DEVICE describes an operating-system-specific handle such as the *sda* drive or the *eth0* network interface. See OS devices.
- HWLOC_OBJ_PCI_DEVICE and HWLOC_OBJ_BRIDGE build up a PCI hierarchy made of bridges (that may be actually be switches) and devices. See PCI devices and bridges.

Any of these types may be filtered individually with hwloc_topology_set_type_filter().

hwloc tries to attach these new objects to normal objects (usually NUMA nodes) to match their actual physical location. For instance, if a I/O hub (or root complex) is physically connected to a package, the corresponding hwloc bridge object (and its PCI bridges and devices children) is inserted as a child of the corresponding hwloc Package object. These children are not in the normal children list but rather in the I/O-specific children list.

I/O objects also have neither CPU sets nor node sets (NULL pointers) because they are not directly usable by the user applications for binding. Moreover I/O hierarchies may be highly complex (asymmetric trees of bridges). So I/O objects are placed in specific levels with custom depths. Their lists may still be traversed with regular helpers such as hwloc_get_next_obj_by_type(). However, hwloc offers some dedicated helpers such as hwloc_get_next_pcidev() and hwloc_get_next_osdev() for convenience (see Finding I/O objects).

7.3 OS devices

Although each PCI device is uniquely identified by its bus ID (e.g. 0000:01:02.3), a user-space application can hardly find out which PCI device it is actually using. Applications rather use software handles (such as the eth0

28 I/O Devices

network interface, the *sda* hard drive, or the *mlx4_0* OpenFabrics HCA). Therefore hwloc tries to add software devices (HWLOC_OBJ_OS_DEVICE, also known as OS devices).

OS devices may be attached below PCI devices, but they may also be attached directly to normal objects. Indeed some OS devices are not related to PCI. For instance, NVDIMM block devices (such as *pmem0s* on Linux) are directly attached near their NUMA node (I/O child of the parent whose memory child is the NUMA node). Also, if hwloc could not discover PCI for some reason, PCI-related OS devices may also be attached directly to normal objects.

Finally, OS *subdevices* may be exposed as OS devices children of another OS device. This is the case of LevelZero subdevices for instance.

hwloc first tries to discover OS devices from the operating system, e.g. *eth0*, *sda* or *mlx4_0*. However, this ability is currently only available on Linux for some classes of devices.

hwloc then tries to discover software devices through additional I/O components using external libraries. For instance proprietary graphics drivers do not expose any named OS device, but hwloc may still create one OS object per software handle when supported. For instance the opencl and cuda components may add some opencl0d0 and cuda0 OS device objects.

Here is a list of OS device objects commonly created by hwloc components when I/O discovery is enabled and supported.

- Hard disks or non-volatile memory devices (HWLOC_OBJ_OSDEV_BLOCK)
 - sda or dax2.0 (Linux component)
- Network interfaces (HWLOC_OBJ_OSDEV_NETWORK)
 - eth0, wlan0, ib0 (Linux component)
 - hsn0 with "Slingshot" subtype for HPE Cray HSNs (Linux component).
- OpenFabrics (InfiniBand, Omni-Path, usNIC, etc) HCAs (HWLOC_OBJ_OSDEV_OPENFABRICS)
 - mlx5 0, hfi1 0, gib0, usnic 0 (Linux component)
 - bxi0 with "BXI" subtype for Atos/Bull BXI HCAs (Linux component) even if those are not really Open
 Fabrics.
- GPUs (HWLOC_OBJ_OSDEV_GPU)
 - rsmi0 for the first RSMI device ("RSMI" subtype, from the RSMI component, using the AMD ROCm SMI library)
 - nvml0 for the first NVML device ("NVML" subtype, from the NVML component, using the NVIDIA Management Library)
 - :0.0 for the first display ("Display" subtype, from the GL component, using the NV-CONTROL X extension library, NVCtrl)
 - card0 and renderD128 for DRM device files (from the Linux component, filtered-out by default because considered non-important)
- Co-Processors (HWLOC_OBJ_OSDEV_COPROC)
 - opencl0d0 for the first device of the first OpenCL platform, opencl1d3 for the fourth device of the second
 OpenCL platform ("OpenCL" subtype, from the OpenCL component)
 - ze0 for the first Level Zero device ("LevelZero" subtype, from the levelzero component, using the oneAPI Level Zero library), and ze0.1 for its second subdevice (if any).
 - cuda0 for the first NVIDIA CUDA device ("CUDA" subtype, from the CUDA component, using the NVIDIA CUDA Library)
 - ve0 for the first NEC Vector Engine device ("VectorEngine" subtype, from the Linux component)
- DMA engine channel (HWLOC_OBJ_OSDEV_DMA)
 - dma0chan0 (Linux component) when all OS devices are enabled (HWLOC_TYPE_FILTER_KEEP_ALL)

Note that some PCI devices may contain multiple software devices (see the example below).

See also Interoperability With Other Software for managing these devices without considering them as hwloc objects.

7.4 PCI devices and bridges

A PCI hierarchy is usually organized as follows: A hostbridge object (<code>HWLOC_OBJ_BRIDGE</code> object with upstream type *Host* and downstream type *PCI*) is attached below a normal object (usually the entire machine or a NUMA node). There may be multiple hostbridges in the machine, attached to different places, but all PCI devices are below one of them (unless the Bridge object type is filtered-out).

Each hostbridge contains one or several children, either other bridges (usually PCI to PCI switches) or PCI devices (HWLOC_OBJ_PCI_DEVICE). The number of bridges between the hostbridge and a PCI device depends on the machine.

7.5 Consulting I/O devices and binding

I/O devices may be consulted by traversing the topology manually (with usual routines such as hwloc_get_obj_by_type()) or by using dedicated helpers (such as hwloc_get_pcidev_by_busid(), see Finding I/O objects).

I/O objects do not actually contain any locality information because their CPU sets and node sets are NULL. Their locality must be retrieved by walking up the object tree (through the parent link) until a non-I/O object is found (see hwloc_get_non_io_ancestor_obj()). This normal object should have non-NULL CPU sets and node sets which describe the processing units and memory that are immediately close to the I/O device. For instance the path from a OS device to its locality may go across a PCI device parent, one or several bridges, up to a Package node with the same locality.

Command-line tools are also aware of I/O devices. Istopo displays the interesting ones by default (passing --no-io disables it).

hwloc-calc and hwloc-bind may manipulate I/O devices specified by PCI bus ID or by OS device name.


- pci=0000:02:03.0 is replaced by the set of CPUs that are close to the PCI device whose bus ID is given.
- os=eth0 is replaced by CPUs that are close to the I/O device whose software handle is called eth0.

This enables easy binding of I/O-intensive applications near the device they use.

7.6 Examples

The following picture shows a dual-package dual-core host whose PCI bus is connected to the first package and NUMA node.

30 I/O Devices

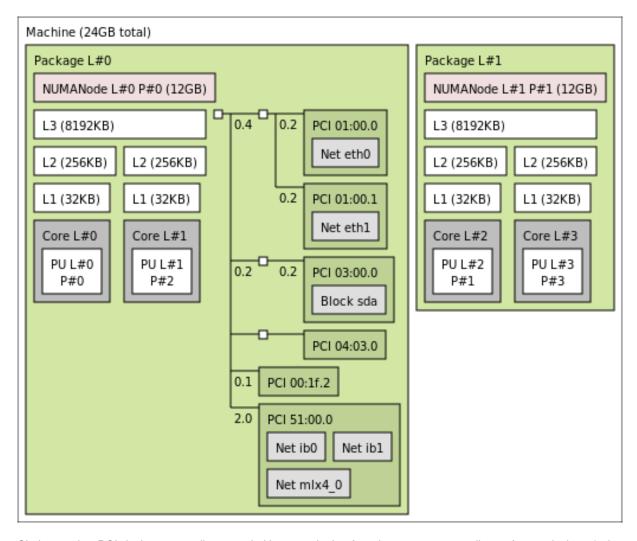

Six interesting PCI devices were discovered. However, hwloc found some corresponding software devices (eth0, eth1, sda, mlx4_0, ib0, and ib1) for only four of these physical devices. The other ones (PCI 102b:0532 and PCI 8086:3a20) are an unused IDE controller (no disk attached) and a graphic card (no corresponding software device reported to the user by the operating system).

On the contrary, it should be noted that three different software devices were found for the last PCI device (*PCI* 15b3:634a). Indeed this OpenFabrics HCA PCI device object contains one one OpenFabrics software device (*mlx4_0*) and two virtual network interface software devices (*ib0* and *ib1*). Here is the corresponding textual output:

```
Machine (24GB total)
  Package L#0
    NUMANode L#0 (P#0 12GB)
    L3 L#0 (8192KB)
     L2 L#0 (256KB) + L1 L#0 (32KB) + Core L#0 + PU L#0 (P#0)
      L2 L#1 (256KB) + L1 L#1 (32KB) + Core L#1 + PU L#1 (P#2)
    HostBridge
      PCIBridge
        PCI 01:00.0 (Ethernet)
          Net "eth0"
        PCI 01:00.1 (Ethernet)
         Net "eth1"
      PCIBridge
        PCI 03:00.0 (RAID)
          Block "sda"
      PCIBridge
        PCI 04:03.0 (VGA)
      PCI 00:1f.2 (IDE)
      PCI 51:00.0 (InfiniBand)
        Net "ib0"
        Net "ib1"
        Net "mlx4_0"
```

7.6 Examples 31

```
Package L#1

NUMANode L#1 (P#1 12GB)

L3 L#1 (8192KB)

L2 L#2 (256KB) + L1 L#2 (32KB) + Core L#2 + PU L#2 (P#1)

L2 L#3 (256KB) + L1 L#3 (32KB) + Core L#3 + PU L#3 (P#3)
```

32 I/O Devices

Miscellaneous objects

hwloc topologies may be annotated with Misc objects (of type HWLOC_OBJ_MISC) either automatically or by the user. This is a flexible way to annotate topologies with large sets of information since Misc objects may be inserted anywhere in the topology (to annotate specific objects or parts of the topology), even below other Misc objects, and each of them may contain multiple attributes (see also How do I annotate the topology with private notes?). These Misc objects may have a subtype field to replace Misc with something else in the Istopo output.

8.1 Misc objects added by hwloc

hwloc only uses Misc objects when other object types are not sufficient, and when the Misc object type is not filtered-out anymore. This currently includes:

- Memory modules (DIMMs), on Linux when privileged and when dmi-sysfs is supported by the kernel. These objects have a subtype field of value MemoryModule. They are currently always attached to the root object. Their attributes describe the DIMM vendor, model, etc. lstopo -v displays them as:

 Misc (MemoryModule) (P#1 DeviceLocation="Bottom-Slot 2 (right)" BankLocation="BANK 2" Vendor=Elpida SerialNumber=21733667 AssetTag=9876543210 PartNumber="EBJ81UG8EFUO-GN-F")
- Displaying process binding in lstopo —-top. These objects have a subtype field of value Process and a name attribute made of their PID and program name. They are attached below the object they are bound to. The textual lstopo displays them as:

 PU L#0 (P#0)

 Misc (Process) 4445 myprogram

8.2 Annotating topologies with Misc objects

The user may annotate hwloc topologies with its own Misc objects. This can be achieved with hwloc_topology_insert_misc_ as well as hwloc-annotate command-line tool.

Object attributes

9.1 Normal attributes

hwloc objects have many generic attributes in the hwloc_obj structure, for instance their logical_index or os_index (see Should I use logical or physical/OS indexes? and how?), depth or name.

The kind of object is first described by the obj->type generic attribute (an integer). OS devices also have a specific obj->attr->osdev.type integer for distinguishing between NICs, GPUs, etc.

Objects may also have an optional obj->subtype pointing to a better description string (displayed by Istopo either in place or after the main obj->type attribute):

- NUMA nodes: subtype DRAM (for usual main memory), HBM (high-bandwidth memory), SPM (specific-purpose memory, usually reserved for some custom applications), NVM (non-volatile memory when used as main memory), MCDRAM (on KNL) or GPUMemory (on POWER architecture with NVIDIA GPU memory shared over NVLink).
- Groups: subtype Cluster, Module, Tile, Compute Unit, Book or Drawer for different architecture-specific groups of CPUs (see also What are these Group objects in my topology?).
- OS devices (see also OS devices):
 - Co-processor: subtype OpenCL, LevelZero, CUDA, or VectorEngine.
 - GPU: subtype RSMI (AMD GPU) or NVML (NVIDIA GPU).
 - OpenFabrics: subtype BXI (Bull/Atos BXI HCA).
 - Network: subtype Slingshot (HPE Cray Slingshot Cassini HSN).
 - Block: subtype Disk, NVM (non-volatile memory), SPM (specific-purpose memory), CXLMem (CXL volatile ou persistent memory), Tape, or Removable Media Device.
- L3 Caches: subtype MemorySideCache when hwloc is configured to expose the KNL MCDRAM in Cache mode as a L3.
- PCI devices: subtype NVSwitch for NVLink switches (see also NVLinkBandwidth in Distances).
- Misc devices: subtype MemoryModule (see also Misc objects added by hwloc)

Each object also contains an attr field that, if non NULL, points to a union hwloc_obj_attr_u of type-specific attribute structures. For instance, a L2Cache object obj contains cache-specific information in obj->attr->cache, such as its size and associativity, cache type. See hwloc_obj_attr_u for details.

9.2 Custom string infos

Aside of these generic attribute fields, hwloc annotates many objects with info attributes made of name and value strings. Each object contains a list of such pairs that may be consulted manually (looking at the object infos array field) or using the hwloc_obj_get_info_by_name(). The user may additionally add new name-value pairs to any object using hwloc_obj_add_info() or the hwloc-annotate program.

Here is a non-exhaustive list of attributes that may be automatically added by hwloc. Note that these attributes heavily depend on the ability of the operating system to report them. Many of them will therefore be missing on some OS.

36 Object attributes

9.2.1 Hardware Platform Information

These info attributes are attached to the root object (Machine).

PlatformName, PlatformModel, PlatformVendor, PlatformBoardID, PlatformRevision,

SystemVersionRegister, ProcessorVersionRegister (Machine) Some POWER/PowerPC-specific attributes describing the platform and processor. Currently only available on Linux. Usually added to Package objects, but can be in Machine instead if hwloc failed to discover any package.

DMIBoardVendor, DMIBoardName, etc. DMI hardware information such as the motherboard and chassis models and vendors, the BIOS revision, etc., as reported by Linux under /sys/class/dmi/id/.

MemoryMode, ClusterMode Intel Xeon Phi processor configuration modes. Available if hwloc-dump-hwdata was used (see Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?) or if hwloc managed to guess them from the NUMA configuration.

The memory mode may be *Cache*, *Flat*, *Hybrid50* (half the MCDRAM is used as a cache) or *Hybrid25* (25% of MCDRAM as cache). The cluster mode may be *Quadrant*, *Hemisphere*, *All2All*, *SNC2* or *SNC4*. See doc/examples/get-knl-modes.c in the source directory for an example of retrieving these attributes.

9.2.2 Operating System Information

These info attributes are attached to the root object (Machine).

OSName, OSRelease, OSVersion, HostName, Architecture The operating system name, release, version, the hostname and the architecture name, as reported by the Unix uname command.

LinuxCgroup The name the Linux control group where the calling process is placed.

WindowsBuildEnvironment Either MinGW or Cygwin when one of these environments was used during build.

9.2.3 hwloc Information

Unless specified, these info attributes are attached to the root object (Machine).

Backend (topology root, or specific object added by that backend) The name of the hwloc backend/component that filled the topology. If several components were combined, multiple Backend pairs may exist, with different values, for instance x86 and Linux in the root object and CUDA in CUDA OS device objects.

SyntheticDescription The description string that was given to hwloc to build this synthetic topology.

hwlocVersion The version number of the hwloc library that was used to generate the topology. If the topology was loaded from XML, this is not the hwloc version that loaded it, but rather the first hwloc instance that exported the topology to XML earlier.

ProcessName The name of the process that contains the hwloc library that was used to generate the topology. If the topology was from XML, this is not the hwloc process that loaded it, but rather the first process that exported the topology to XML earlier.

9.2.4 CPU Information

These info attributes are attached to Package objects, or to the root object (Machine) if package locality information is missing.

CPUModel The processor model name.

CPUVendor, CPUModelNumber, CPUFamilyNumber, CPUStepping The processor vendor name, model number, family number, and stepping number. Currently available for x86 and Xeon Phi processors on most systems, and for ia64 processors on Linux (except CPUStepping).

CPURevision A POWER/PowerPC-specific general processor revision number, currently only available on Linux.

CPUType A Solaris-specific general processor type name, such as "i86pc".

9.2.5 OS Device Information

These info attributes are attached to OS device objects specified in parentheses.

- **Vendor, Model, Revision, SerialNumber, Size, SectorSize (Block OS devices)** The vendor and model names, revision, serial number, size (in KiB = 1024 bytes) and SectorSize (in bytes).
- LinuxDeviceID (Block OS devices) The major/minor device number such as 8:0 of Linux device.
- **CXLRAMSize, CXLPMEMSize (CXL Memory Block OS devices)** The size of the volatile (RAM) or persistent (PMEM) memory in a CXL Type-3 device. Sizes are in KiB (1024 bytes).
- GPUVendor, GPUModel (GPU or Co-Processor OS devices) The vendor and model names of the GPU device.
- OpenCLDeviceType, OpenCLPlatformIndex,
- **OpenCLPlatformName, OpenCLPlatformDeviceIndex (OpenCL OS devices)** The type of OpenCL device, the OpenCL platform index and name, and the index of the device within the platform.
- OpenCLComputeUnits, OpenCLGlobalMemorySize (OpenCL OS devices) The number of compute units and global memory size of an OpenCL device. Sizes are in KiB (1024 bytes).
- LevelZeroVendor, LevelZeroModel, LevelZeroBrand,
- **LevelZeroSerialNumber, LevelZeroBoardNumber (LevelZero OS devices)** The name of the vendor, device model, brand of a Level Zero device, and its serial and board numbers.
- **LevelZeroDriverIndex, LevelZeroDriverDeviceIndex (LevelZero OS devices)** The index of the Level Zero driver within the list of drivers, and the index of the device within the list of devices managed by this driver.
- LevelZeroUUID (LevelZero OS devices or subdevices) The UUID of the device or subdevice.
- LevelZeroSubdevices (LevelZero OS devices) The number of subdevices below this OS device.
- LevelZeroSubdeviceID (LevelZero OS subdevices) The index of this subdevice within its parent.
- **LevelZeroDeviceType** (LevelZero OS devices or subdevices) A string describing the type of device, for instance "GPU", "CPU", "FPGA", etc.
- LevelZeroNumSlices, LevelZeroNumSubslicesPerSlice,
- **LevelZeroNumEUsPerSubslice, LevelZeroNumThreadsPerEU (LevelZero OS devices or subdevices)** The number of slices in the device, of subslices per slice, of execution units (EU) per subslice, and of threads per EU.
- LevelZeroHBMSize, LevelZeroDDRSize, LevelZeroMemorySize (LevelZero OS devices or subdevices) The amount of HBM or DDR memory of a LevelZero device or subdevice. Sizes are in KiB (1024 bytes). If the type of memory could not be determined, the generic name LevelZeroMemorySize is used. For devices that contain subdevices, the amount reported in the root device includes the memories of all its subdevices.
- **LevelZeroCQGroups, LevelZeroCQGroup2 (LevelZero OS devices or subdevices)** The number of completion queue groups, and the description of the third group (as N*0xX where N is the number of queues in the group, and 0xX is the hexadecimal bitmask of ze_command_queue_group_property_flag_t listing properties of those queues).
- AMDUUID, AMDSerial (RSMI GPU OS devices) The UUID and serial number of AMD GPUs.
- **RSMIVRAMSize, RSMIVisibleVRAMSize, RSMIGTTSize (RSMI GPU OS devices)** The amount of GPU memory (VRAM), of GPU memory that is visible from the host (Visible VRAM), and of system memory that is usable by the GPU (Graphics Translation Table). Sizes are in KiB (1024 bytes).
- XGMIHiveID (RSMI GPU OS devices) The ID of the group of GPUs (Hive) interconnected by XGMI links
- **XGMIPeers (RSMI GPU OS devices)** The list of RSMI OS devices that are directly connected to the current device through XGMI links. They are given as a space-separated list of object names, for instance *rsmi2 rsmi3*.
- NVIDIAUUID, NVIDIASerial (NVML GPU OS devices) The UUID and serial number of NVIDIA GPUs.

38 Object attributes

CUDAMultiProcessors, CUDACoresPerMP,

CUDAGlobalMemorySize, **CUDAL2CacheSize**, **CUDASharedMemorySizePerMP** (**CUDA OS devices**) The number of shared multiprocessors, the number of cores per multiprocessor, the global memory size, the (global) L2 cache size, and size of the shared memory in each multiprocessor of a CUDA device. Sizes are in KiB (1024 bytes).

- **VectorEngineModel, VectorEngineSerialNumber (VectorEngine OS devices)** The model and serial number of a VectorEngine device.
- VectorEngineCores, VectorEngineMemorySize, VectorEngineLLCSize,
- VectorEngineL1dSize, VectorEngineL1dSize, VectorEngineL1iSize (VectorEngine OS devices) The number of cores, memory size, and the sizes of the (global) last level cache and of L2, L1d and L1i caches of a VectorEngine device. Sizes are in KiB (1024 bytes).
- **VectorEngineNUMAPartitioned (VectorEngine OS devices)** If this attribute exists, the VectorEngine device is configured in partitioned mode with multiple NUMA nodes.
- **Address, Port (Network interface OS devices)** The MAC address and the port number of a software network interface, such as eth4 on Linux.
- NodeGUID, SysImageGUID, Port1State, Port2LID, Port2LMC, Port3GID1 (OpenFabrics OS devices) The node GUID and GUID mask, the state of a port #1 (value is 4 when active), the LID and LID mask count of port #2, and GID #1 of port #3.
- BXIUUID (OpenFabrics BXI OS devices) The UUID of an Atos/Bull BXI HCA.

9.2.6 Other Object-specific Information

These info attributes are attached to objects specified in parentheses.

- **DAXDevice (NUMA Nodes)** The name of the Linux DAX device that was used to expose a non-volatile memory region as a volatile NUMA node.
- **DAXType (NUMA Nodes or DAX OS devices)** The type of memory exposed in a Linux DAX device or in the corresponding NUMA node, either "NVM" (non-volatile memory) or "SPM" (specific-purpose memory).
- **DAXParent (NUMA Nodes or DAX OS devices)** A string describing the Linux sysfs hierarchy that exposes the DAX device, for instance containing "hmem1" for specific-purpose memory or "ndbus0" for NVDIMMs.
- **PCIBusID (GPUMemory NUMA Nodes)** The PCI bus ID of the GPU whose memory is exposed in this NUMA node.
- **Inclusive (Caches)** The inclusiveness of a cache (1 if inclusive, 0 otherwise). Currently only available on x86 processors.
- **SolarisProcessorGroup (Group)** The Solaris kstat processor group name that was used to build this Group object.
- PCIVendor, PCIDevice (PCI devices and bridges) The vendor and device names of the PCI device.
- **PCISIot (PCI devices or Bridges)** The name/number of the physical slot where the device is plugged. If the physical device contains PCI bridges above the actual PCI device, the attribute may be attached to the highest bridge (i.e. the first object that actually appears below the physical slot).
- **Vendor, AssetTag, PartNumber, DeviceLocation, BankLocation (MemoryModule Misc objects)** Information about memory modules (DIMMs) extracted from SMBIOS.

9.2.7 User-Given Information

Here is a non-exhaustive list of user-provided info attributes that have a special meaning:

IstopoStyle Enforces the style of an object (background and text colors) in the graphical output of Istopo. See CUSTOM COLORS in the Istopo(1) manpage for details.

Topology Attributes: Distances, Memory Attributes and CPU Kinds

Besides the hierarchy of objects and individual object attributes (see Object attributes), hwloc may also expose finer information about the hardware organization.

10.1 Distances

A machine with 4 CPUs may have identical links between every pairs of CPUs, or those CPUs could also only be connected through a ring. In the ring case, accessing the memory of nearby CPUs is slower than local memory, but it is also faster than accessing the memory of CPU on the opposite side of the ring. These deep details cannot be exposed in the hwloc hierarchy, that is why hwloc also exposes distances.

Distances are matrices of values between sets of objects, usually latencies or bandwidths. By default, hwloc tries to get a matrix of relative latencies between NUMA nodes when exposed by the hardware.

In the aforementioned ring case, the matrix could report 10 for latency between a NUMA node and itself, 20 for nearby nodes, and 30 for nodes that are opposites on the ring. Those are theoretical values exposed by hardware vendors (in the System Locality Distance Information Table (SLIT) in the ACPI) rather than physical latencies. They are mostly meant for comparing node relative distances.

Distances structures currently created by hwloc are:

NUMALatency (Linux, Solaris, FreeBSD) This is the matrix of theoretical latencies described above.

XGMIBandwidth (RSMI) This is the matrix of unidirectional XGMI bandwidths between AMD GPUs (in MB/s). It contains 0 when there is no direct XGMI link between objects. Values on the diagonal are artificially set to very high so that local access always appears faster than remote access.

GPUs are identified by RSMI OS devices such as "rsmi0". They may be converted into the corresponding OpenCL or PCI devices using hwloc_get_obj_with_same_locality() or the hwloc-annotate tool.

hwloc_distances_transform() or hwloc-annotate may also be used to transform this matrix into something more convenient, for instance by replacing bandwidths with numbers of links between peers.

XGMIHops (RSMI) This matrix lists the number of XGMI hops between AMD GPUs. It reports 1 when there is a direct link between two distinct GPUs. If there is no XGMI route between them, the value is 0. The number of hops between a GPU and itself (on the diagonal) is 0 as well.

XeLinkBandwidth (LevelZero) This is the matrix of unidirectional XeLink bandwidths between Intel GPUs (in MB/s). It contains 0 when there is no direct XeLink between objects. When there are multiple links, their bandwidth is aggregated.

Values on the diagonal are artificially set to very high so that local access always appears faster than remote access. This includes bandwidths between a (sub)device and itself, between a subdevice and its parent device, or between two subdevices of the same parent.

The matrix interconnects all LevelZero devices and subdevices (if any), even if some of them may have no link at all.

NVLinkBandwidth (NVML) This is the matrix of unidirectional NVLink bandwidths between NVIDIA GPUs (in MB/s). It contains 0 when there is no direct NVLink between objects. When there are multiple links, their bandwidth is aggregated. Values on the diagonal are artificially set to very high so that local access always appears faster than remote access.

On POWER platforms, NVLinks may also connects GPUs to CPUs. On NVIDIA platforms such as DGX-2, a NVSwitch may interconnect GPUs through NVLinks. In these cases, the distances structure is heterogeneous. GPUs always appear first in the matrix (as NVML OS devices such as "nvml0"), and non-GPU objects may appear at the end (Package for POWER processors, PCI device for NVSwitch).

NVML OS devices may be converted into the corresponding CUDA, OpenCL or PCI devices using hwloc get obj with same locality() or the hwloc-annotate tool.

hwloc_distances_transform() or hwloc-annotate may also be used to transform this matrix into something more convenient, for instance by removing switches or CPU ports, or by replacing bandwidths with numbers of links between peers.

When a NVSwitch interconnects GPUs, only links between one GPU and different NVSwitch ports are reported. They may be merged into a single switch port with hwloc_distances_transform() or hwloc-annotate. Or a transitive closure may also be applied to report the bandwidth between GPUs across the NVSwitch.

Users may also specify their own matrices between any set of objects, even if these objects are of different types (e.g. bandwidths between GPUs and CPUs).

The entire API is located in **hwloc/distances.h**. See also Retrieve distances between objects, as well as Helpers for consulting distance matrices and Add distances between objects.

10.2 Memory Attributes

Machines with heterogeneous memory, for instance high-bandwidth memory (HBM), normal memory (DDR), and/or high-capacity slow memory (such as non-volatile memory DIMMs, NVDIMMs) require applications to allocate buffers in the appropriate target memory depending on performance and capacity needs. Those target nodes may be exposed in the hwloc hierarchy as different memory children but there is a need for performance information to select the appropriate one.

hwloc memory attributes are designed to expose memory information such as latency, bandwidth, etc. Users may also specify their own attributes and values.

The memory attributes API is located in **hwloc/memattrs.h**, see Comparing memory node attributes for finding where to allocate on and Managing memory attributes for details. See also an example in doc/examples/memory-attributes.c in the source tree.

10.3 CPU Kinds

Hybrid CPUs may contain different kinds of cores. The CPU kinds API in **hwloc/cpukinds.h** provides a way to list the sets of PUs in each kind and get some optional information about their hardware characteristics and efficiency. If the operating system provides efficiency information (e.g. Windows 10, MacOS X / Darwin and some Linux kernels), it is used to rank hwloc CPU kinds by efficiency. Otherwise, hwloc implements several heuristics based on frequencies and core types (see HWLOC CPUKINDS RANKING in Environment Variables).

The ranking shows energy-efficient CPUs first, and high-performance power-hungry cores last.

These CPU kinds may be annotated with the following native attributes:

FrequencyMaxMHz (Linux) The maximal operating frequency of the core, as reported by cpufreq drivers on Linux.

FrequencyBaseMHz (Linux) The base operating frequency of the core, as reported by some cpufreq drivers on Linux (e.g. intel_pstate).

CoreType (x86) A string describing the kind of core, currently IntelAtom or IntelCore, as reported by the x86 CPUID instruction on some Intel processors.

LinuxCapacity (Linux) The Linux-specific CPU capacity found in sysfs, as reported by the Linux kernel on some recent platforms. Higher values usually mean that the Linux scheduler considers the core as high-performance rather than energy-efficient.

10.3 CPU Kinds 41

LinuxCPUType (Linux) The Linux-specific CPU type found in sysfs, such as intel_atom_0, as reported by future Linux kernels on some Intel processors.

DarwinCompatible (Darwin / Mac OS X) The compatibility attribute of the CPUs as found in the IO registry on Darwin / Mac OS X. For instance apple, icestorm; ARM, v8 for energy-efficient cores and apple, firestorm; ARM, v8 on performance cores on Apple M1 CPU.

See Kinds of CPU cores for details.

42	Topology Attributes:	Distances, Memory	Attributes and CPU Kinds
			Concreted by Dovugen

Importing and exporting topologies from/to XML files

hwloc offers the ability to export topologies to XML files and reload them later. This is for instance useful for loading topologies faster (see I do not want hwloc to rediscover my enormous machine topology every time I rerun a process), manipulating other nodes' topology, or avoiding the need for privileged processes (see Does hwloc require privileged access?). Topologies may be exported to XML files thanks to hwloc_topology_export_xml(), or to a XML memory buffer with hwloc_topology_export_xmlbuffer(). The Istopo program can also serve as a XML topology export tool. XML topologies may then be reloaded later with hwloc_topology_set_xml() and hwloc_topology_set_xmlbuffer(). The HWLOC_XMLFILE environment variable also tells hwloc to load the topology from the given XML file (see Environment Variables).

Note

Loading XML topologies disables binding because the loaded topology may not correspond to the physical machine that loads it. This behavior may be reverted by asserting that loaded file really matches the underlying system with the HWLOC_THISSYSTEM environment variable or the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM topology flag.

The topology flag HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES may be used to load a XML topology that contains the entire machine and restrict it to the part that is actually available to the current process (e.g. when Linux Cgroup/Cpuset are used to restrict the set of resources).

hwloc also offers the ability to export/import Topology differences.

XML topology files are not localized. They use a dot as a decimal separator. Therefore any exported topology can be reloaded on any other machine without requiring to change the locale.

XML exports contain all details about the platform. It means that two very similar nodes still have different XML exports (e.g. some serial numbers or MAC addresses are different). If a less precise exporting/importing is required, one may want to look at Synthetic topologies instead.

11.1 libxml2 and minimalistic XML backends

hwloc offers two backends for importing/exporting XML.

First, it can use the libxml2 library for importing/exporting XML files. It features full XML support, for instance when those files have to be manipulated by non-hwloc software (e.g. a XSLT parser). The libxml2 backend is enabled by default if libxml2 development headers are available (the relevant development package is usually libxml2-devel or libxml2-dev).

If libxml2 is not available at configure time, or if <code>--disable-libxml2</code> is passed, hwloc falls back to a custom backend. Contrary to the aforementioned full XML backend with libxml2, this minimalistic XML backend cannot be guaranteed to work with external programs. It should only be assumed to be compatible with the same hwloc release (even if using the libxml2 backend). Its advantage is, however, to always be available without requiring any external dependency.

If libxml2 is available but the core hwloc library should not directly depend on it, the libxml2 support may be built as a dynamicall-loaded plugin. One should pass <code>--enable-plugins</code> to enable plugin support (when supported) and build as plugins all component that support it. Or pass <code>--enable-plugins=xml_libxml</code> to only build this libxml2 support as a plugin.

11.2 XML import error management

Importing XML files can fail at least because of file access errors, invalid XML syntax, non-hwloc-valid XML contents, or incompatibilities between hwloc releases (see Are XML topology files compatible between hwloc releases?). Both backend cannot detect all these errors when the input XML file or buffer is selected (when hwloc_topology_set_xml() or hwloc_topology_set_xmlbuffer() is called). Some errors such non-hwloc-valid contents can only be detected later when loading the topology with hwloc_topology_load().

It is therefore strongly recommended to check the return value of both hwloc_topology_set_xml() (or hwloc_topology_set_xml() (or hwloc_topology_set_xml() (or hwloc_topology_load() to handle all these errors.

Synthetic topologies

hwloc may load fake or remote topologies so as to consult them without having the underlying hardware available. Aside from loading XML topologies, hwloc also enables the building of *synthetic* topologies that are described by a single string listing the arity of each levels.

For instance, Istopo may create a topology made of 2 packages, containing a single NUMA node and a L2 cache above two single-threaded cores:

```
$ lstopo -i "pack:2 node:1 12:1 core:2 pu:1" -
Machine (2048MB)
Package L#0
NUMANode L#0 (P#0 1024MB)
L2 L#0 (4096KB)
Core L#0 + PU L#0 (P#0)
Core L#1 + PU L#1 (P#1)
Package L#1
NUMANode L#1 (P#1 1024MB)
L2 L#1 (4096KB)
Core L#2 + PU L#2 (P#2)
Core L#3 + PU L#3 (P#3)
```

Replacing - with file.xml in this command line will export this topology to XML as usual.

Note

Synthetic topologies offer a very basic way to export a topology and reimport it on another machine. It is a lot less precise than XML but may still be enough when only the hierarchy of resources matters.

12.1 Synthetic description string

Each item in the description string gives the type of the level and the number of such children under each object of the previous level. That is why the above topology contains 4 cores (2 cores times 2 nodes).

These type names must be written as numanode, package, core, 12u, 11i, pu, group (hwloc_obj_type_ sscanf() is used for parsing the type names). They do not need to be written case-sensitively, nor entirely (as long as there is no ambiguity, 2 characters such as ma select a Machine level). Note that I/O and Misc objects are not available.

Instead of specifying the type of each level, it is possible to just specify the arities and let hwloc choose all types according to usual topologies. The following examples are therefore equivalent:

```
$ lstopo -i "2 3 4 5 6"
$ lstopo -i "Package:2 NUMANode:3 L2Cache:4 Core:5 PU:6"
```

NUMA nodes are handled in a special way since they are not part of the main CPU hierarchy but rather attached below it as memory children. Thus, NUMANode: 3 actually means Group: 3 where one NUMA node is attached below each group. These groups are merged back into the parent when possible (typically when a single NUMA node is requested below each parent).

It is also possible the explicitly attach NUMA nodes to specific levels. For instance, a topology similar to a Intel Xeon Phi processor (with 2 NUMA nodes per 16-core group) may be created with:

```
$ lstopo -i "package:1 group:4 [numa] [numa] core:16 pu:4"
```

46 Synthetic topologies

The root object does not appear in the synthetic description string since it is always a Machine object. Therefore the Machine type is disallowed in the description as well.

A NUMA level (with a single NUMA node) is automatically added if needed.

Each item may be followed parentheses containing a list of space-separated attributes. For instance:

- L2iCache: 2 (size=32kB) specifies 2 children of 32kB level-2 instruction caches. The size may be specified in bytes (without any unit suffix) or as kB, KiB, MB, MiB, etc.
- NUMANode: 3 (memory=16MB) specifies 3 NUMA nodes with 16MB each. The size may be specified in bytes (without any unit suffix) or as GB, GiB, TB, TiB, etc.
- PU:2 (indexes=0, 2, 1, 3) specifies 2 PU children and the full list of OS indexes among the entire set of 4 PU objects.
- PU:2 (indexes=numa:core) specifies 2 PU children whose OS indexes are interleaved by NUMA node first and then by package.
- Attributes in parentheses at the very beginning of the description apply to the root object.

hwloc command-line tools may modify a synthetic topology, for instance to customize object attributes, or to remove some objects to make the topology heterogeneous or asymmetric. See many examples in How do I create a custom heterogeneous and asymmetric topology?.

12.2 Loading a synthetic topology

Aside from Istopo, the hwloc programming interface offers the same ability by passing the synthetic description string to hwloc_topology_set_synthetic() before hwloc_topology_load().

Synthetic topologies are created by the synthetic component. This component may be enabled by force by setting the HWLOC_SYNTHETIC environment variable to something such as node: 2 core: 3 pu: 4.

Loading a synthetic topology disables binding support since the topology usually does not match the underlying hardware. Binding may be reenabled as usual by setting HWLOC_THISSYSTEM=1 in the environment or by setting the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM topology flag.

12.3 Exporting a topology as a synthetic string

The function hwloc_topology_export_synthetic() may export a topology as a synthetic string. It offers a convenient way to quickly describe the contents of a machine. The Istopo tool may also perform such an export by forcing the output format.

```
$ lstopo --of synthetic --no-io
Package:1 L3Cache:1 L2Cache:2 L1dCache:1 L1iCache:1 Core:1 PU:2
```

The exported string may be passed back to hwloc for recreating another similar topology (see also Are synthetic strings compatible between hwloc releases?). The entire tree will be similar, but some attributes such as the processor model will be missing.

Such an export is only possible if the topology is totally symmetric. It means that the symmetric_subtree field of the root object is set. Also memory children should be attached in a symmetric way (e.g. the same number of memory children below each Package object, etc.). However, I/O devices and Misc objects are ignored when looking at symmetry and exporting the string.

Interoperability With Other Software

Although hwloc offers its own portable interface, it still may have to interoperate with specific or non-portable libraries that manipulate similar kinds of objects. hwloc therefore offers several specific "helpers" to assist converting between those specific interfaces and hwloc.

Some external libraries may be specific to a particular OS; others may not always be available. The hwloc core therefore generally does not explicitly depend on these types of libraries. However, when a custom application uses or otherwise depends on such a library, it may optionally include the corresponding hwloc helper to extend the hwloc interface with dedicated helpers.

Most of these helpers use structures that are specific to these external libraries and only meaningful on the local machine. If so, the helper requires the input topology to match the current machine. Some helpers also require I/O device discovery to be supported and enabled for the current topology.

- **Linux specific features** hwloc/linux.h offers Linux-specific helpers that utilize some non-portable features of the Linux system, such as binding threads through their thread ID ("tid") or parsing kernel CPU mask files. See Linux-specific helpers.
- **Windows specific features** hwloc/windows.h offers Windows-specific helpers to query information about Windows processor groups. See Windows-specific helpers.
- Linux libnuma hwloc/linux-libnuma.h provides conversion helpers between hwloc CPU sets and libnumaspecific types, such as bitmasks. It helps you use libnuma memory-binding functions with hwloc CPU sets. See Interoperability with Linux libnuma bitmask and Interoperability with Linux libnuma unsigned long masks.
- Glibc hwloc/glibc-sched.h offers conversion routines between Glibc and hwloc CPU sets in order to use hwloc with functions such as sched getaffinity() or pthread attr setaffinity np(). See Interoperability with glibc sched affinity.
- **OpenFabrics Verbs** hwloc/openfabrics-verbs.h helps interoperability with the OpenFabrics Verbs interface. For example, it can return a list of processors near an OpenFabrics device. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with OpenFabrics.
- OpenCL hwloc/opencl.h enables interoperability with the OpenCL interface. Only the AMD and NVIDIA implementations currently offer locality information. It may return the list of processors near a GPU given as a cl_device_id. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with OpenCL.
- oneAPI Level Zero hwloc/levelzero.h enables interoperability with the oneAPI Level Zero interface. It may return the list of processors near an accelerator or GPU. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the oneAPI Level Zero interface..
- AMD ROCm SMI Library (RSMI) hwloc/rsmi.h enables interoperability with the AMD ROCm SMI interface. It may return the list of processors near an AMD GPU. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the ROCm SMI Management Library.
- NVIDIA CUDA hwloc/cuda.h and hwloc/cudart.h enable interoperability with NVIDIA CUDA Driver and Runtime interfaces. For instance, it may return the list of processors near NVIDIA GPUs. It may also return

the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the CUDA Driver API and Interoperability with the CUDA Runtime API.

- NVIDIA Management Library (NVML) hwloc/nvml.h enables interoperability with the NVIDIA NVML interface. It may return the list of processors near a NVIDIA GPU given as a nvmlDevice_t. It may also return the corresponding OS device hwloc object for further information (if I/O device discovery is enabled). See Interoperability with the NVIDIA Management Library.
- **NVIDIA displays hwloc/gl.h** enables interoperability with NVIDIA displays using the NV-CONTROL X extension (NVCtrl library). If I/O device discovery is enabled, it may return the OS device hwloc object that corresponds to a display given as a name such as :0.0 or given as a port/device pair (server/screen). See Interoperability with OpenGL displays.
- **Taskset command-line tool** The taskset command-line tool is widely used for binding processes. It manipulates CPU set strings in a format that is slightly different from hwloc's one (it does not divide the string in fixed-size subsets and separates them with commas). To ease interoperability, hwloc offers routines to convert hwloc CPU sets from/to taskset-specific string format. See for instance hwloc_bitmap_taskset_snprintf() in The bitmap API.

 $Most\ hwloc\ command\mbox{-line tools also support the $--$taskset option to manipulate taskset-specific strings.}$

Thread Safety

Like most libraries that mainly fill data structures, hwloc is not thread safe but rather reentrant: all state is held in a hwloc_topology_t instance without mutex protection. That means, for example, that two threads can safely operate on and modify two different hwloc_topology_t instances, but they should not simultaneously invoke functions that modify the *same* instance. Similarly, one thread should not modify a hwloc_topology_t instance while another thread is reading or traversing it. However, two threads can safely read or traverse the same hwloc_topology_t instance concurrently.

When running in multiprocessor environments, be aware that proper thread synchronization and/or memory coherency protection is needed to pass hwloc data (such as hwloc_topology_t pointers) from one processor to another (e.g., a mutex, semaphore, or a memory barrier). Note that this is not a hwloc-specific requirement, but it is worth mentioning.

For reference, hwloc topology t modification operations include (but may not be limited to):

Creation and destruction hwloc_topology_load(), hwloc_topology_destroy (see Topology Creation and Destruction) imply major modifications of the structure, including freeing some objects. No other thread cannot access the topology or any of its objects at the same time.

Also references to objects inside the topology are not valid anymore after these functions return.

Runtime topology modifications hwloc_topology_insert_misc_object(),hwloc_topology_alloc_group_c and hwloc_topology_insert_group_object() (see Modifying a loaded Topology) may modify the topology significantly by adding objects inside the tree, changing the topology depth, etc.

hwloc_distances_add_commit () and hwloc_distances_remove () (see Add distances between objects) modify the list of distance structures in the topology, and the former may even insert new Group objects.

hwloc_memattr_register() and hwloc_memattr_set_value() (see Managing memory attributes) modify the memory attributes of the topology.

hwloc_topology_restrict() modifies the topology even more dramatically by removing some objects.

hwloc_topology_refresh() updates some internal cached structures. (see below).

Although references to former objects *may* still be valid after insertion or restriction, it is strongly advised to not rely on any such guarantee and always re-consult the topology to reacquire new instances of objects.

Consulting distances hwloc_distances_get () and its variants are thread-safe except if the topology was recently modified (because distances may involve objects that were removed).

Whenever the topology is modified (see above), hwloc_topology_refresh() should be called in the same thread-safe context to force the refresh of internal distances structures. A call to hwloc_distances_get() may also refresh distances-related structures.

Once this refresh has been performed, multiple $hwloc_distances_get$ () may then be performed concurrently by multiple threads.

Consulting memory attributes Functions consulting memory attributes in **hwloc/memattrs.h** are thread-safe except if the topology was recently modified (because memory attributes may involve objects that were removed).

Whenever the topology is modified (see above), hwloc_topology_refresh() should be called in the same thread-safe context to force the refresh of internal memory attribute structures. A call to

50 Thread Safety

hwloc_memattr_get_value() or hwloc_memattr_get_targets() may also refresh internal structures for a given memory attribute.

Once this refresh has been performed, multiple functions consulting memory attributes may then be performed concurrently by multiple threads.

Locating topologies hwloc_topology_set_* (see Topology Detection Configuration and Query) do not modify the topology directly, but they do modify internal structures describing the behavior of the upcoming invocation of hwloc_topology_load(). Hence, all of these functions should not be used concurrently.

Components and plugins

hwloc is organized in **components** that are responsible for discovering objects. Depending on the topology configuration, some components will be used (once enabled, they create a **backend**), some will be ignored.

The usual default is to enable the native operating system component, (e.g. linux or solaris) and the pci one. If available, an architecture-specific component (such as x86) may also improve the topology detection. Finally, some hardware-specific components (such as cuda or rsmi) may add information about GPUs, accelerators, etc. If a XML topology is loaded, the xml discovery component will be used instead of all other components.

15.1 Components enabled by default

The hwloc core contains a list of components sorted by priority. Each one is enabled as long as it does not conflict with the previously enabled ones. This includes native operating system components, architecture-specific ones, and if available, I/O components such as pci.

Usually the native operating system component (when it exists, e.g. linux or aix) is enabled first. Then hwloc looks for an architecture specific component (e.g. x86). Finally there also exist a basic component (no_os) that just tries to discover the number of PUs in the system.

Each component discovers as much topology information as possible. Most of them, including most native OS components, do nothing unless the topology is still empty. Some others, such as x86 and pci, can complete and annotate what other backends found earlier. Discovery is performed by phases: CPUs are first discovered, then memory is attached, then PCI, etc.

Default priorities ensure that clever components are invoked first. Native operating system components have higher priorities, and are therefore invoked first, because they likely offer very detailed topology information. If needed, it will be later extended by architecture-specific information (e.g. from the x86 component).

If any configuration function such as hwloc_topology_set_xml() is used before loading the topology, the corresponding component is enabled first. Then, as usual, hwloc enables any other component (based on priorities) that does not conflict.

Certain components that manage a virtual topology, for instance XML topology import or synthetic topology description, conflict with all other components. Therefore, they may only be loaded (e.g. with $hwloc_topology_set_xml()$) if no other component is enabled.

The environment variable HWLOC_COMPONENTS_VERBOSE may be set to get verbose messages about available components (including their priority) and enabling as backends.

15.2 Selecting which components to use

If no topology configuration functions such as $hwloc_topology_set_synthetic()$ have been called, components may be selected with environment variables such as $hwloc_xmlfile$, $hwloc_synthetic$, hwloc

Finally, the environment variable HWLOC_COMPONENTS resets the list of selected components. If the variable is set and empty (or set to a single comma separating nothing, since some operating systems do not accept empty variables), the normal component priority order is used.

If the variable is set to x86 in this variable will cause the x86 component to take precedence over any other component, including the native operating system component. It is therefore loaded first, before hwloc tries to load all remaining non-conflicting components. In this case, x86 would take care of discovering everything it supports,

instead of only completing what the native OS information. This may be useful if the native component is buggy on some platforms.

It is possible to prevent some components from being loaded by prefixing their name with – in the list. For instance x86, –pci will load the x86 component, then let hwloc load all the usual components except pci. A single component phase may also be blacklisted, for instance with -linux:io.

It is possible to prevent all remaining components from being loaded by placing stop in the environment variable. Only the components listed before this keyword will be enabled.

hwloc_topology_set_components() may also be used inside the program to prevent the loading of a specific component (or phases) for the target topology.

15.3 Loading components from plugins

Components may optionally be built as **plugins** so that the hwloc core library does not directly depend on their dependencies (for instance the libpciaccess library). Plugin support may be enabled with the --enable-plugins configure option. All components buildable as plugins will then be built as plugins. The configure option may be given a comma-separated list of component names to specify the exact list of components to build as plugins.

Plugins are built as independent dynamic libraries that are installed in \$libdir/hwloc. All plugins found in this directory are loaded during topology_init() (unless blacklisted in HWLOC_PLUGINS_BLACKLIST, see Environment Variables). A specific list of directories (colon-separated) to scan may be specified in the HWLOC_\circ PLUGINS_PATH environment variable.

Note that loading a plugin just means that the corresponding component is registered to the hwloc core. Components are then only enabled (as a **backend**) if the topology configuration requests it, as explained in the previous sections

Also note that plugins should carefully be enabled and used when embedding hwloc in another project, see Embedding hwloc in Other Software for details.

15.4 Existing components and plugins

All components distributed within hwloc are listed below. The list of actually available components may be listed at running with the HWLOC_COMPONENTS_VERBOSE environment variable (see Environment Variables).

- **linux** The official component for discovering CPU, memory and I/O devices on Linux. It discovers PCI devices without the help of external libraries such as libpciaccess, but requires the pci component for adding vendor/device names to PCI objects. It also discovers many kinds of Linux-specific OS devices.
- **aix**, **darwin**, **freebsd**, **hpux**, **netbsd**, **solaris**, **windows** Each officially supported operating system has its own native component, which is statically built when supported, and which is used by default.
- **x86** The x86 architecture (either 32 or 64 bits) has its own component that may complete or replace the previously-found CPU information. It is statically built when supported.
- bgq This component is specific to IBM BlueGene/Q compute node (running CNK). It is built and enabled by default when --host=powerpc64-bgq-linux is passed to configure (see How do I build hwloc for BlueGene/Q?).
- **no_os** A basic component that just tries to detect the number of processing units in the system. It mostly serves on operating systems that are not natively supported. It is always statically built.
- pci PCI object discovery uses the external libpciaccess library; see I/O Devices. It may also annotate existing PCI devices with vendor and device names. It may be built as a plugin.
- **opencl** The OpenCL component creates co-processor OS device objects such as *opencl0d0* (first device of the first OpenCL platform) or *opencl1d3* (fourth device of the second platform). Only the AMD and NVIDIA OpenCL implementations currently offer locality information. **It may be built as a plugin**.
- **rsmi** This component creates GPU OS device objects such as *rsmi0* for describing AMD GPUs. **It may be built as a plugin**.
- **levelzero** This component creates co-processor OS device objects such as *ze0* for describing oneAPI Level Zero devices. It may also create sub-OS-devices such as *ze0.0* inside those devices. **It may be built as a plugin**.

- **cuda** This component creates co-processor OS device objects such as *cuda0* that correspond to NVIDIA GPUs used with CUDA library. **It may be built as a plugin**.
- **nvml** Probing the NVIDIA Management Library creates OS device objects such as *nvml0* that are useful for batch schedulers. It also detects the actual PCIe link bandwidth without depending on power management state and without requiring administrator privileges. **It may be built as a plugin**.
- **gl** Probing the NV-CONTROL X extension (NVCtrl library) creates OS device objects such as :0.0 corresponding to NVIDIA displays. They are useful for graphical applications that need to place computation and/or data near a rendering GPU. **It may be built as a plugin**.
- synthetic Synthetic topology support (see Synthetic topologies) is always built statically.
- xml XML topology import (see Importing and exporting topologies from/to XML files) is always built statically. It internally uses a specific class of components for the actual XML import/export routines (see libxml2 and minimalistic XML backends for details).
 - xml_nolibxml is a basic and hwloc-specific XML import/export. It is always statically built.
 - xml_libxml relies on the external libxml2 library for provinding a feature-complete XML import/export.
 It may be built as a plugin.

fake A dummy plugin that does nothing but is used for debugging plugin support.

Embedding hwloc in Other Software

It can be desirable to include hwloc in a larger software package (be sure to check out the LICENSE file) so that users don't have to separately download and install it before installing your software. This can be advantageous to ensure that your software uses a known-tested/good version of hwloc, or for use on systems that do not have hwloc pre-installed.

When used in "embedded" mode, hwloc will:

- · not install any header files
- · not build any documentation files
- · not build or install any executables or tests
- not build libhwloc.* instead, it will build libhwloc_embedded.*

There are two ways to put hwloc into "embedded" mode. The first is directly from the configure command line:

```
shell$ ./configure --enable-embedded-mode ...
```

The second requires that your software project uses the GNU Autoconf / Automake / Libtool tool chain to build your software. If you do this, you can directly integrate hwloc's m4 configure macro into your configure script. You can then invoke hwloc's configuration tests and build setup by calling a m4 macro (see below).

Although hwloc dynamic shared object plugins may be used in embedded mode, the embedder project will have to manually setup dlopen or libltdl in its build system so that hwloc can load its plugins at run time. Also, embedders should be aware of complications that can arise due to public and private linker namespaces (e.g., if the embedder project is loaded into a private namespace and then hwloc tries to dynamically load its plugins, such loading may fail since the hwloc plugins can't find the hwloc symbols they need). The embedder project is **strongly** advised not to use hwloc's dynamically loading plugins / dlopen / libltdl capability.

16.1 Using hwloc's M4 Embedding Capabilities

Every project is different, and there are many different ways of integrating hwloc into yours. What follows is *one* example of how to do it.

If your project uses recent versions Autoconf, Automake, and Libtool to build, you can use hwloc's embedded m4 capabilities. We have tested the embedded m4 with projects that use Autoconf 2.65, Automake 1.11.1, and Libtool 2.2.6b. Slightly earlier versions of may also work but are untested. Autoconf versions prior to 2.65 are almost certain to not work.

You can either copy all the config/hwloc*m4 files from the hwloc source tree to the directory where your project's m4 files reside, or you can tell aclocal to find more m4 files in the embedded hwloc's "config" subdirectory (e.g., add "-lpath/to/embedded/hwloc/config" to your Makefile.am's ACLOCAL AMFLAGS).

The following macros can then be used from your configure script (only HWLOC_SETUP_CORE *must* be invoked if using the m4 macros):

HWLOC_SETUP_CORE(config-dir-prefix, action-upon-success, action-upon-failure, print_banner_or_not) ←
 Invoke the hwloc configuration tests and setup the hwloc tree to build. The first argument is the prefix to use for AC_OUTPUT files – it's where the hwloc tree is located relative to \$top_srcdir. Hence, if your

embedded hwloc is located in the source tree at contrib/hwloc, you should pass <code>[contrib/hwloc]</code> as the first argument. If HWLOC_SETUP_CORE and the rest of <code>configure</code> completes successfully, then "make" traversals of the hwloc tree with standard Automake targets (all, clean, install, etc.) should behave as expected. For example, it is safe to list the hwloc directory in the SUBDIRS of a higher-level Makefile.am. The last argument, if not empty, will cause the macro to display an announcement banner that it is starting the hwloc core configuration tests.

HWLOC_SETUP_CORE will set the following environment variables and AC_SUBST them: HWLOC_← EMBEDDED_CFLAGS, HWLOC_EMBEDDED_CPPFLAGS, and HWLOC_EMBEDDED_LIBS. These flags are filled with the values discovered in the hwloc-specific m4 tests, and can be used in your build process as relevant. The _CFLAGS, _CPPFLAGS, and _LIBS variables are necessary to build libhwloc (or libhwloc_← embedded) itself.

HWLOC_SETUP_CORE also sets HWLOC_EMBEDDED_LDADD environment variable (and AC_SUBSTs it) to contain the location of the libhwloc_embedded.la convenience Libtool archive. It can be used in your build process to link an application or other library against the embedded hwloc library.

NOTE: If the HWLOC_SET_SYMBOL_PREFIX macro is used, it must be invoked before HWLOC_ \leftarrow SETUP_CORE.

- HWLOC_BUILD_STANDALONE: HWLOC_SETUP_CORE defaults to building hwloc in an "embedded" mode (described above). If HWLOC_BUILD_STANDALONE is invoked *before* HWLOC_SETUP_CORE, the embedded definitions will not apply (e.g., libhwloc.la will be built, not libhwloc_embedded.la).
- HWLOC_SET_SYMBOL_PREFIX(foo_): Tells the hwloc to prefix all of hwloc's types and public symbols with "foo_"; meaning that function hwloc_init() becomes foo_hwloc_init(). Enum values are prefixed with an upper-case translation if the prefix supplied; HWLOC_OBJ_CORE becomes FOO_hwloc_OBJ_CORE. This is recommended behavior if you are including hwloc in middleware it is possible that your software will be combined with other software that links to another copy of hwloc. If both uses of hwloc utilize different symbol prefixes, there will be no type/symbol clashes, and everything will compile, link, and run successfully. If you both embed hwloc without changing the symbol prefix and also link against an external hwloc, you may get multiple symbol definitions when linking your final library or application.
- HWLOC_SETUP_DOCS, HWLOC_SETUP_UTILS, HWLOC_SETUP_TESTS: These three macros only apply when hwloc is built in "standalone" mode (i.e., they should NOT be invoked unless HWLOC_BUILD_

 STANDALONE has already been invoked).
- HWLOC_DO_AM_CONDITIONALS: If you embed hwloc in a larger project and build it conditionally with Automake (e.g., if HWLOC_SETUP_CORE is invoked conditionally), you must unconditionally invoke HWLOC

 _DO_AM_CONDITIONALS to avoid warnings from Automake (for the cases where hwloc is not selected to be built). This macro is necessary because hwloc uses some AM_CONDITIONALs to build itself, and AM

 _CONDITIONALS cannot be defined conditionally. Note that it is safe (but unnecessary) to call HWLOC

 _DO_AM_CONDITIONALS even if HWLOC_SETUP_CORE is invoked unconditionally. If you are not using Automake to build hwloc, this macro is unnecessary (and will actually cause errors because it invoked AM_* macros that will be undefined).

NOTE: When using the HWLOC_SETUP_CORE m4 macro, it may be necessary to explicitly invoke AC_ CANONICAL_TARGET (which requires config.sub and config.guess) and/or AC_USE_SYSTEM_EXTENSIONS macros early in the configure script (e.g., after AC_INIT but before AM_INIT_AUTOMAKE). See the Autoconf documentation for further information.

Also note that hwloc's top-level configure.ac script uses exactly the macros described above to build hwloc in a standalone mode (by default). You may want to examine it for one example of how these macros are used.

16.2 Example Embedding hwloc

Here's an example of integrating with a larger project named sandbox that already uses Autoconf, Automake, and Libtool to build itself:

```
# First, cd into the sandbox project source tree
shell$ cd sandbox
shell$ cp -r /somewhere/else/hwloc-<version> my-embedded-hwloc
shell$ edit Makefile.am
```

```
1. Add "-Imy-embedded-hwloc/config" to ACLOCAL_AMFLAGS
 2. Add "my-embedded-hwloc" to SUBDIRS
 3. Add "\$ (HWLOC_EMBEDDED_LDADD)" and "\$ (HWLOC_EMBEDDED_LIBS)" to
    sandbox's executable's LDADD line. The former is the name of the
    Libtool convenience library that hwloc will generate. The latter
    is any dependent support libraries that may be needed by
    $ (HWLOC_EMBEDDED_LDADD) .
 4. Add "$(HWLOC_EMBEDDED_CFLAGS)" to AM_CFLAGS
 5. Add "$(HWLOC_EMBEDDED_CPPFLAGS)" to AM_CPPFLAGS
shell$ edit configure.ac
 1. Add "HWLOC_SET_SYMBOL_PREFIX(sandbox_hwloc_)" line
 2. Add "HWLOC_SETUP_CORE([my-embedded-hwloc], [happy=yes], [happy=no])" line
 3. Add error checking for happy=no case
shell$ edit sandbox.c
 1. Add #include <hwloc.h>
 2. Add calls to sandbox_hwloc_init() and other hwloc API functions
```

Now you can bootstrap, configure, build, and run the sandbox as normal – all calls to "sandbox_hwloc_*" will use the embedded hwloc rather than any system-provided copy of hwloc.

Frequently Asked Questions (FAQ)

17.1 Concepts

17.1.1 I only need binding, or the number of cores, why should I use hwloc?

hwloc is its portable API that works on a variety of operating systems. It supports binding of threads, processes and memory buffers (see CPU binding and Memory binding). Even if some features are not supported on some systems, using hwloc is much easier than reimplementing your own portability layer.

Moreover, hwloc provides knowledge of cores and hardware threads. It offers easy ways to bind tasks to individual hardware threads, or to entire multithreaded cores, etc. See How may I ignore symmetric multithreading, hyper-threading, etc. in hwlo Most alternative software for binding do not even know whether each core is single-threaded, multithreaded or hyper-threaded. They would bind to individual threads without any way to know whether multiple tasks are in the same physical core.

However, using hwloc comes with an overhead since a topology must be loaded before gathering information and binding tasks or memory. Fortunately this overhead may be significantly reduced by filtering non-interesting information out of the topology, see What may I disable to make hwloc faster? below.

17.1.2 What may I disable to make hwloc faster?

Building a hwloc topology on a large machine may be slow because the discovery of hundreds of hardware cores or threads takes time (especially when reading thousands of sysfs files on Linux). Ignoring some objects (for instance caches) that aren't useful to the current application may improve this overhead. One should also consider using XML (see I do not want hwloc to rediscover my enormous machine topology every time I rerun a process) to work around such issues.

Contrary to Istopo which enables most features (see Why is Istopo slow?), the default hwloc configuration is to keep all objects enabled except I/Os and instruction caches. This usually builds a very precise view of the CPU and memory subsystems, which may be reduced if some information is unneeded.

The following code tells hwloc to build a much smaller topology that only contains Cores (explicitly filtered-in below), hardware threads (PUs, cannot be filtered-out), NUMA nodes (cannot be filtered-out), and the root object (usually a Machine; the root cannot be removed without breaking the tree):

```
hwloc_topology_t topology;
hwloc_topology_init(&topology);
/* filter everything out */
hwloc_topology_set_all_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_NONE);
/* filter Cores back in */
hwloc_topology_set_type_filter(topology, HWLOC_OBJ_CORE, HWLOC_TYPE_FILTER_KEEP_ALL);
hwloc_topology_load(topology);
```

However, one should remember that filtering such objects out removes locality information from the hwloc tree. For instance, we may not know anymore which PU is close to which NUMA node. This would be useful to applications that explicitly want to place specific memory buffers close to specific tasks. To ignore useless objects but keep those that bring locality/hierarchy information, applications may replace HWLOC_TYPE_FILTER_KEEP_NONE with HWLOC_TYPE_FILTER_KEEP_STRUCTURE above.

Starting with hwloc 2.8, it is also possible to ignore distances between objects, memory performance attributes, and

kinds of CPU cores, by setting topology flags before load:

Finally it is possible to prevent some hwloc components from being loaded and queried. If you are sure that the Linux (or x86) component is enough to discover everything you need, you may ask hwloc to disable all other components by setting something like $\verb|HWLOC_COMPONENTS=linux|$, stop in the environment. See Components and plugins for details.

17.1.3 Should I use logical or physical/OS indexes? and how?

One of the original reasons why hwloc was created is that **physical/OS indexes** (obj->os_index) are often crazy and unpredictable: processors numbers are usually non-contiguous (processors 0 and 1 are not physically close), they vary from one machine to another, and may even change after a BIOS or system update. These numbers make task placement hardly portable. Moreover some objects have no physical/OS numbers (caches), and some objects have non-unique numbers (core numbers are only unique within a socket). Physical/OS indexes are only guaranteed to exist and be unique for PU and NUMA nodes.

hwloc therefore introduces **logical indexes** (obj->logical_index) which are portable, contiguous and logically ordered (based on the resource organization in the locality tree). In general, one should only use logical indexes and just let hwloc do the internal conversion when really needed (when talking to the OS and hardware). hwloc developers recommends that users do not use physical/OS indexes unless they really know what they are doing. The main reason for still using physical/OS indexes is when interacting with non-hwloc tools such as numactl or taskset, or when reading hardware information from raw sources such as /proc/cpuinfo.

Istopo options -1 and -p may be used to switch between logical indexes (prefixed with L#) and physical/OS indexes (P#). Converting one into the other may also be achieved with hwloc-calc which may manipulate either logical or physical indexes as input or output. See also hwloc-calc.

```
# Convert PU with physical number 3 into logical number
$ hwloc-calc -I pu --physical-input --logical-output pu:3
5

# Convert a set of NUMA nodes from logical to physical
# (beware that the output order may not match the input order)
$ hwloc-calc -I numa --logical-input --physical-output numa:2-3 numa:7
0,2,5
```

17.1.4 hwloc is only a structural model, it ignores performance models, memory bandwidth, etc.?

hwloc is indeed designed to provide applications with a structural model of the platform. This is an orthogonal approach to describing the machine with performance models, for instance using memory bandwidth or latencies measured by benchmarks. We believe that both approaches are important for helping application make the most of the hardware.

For instance, on a dual-processor host with four cores each, hwloc clearly shows which four cores are together. Latencies between all pairs of cores of the same processor are likely identical, and also likely lower than the latency between cores of different processors. However, the structural model cannot guarantee such implementation details. On the other side, performance models would reveal such details without always clearly identifying which cores are in the same processor.

The focus of hwloc is mainly of the structural modeling side. However, hwloc lets user adds performance information to the topology through distances (see Distances), memory attributes (see Memory Attributes) or even custom annotations (see How do I annotate the topology with private notes?). hwloc may also use such distance information for grouping objects together (see hwloc only has a one-dimensional view of the architecture, it ignores distances? and What are these Group objects in my topology?).

17.1 Concepts 61

17.1.5 hwloc only has a one-dimensional view of the architecture, it ignores distances?

hwloc places all objects in a tree. Each level is a one-dimensional view of a set of similar objects. All children of the same object (siblings) are assumed to be equally interconnected (same distance between any of them), while the distance between children of different objects (cousins) is supposed to be larger.

Modern machines exhibit complex hardware interconnects, so this tree may miss some information about the actual physical distances between objects. The hwloc topology may therefore be annotated with distance information that may be used to build a more realistic representation (multi-dimensional) of each level. For instance, there can be a distance matrix that representing the latencies between any pair of NUMA nodes if the BIOS and/or operating system reports them.

For more information about the hwloc distances, see Distances.

17.1.6 What are these Group objects in my topology?

hwloc comes with a set of predefined object types (Core, Package, NUMA node, Caches) that match the vast majority of hardware platforms. The HWLOC_OBJ_GROUP type was designed for cases where this set is not sufficient. Groups may be used anywhere to add more structure information to the topology, for instance to show that 2 out of 4 NUMA nodes are actually closer than the others. When applicable, the <code>subtype</code> field describes why a Group was actually added (see also Normal attributes).

hwloc currently uses Groups for the following reasons:

- NUMA parents when memory locality does not match any existing object.
- I/O parents when I/O locality does not match any existing object.
- · Distance-based groups made of close objects.
- AMD Bulldozer dual-core compute units (subtype is ComputeUnit, in the x86 backend), but these objects are usually merged with the L2 caches.
- Intel Extended Topology Enumeration levels (in the x86 backend).
- Windows processor groups when HWLOC_WINDOWS_PROCESSOR_GROUP_OBJS=1 is set in the environment (except if they contain exactly a single NUMA node, or a single Package, etc.).
- IBM S/390 "Books" on Linux (subtype is Book).
- Linux Clusters of CPUs (subtype is Cluster), for instance for ARM cores sharing of some internal cache or bus, or x86 cores sharing a L2 cache (since Linux kernel 5.16). HWLOC_DONT_MERGE_CLUSTER_ GROUPS=1 may be set in the environment to disable the automerging of these groups with identical caches, etc.
- · AIX unknown hierarchy levels.

hwloc Groups are only kept if no other object has the same locality information. It means that a Group containing a single child is merged into that child. And a Group is merged into its parent if it is its only child. For instance a Windows processor group containing a single NUMA node would be merged with that NUMA node since it already contains the relevant hierarchy information.

When inserting a custom Group with hwloc_hwloc_topology_insert_group_object(), this merging may be disabled by setting its dont merge attribute.

17.1.7 What happens if my topology is asymmetric?

hwloc supports asymmetric topologies even if most platforms are usually symmetric. For example, there could be different types of processors in a single machine, each with different numbers of cores, symmetric multithreading, or levels of caches.

In practice, asymmetric topologies are rare but occur for at least two reasons:

• Intermediate groups may added for I/O affinity: on a 4-package machine, an I/O bus may be connected to 2 packages. These packages are below an additional Group object, while the other packages are not (see also What are these Group objects in my topology?).

If only part of a node is available to the current process, for instance because the resource manager uses
Linux Cgroups to restrict process resources, some cores (or NUMA nodes) will disappear from the topology
(unless flag HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was passed). On a 32-core machine
where 12 cores were allocated to the process, this may lead to one CPU package with 8 cores, another one
with only 4 cores, and two missing packages.

To understand how hwloc manages such cases, one should first remember the meaning of levels and cousin objects. All objects of the same type are gathered as horizontal levels with a given depth. They are also connected through the cousin pointers of the hwloc_obj structure. Object attribute (cache depth and type, group depth) are also taken in account when gathering objects as horizontal levels. To be clear: there will be one level for L1i caches, another level for L1d caches, another one for L2, etc.

If the topology is asymmetric (e.g., if a group is missing above some processors), a given horizontal level will still exist if there exist any objects of that type. However, some branches of the overall tree may not have an object located in that horizontal level. Note that this specific hole within one horizontal level does not imply anything for other levels. All objects of the same type are gathered in horizontal levels even if their parents or children have different depths and types.

See the diagram in Terms and Definitions for a graphical representation of such topologies.

Moreover, it is important to understand that a same parent object may have children of different types (and therefore, different depths). These children are therefore siblings (because they have the same parent), but they are not cousins (because they do not belong to the same horizontal level).

17.1.8 What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system?

hwloc creates one PU (processing unit) object per hardware thread. If your machine supports symmetric multithreading, for instance Hyper-Threading, each Core object may contain multiple PU objects:

```
$ lstopo -
...
Core L#0
PU L#0 (P#0)
PU L#1 (P#2)
Core L#1
PU L#2 (P#1)
PU L#3 (P#3)
```

x86 machines usually offer the ability to disable hyper-threading in the BIOS. Or it can be disabled on the Linux kernel command-line at boot time, or later by writing in sysfs virtual files.

If you do so, the hwloc topology structure does not significantly change, but some PU objects will not appear anymore. No level will disappear, you will see the same number of Core objects, but each of them will contain a single PU now. The PU level does not disappear either (remember that hwloc topologies always contain a PU level at the bottom of the topology) even if there is a single PU object per Core parent.

```
$ lstopo -
...
Core L#0
PU L#0 (P#0)
Core L#1
PU L#1 (P#1)
```

17.1.9 How may I ignore symmetric multithreading, hyper-threading, etc. in hwloc?

First, see What happens to my topology if I disable symmetric multithreading, hyper-threading, etc. in the system? for more information about multithreading.

If you need to ignore symmetric multithreading in software, you should likely manipulate hwloc Core objects directly:

17.2 Advanced 63

Whenever you want to bind a process or thread to a core, make sure you singlify its cpuset first, so that the task is actually bound to a single thread within this core (to avoid useless migrations).

```
/* bind on the second core */
hwloc_obj_t core = hwloc_get_obj_by_type(topology, HWLOC_OBJ_CORE, 1);
hwloc_cpuset_t set = hwloc_bitmap_dup(core->cpuset);
hwloc_bitmap_singlify(set);
hwloc_set_cpubind(topology, set, 0);
hwloc_bitmap_free(set);
```

With hwloc-calc or hwloc-bind command-line tools, you may specify that you only want a single-thread within each core by asking for their first PU object:

```
$ hwloc-calc core:4-7
0x0000ff00
$ hwloc-calc core:4-7.pu:0
0x00005500
```

When binding a process on the command-line, you may either specify the exact thread that you want to use, or ask hwloc-bind to singlify the cpuset before binding

```
$ hwloc-bind core:3.pu:0 -- echo "hello from first thread on core #3"
hello from first thread on core #3
...
$ hwloc-bind core:3 --single -- echo "hello from a single thread on core #3"
hello from a single thread on core #3
```

17.2 Advanced

17.2.1 I do not want hwloc to rediscover my enormous machine topology every time I rerun a process

Although the topology discovery is not expensive on common machines, its overhead may become significant when multiple processes repeat the discovery on large machines (for instance when starting one process per core in a parallel application). The machine topology usually does not vary much, except if some cores are stopped/restarted or if the administrator restrictions are modified. Thus rediscovering the whole topology again and again may look useless.

For this purpose, hwloc offers XML import/export and shared memory features.

XML lets you save the discovered topology to a file (for instance with the Istopo program) and reload it later by setting the HWLOC_XMLFILE environment variable. The HWLOC_THISSYSTEM environment variable should also be set to 1 to assert that loaded file is really the underlying system.

Loading a XML topology is usually much faster than querying multiple files or calling multiple functions of the operating system. It is also possible to manipulate such XML files with the C programming interface, and the import/export may also be directed to memory buffer (that may for instance be transmitted between applications through a package). See also Importing and exporting topologies from/to XML files.

Note

The environment variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES may be used to load a XML topology that contains the entire machine and restrict it to the part that is actually available to the current process (e.g. when Linux Cgroup/Cpuset are used to restrict the set of resources). See Environment Variables.

Shared-memory topologies consist in one process exposing its topology in a shared-memory buffer so that other processes (running on the same machine) may use it directly. This has the advantage of reducing the memory footprint since a single topology is stored in physical memory for multiple processes. However, it requires all processes to map this shared-memory buffer at the same virtual address, which may be difficult in some cases. This API is described in Sharing topologies between processes.

17.2.2 How many topologies may I use in my program?

hwloc lets you manipulate multiple topologies at the same time. However, these topologies consume memory and system resources (for instance file descriptors) until they are destroyed. It is therefore discouraged to open the same topology multiple times.

Sharing a single topology between threads is easy (see Thread Safety) since the vast majority of accesses are read-only.

If multiple topologies of different (but similar) nodes are needed in your program, have a look at How to avoid memory waste when man

17.2.3 How to avoid memory waste when manipulating multiple similar topologies?

hwloc does not share information between topologies. If multiple similar topologies are loaded in memory, for instance the topologies of different identical nodes of a cluster, lots of information will be duplicated.

hwloc/diff.h (see also Topology differences) offers the ability to compute topology differences, apply or unapply them, or export/import to/from XML. However, this feature is limited to basic differences such as attribute changes. It does not support complex modifications such as adding or removing some objects.

17.2.4 How do I annotate the topology with private notes?

Each hwloc object contains a userdata field that may be used by applications to store private pointers. This field is only valid during the lifetime of these container object and topology. It becomes invalid as soon the topology is destroyed, or as soon as the object disappears, for instance when restricting the topology. The userdata field is not exported/imported to/from XML by default since hwloc does not know what it contains. This behavior may be changed by specifying application-specific callbacks with hwloc_topology_set_userdata_export_callback() and hwloc_topology_set_userdata_import_callback () and hwloc_topology_set_userdata_import_callback () and hwloc_topology_set_userdata_import_callback () and that may be extended by the user with hwloc_obj_add_info() (see also Object attributes). Contrary to the userdata field which is unique, multiple info attributes may exist for each object, even with the same name. These attributes are always exported to XML. However, only character strings may be used as names and values. It is also possible to insert Misc objects with a custom name anywhere as a leaf of the topology (see Miscellaneous objects). And Misc objects may have their own userdata and info attributes just like any other object.

The hwloc-annotate command-line tool may be used for adding Misc objects and info attributes.

There is also a topology-specific userdata pointer that can be used to recognize different topologies by storing a custom pointer. It may be manipulated with hwloc_topology_get_userdata().

17.2.5 How do I create a custom heterogeneous and asymmetric topology?

Synthetic topologies (see Synthetic topologies) allow to create custom topologies but they are always symmetric: same numbers of cores in each package, same local NUMA nodes, same shared cache, etc. To create an asymmetric topology, for instance to simulate hybrid CPUs, one may want to start from a larger symmetric topology and restrict it.

Assuming we want two packages, one with 4 dual-threaded cores, and one with 8 single-threaded cores, first we create a topology with two identical packages, each with 8 dual-threaded cores:

```
$ lstopo -i "pack:2 core:8 pu:2" topo.xml
```

Then create the bitmask representing the PUs that we wish to keep and pass it to Istopo's restrict option:

```
$ hwloc-calc -i topo.xml pack:0.core:0-3.pu:0-1 pack:1.core:0-7.pu:0
0x555500ff
$ lstopo -i topo.xml --restrict 0x555500ff topo2.xml
$ mv -f topo2.xml topo.xml
```

To mark the cores of first package as Big (power hungry) and those of second package as Little (energy efficient), define CPU kinds:

```
$ hwloc-annotate topo.xml topo.xml -- none -- cpukind $(hwloc-calc -i topo.xml pack:0) 1 0 CoreType Big
$ hwloc-annotate topo.xml topo.xml -- none -- cpukind $(hwloc-calc -i topo.xml pack:1) 0 0 CoreType Little
```

A similar method may be used for heterogeneous memory. First we specify 2 NUMA nodes per package in our synthetic description:

```
$ lstopo -i "pack:2 [numa(memory=100GB)] [numa(memory=10GB)] core:8 pu:2" topo.xml
```

Then remove the second node of first package:

17.3 Caveats 65

```
$ hwloc-calc -i topo.xml --nodeset node:all ~pack:0.node:1
0x0000000e
$ lstopo -i topo.xml --restrict nodeset=0xe topo2.xml
$ mv -f topo2.xml topo.xml
```

Then make one large node even bigger:

```
$ hwloc-annotate topo.xml topo.xml -- pack:0.numa:0 -- size 200GB
```

Now we have 200GB in first package, and 100GB+10GB in second package.

Next we may specify that the small NUMA node (second of second package) is HBM while the large ones are DRAM:

```
$ hwloc-annotate topo.xml topo.xml -- pack:0.numa:0 pack:1.numa:0 -- subtype DRAM
$ hwloc-annotate topo.xml topo.xml -- pack:1.numa:1 -- subtype HBM
```

Finally we may define memory performance attributes to specify that the HBM bandwidth (200GB/s) from local cores is higher than the DRAM bandwidth (50GB/s):

```
$ hwloc-annotate topo.xml topo.xml -- pack:0.numa:0 -- memattr Bandwidth pack:0 50000
$ hwloc-annotate topo.xml topo.xml -- pack:1.numa:0 -- memattr Bandwidth pack:1 50000
$ hwloc-annotate topo.xml topo.xml -- pack:1.numa:1 -- memattr Bandwidth pack:1 200000
```

There is currently no way to create or modify I/O devices attached to such fake topologies. There is also no way to have some *partial levels*, e.g. a L3 cache in one package but not in the other.

More changes may obviously be performed by manually modifying the XML export file. Simple operations such as modifying object attributes (cache size, memory size, name-value info attributes, etc.), moving I/O subtrees, moving Misc objects, or removing objects are easy to perform.

However, modifying CPU and Memory objects requires care since cpusets and nodesets are supposed to remain consistent between parents and children. Similarly, PCI bus IDs should remain consistent between bridges and children within an I/O subtree.

17.3 Caveats

17.3.1 Why is Istopo slow?

Istopo enables most hwloc objects and discovery flags by default so that the output topology is as precise as possible (while hwloc disables many of them by default). This includes I/O device discovery through PCI libraries as well as external libraries such as NVML. To speed up Istopo, you may disable such features with command-line options such as -no-io.

When NVIDIA GPU probing is enabled (e.g. with CUDA or NVML), one may enable the *Persistent* mode (with nvidia-smi -pm 1) to avoid significant GPU wakeup and initialization overhead.

When AMD GPU discovery is enabled with OpenCL and hwloc is used remotely over ssh, some spurious round-trips on the network may significantly increase the discovery time. Forcing the DISPLAY environment variable to the remote X server display (usually:0) instead of only setting the COMPUTE variable may avoid this.

Also remember that these hwloc components may be disabled. At build-time, one may pass configure flags such as --disable-opencl, --disable-cuda, --disable-nvml, --disable-rsmi, and --disable-levelzero. At runtime, one may set the environment variable HWLOC_COMPONENTS=-opencl, -cuda, -nvml or call hwloc_topology_set_components().

Remember that these backends are disabled by default, except in Istopo. If hwloc itself is still too slow even after disabling all the I/O devices as explained above, see also What may I disable to make hwloc faster? for disabling even more features.

17.3.2 Does hwloc require privileged access?

hwloc discovers the topology by querying the operating system. Some minor features may require privileged access to the operation system. For instance memory module discovery on Linux is reserved to root, and the entire PCI

discovery on Solaris and BSDs requires access to some special files that are usually restricted to root (/dev/pci* or /devices/pci*).

To workaround this limitation, it is recommended to export the topology as a XML file generated by the administrator (with the Istopo program) and make it available to all users (see Importing and exporting topologies from/to XML files). It will offer all discovery information to any application without requiring any privileged access anymore. Only the necessary hardware characteristics will be exported, no sensitive information will be disclosed through this XML export.

This XML-based model also has the advantage of speeding up the discovery because reading a XML topology is usually much faster than querying the operating system again.

The utility hwloc-dump-hwdata is also involved in gathering privileged information at boot time and making it available to non-privileged users (note that this may require a specific SELinux MLS policy module). However, it only applies to Intel Xeon Phi processors for now (see Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?). See also HWLOC_DUMPED_HWDATA_DIR in Environment Variables for details about the location of dumped files.

17.3.3 What should I do when hwloc reports "operating system" warnings?

When the operating system reports invalid locality information (because of either software or hardware bugs), hwloc may fail to insert some objects in the topology because they cannot fit in the already built tree of resources. If so, hwloc will report a warning like the following. The object causing this error is ignored, the discovery continues but the resulting topology will miss some objects and may be asymmetric (see also What happens if my topology is asymmetric?).

```
**********

* hwloc received invalid information from the operating system.

* L3 (cpuset 0x000003f0) intersects with NUMANode (P#0 cpuset 0x0000003f) without inclusion!

* Error occurred in topology.c line 940

* Please report this error message to the hwloc user's mailing list,

* along with the files generated by the hwloc-gather-topology script.

* hwloc will now ignore this invalid topology information and continue.
```

These errors are common on large AMD platforms because of BIOS and/or Linux kernel bugs causing invalid L3 cache information. In the above example, the hardware reports a L3 cache that is shared by 2 cores in the first NUMA node and 4 cores in the second NUMA node. That's wrong, it should actually be shared by all 6 cores in a single NUMA node. The resulting topology will miss some L3 caches.

If your application does not care about cache sharing, or if you do not plan to request cache-aware binding in your process launcher, you may likely ignore this error (and hide it by setting HWLOC_HIDE_ERRORS=1 in your environment).

Some platforms report similar warnings about conflicting Packages and NUMANodes.

On x86 hosts, passing $\texttt{HWLOC_COMPONENTS} = x86$ in the environment may workaround some of these issues by switching to a different way to discover the topology.

Upgrading the BIOS and/or the operating system may help. Otherwise, as explained in the message, reporting this issue to the hwloc developers (by sending the tarball that is generated by the hwloc-gather-topology script on this platform) is a good way to make sure that this is a software (operating system) or hardware bug (BIOS, etc).

See also Questions and Bugs. Opening an issue on GitHub automatically displays hints on what information you should provide when reporting such bugs.

17.3.4 Why does Valgrind complain about hwloc memory leaks?

If you are debugging your application with Valgrind, you want to avoid memory leak reports that are caused by hwloc and not by your program.

hwloc itself is often checked with Valgrind to make sure it does not leak memory. However, some global variables in hwloc dependencies are never freed. For instance libz allocates its global state once at startup and never frees it so that it may be reused later. Some libxml2 global state is also never freed because hwloc does not know whether it can safely ask libxml2 to free it (the application may also be using libxml2 outside of hwloc).

These unfreed variables cause leak reports in Valgrind. hwloc installs a Valgrind *suppressions* file to hide them. You should pass the following command-line option to Valgrind to use it:

```
-- {\tt suppressions=/path/to/hwloc-valgrind.supp}
```

17.4 Platform-specific 67

17.4 Platform-specific

17.4.1 How do I enable ROCm SMI and select which version to use?

hwloc enables ROCm SMI as soon as it finds its development headers and libraries on the system. This detection consists in looking in /opt/rocm by default. If a ROCm version was specified with --with-rocm-version=4.4.0 or in the ROCM_VERSION environment variable, then /opt/rocm-<version> is used instead. Finally, a specific installation path may be specified with --with-rocm=/path/to/rocm. As usual, developer header and library paths may also be set through environment variables such as LIBRARY - _PATH and C_INCLUDE_PATH.

To find out whether ROCm SMI was detected and enabled, look in *Probe / display I/O devices* at the end of the configure script output. Passing --enable-rsmi will also cause configure to fail if RSMI could not be found and enabled in hwloc.

17.4.2 How do I enable CUDA and select which CUDA version to use?

hwloc enables CUDA as soon as it finds CUDA development headers and libraries on the system. This detection may be performed thanks to pkg-config but it requires hwloc to know which CUDA version to look for. This may be done by passing -with-cuda-version=11.0 to the configure script. Otherwise hwloc will also look for the CUDA VERSION environment variable.

If pkg-config does not work, passing --with-cuda=/path/to/cuda to the configure script is another way to define the corresponding library and header paths. Finally, these paths may also be set through environment variables such as LIBRARY PATH and C INCLUDE PATH.

These paths, either detected by pkg-config or given manually, will also be used to detect NVML and OpenCL libraries and enable their hwloc backends.

To find out whether CUDA was detected and enabled, look in *Probe / display I/O devices* at the end of the configure script output. Passing --enable-cuda will also cause configure to fail if CUDA could not be found and enabled in hwloc.

Note that --with-cuda=/nonexisting may be used to disable all dependencies that are installed by CUDA, i.e. the CUDA, NVML and NVIDIA OpenCL backends, since the given directory does not exist.

17.4.3 How do I find the local MCDRAM NUMA node on Intel Xeon Phi processor?

Intel Xeon Phi processors introduced a new memory architecture by possibly having two distinct local memories \leftarrow : some normal memory (DDR) and some high-bandwidth on-package memory (MCDRAM). Processors can be configured in various clustering modes to have up to 4 *Clusters*. Moreover, each *Cluster* (quarter, half or whole processor) of the processor may have its own local parts of the DDR and of the MCDRAM. This memory and clustering configuration may be probed by looking at MemoryMode and ClusterMode attributes, see Hardware Platform Information and doc/examples/get-knl-modes.c in the source directory.

Starting with version 2.0, hwloc properly exposes this memory configuration. DDR and MCDRAM are attached as two memory children of the same parent, DDR first, and MCDRAM second if any. Depending on the processor configuration, that parent may be a Package, a Cache, or a Group object of type Cluster.

Hence cores may have one or two local NUMA nodes, listed by the core nodeset. An application may allocate local memory from a core by using that nodeset. The operating system will actually allocate from the DDR when possible, or fallback to the MCDRAM.

To allocate specifically on one of these memories, one should walk up the parent pointers until finding an object with some memory children. Looking at these memory children will give the DDR first, then the MCDRAM if any. Their nodeset may then be used for allocating or binding memory buffers.

One may also traverse the list of NUMA nodes until finding some whose cpuset matches the target core or PUs. The MCDRAM NUMA nodes may be identified thanks to the <code>subtype</code> field which is set to <code>MCDRAM</code>.

Command-line tools such as hwloc-bind may bind memory on the MCDRAM by using the *hbm* keyword. For instance, to bind on the first MCDRAM NUMA node:

```
$ hwloc-bind --membind --hbm numa:0 -- myprogram
$ hwloc-bind --membind numa:0 -- myprogram
```

17.4.4 Why do I need hwloc-dump-hwdata for memory on Intel Xeon Phi processor?

Intel Xeon Phi processors may use the on-package memory (MCDRAM) as either memory or a memory-side cache (reported as a L3 cache by hwloc by default, see HWLOC_KNL_MSCACHE_L3 in Environment Variables). There

are also several clustering modes that significantly affect the memory organization (see How do I find the local MCDRAM NUMA node for more information about these modes). Details about these are currently only available to privileged users. Without them, hwloc relies on a heuristic for guessing the modes.

The hwloc-dump-hwdata utility may be used to dump this privileged binary information into human-readable and world-accessible files that the hwloc library will later load. The utility should usually run as root once during boot, in order to update dumped information (stored under /var/run/hwloc by default) in case the MCDRAM or clustering configuration changed between reboots.

When SELinux MLS policy is enabled, a specific hwloc policy module may be required so that all users get access to the dumped files (in /var/run/hwloc by default). One may use hwloc policy files from the SELinux Reference Policy at https://github.com/TresysTechnology/refpolicy-contrib (see also the documentation at https://github.com/TresysTechnology/refpolicy/wiki/GettingStarted).

hwloc-dump-hwdata requires dmi-sysfs kernel module loaded.

The utility is currently unneeded on platforms without Intel Xeon Phi processors.

See HWLOC DUMPED HWDATA DIR in Environment Variables for details about the location of dumped files.

17.4.5 How do I build hwloc for BlueGene/Q?

IBM BlueGene/Q machines run a standard Linux on the login/frontend nodes and a custom CNK (*Compute Node Kernel*) on the compute nodes.

To discover the topology of a login/frontend node, hwloc should be configured as usual, without any BlueGene/Q-specific option.

However, one would likely rather discover the topology of the compute nodes where parallel jobs are actually running. If so, hwloc must be cross-compiled with the following configuration line:

```
./configure --host=powerpc64-bgq-linux --disable-shared --enable-static 
  \label{linux} {\tt CPPFLAGS='-I/bgsys/drivers/ppcfloor-I/bgsys/drivers/ppcfloor/spi/include/kernel/cnk/'}
```

CPPFLAGS may have to be updated if your platform headers are installed in a different directory.

17.4.6 How do I build hwloc for Windows?

hwloc binary releases for Windows are available on the website download pages (as pre-built ZIPs for both 32bits and 64bits x86 platforms). However hwloc also offers several ways to build on Windows:

- The usual Unix build steps (configure, make and make install) work on the MSYS2/MinGW environment on Windows (the official hwloc binary releases are built this way). Some environment variables and options must be configured, see contrib/ci.inria.fr/job-3-mingw.sh in the hwloc repository for an example (used for nightly testing).
- hwloc also supports such Unix-like builds in Cygwin (environment for porting Unix code to Windows).
- Windows build is also possible with CMake (CMakeLists.txt available under contrib/windows-cmake/).
- hwloc also comes with an example of Microsoft Visual Studio solution (under contrib/windows/) that may serve as a base for custom builds.

17.4.7 How to get useful topology information on NetBSD?

The NetBSD (and FreeBSD) backend uses x86-specific topology discovery (through the x86 component). This implementation requires CPU binding so as to query topology information from each individual processor. This means that hwloc cannot find any useful topology information unless user-level process binding is allowed by the NetBSD kernel. The security.models.extensions.user_set_cpu_affinity sysctl variable must be set to 1 to do so. Otherwise, only the number of processors will be detected.

17.4.8 Why does binding fail on AIX?

The AIX operating system requires specific user capabilities for attaching processes to resource sets (CAP $_{\leftarrow}$ NUMA_ATTACH). Otherwise functions such as hwloc_set_cpubind() fail (return -1 with errno set to EPERM). This capability must also be inherited (through the additional CAP_PROPAGATE capability) if you plan to bind a process before forking another process, for instance with hwloc-bind.

These capabilities may be given by the administrator with:

```
chuser "capabilities=CAP_PROPAGATE,CAP_NUMA_ATTACH" <username>
```

17.5 Compatibility between hwloc versions

17.5.1 How do I handle API changes?

The hwloc interface is extended with every new major release. Any application using the hwloc API should be prepared to check at compile-time whether some features are available in the currently installed hwloc distribution. For instance, to check whether the hwloc version is at least 2.0, you should use:

```
#include <hwloc.h>
#if HWLOC_API_VERSION >= 0x00020000
...
#endif
```

To check for the API of release X.Y.Z at build time, you may compare HWLOC_API_VERSION with (X << 16) + (Y << 8) + Z.

For supporting older releases that do not have HWLOC_OBJ_NUMANODE and HWLOC_OBJ_PACKAGE yet, you may use:

```
#include <hwloc.h>
#if HWLOC_API_VERSION < 0x00010b00
#define HWLOC_OBJ_NUMANODE HWLOC_OBJ_NODE
#define HWLOC_OBJ_PACKAGE HWLOC_OBJ_SOCKET
#endif</pre>
```

Once a program is built against a hwloc library, it may also dynamically link with compatible libraries from other hwloc releases. The version of that runtime library may be queried with hwloc_get_api_version(). For instance, the following code enables the topology flag HWLOC_TOPOLOGY_FLAG_NO_DISTANCES when compiling on hwloc 2.8 or later, but it disables it at runtime if running on an older hwloc (otherwise hwloc_topology_set_flags() would fail).

```
unsigned long topology_flags = ...; /* wanted flags that were supported before 2.8 */
#if HWLOC_API_VERSION >= 0x20800
if (hwloc_get_api_version() >= 0x20800)
  topology_flags |= HWLOC_TOPOLOGY_FLAG_NO_DISTANCES; /* wanted flags only supported in 2.8+ */
#endif
hwloc_topology_set_flags(topology, topology_flags);
```

See also How do I handle ABI breaks? for using hwloc_get_api_version() for testing ABI compatibility.

17.5.2 What is the difference between API and library version numbers?

HWLOC_API_VERSION is the version of the API. It changes when functions are added, modified, etc. However it does not necessarily change from one release to another. For instance, two releases of the same series (e.g. 2.0.3 and 2.0.4) usually have the same HWLOC_API_VERSION (0x00020000). However their HWLOC_VERSION strings are different ("2.0.3" and "2.0.4" respectively).

17.5.3 How do I handle ABI breaks?

The hwloc interface was deeply modified in release 2.0 to fix several issues of the 1.x interface (see Upgrading to the hwloc 2.0 API and the NEWS file in the source directory for details). The ABI was broken, which means applications must be recompiled against the new 2.0 interface.

To check that you are not mixing old/recent headers with a recent/old runtime library, check the major revision number in the API version:

To specifically detect v2.0 issues:

```
#include <hwloc.h>
#if HWLOC_API_VERSION >= 0x00020000
   /* headers are recent */
   if (hwloc_get_api_version() < 0x20000)
        ... error out, the hwloc runtime library is older than 2.0 ...
#else
   /* headers are pre-2.0 */
   if (hwloc_get_api_version() >= 0x20000)
        ... error out, the hwloc runtime library is more recent than 2.0 ...
#endif
```

In theory, library sonames prevent linking with incompatible libraries. However custom hwloc installations or improperly configured build environments may still lead to such issues. Hence running one of the above (cheap) checks before initializing hwloc topology may be useful.

17.5.4 Are XML topology files compatible between hwloc releases?

XML topology files are forward-compatible: a XML file may be loaded by a hwloc library that is more recent than the hwloc release that exported that file.

However, hwloc XMLs are not always backward-compatible: Topologies exported by hwloc 2.x cannot be imported by 1.x by default (see XML changes for working around such issues). There are also some corner cases where backward compatibility is not guaranteed because of changes between major releases (for instance 1.11 XMLs could not be imported in 1.10).

XMLs are exchanged at runtime between some components of the HPC software stack (for instance the resource managers and MPI processes). Building all these components on the same (cluster-wide) hwloc installation is a good way to avoid such incompatibilities.

17.5.5 Are synthetic strings compatible between hwloc releases?

Synthetic strings (see Synthetic topologies) are forward-compatible: a synthetic string generated by a release may be imported by future hwloc libraries.

However they are often not backward-compatible because new details may have been added to synthetic descriptions in recent releases. Some flags may be given to hwloc_topology_export_synthetic() to avoid such details and stay backward compatible.

17.5.6 Is it possible to share a shared-memory topology between different hwloc releases?

Shared-memory topologies (see Sharing topologies between processes) have strong requirements on compatibility between hwloc libraries. Adopting a shared-memory topology fails if it was exported by a non-compatible hwloc release. Releases with same major revision are usually compatible (e.g. hwloc 2.0.4 may adopt a topology exported by 2.0.3) but different major revisions may be incompatible (e.g. hwloc 2.1.0 cannot adopt from 2.0.x).

Topologies are shared at runtime between some components of the HPC software stack (for instance the resource managers and MPI processes). Building all these components on the same (system-wide) hwloc installation is a good way to avoid such incompatibilities.

Upgrading to the hwloc 2.0 API

See Compatibility between hwloc versions for detecting the hwloc version that you are compiling and/or running against.

18.1 New Organization of NUMA nodes and Memory

18.1.1 Memory children

In hwloc v1.x, NUMA nodes were inside the tree, for instance Packages contained 2 NUMA nodes which contained a L3 and several cache.

Starting with hwloc v2.0, NUMA nodes are not in the main tree anymore. They are attached under objects as *Memory Children* on the side of normal children. This memory children list starts at obj->memory_first_ \leftarrow child and its size is obj->memory_arity. Hence there can now exist two local NUMA nodes, for instance on Intel Xeon Phi processors.

The normal list of children (starting at obj->first_child, ending at obj->last_child, of size obj->arity, and available as the array obj->children) now only contains CPU-side objects: PUs, Cores, Packages, Caches, Groups, Machine and System. hwloc_get_next_child() may still be used to iterate over all children of all lists.

Hence the CPU-side hierarchy is built using normal children, while memory is attached to that hierarchy depending on its affinity.

18.1.2 Examples

 a UMA machine with 2 packages and a single NUMA node is now modeled as a "Machine" object with two "Package" children and one "NUMANode" memory children (displayed first in Istopo below):

```
Machine (1024MB total)

NUMANode L#0 (P#0 1024MB)

Package L#0

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Package L#1

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)
```

a machine with 2 packages with one NUMA node and 2 cores in each is now:

```
Machine (2048MB total)

Package L#0

NUMANode L#0 (P#0 1024MB)

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Package L#1

NUMANode L#1 (P#1 1024MB)

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)
```

 if there are two NUMA nodes per package, a Group object may be added to keep cores together with their local NUMA node:

```
Machine (4096MB total)

Package L#0

Group0 L#0

NUMANode L#0 (P#0 1024MB)

Core L#0 + PU L#0 (P#0)

Core L#1 + PU L#1 (P#1)

Group0 L#1

NUMANode L#1 (P#1 1024MB)

Core L#2 + PU L#2 (P#2)

Core L#3 + PU L#3 (P#3)

Package L#1

[...]
```

• if the platform has L3 caches whose localities are identical to NUMA nodes, Groups aren't needed:

```
Machine (4096MB total)
Package L#0
L3 L#0 (16MB)
NUMANode L#0 (P#0 1024MB)
Core L#0 + PU L#0 (P#0)
Core L#1 + PU L#1 (P#1)
L3 L#1 (16MB)
NUMANode L#1 (P#1 1024MB)
Core L#2 + PU L#2 (P#2)
Core L#3 + PU L#3 (P#3)
Package L#1
[...]
```

18.1.3 NUMA level and depth

NUMA nodes are not in "main" tree of normal objects anymore. Hence, they don't have a meaningful depth anymore (like I/O and Misc objects). They have a virtual (negative) depth (HWLOC_TYPE_DEPTH_NUMANODE) so that functions manipulating depths and level still work, and so that we can still iterate over the level of NUMA nodes just like for any other level.

For instance we can still use lines such as

```
int depth = hwloc_get_type_depth(topology, HWLOC_OBJ_NUMANODE);
hwloc_obj_t obj = hwloc_get_obj_by_type(topology, HWLOC_OBJ_NUMANODE, 4);
hwloc_obj_t node = hwloc_get_next_obj_by_depth(topology, HWLOC_TYPE_DEPTH_NUMANODE, prev);
```

The NUMA depth should not be compared with others. An unmodified code that still compares NUMA and Package depths (to find out whether Packages contain NUMA or the contrary) would now always assume Packages contain NUMA (because the NUMA depth is negative).

18.1.4 Finding Local NUMA nodes and looking at Children and Parents

Applications that walked up/down to find NUMANode parent/children must now be updated. Instead of looking directly for a NUMA node, one should now look for an object that has some memory children. NUMA node(s) will be attached there. For instance, when looking for a NUMA node above a given core core:

```
hwloc_obj_t parent = core->parent;
while (parent && !parent->memory_arity)
  parent = parent->parent; /* no memory child, walk up */
if (parent)
  /* use parent->memory_first_child (and its siblings if there are multiple local NUMA nodes) */
```

The list of local NUMA nodes (usually a single one) is also described by the nodeset attribute of each object (which contains the physical indexes of these nodes). Iterating over the NUMA level is also an easy way to find local NUMA nodes:

```
hwloc_obj_t tmp = NULL;
while ((tmp = hwloc_get_next_obj_by_type(topology, HWLOC_OBJ_NUMANODE, tmp)) != NULL) {
```

```
if (hwloc_bitmap_isset(obj->nodeset, tmp->os_index))
   /* tmp is a NUMA node local to obj, use it */
```

Similarly finding objects that are close to a given NUMA nodes should be updated too. Instead of looking at the NUMA node parents/children, one should now find a Normal parent above that NUMA node, and then look at its parents/children as usual:

```
hwloc_obj_t tmp = obj->parent;
while (hwloc_obj_type_is_memory(tmp))
  tmp = tmp->parent;
/* now use tmp instead of obj */
```

To avoid such hwloc v2.x-specific and NUMA-specific cases in the code, a **generic lookup for any kind of object, including NUMA nodes**, might also be implemented by iterating over a level. For instance finding an object of type type which either contains or is included in object obj can be performed by traversing the level of that type and comparing CPU sets:

```
hwloc_obj_t tmp = NULL;
while ((tmp = hwloc_get_next_obj_by_type(topology, type, tmp)) != NULL) {
  if (hwloc_bitmap_intersects(tmp->cpuset, obj->cpuset))
    /* tmp matches, use it */
}
```

This generic lookup works whenever type or obj are Normal or Memory objects since both have CPU sets. Moreover, it is compatible with the hwloc v1.x API.

18.2 4 Kinds of Objects and Children

18.2.1 I/O and Misc children

I/O children are not in the main object children list anymore either. They are in the list starting at obj->io_ children list anymore either. They are in the list starting at obj->io_ children list anymore either. They are in the list starting at obj->io_ children list anymore either.

Misc children are not in the main object children list anymore. They are in the list starting at obj->misc_ \leftarrow first_child and its size is obj->misc_arity.

See hwloc obj for details about children lists.

hwloc_get_next_child() may still be used to iterate over all children of all lists.

18.2.2 Kinds of objects

Given the above, objects may now be of 4 kinds:

- · Normal (everything not listed below, including Machine, Package, Core, PU, CPU Caches, etc);
- Memory (currently NUMA nodes or Memory-side Caches), attached to parents as Memory children;
- I/O (Bridges, PCI and OS devices), attached to parents as I/O children;
- · Misc objects, attached to parents as Misc children.

See hwloc obj for details about children lists.

For a given object type, the kind may be found with hwloc_obj_type_is_normal(), hwloc_obj_type_is_memory(), hwloc_obj_type_is_normal(), or comparing with HWLOC_OBJ_MISC.

Normal and Memory objects have (non-NULL) CPU sets and nodesets, while I/O and Misc objects don't have any sets (they are NULL).

18.3 HWLOC_OBJ_CACHE replaced

Instead of a single HWLOC_OBJ_CACHE, there are now 8 types HWLOC_OBJ_L1CACHE, ..., HWLOC_OBJ_L5CACHE, HWLOC_OBJ_L1ICACHE, ..., HWLOC_OBJ_L3ICACHE.

Cache object attributes are unchanged.

hwloc_get_cache_type_depth() is not needed to disambiguate cache types anymore since new types can be passed to hwloc_get_type_depth() without ever getting HWLOC_TYPE_DEPTH_MULTIPLE anymore.

hwloc_obj_type_is_cache(), hwloc_obj_type_is_dcache() and hwloc_obj_type_is_icache() may be used to check whether a given type is a cache, data/unified cache or instruction cache.

18.4 allowed cpuset and allowed nodeset only in the main topology

Objects do not have allowed_cpuset and allowed_nodeset anymore. They are only available for the entire topology using hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset(). As usual, those are only needed when the INCLUDE_DISALLOWED topology flag is given, which means disallowed objects are kept in the topology. If so, one may find out whether some PUs inside an object is allowed by checking

```
hwloc_bitmap_intersects(obj->cpuset, hwloc_topology_get_allowed_cpuset(topology))
```

Replace cpusets with nodesets for NUMA nodes. To find out which ones, replace intersects() with and() to get the actual intersection.

18.5 Object depths are now signed int

obj->depth as well as depths given to functions such as $hwloc_get_obj_by_depth()$ or returned by $hwloc_topology_get_depth()$ are now signed int.

Other depth such as cache-specific depth attribute are still unsigned.

18.6 Memory attributes become NUMANode-specific

Memory attributes such as $obj->memory.local_memory$ are now only available in NUMANode-specific attributes in $obj->attr->numanode.local_memory$.

```
\verb"obj-> memory.total_memory" is available in all objects as \verb"obj-> total_memory".
```

See hwloc_obj_attr_u::hwloc_numanode_attr_s and hwloc_obj for details.

18.7 Topology configuration changes

hwloc_topology_ignore_type(), hwloc_topology_ignore_type_keep_structure() and hwloc_topology_ignore
 all keep_structure() are respectively superseded by

```
hwloc_topology_set_type_filter(topology, type, HWLOC_TYPE_FILTER_KEEP_NONE); hwloc_topology_set_type_filter(topology, type, HWLOC_TYPE_FILTER_KEEP_STRUCTURE); hwloc_topology_set_all_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_STRUCTURE);
```

Also, the meaning of KEEP_STRUCTURE has changed (only entire levels may be ignored, instead of single objects), the old behavior is not available anymore.

HWLOC TOPOLOGY FLAG ICACHES is superseded by

```
hwloc_topology_set_icache_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_ALL);
```

• HWLOC_TOPOLOGY_FLAG_WHOLE_IO, HWLOC_TOPOLOGY_FLAG_IO_DEVICES and HWLOC_← TOPOLOGY_FLAG_IO_BRIDGES replaced.

To keep all I/O devices (PCI, Bridges, and OS devices), use:

```
hwloc_topology_set_io_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_ALL);
```

To only keep important devices (Bridges with children, common PCI devices and OS devices):

```
hwloc_topology_set_io_types_filter(topology, HWLOC_TYPE_FILTER_KEEP_IMPORTANT);
```

18.8 XML changes 75

18.8 XML changes

2.0 XML files are not compatible with 1.x

2.0 can load 1.x files, but only NUMA distances are imported. Other distance matrices are ignored (they were never used by default anyway).

2.0 can export 1.x-compatible files, but only distances attached to the root object are exported (i.e. distances that cover the entire machine). Other distance matrices are dropped (they were never used by default anyway).

Users are advised to negociate hwloc versions between exporter and importer: If the importer isn't 2.x, the exporter should export to 1.x. Otherwise, things should work by default.

Hence hwloc_topology_export_xml() and hwloc_topology_export_xmlbuffer() have a new flags argument. to force a hwloc-1.x-compatible XML export.

- If both always support 2.0, don't pass any flag.
- When the importer uses hwloc 1.x, export with HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1. Otherwise the importer will fail to import.
- When the exporter uses hwloc 1.x, it cannot pass any flag, and a 2.0 importer can import without problem.

```
#if HWLOC_API_VERSION >= 0x20000
  if (need 1.x compatible XML export)
    hwloc_topology_export_xml(...., HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1);
  else /* need 2.x compatible XML export */
    hwloc_topology_export_xml(...., 0);
#else
  hwloc_topology_export_xml(....);
#endif
```

Additionally, hwloc_topology_diff_load_xml(), hwloc_topology_diff_load_xmlbuffer(), hwloc_topology_diff_export_xml(), hwloc_topology_diff_export_xmlbuffer() and hwloc_topology_diff_destroy() lost the topology argument: The first argument (topology) isn't needed anymore.

18.9 Distances API totally rewritten

The new distances API is in hwloc/distances.h.

Distances are not accessible directly from objects anymore. One should first call hwloc_distances_get() (or a variant) to retrieve distances (possibly with one call to get the number of available distances structures, and another call to actually get them). Then it may consult these structures, and finally release them.

The set of object involved in a distances structure is specified by an array of objects, it may not always cover the entire machine or so.

18.10 Return values of functions

Bitmap functions (and a couple other functions) can return errors (in theory).

Most bitmap functions may have to reallocate the internal bitmap storage. In v1.x, they would silently crash if realloc failed. In v2.0, they now return an int that can be negative on error. However, the preallocated storage is 512 bits, hence realloc will not even be used unless you run hwloc on machines with larger PU or NUMAnode indexes. hwloc_obj_add_info(), hwloc_cpuset_from_nodeset() and hwloc_cpuset_from_nodeset() also return an int, which would be -1 in case of allocation errors.

18.11 Misc API changes

- hwloc_type_sscanf() extends hwloc_obj_type_sscanf() by passing a union hwloc_obj_attr_u which may receive Cache, Group, Bridge or OS device attributes.
- hwloc_type_sscanf_as_depth() is also added to directly return the corresponding level depth within a topology.
- hwloc_topology_insert_misc_object_by_cpuset() is replaced with hwloc_topology_alloc_group_object() and hwloc_topology_insert_group_object().
- hwloc_topology_insert_misc_object_by_parent() is replaced with hwloc_topology_insert_misc_object().

18.12 API removals and deprecations

- · HWLOC_OBJ_SYSTEM removed: The root object is always HWLOC_OBJ_MACHINE
- _membind_nodeset() memory binding interfaces deprecated: One should use the variant without _nodeset suffix and pass the HWLOC MEMBIND BYNODESET flag.
- HWLOC_MEMBIND_REPLICATE removed: no supported operating system supports it anymore.
- hwloc_obj_snprintf() removed because it was long-deprecated by hwloc_obj_type_snprintf() and hwloc_obj_attr_snprintf().
- hwloc obj type sscanf() deprecated, hwloc obj type of string() removed.
- hwloc_cpuset_from/to_nodeset_strict() deprecated: Now useless since all topologies are NUMA. Use the variant without the strict suffix
- hwloc_distribute() and hwloc_distributev() removed, deprecated by hwloc_distrib().
- The Custom interface (hwloc_topology_set_custom(), etc.) was removed, as well as the corresponding command-line tools (hwloc-assembler, etc.). Topologies always start with object with valid cpusets and nodesets.
- obj->online_cpuset removed: Offline PUs are simply listed in the complete_cpuset as previously.
- obj->os_level removed.

Network Locality (netloc)


Portable abstraction of network topologies for high-performance computing. The netloc documentation spans of these sections:

- · Network Locality (netloc), this section below
- · Netloc with Scotch

19.1 Netloc Summary

The Portable Network Locality (netloc) software package provides network topology discovery tools, and an abstract representation of those networks topologies for a range of network types and configurations. It is provided as a companion to the Portable Hardware Locality (hwloc) package. These two software packages work together to provide a comprehensive view of the HPC system topology, spanning from the processor cores in one server to the cores in another - including the complex network(s) in between.

Towards this end, netloc is divided into two sets of components. The first tools are for the admin to extract the information about the topology of the machines with topology discovery tools for each network type and discovery technique (called readers). The second set of tools is for the user to exploit the collected information: to display the topology or create a topology-aware mapping of the processes of an application.

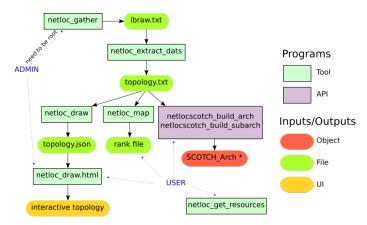

19.1.1 Supported Networks

For now, only InfiniBand (See Setup) is supported, but it is planned to be extended very soon.

19.2 Netloc Installation

The generic installation procedure for both hwloc and netloc is described in Installation.

Note that netloc is currently not supported on as many platforms as the original hwloc project. netloc is enabled by default when supported, or can be disabled by passing --disable-netloc to the configure command-line.

19.3 Setup

To use Netloc tools, we need two steps. The first step consists in getting information about network directly from tools distributed by manufacturers. For Infiniband, for instance, this operation needs privileges to access to the network device. For this step we have wrappers in Netloc that will call the right tools with the right options.

The second step will transform the raw files generated by manufacturer tools, into files in a format readable by Netloc tools, and that will not depend on network technologies.

To be clear, let's take an example with Infiniband. This first step is handled by netloc_ib_gather_raw that will call ibnetdiscover and ibroutes tools to generate the necessary raw data files. The step has to be run by an administrator, since the Infiniband tools need to access to the network device.

```
shell$ netloc_ib_gather_raw --help
Usage: netloc_ib_gather_raw [options] <outdir>
 Dumps topology information to <outdir>/ib-raw/
  Subnets are guessed from the <outdir>/hwloc/ directory where
  the hwloc XML exports of some nodes are stored.
Options:
  -sudo
   Pass sudo to internal ibnetdiscover and ibroute invocations.
    Useful when the entire script cannot run as root.
 --hwloc-dir <dir>
   Use <dir> instead of <outdir>/hwloc/ for hwloc XML exports.
 --force-subnet [<subnet>:]<board>:<port> to force the discovery
   Do not guess subnets from hwloc XML exports.
   Force discovery on local board <board> port <port>
    and optionally force the subnet id <subnet>
    instead of reading it from the first GID.
   Examples: --force-subnet mlx4_0:1
             --force-subnet fe80:0000:0000:0000:mlx4_0:1
 --ibnetdiscover /path/to/ibnetdiscover
 --ibroute /path/to/ibroute
   Specify exact location of programs. Default is /usr/bin/<program>
 --sleep <n>
   Sleep for <n> seconds between invocations of programs probing the network
 --ignore-errors
   Ignore errors from ibnetdiscover and ibroute, assume their outputs are ok
 --force -f
   Always rediscover to overwrite existing files without asking
  -verbose -v
   Add verbose messages
 --dry-run
   Do not actually run programs or modify anything
 --help -h
   Show this help
shell$ ./netloc_ib_gather_raw /home/netloc/data
WARNING: Not running as root.
Using /home/netloc/data/hwloc as hwloc lstopo XML directory.
Exporting local node hwloc XML...
  Running lstopo-no-graphics...
Found 1 subnets in hwloc directory:
Subnet fe80:0000:0000:0000 is locally accessible from board qib0 port 1.
Looking at fe80:0000:0000:0000 (through local board gib0 port 1)...
Running ibnetdiscover...
 Getting routes...
 Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L112' LID 18...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L108' LID 20...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L102' LID 23...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L104' LID 25...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L106' LID 24...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L114' LID 22...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L116' LID 21...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L109' LID 12...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L111' LID 11...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L107' LID 13...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L103' LID 17...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L105' LID 16...
  Running ibroute for switch 'QLogic 12800-180 GUID=0x00066a00e8001310 L113' LID 15...
```

19.4 Topology display 79

The second step, that can be done by a regular user, is done by the tool netloc_ib_extract_dats.

19.4 Topology display

Netloc provides a tool, netloc_draw.html, that displays a topology in a web browser, by using a JSON file.

19.4.1 Generate the JSON file

In order to display a topology, Netloc needs to generate a JSON file corresponding to a topology. For this operation, the user must run netloc_draw_to_json.


```
shell$ netloc_draw_to_json --help
Usage: netloc_draw_to_json <path to topology directory>
shell$ netloc_draw_to_json /home/netloc/data/netloc
```

The netloc_draw_to_json command will write a JSON file for each topology file found in the input directory. The output files, written also in the input directory, can be open by netloc_draw.html in a web browser.

19.4.2 Using netloc_draw

Once the JSON file is opened, the rendering is generated by the Javascript vis library for computing the position of the nodes. From the interface, it is possible to search for a specific node, to color the nodes, to expand merged switches, to show statistics, to export as an image... The user can interact with the nodes by moving them. For now, there are bugs and other nodes might move too.

The placement of the nodes is done statically if the topology is detected as a tree. If not, vis.js will use physics to find good positions, and it can be very time consuming.

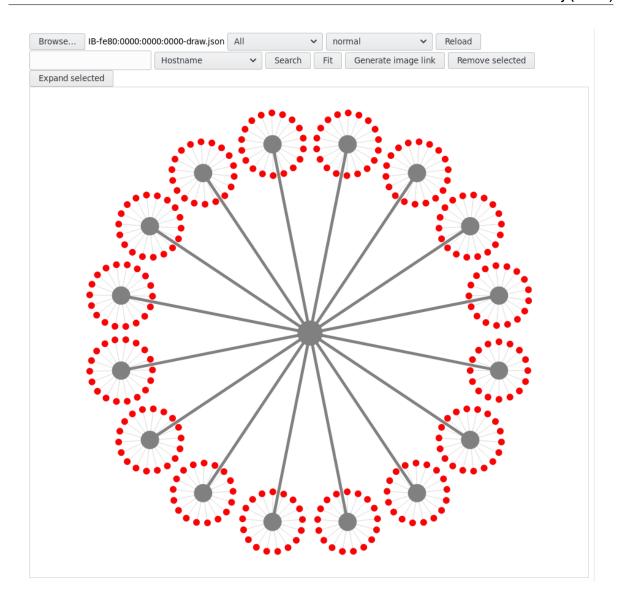

Netloc with Scotch

Scotch is a toolbox for graph partitioning [XXX], that can do mapping between a communication graph and an architecture. Netloc interfaces with Scotch, by getting the topology of the machine and building the Scotch architecture. It is also possible to directly build a mapping file that can be given to mpirun.

20.1 Introduction

Scotch is able to deal architectures to represent the topology of a complete machine. Scotch handles several types of topologies: complete graphs, hypercubes, fat trees, meshes, torus, and random graphs. Moreover, Scotch is able to manage parts of architectures that are called sub-architectures. Thus, from a complete architecture, we can create a sub-architecture that will represent the available resources of the complete machine.

20.2 Setup

The first step in order to use Netloc tools is to discover the network. For this task, we provide tools called netloc—gather that are wrappers to the dedicated tools provided by the manufacturer of the network, that generate the raw data given by the devices. This task needs privileges to access to the network devices. Once, this task is completed, the raw data is converted in a generic format independent to the fabric by extract_dats. Figure 1 shows how the different modules of Netloc are linked, and what are the tools provided by Netloc.

20.3 Tools and API

When the machine is discovered and all the needed files are generated as seen previously, a user can call the netlocscotch functions from the API and interact with Scotch.

20.3.1 Build Scotch architectures

Netloc provides a function to export the built topology into the Scotch format. That will give the possibility to the user to play with the topology in Scotch. Since Netloc matches the discovered topology with known topologies, the Scotch architecture won't be random graphs but known topologies also in Scotch that will lead to optimized graph algorithms. This function is called netlocscotch_build_arch.

When the network topology is a tree, the topology converted by netlocscotch is the complete topology of the machine containing intranode topologies from hwloc. In this case, merging the two levels results in a bigger tree. For other network topologies, the global graph created for Scotch is a generic graph since it is not (at this moment) possible to create nested known architectures.

20.3.2 Build Scotch sub-architectures

Most of the time, the user does not have access to the complete machine. He uses a resource manager to run his application and he will gain access only to a set of nodes. In this case getting the Scotch architecture of the complete machine is not relevant. Fortunately, Netloc is also able to build a Scotch sub-architecture that will contain only the available nodes. For this operation the user needs to run a specific program, netloc_get_resources, that will

82 Netloc with Scotch

record in a file, the lists of available nodes and available cores by using MPI and hwloc. From this file, the function netlocscotch build subarch will build the Scotch sub-architecture.

20.3.3 Mapping of processes

A main goal in having all these data about the network topology, especially in Scotch structures, is to help the process placement. For that, we use the mapping of a process graph to the architecture provided by Scotch. As we have seen previously, Netloc is able to detect the structure of the topology and will build the adapted Scotch architecture that will be more efficient than a random structure.

In case, the network topology is not a tree, netlocscotch converts the complete topology into a generic graph. The drawback in that is the Scotch graph algorithms are less efficient. To overcome that, netlocscotch does two steps of mapping: first it maps the processes to the nodes, and then for each node maps the processes to the cores. We have to conduct tests to check if the method gives better results than using a generic graph directly.

The other input needed in Scotch is the process graph. Since we want to optimize the placement to decrease the communication time, a good metric for building the application graph is the amount of communications between all pairs of processes. Studies still have to be done to choose, in the most efficient way, what we take into account to define the amount of communications between the number of messages, the size of messages... This information will be transformed into a process graph.

Once we have a good mapping computed by Scotch, we can give it to the user, or Netloc can even generate the corresponding rank file useful to MPI.

Chapter 21

Module Index

21.1 Modules

Here is a list of all modules:	
Error reporting in the API	87
API version	87
Object Sets (hwloc_cpuset_t and hwloc_nodeset_t)	88
Object Types	89
Object Structure and Attributes	93
Topology Creation and Destruction	93
Object levels, depths and types	96
Converting between Object Types and Attributes, and Strings	
CPU binding	
Memory binding	
Changing the Source of Topology Discovery	
Topology Detection Configuration and Query	
Modifying a loaded Topology	
Finding Objects inside a CPU set	
Finding Objects covering at least CPU set	
Looking at Ancestor and Child Objects	
Kinds of object Type	
Looking at Cache Objects	
Finding objects, miscellaneous helpers	
Distributing items over a topology	
CPU and node sets of entire topologies	
Converting between CPU sets and node sets	
Finding I/O objects	
· ·	
The bitmap API	
Exporting Topologies to XML	
Exporting Topologies to Synthetic	
Retrieve distances between objects	
Helpers for consulting distance matrices	
Add distances between objects	
Remove distances between objects	
Comparing memory node attributes for finding where to allocate on	
Managing memory attributes	
Kinds of CPU cores	
Linux-specific helpers	
Interoperability with Linux libnuma unsigned long masks	
Interoperability with Linux libnuma bitmask	
Windows-specific helpers	
Interoperability with glibc sched affinity	
Interoperability with OpenCI	193

84 Module Index

Interoperability with the CUDA Driver API	15
Interoperability with the CUDA Runtime API	7
Interoperability with the NVIDIA Management Library	8
Interoperability with the ROCm SMI Management Library	0
Interoperability with the oneAPI Level Zero interface)1
Interoperability with OpenGL displays)2
Interoperability with OpenFabrics)3
Topology differences)5
Sharing topologies between processes)9
Components and Plugins: Discovery components	1
Components and Plugins: Discovery backends	1
Components and Plugins: Generic components	3
Components and Plugins: Core functions to be used by components	4
Components and Plugins: Filtering objects	6
Components and Plugins: helpers for PCI discovery	7
Components and Plugins: finding PCI objects during other discoveries	9
Notice ADI	1

Chapter 22

Data Structure Index

22.1 Data Structures

Here are the data structures with brief descriptions:	
hwloc_backend	
Discovery backend structure	223
hwloc_obj_attr_u::hwloc_bridge_attr_s	
Bridge specific Object Attributes	224
hwloc_obj_attr_u::hwloc_cache_attr_s	
Cache-specific Object Attributes	226
hwloc_cl_device_topology_amd	226
hwloc_component	
Generic component structure	228
hwloc_disc_component	
Discovery component structure	229
hwloc disc status	
Discovery status structure	230
hwloc_distances_s	
Matrix of distances between a set of objects	231
hwloc obj attr u::hwloc group attr s	
Group-specific Object Attributes	232
hwloc_info_s	
Object info attribute (name and value strings)	233
hwloc location	
Where to measure attributes from	233
hwloc_location::hwloc_location_u	
Actual location	234
hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s	
Array of local memory page types, NULL if no local memory and page_types is 0	234
hwloc obj attr u::hwloc numanode attr s	
NUMA node-specific Object Attributes	235
hwloc obj	
Structure of a topology object	236
hwloc_obj_attr_u	
Object type-specific Attributes	241
hwloc_obj_attr_u::hwloc_osdev_attr_s	
OS Device specific Object Attributes	242
hwloc obj attr u::hwloc pcidev attr s	
PCI Device specific Object Attributes	243
hwloc_topology_cpubind_support	
Flags describing actual PU binding support for this topology	244
hwloc topology diff u::hwloc topology diff generic s	
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s	
hwloc topology diff u::hwloc topology diff obj attr s	

86 Data Structure Index

hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s	
String attribute modification with an optional name	247
hwloc_topology_diff_obj_attr_u	
One object attribute difference	248
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s	
Integer attribute modification with an optional index	249
hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s	249
hwloc_topology_diff_u	
One element of a difference list between two topologies	250
hwloc_topology_discovery_support	
Flags describing actual discovery support for this topology	251
hwloc_topology_membind_support	
Flags describing actual memory binding support for this topology	252
hwloc_topology_misc_support	
Flags describing miscellaneous features	254
hwloc_topology_support	
Set of flags describing actual support for this topology	254

Chapter 23

Module Documentation

23.1 Error reporting in the API

Most functions in the hwloc API return an integer value. Unless documentated differently, they return 0 on success and -1 on error. Functions that return a pointer type return \mathtt{NULL} on error.

errno will be set to a meaningful value whenever possible. This includes the usual EINVAL when invalid function parameters are passed or ENOMEM when an internal allocation fails. Some specific errno value are also used, for instance for binding errors as documented in CPU binding.

Some modules describe return values of their functions in their introduction, for instance in The bitmap API.

23.2 API version

Macros

- #define HWLOC_API_VERSION 0x00020800
- #define HWLOC_COMPONENT_ABI 7

Functions

• unsigned hwloc_get_api_version (void)

23.2.1 Detailed Description

23.2.2 Macro Definition Documentation

23.2.2.1 HWLOC_API_VERSION

#define HWLOC_API_VERSION 0x00020800

Indicate at build time which hwloc API version is being used.

This number is updated to (X << 16)+(Y << 8)+Z when a new release X.Y.Z actually modifies the API. Users may check for available features at build time using this number (see How do I handle API changes?).

Note

This should not be confused with HWLOC_VERSION, the library version. Two stable releases of the same series usually have the same HWLOC_API_VERSION even if their HWLOC_VERSION are different.

23.2.2.2 HWLOC COMPONENT ABI

#define HWLOC_COMPONENT_ABI 7

Current component and plugin ABI version (see hwloc/plugins.h)

23.2.3 Function Documentation

23.2.3.1 hwloc_get_api_version()

Indicate at runtime which hwloc API version was used at build time. Should be HWLOC_API_VERSION if running on the same version.

Returns

the build-time version number.

23.3 Object Sets (hwloc_cpuset_t and hwloc_nodeset_t)

Typedefs

- typedef hwloc_bitmap_t hwloc_cpuset_t
- typedef hwloc_const_bitmap_t hwloc_const_cpuset_t
- typedef hwloc_bitmap_t hwloc_nodeset_t
- typedef hwloc_const_bitmap_t hwloc_const_nodeset_t

23.3.1 Detailed Description

Hwloc uses bitmaps to represent two distinct kinds of object sets: CPU sets (hwloc_cpuset_t) and NUMA node sets (hwloc_nodeset_t). These types are both typedefs to a common back end type (hwloc_bitmap_t), and therefore all the hwloc bitmap functions are applicable to both hwloc_cpuset_t and hwloc_nodeset_t (see The bitmap API). The rationale for having two different types is that even though the actions one wants to perform on these types are the same (e.g., enable and disable individual items in the set/mask), they're used in very different contexts: one for specifying which processors to use and one for specifying which NUMA nodes to use. Hence, the name difference is really just to reflect the intent of where the type is used.

23.3.2 Typedef Documentation

23.3.2.1 hwloc_const_cpuset_t

```
typedef hwloc_const_bitmap_t hwloc_const_cpuset_t
A non-modifiable hwloc_cpuset_t.
```

23.3.2.2 hwloc const nodeset t

```
typedef hwloc_const_bitmap_t hwloc_const_nodeset_t
A non-modifiable hwloc nodeset t.
```

23.3.2.3 hwloc_cpuset_t

```
typedef hwloc_bitmap_t hwloc_cpuset_t
```

A CPU set is a bitmap whose bits are set according to CPU physical OS indexes.

It may be consulted and modified with the bitmap API as any hwloc_bitmap_t (see hwloc/bitmap.h).

Each bit may be converted into a PU object using hwloc_get_pu_obj_by_os_index().

23.4 Object Types 89

23.3.2.4 hwloc_nodeset_t

```
typedef hwloc_bitmap_t hwloc_nodeset_t
```

A node set is a bitmap whose bits are set according to NUMA memory node physical OS indexes.

It may be consulted and modified with the bitmap API as any hwloc_bitmap_t (see hwloc/bitmap.h). Each bit may be converted into a NUMA node object using hwloc_get_numanode_obj_by_os_index().

When binding memory on a system without any NUMA node, the single main memory bank is considered as NUMA node #0

See also Converting between CPU sets and node sets.

23.4 Object Types

Macros

• #define HWLOC_TYPE_UNORDERED

Typedefs

- typedef enum hwloc_obj_cache_type_e hwloc_obj_cache_type_t
- typedef enum hwloc_obj_bridge_type_e hwloc_obj_bridge_type_t
- typedef enum hwloc_obj_osdev_type_e hwloc_obj_osdev_type_t

Enumerations

```
enum hwloc_obj_type_t {
    HWLOC_OBJ_MACHINE, HWLOC_OBJ_PACKAGE, HWLOC_OBJ_CORE, HWLOC_OBJ_PU,
    HWLOC_OBJ_L1CACHE, HWLOC_OBJ_L2CACHE, HWLOC_OBJ_L3CACHE, HWLOC_OBJ_L4CACHE
    ,
    HWLOC_OBJ_L5CACHE, HWLOC_OBJ_L1ICACHE, HWLOC_OBJ_L2ICACHE, HWLOC_OBJ_L3ICACHE
    ,
    HWLOC_OBJ_GROUP, HWLOC_OBJ_NUMANODE, HWLOC_OBJ_BRIDGE, HWLOC_OBJ_PCI_DEVICE
    ,
    HWLOC_OBJ_OS_DEVICE, HWLOC_OBJ_MISC, HWLOC_OBJ_MEMCACHE, HWLOC_OBJ_DIE,
    HWLOC_OBJ_TYPE_MAX }
enum hwloc_obj_cache_type_e { HWLOC_OBJ_CACHE_UNIFIED , HWLOC_OBJ_CACHE_DATA ,
        HWLOC_OBJ_CACHE_INSTRUCTION }
enum hwloc_obj_bridge_type_e { HWLOC_OBJ_BRIDGE_HOST, HWLOC_OBJ_BRIDGE_PCI }
enum hwloc_obj_osdev_type_e {
        HWLOC_OBJ_OSDEV_BLOCK , HWLOC_OBJ_OSDEV_GPU , HWLOC_OBJ_OSDEV_NETWORK ,
        HWLOC_OBJ_OSDEV_DMA, HWLOC_OBJ_OSDEV_COPROC }
```

Functions

int hwloc_compare_types (hwloc_obj_type_t type1, hwloc_obj_type_t type2)

23.4.1 Detailed Description

23.4.2 Macro Definition Documentation

23.4.2.1 HWLOC TYPE UNORDERED

```
#define HWLOC_TYPE_UNORDERED
```

Value returned by hwloc_compare_types() when types can not be compared.

23.4.3 Typedef Documentation

23.4.3.1 hwloc_obj_bridge_type_t

typedef enum hwloc_obj_bridge_type_e hwloc_obj_bridge_type_t Type of one side (upstream or downstream) of an I/O bridge.

23.4.3.2 hwloc_obj_cache_type_t

 $\label{type_entropy} \begin{tabular}{ll} type def enum $hwloc_obj_cache_type_e & hwloc_obj_cache_type_t \\ \begin{tabular}{ll} Cache type. \end{tabular}$

23.4.3.3 hwloc_obj_osdev_type_t

typedef enum hwloc_obj_osdev_type_e hwloc_obj_osdev_type_t Type of a OS device.

23.4.4 Enumeration Type Documentation

23.4.4.1 hwloc_obj_bridge_type_e

enum hwloc_obj_bridge_type_e

Type of one side (upstream or downstream) of an I/O bridge.

Enumerator

HWLOC_OBJ_BRIDGE_HOST	Host-side of a bridge, only possible upstream.
HWLOC_OBJ_BRIDGE_PCI	PCI-side of a bridge.

23.4.4.2 hwloc_obj_cache_type_e

enum hwloc_obj_cache_type_e
Cache type.

Enumerator

HWLOC_OBJ_CACHE_UNIFIED	Unified cache.
HWLOC_OBJ_CACHE_DATA	Data cache.
HWLOC_OBJ_CACHE_INSTRUCTION	Instruction cache (filtered out by default).

23.4.4.3 hwloc_obj_osdev_type_e

enum hwloc_obj_osdev_type_e

Type of a OS device.

Enumerator

HWLOC_OBJ_OSDEV_BLOCK	Operating system block device, or non-volatile memory device. For
	instance "sda" or "dax2.0" on Linux.

23.4 Object Types 91

Enumerator

HWLOC_OBJ_OSDEV_GPU	Operating system GPU device. For instance ":0.0" for a GL display, "card0" for a Linux DRM device.
HWLOC_OBJ_OSDEV_NETWORK	Operating system network device. For instance the "eth0" interface on Linux.
HWLOC_OBJ_OSDEV_OPENFABRICS	Operating system openfabrics device. For instance the "mlx4_0" InfiniBand HCA, "hfi1_0" Omni-Path interface, or "bxi0" Atos/Bull BXI HCA on Linux.
HWLOC_OBJ_OSDEV_DMA	Operating system dma engine device. For instance the "dma0chan0" DMA channel on Linux.
HWLOC_OBJ_OSDEV_COPROC	Operating system co-processor device. For instance "opencl0d0" for a OpenCL device, "cuda0" for a CUDA device.

23.4.4.4 hwloc_obj_type_t

enum hwloc_obj_type_t

Type of topology object.

Note

Enumerator

HWLOC_OBJ_MACHINE	Machine. A set of processors and memory with cache coherency. This type is always used for the root object of a topology, and never used anywhere else. Hence its parent is always NULL.
HWLOC_OBJ_PACKAGE	Physical package. The physical package that usually gets inserted into a socket on the motherboard. A processor package usually contains multiple cores, and possibly some dies.
HWLOC_OBJ_CORE	Core. A computation unit (may be shared by several PUs, aka logical processors).
HWLOC_OBJ_PU	Processing Unit, or (Logical) Processor. An execution unit (may share a core with some other logical processors, e.g. in the case of an SMT core). This is the smallest object representing CPU resources, it cannot have any child except Misc objects. Objects of this kind are always reported and can thus be used as fallback when others are not.
HWLOC_OBJ_L1CACHE	Level 1 Data (or Unified) Cache.
HWLOC_OBJ_L2CACHE	Level 2 Data (or Unified) Cache.
HWLOC_OBJ_L3CACHE	Level 3 Data (or Unified) Cache.
HWLOC_OBJ_L4CACHE	Level 4 Data (or Unified) Cache.
HWLOC_OBJ_L5CACHE	Level 5 Data (or Unified) Cache.
HWLOC_OBJ_L1ICACHE	Level 1 instruction Cache (filtered out by default).
HWLOC_OBJ_L2ICACHE	Level 2 instruction Cache (filtered out by default).
HWLOC_OBJ_L3ICACHE	Level 3 instruction Cache (filtered out by default).
HWLOC_OBJ_GROUP	Group objects. Objects which do not fit in the above but are detected by hwloc and are useful to take into account for affinity. For instance, some operating systems expose their arbitrary processors aggregation this way. And hwloc may insert such objects to group NUMA nodes according to their distances. See also What are these Group objects in my topology?. These objects are removed when they do not bring any structure (see HWLOC_TYPE_FILTER_KEEP_STRUCTURE).

Enumerator

HWLOC_OBJ_NUMANODE	NUMA node. An object that contains memory that is directly and byte-accessible to the host processors. It is usually close to some cores (the corresponding objects are descendants of the NUMA node object in the hwloc tree). This is the smallest object representing Memory resources, it cannot have any child except Misc objects. However it may have Memory-side cache parents. There is always at least one such object in the topology even if the machine is not NUMA. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. NUMA nodes have a special depth HWLOC_TYPE_DEPTH_NUMANODE instead of a normal depth just like other objects in the main tree.
HWLOC_OBJ_BRIDGE	Bridge (filtered out by default). Any bridge (or PCI switch) that connects the host or an I/O bus, to another I/O bus. Bridges are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets.
HWLOC_OBJ_PCI_DEVICE	PCI device (filtered out by default). PCI devices are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets.
HWLOC_OBJ_OS_DEVICE	Operating system device (filtered out by default). OS devices are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter() and hwloc_topology_set_io_types_filter()). I/O objects are not listed in the main children list, but rather in the dedicated io children list. I/O objects have NULL CPU and node sets.
HWLOC_OBJ_MISC	Miscellaneous objects (filtered out by default). Objects without particular meaning, that can e.g. be added by the application for its own use, or by hwloc for miscellaneous objects such as MemoryModule (DIMMs). They are not added to the topology unless their filtering is changed (see hwloc_topology_set_type_filter()). These objects are not listed in the main children list, but rather in the dedicated misc children list. Misc objects may only have Misc objects as children, and those are in the dedicated misc children list as well. Misc objects have NULL CPU and node sets.
HWLOC_OBJ_MEMCACHE	Memory-side cache (filtered out by default). A cache in front of a specific NUMA node. This object always has at least one NUMA node as a memory child. Memory objects are not listed in the main children list, but rather in the dedicated Memory children list. Memory-side cache have a special depth HWLOC_TYPE_DEPTH_MEMCACHE instead of a normal depth just like other objects in the main tree.
HWLOC_OBJ_DIE	Die within a physical package. A subpart of the physical package, that contains multiple cores.

23.4.5 Function Documentation

23.4.5.1 hwloc_compare_types()

Compare the depth of two object types.

Types shouldn't be compared as they are, since newer ones may be added in the future.

Returns

A negative integer if type1 objects usually include type2 objects.

A positive integer if type1 objects are usually included in type2 objects.

0 if type1 and type2 objects are the same.

HWLOC_TYPE_UNORDERED if objects cannot be compared (because neither is usually contained in the other).

Note

Object types containing CPUs can always be compared (usually, a machine contains packages, which contain caches, which contain PUs).

HWLOC_OBJ_PU will always be the deepest, while HWLOC_OBJ_MACHINE is always the highest.

This does not mean that the actual topology will respect that order: e.g. as of today cores may also contain caches, and packages may also contain nodes. This is thus just to be seen as a fallback comparison method.

23.5 Object Structure and Attributes

Data Structures

- struct hwloc obj
- · union hwloc obj attr u
- struct hwloc info s

Typedefs

• typedef struct hwloc_obj * hwloc_obj_t

23.5.1 Detailed Description

23.5.2 Typedef Documentation

23.5.2.1 hwloc_obj_t

```
typedef struct hwloc_obj* hwloc_obj_t
Convenience typedef; a pointer to a struct hwloc_obj.
```

23.6 Topology Creation and Destruction

Typedefs

typedef struct hwloc topology * hwloc topology t

Functions

- int hwloc_topology_init (hwloc_topology_t *topologyp)
- int hwloc topology load (hwloc topology t topology)
- void hwloc_topology_destroy (hwloc_topology_t topology)
- int hwloc_topology_dup (hwloc_topology_t *newtopology, hwloc_topology_t oldtopology)
- int hwloc topology abi check (hwloc topology t topology)
- void hwloc_topology_check (hwloc_topology_t topology)

23.6.1 Detailed Description

23.6.2 Typedef Documentation

23.6.2.1 hwloc_topology_t

```
typedef struct hwloc_topology* hwloc_topology_t
Topology context.
```

To be initialized with hwloc_topology_init() and built with hwloc_topology_load().

23.6.3 Function Documentation

23.6.3.1 hwloc_topology_abi_check()

Verify that the topology is compatible with the current hwloc library.

This is useful when using the same topology structure (in memory) in different libraries that may use different hwloc installations (for instance if one library embeds a specific version of hwloc, while another library uses a default system-wide hwloc installation).

If all libraries/programs use the same hwloc installation, this function always returns success.

Returns

0 on success.

−1 with errno set to EINVAL if incompatible.

Note

If sharing between processes with hwloc_shmem_topology_write(), the relevant check is already performed inside hwloc_shmem_topology_adopt().

23.6.3.2 hwloc topology check()

Run internal checks on a topology structure.

The program aborts if an inconsistency is detected in the given topology.

Parameters

topology	is the topology to be checked

Note

This routine is only useful to developers.

The input topology should have been previously loaded with hwloc_topology_load().

23.6.3.3 hwloc_topology_destroy()

```
void hwloc_topology_destroy ( {\tt hwloc\_topology\_t\ topology\ )}
```

Terminate and free a topology context.

Parameters

topology	is the topology to be freed
----------	-----------------------------

23.6.3.4 hwloc_topology_dup()

Duplicate a topology.

The entire topology structure as well as its objects are duplicated into a new one.

This is useful for keeping a backup while modifying a topology.

Returns

0 on success, -1 on error.

Note

Object userdata is not duplicated since hwloc does not know what it point to. The objects of both old and new topologies will point to the same userdata.

23.6.3.5 hwloc_topology_init()

Allocate a topology context.

Parameters

	out	topologyp	is assigned a pointer to the new allocated context.	
--	-----	-----------	---	--

Returns

0 on success, -1 on error.

23.6.3.6 hwloc_topology_load()

```
int hwloc_topology_load (
          hwloc_topology_t topology )
```

Build the actual topology.

Build the actual topology once initialized with hwloc_topology_init() and tuned with Topology Detection Configuration and Query and Changing the Source of Topology Discovery routines. No other routine may be called earlier using this topology context.

Parameters

topology	is the topology to be loaded with objects.
----------	--

Returns

0 on success, -1 on error.

Note

This function may be called only once per topology.

The binding of the current thread or process may temporarily change during this call but it will be restored before it returns.

See also

Topology Detection Configuration and Query and Changing the Source of Topology Discovery

23.7 Object levels, depths and types

Enumerations

enum hwloc_get_type_depth_e {
 HWLOC_TYPE_DEPTH_UNKNOWN, HWLOC_TYPE_DEPTH_MULTIPLE, HWLOC_TYPE_DEPTH_NUMANODE
 , HWLOC_TYPE_DEPTH_BRIDGE,
 HWLOC_TYPE_DEPTH_PCI_DEVICE, HWLOC_TYPE_DEPTH_OS_DEVICE, HWLOC_TYPE_DEPTH_MISC
 , HWLOC_TYPE_DEPTH_MEMCACHE }

Functions

- int hwloc topology get depth (hwloc topology t restrict topology)
- int hwloc_get_type_depth (hwloc_topology_t topology, hwloc_obj_type_t type)
- int hwloc_get_memory_parents_depth (hwloc_topology_t topology)
- static int hwloc_get_type_or_below_depth (hwloc_topology_t topology, hwloc_obj_type_t type)
- static int hwloc_get_type_or_above_depth (hwloc_topology_t topology, hwloc_obj_type_t type)
- hwloc obj type t hwloc get depth type (hwloc topology t topology, int depth)
- unsigned hwloc get nbobjs by depth (hwloc topology t topology, int depth)
- static int hwloc_get_nbobjs_by_type (hwloc_topology_t topology, hwloc_obj_type_t type)
- static hwloc_obj_t hwloc_get_root_obj (hwloc_topology_t topology)
- hwloc_obj_t hwloc_get_obj_by_depth (hwloc_topology_t topology, int depth, unsigned idx)
- static hwloc_obj_t hwloc_get_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned idx)
- static hwloc_obj_t hwloc_get_next_obj_by_depth (hwloc_topology_t topology, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, hwloc_obj_t prev)

23.7.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.7.2 Enumeration Type Documentation

23.7.2.1 hwloc_get_type_depth_e

```
enum hwloc_get_type_depth_e
```

Enumerator

HWLOC_TYPE_DEPTH_UNKNOWN	No object of given type exists in the topology.
HWLOC_TYPE_DEPTH_MULTIPLE	Objects of given type exist at different depth in the topology (only for Groups).
HWLOC_TYPE_DEPTH_NUMANODE	Virtual depth for NUMA nodes.
HWLOC_TYPE_DEPTH_BRIDGE	Virtual depth for bridge object level.
HWLOC_TYPE_DEPTH_PCI_DEVICE	Virtual depth for PCI device object level.
HWLOC_TYPE_DEPTH_OS_DEVICE	Virtual depth for software device object level.
HWLOC_TYPE_DEPTH_MISC	Virtual depth for Misc object.
HWLOC_TYPE_DEPTH_MEMCACHE	Virtual depth for MemCache object.

23.7.3 Function Documentation

23.7.3.1 hwloc_get_depth_type()

Returns the type of objects at depth depth.

depth should between 0 and hwloc_topology_get_depth()-1, or a virtual depth such as HWLOC_TYPE_DEPTH_NUMANODE.

Returns

The type of objects at depth depth.

(hwloc_obj_type_t)-1 if depth depth does not exist.

23.7.3.2 hwloc_get_memory_parents_depth()

Return the depth of parents where memory objects are attached.

Memory objects have virtual negative depths because they are not part of the main CPU-side hierarchy of objects. This depth should not be compared with other level depths.

If all Memory objects are attached to Normal parents at the same depth, this parent depth may be compared to other as usual, for instance for knowing whether NUMA nodes is attached above or below Packages.

Returns

The depth of Normal parents of all memory children if all these parents have the same depth. For instance the depth of the Package level if all NUMA nodes are attached to Package objects.

HWLOC_TYPE_DEPTH_MULTIPLE if Normal parents of all memory children do not have the same depth. For instance if some NUMA nodes are attached to Packages while others are attached to Groups.

23.7.3.3 hwloc_get_nbobjs_by_depth()

Returns the width of level at depth depth.

Returns

The number of objects at topology depth depth.

0 if there are no objects at depth depth.

23.7.3.4 hwloc_get_nbobjs_by_type()

Returns the width of level type type.

Returns

The number of objects of type type.

-1 if there are multiple levels with objects of that type, e.g. HWLOC OBJ GROUP.

0 if there are no objects at depth depth.

23.7.3.5 hwloc_get_next_obj_by_depth()

Returns the next object at depth depth.

Returns

The first object at depth depth if prev is NULL.

The object after ${\tt prev}$ at depth depth if ${\tt prev}$ is not ${\tt NULL}.$

NULL if there is no such object.

23.7.3.6 hwloc_get_next_obj_by_type()

Returns the next object of type type.

Returns

The first object of type type if prev is NULL.

The object after prev of type type if prev is not NULL.

 ${\tt NULL}$ if there is no such object.

NULL if there are multiple levels with objects of that type (e.g. HWLOC_OBJ_GROUP), the caller may fallback to hwloc_get_obj_by_depth().

23.7.3.7 hwloc_get_obj_by_depth()

```
hwloc_obj_t hwloc_get_obj_by_depth (
          hwloc_topology_t topology,
          int depth,
          unsigned idx )
```

Returns the topology object at logical index idx from depth depth.

Returns

The object if it exists.

NULL if there is no object with this index and depth.

23.7.3.8 hwloc get obj by type()

```
static hwloc_obj_t hwloc_get_obj_by_type (
          hwloc_topology_t topology,
          hwloc_obj_type_t type,
          unsigned idx ) [inline], [static]
```

Returns the topology object at logical index idx with type type.

Returns

The object if it exists.

 \mathtt{NULL} if there is no object with this index and type.

NULL if there are multiple levels with objects of that type (e.g. HWLOC_OBJ_GROUP), the caller may fallback to hwloc_get_obj_by_depth().

23.7.3.9 hwloc_get_root_obj()

Returns the top-object of the topology-tree.

Its type is HWLOC_OBJ_MACHINE.

This function cannot return NULL.

23.7.3.10 hwloc_get_type_depth()

Returns the depth of objects of type type.

Returns

The depth of objects of type type.

A negative virtual depth if a NUMA node, I/O or Misc object type is given. These objects are stored in special levels that are not CPU-related. This virtual depth may be passed to other hwloc functions such as hwloc_get_obj_by_depth() but it should not be considered as an actual depth by the application. In particular, it should not be compared with any other object depth or with the entire topology depth.

HWLOC_TYPE_DEPTH_UNKNOWN if no object of this type is present on the underlying architecture, or if the OS doesn't provide this kind of information.

HWLOC_TYPE_DEPTH_MULTIPLE if type HWLOC_OBJ_GROUP is given and multiple levels of Groups exist.

Note

If the type is absent but a similar type is acceptable, see also hwloc_get_type_or_below_depth() and hwloc_get_type_or_above_depth().

See also

hwloc get memory parents depth() for managing the depth of memory objects.

hwloc_type_sscanf_as_depth() for returning the depth of objects whose type is given as a string.

23.7.3.11 hwloc_get_type_or_above_depth()

Returns the depth of objects of type type or above.

If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically containing type.

This function is only meaningful for normal object types. If a memory, I/O or Misc object type is given, the corresponding virtual depth is always returned (see <a href="https://www.hullon.com/hullon/hullo

May return HWLOC_TYPE_DEPTH_MULTIPLE for HWLOC_OBJ_GROUP just like hwloc_get_type_depth().

23.7.3.12 hwloc get type or below depth()

Returns the depth of objects of type ${\tt type}$ or below.

If no object of this type is present on the underlying architecture, the function returns the depth of the first "present" object typically found inside type.

This function is only meaningful for normal object types. If a memory, I/O or Misc object type is given, the corresponding virtual depth is always returned (see <a href="https://www.hullon.com/hullon/hullo

May return HWLOC_TYPE_DEPTH_MULTIPLE for HWLOC_OBJ_GROUP just like hwloc_get_type_depth().

23.7.3.13 hwloc topology get depth()

Get the depth of the hierarchical tree of objects.

This is the depth of HWLOC_OBJ_PU objects plus one.

Returns

the depth of the object tree.

Note

NUMA nodes, I/O and Misc objects are ignored when computing the depth of the tree (they are placed on special levels).

23.8 Converting between Object Types and Attributes, and Strings

Functions

- const char * hwloc_obj_type_string (hwloc_obj_type_t type)
- int hwloc_obj_type_snprintf (char *restrict string, size_t size, hwloc_obj_t obj, int verbose)
- int hwloc_obj_attr_snprintf (char *restrict string, size_t size, hwloc_obj_t obj, const char *restrict separator, int verbose)

- int hwloc_type_sscanf (const char *string, hwloc_obj_type_t *typep, union hwloc_obj_attr_u *attrp, size_t attrsize)
- int hwloc_type_sscanf_as_depth (const char *string, hwloc_obj_type_t *typep, hwloc_topology_t topology, int *depthp)

23.8.1 Detailed Description

23.8.2 Function Documentation

23.8.2.1 hwloc_obj_attr_snprintf()

Stringify the attributes of a given topology object into a human-readable form.

Attribute values are separated by separator.

Only the major attributes are printed in non-verbose mode.

If size is 0, string may safely be NULL.

Returns

the number of characters that were actually written if not truncating, or that would have been written (not including the ending \0).

23.8.2.2 hwloc_obj_type_snprintf()

Stringify the type of a given topology object into a human-readable form.

Contrary to hwloc_obj_type_string(), this function includes object-specific attributes (such as the Group depth, the Bridge type, or OS device type) in the output, and it requires the caller to provide the output buffer.

The output is guaranteed to be the same for all objects of a same topology level.

If verbose is 1, longer type names are used, e.g. L1Cache instead of L1.

The output string may be parsed back by hwloc type sscanf().

If size is 0, string may safely be NULL.

Returns

the number of characters that were actually written if not truncating, or that would have been written (not including the ending \0).

23.8.2.3 hwloc_obj_type_string()

Return a constant stringified object type.

This function is the basic way to convert a generic type into a string. The output string may be parsed back by hwloc_type_sscanf().

hwloc_obj_type_snprintf() may return a more precise output for a specific object, but it requires the caller to provide the output buffer.

Returns

A constant string containing the object type name or "Unknown".

23.8.2.4 hwloc_type_sscanf()

Return an object type and attributes from a type string.

Convert strings such as "Package" or "L1iCache" into the corresponding types. Matching is case-insensitive, and only the first letters are actually required to match.

The matched object type is set in typep (which cannot be NULL).

Type-specific attributes, for instance Cache type, Cache depth, Group depth, Bridge type or OS Device type may be returned in attrp. Attributes that are not specified in the string (for instance "Group" without a depth, or "L2Cache" without a cache type) are set to -1.

attrp is only filled if not <code>NULL</code> and if its size specified in <code>attrsize</code> is large enough. It should be at least as large as union <code>hwloc_obj_attr_u</code>.

Returns

0 if a type was correctly identified, otherwise -1.

Note

This function is guaranteed to match any string returned by hwloc_obj_type_string() or hwloc_obj_type_snprintf(). This is an extended version of the now deprecated hwloc_obj_type_sscanf().

23.8.2.5 hwloc_type_sscanf_as_depth()

Return an object type and its level depth from a type string.

Convert strings such as "Package" or "L1iCache" into the corresponding types and return in depthp the depth of the corresponding level in the topology topology.

If no object of this type is present on the underlying architecture, HWLOC_TYPE_DEPTH_UNKNOWN is returned. If multiple such levels exist (for instance if giving Group without any depth), the function may return HWLOC TYPE DEPTH MULTIPLE instead.

The matched object type is set in ${\tt typep}$ if ${\tt typep}$ is non ${\tt NULL}.$

Note

This function is similar to hwloc_type_sscanf() followed by hwloc_get_type_depth() but it also automatically disambiguates multiple group levels etc.

This function is guaranteed to match any string returned by hwloc_obj_type_string() or hwloc_obj_type_snprintf().

23.9 Consulting and Adding Info Attributes

Functions

- static const char * hwloc_obj_get_info_by_name (hwloc_obj_t obj, const char *name)
- int hwloc_obj_add_info (hwloc_obj_t obj, const char *name, const char *value)

23.10 CPU binding 103

23.9.1 Detailed Description

23.9.2 Function Documentation

23.9.2.1 hwloc_obj_add_info()

Add the given name and value pair to the given object info attributes.

The info pair is appended to the existing info array even if another pair with the same name already exists.

The input strings are copied before being added in the object infos.

Returns

0 on success, -1 on error.

Note

This function may be used to enforce object colors in the Istopo graphical output by adding "IstopoStyle" as a name and "Background=#rrggbb" as a value. See CUSTOM COLORS in the Istopo(1) manpage for details.

If name or value contain some non-printable characters, they will be dropped when exporting to XML, see hwloc topology export xml() in hwloc/export.h.

23.9.2.2 hwloc_obj_get_info_by_name()

Search the given name in object infos and return the corresponding value.

If multiple info attributes match the given name, only the first one is returned.

Returns

A pointer to the value string if it exists.

NULL if no such info attribute exists.

Note

The string should not be freed by the caller, it belongs to the hwloc library.

23.10 CPU binding

Enumerations

enum hwloc_cpubind_flags_t { HWLOC_CPUBIND_PROCESS , HWLOC_CPUBIND_THREAD , HWLOC_CPUBIND_STRICT, HWLOC_CPUBIND_NOMEMBIND }

Functions

- int hwloc_set_cpubind (hwloc_topology_t topology, hwloc_const_cpuset_t set, int flags)
- int hwloc_get_cpubind (hwloc_topology_t topology, hwloc_cpuset_t set, int flags)
- int hwloc_set_proc_cpubind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_const_cpuset_t set, int flags)
- int hwloc get proc cpubind (hwloc topology t topology, hwloc pid t pid, hwloc cpuset t set, int flags)

int hwloc_set_thread_cpubind (hwloc_topology_t topology, hwloc_thread_t thread, hwloc_const_cpuset_t set, int flags)

- int hwloc_get_thread_cpubind (hwloc_topology_t topology, hwloc_thread_t thread, hwloc_cpuset_t set, int flags)
- int hwloc_get_last_cpu_location (hwloc_topology_t topology, hwloc_cpuset_t set, int flags)
- int hwloc_get_proc_last_cpu_location (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_cpuset_t set, int flags)

23.10.1 Detailed Description

Some operating systems only support binding threads or processes to a single PU. Others allow binding to larger sets such as entire Cores or Packages or even random sets of individual PUs. In such operating system, the scheduler is free to run the task on one of these PU, then migrate it to another PU, etc. It is often useful to call hwloc_bitmap_singlify() on the target CPU set before passing it to the binding function to avoid these expensive migrations. See the documentation of hwloc_bitmap_singlify() for details.

Some operating systems do not provide all hwloc-supported mechanisms to bind processes, threads, etc. hwloc_topology_get_support() may be used to query about the actual CPU binding support in the currently used operating system.

When the requested binding operation is not available and the HWLOC_CPUBIND_STRICT flag was passed, the function returns -1. errno is set to ENOSYS when it is not possible to bind the requested kind of object processes/threads. errno is set to EXDEV when the requested cpuset can not be enforced (e.g. some systems only allow one CPU, and some other systems only allow one NUMA node).

If HWLOC_CPUBIND_STRICT was not passed, the function may fail as well, or the operating system may use a slightly different operation (with side-effects, smaller binding set, etc.) when the requested operation is not exactly supported.

The most portable version that should be preferred over the others, whenever possible, is the following one which just binds the current program, assuming it is single-threaded:

hwloc_set_cpubind(topology, set, 0),

If the program may be multithreaded, the following one should be preferred to only bind the current thread:
hwloc_set_cpubind(topology, set, HWLOC_CPUBIND_THREAD),

See also

Some example codes are available under doc/examples/ in the source tree.

Note

To unbind, just call the binding function with either a full cpuset or a cpuset equal to the system cpuset.

On some operating systems, CPU binding may have effects on memory binding, see HWLOC_CPUBIND_NOMEMBIND Running Istopo --top or hwloc-ps can be a very convenient tool to check how binding actually happened.

23.10.2 Enumeration Type Documentation

23.10.2.1 hwloc_cpubind_flags_t

enum hwloc_cpubind_flags_t

Process/Thread binding flags.

These bit flags can be used to refine the binding policy.

The default (0) is to bind the current process, assumed to be single-threaded, in a non-strict way. This is the most portable way to bind as all operating systems usually provide it.

Note

Not all systems support all kinds of binding. See the "Detailed Description" section of CPU binding for a description of errors that can occur.

23.10 CPU binding

Enumerator

HWLOC_CPUBIND_PROCESS	Bind all threads of the current (possibly) multithreaded process.
HWLOC_CPUBIND_THREAD	Bind current thread of current process.
HWLOC_CPUBIND_STRICT	Request for strict binding from the OS. By default, when the designated CPUs are all busy while other CPUs are idle, operating systems may execute the thread/process on those other CPUs instead of the designated CPUs, to let them progress anyway. Strict binding means that the thread/process will _never_ execute on other CPUs than the designated CPUs, even when those are busy with other tasks and other CPUs are idle.
	Note
	Depending on the operating system, strict binding may not be possible (e.g., the OS does not implement it) or not allowed (e.g., for an administrative reasons), and the function will fail in that case.
	When retrieving the binding of a process, this flag checks whether all its threads actually have the same binding. If the flag is not given, the binding of each thread will be accumulated.
	Note
	This flag is meaningless when retrieving the binding of a thread.
HWLOC_CPUBIND_NOMEMBIND	Avoid any effect on memory binding. On some operating systems, some CPU binding function would also bind the memory on the corresponding NUMA node. It is often not a problem for the application, but if it is, setting this flag will make hwloc avoid using OS functions that would also bind memory. This will however reduce the support of CPU bindings, i.e. potentially return -1 with errno set to ENOSYS in some cases. This flag is only meaningful when used with functions that set the CPU binding. It is ignored when used with functions that get CPU binding information.

23.10.3 Function Documentation

23.10.3.1 hwloc_get_cpubind()

```
int hwloc_get_cpubind (
          hwloc_topology_t topology,
          hwloc_cpuset_t set,
          int flags )
```

Get current process or thread binding.

The CPU-set set (previously allocated by the caller) is filled with the list of PUs which the process or thread (according to flags) was last bound to.

Returns

0 on success, -1 on error.

23.10.3.2 hwloc_get_last_cpu_location()

```
hwloc_cpuset_t set,
int flags )
```

Get the last physical CPU where the current process or thread ran.

The CPU-set set (previously allocated by the caller) is filled with the list of PUs which the process or thread (according to *flags*) last ran on.

The operating system may move some tasks from one processor to another at any time according to their binding, so this function may return something that is already outdated.

flags can include either HWLOC_CPUBIND_PROCESS or HWLOC_CPUBIND_THREAD to specify whether the query should be for the whole process (union of all CPUs on which all threads are running), or only the current thread. If the process is single-threaded, flags can be set to zero to let hwloc use whichever method is available on the underlying OS.

Returns

0 on success, -1 on error.

23.10.3.3 hwloc get proc cpubind()

Get the current physical binding of process pid.

The CPU-set set (previously allocated by the caller) is filled with the list of PUs which the process was last bound to.

Returns

0 on success, -1 on error.

Note

hwloc pid t is pid t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_

CPUBIND THREAD is passed in flags, the binding for that specific thread is returned.

On non-Linux systems, HWLOC_CPUBIND_THREAD can not be used in flags.

23.10.3.4 hwloc_get_proc_last_cpu_location()

Get the last physical CPU where a process ran.

The CPU-set \mathtt{set} (previously allocated by the caller) is filled with the list of PUs which the process last ran on.

The operating system may move some tasks from one processor to another at any time according to their binding, so this function may return something that is already outdated.

Returns

0 on success, -1 on error.

23.10 CPU binding 107

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_CPUBIND_THREAD is passed in flags, the last CPU location of that specific thread is returned.

On non-Linux systems, HWLOC_CPUBIND_THREAD can not be used in flags.

23.10.3.5 hwloc_get_thread_cpubind()

Get the current physical binding of thread tid.

The CPU-set set (previously allocated by the caller) is filled with the list of PUs which the thread was last bound to.

Returns

0 on success, -1 on error.

Note

hwloc_thread_t is pthread_t on Unix platforms, and HANDLE on native Windows platforms. HWLOC_CPUBIND_PROCESS can not be used in flags.

23.10.3.6 hwloc set cpubind()

```
int hwloc_set_cpubind (
          hwloc_topology_t topology,
          hwloc_const_cpuset_t set,
          int flags )
```

Bind current process or thread on CPUs given in physical bitmap set.

Returns

0 on success.

- -1 with errno set to ENOSYS if the action is not supported.
- -1 with errno set to ${\tt EXDEV}$ if the binding cannot be enforced.

23.10.3.7 hwloc_set_proc_cpubind()

```
int hwloc_set_proc_cpubind (
                hwloc_topology_t topology,
                hwloc_pid_t pid,
                 hwloc_const_cpuset_t set,
                 int flags )
```

Bind a process pid on CPUs given in physical bitmap set.

Returns

0 on success, -1 on error.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

As a special case on Linux, if a tid (thread ID) is supplied instead of a pid (process ID) and HWLOC_CPUBIND_THREAD is passed in flags, the binding is applied to that specific thread.

On non-Linux systems, HWLOC CPUBIND THREAD can not be used in flags.

23.10.3.8 hwloc_set_thread_cpubind()

Bind a thread thread on CPUs given in physical bitmap set.

Returns

0 on success, -1 on error.

Note

hwloc_thread_t is pthread_t on Unix platforms, and HANDLE on native Windows platforms. HWLOC CPUBIND PROCESS can not be used in flags.

23.11 Memory binding

Enumerations

```
    enum hwloc_membind_policy_t {
        HWLOC_MEMBIND_DEFAULT , HWLOC_MEMBIND_FIRSTTOUCH , HWLOC_MEMBIND_BIND ,
        HWLOC_MEMBIND_INTERLEAVE ,
        HWLOC_MEMBIND_NEXTTOUCH , HWLOC_MEMBIND_MIXED }

    enum hwloc_membind_flags_t {
        HWLOC_MEMBIND_PROCESS , HWLOC_MEMBIND_THREAD , HWLOC_MEMBIND_STRICT ,
        HWLOC_MEMBIND_MIGRATE ,
        HWLOC_MEMBIND_NOCPUBIND , HWLOC_MEMBIND_BYNODESET }
```

Functions

- int hwloc_set_membind (hwloc_topology_t topology, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_get_membind (hwloc_topology_t topology, hwloc_bitmap_t set, hwloc_membind_policy_t *policy, int flags)
- int hwloc_set_proc_membind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_const_bitmap_t set, hwloc membind policy t policy, int flags)
- int hwloc_get_proc_membind (hwloc_topology_t topology, hwloc_pid_t pid, hwloc_bitmap_t set, hwloc_membind_policy_t *policy, int flags)
- int hwloc_set_area_membind (hwloc_topology_t topology, const void *addr, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)
- int hwloc_get_area_membind (hwloc_topology_t topology, const void *addr, size_t len, hwloc_bitmap_t set, hwloc_membind_policy_t *policy, int flags)
- int hwloc_get_area_memlocation (hwloc_topology_t topology, const void *addr, size_t len, hwloc_bitmap_t set, int flags)
- void * hwloc alloc (hwloc topology t topology, size t len)
- void * hwloc_alloc_membind (hwloc_topology_t topology, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)

23.11 Memory binding 109

 static void * hwloc_alloc_membind_policy (hwloc_topology_t topology, size_t len, hwloc_const_bitmap_t set, hwloc_membind_policy_t policy, int flags)

int hwloc_free (hwloc_topology_t topology, void *addr, size_t len)

23.11.1 Detailed Description

Memory binding can be done three ways:

- explicit memory allocation thanks to <a href="https://www.number.numbe
- implicit memory binding through binding policy: hwloc_set_membind() and friends only define the current policy of the process, which will be applied to the subsequent calls to malloc() and friends.
- migration of existing memory ranges, thanks to hwloc_set_area_membind() and friends, which move already-allocated data.

Not all operating systems support all three ways. hwloc_topology_get_support() may be used to query about the actual memory binding support in the currently used operating system.

When the requested binding operation is not available and the HWLOC_MEMBIND_STRICT flag was passed, the function returns -1. errno will be set to ENOSYS when the system does support the specified action or policy (e.g., some systems only allow binding memory on a per-thread basis, whereas other systems only allow binding memory for all threads in a process). errno will be set to EXDEV when the requested set can not be enforced (e.g., some systems only allow binding memory to a single NUMA node).

If HWLOC_MEMBIND_STRICT was not passed, the function may fail as well, or the operating system may use a slightly different operation (with side-effects, smaller binding set, etc.) when the requested operation is not exactly supported.

The most portable form that should be preferred over the others whenever possible is as follows. It allocates some memory hopefully bound to the specified set. To do so, hwloc will possibly have to change the current memory binding policy in order to actually get the memory bound, if the OS does not provide any other way to simply allocate bound memory without changing the policy for all allocations. That is the difference with hwloc_alloc_membind(), which will never change the current memory binding policy.

```
hwloc_alloc_membind_policy(topology, size, set, HWLOC_MEMBIND_BIND, 0);
```

Each hwloc memory binding function takes a bitmap argument that is a CPU set by default, or a NUMA memory node set if the flag HWLOC_MEMBIND_BYNODESET is specified. See Object Sets (hwloc_cpuset_t and hwloc_nodeset_t) and The bitmap API for a discussion of CPU sets and NUMA memory node sets. It is also possible to convert between CPU set and node set using hwloc_cpuset_to_nodeset() or hwloc_cpuset_from_nodeset(). Memory binding by CPU set cannot work for CPU-less NUMA memory nodes. Binding by nodeset should therefore

Memory binding by CPU set cannot work for CPU-less NUMA memory nodes. Binding by nodeset should therefore be preferred whenever possible.

See also

Some example codes are available under doc/examples/ in the source tree.

Note

On some operating systems, memory binding affects the CPU binding; see HWLOC_MEMBIND_NOCPUBIND

23.11.2 Enumeration Type Documentation

Memory binding for a description of errors that can occur.

23.11.2.1 hwloc membind flags t

```
enum hwloc membind flags t
```

Memory binding flags.

These flags can be used to refine the binding policy. All flags can be logically OR'ed together with the exception of HWLOC_MEMBIND_PROCESS and HWLOC_MEMBIND_THREAD; these two flags are mutually exclusive. Not all systems support all kinds of binding. hwloc_topology_get_support() may be used to query about the actual memory binding support in the currently used operating system. See the "Detailed Description" section of

Enumerator

HWLOC_MEMBIND_PROCESS	Set policy for all threads of the specified (possibly multithreaded) process. This flag is mutually exclusive with HWLOC_MEMBIND_THREAD.
HWLOC_MEMBIND_THREAD	Set policy for a specific thread of the current process. This flag is mutually exclusive with HWLOC_MEMBIND_PROCESS.
HWLOC_MEMBIND_STRICT	Request strict binding from the OS. The function will fail if the binding can not be guaranteed / completely enforced. This flag has slightly different meanings depending on which function it is used with.
HWLOC_MEMBIND_MIGRATE	Migrate existing allocated memory. If the memory cannot be migrated and the HWLOC_MEMBIND_STRICT flag is passed, an error will be returned.
HWLOC_MEMBIND_NOCPUBIND	Avoid any effect on CPU binding. On some operating systems, some underlying memory binding functions also bind the application to the corresponding CPU(s). Using this flag will cause hwloc to avoid using OS functions that could potentially affect CPU bindings. Note, however, that using NOCPUBIND may reduce hwloc's overall memory binding support. Specifically: some of hwloc's memory binding functions may fail with errno set to ENOSYS when used with NOCPUBIND.
HWLOC_MEMBIND_BYNODESET	Consider the bitmap argument as a nodeset. The bitmap argument is considered a nodeset if this flag is given, or a cpuset otherwise by default. Memory binding by CPU set cannot work for CPU-less NUMA memory nodes. Binding by nodeset should therefore be preferred whenever possible.

23.11.2.2 hwloc_membind_policy_t

enum hwloc_membind_policy_t

Memory binding policy.

These constants can be used to choose the binding policy. Only one policy can be used at a time (i.e., the values cannot be OR'ed together).

Not all systems support all kinds of binding. hwloc_topology_get_support() may be used to query about the actual memory binding policy support in the currently used operating system. See the "Detailed Description" section of Memory binding for a description of errors that can occur.

Enumerator

HWLOC_MEMBIND_DEFAULT	Reset the memory allocation policy to the system default. Depending on the operating system, this may correspond to HWLOC_MEMBIND_FIRSTTOUCH (Linux, FreeBSD), or HWLOC_MEMBIND_BIND (AIX, HP-UX, Solaris, Windows). This policy is never returned by get membind functions. The nodeset argument is ignored.
HWLOC_MEMBIND_FIRSTTOUCH	Allocate each memory page individually on the local NUMA node of the thread that touches it. The given nodeset should usually be

23.11 Memory binding

Enumerator

HWLOC_MEMBIND_BIND	Allocate memory on the specified nodes. The actual behavior may slightly vary between operating systems, especially when (some of) the requested nodes are full. On Linux, by default, the MPOL_PREFERRED_MANY (or MPOL_PREFERRED) policy is used. However, if the hwloc strict flag is also given, the Linux MPOL_BIND policy is rather used.
HWLOC_MEMBIND_INTERLEAVE	Allocate memory on the given nodes in an interleaved / round-robin manner. The precise layout of the memory across multiple NUMA nodes is OS/system specific. Interleaving can be useful when threads distributed across the specified NUMA nodes will all be accessing the whole memory range concurrently, since the interleave will then balance the memory references.
HWLOC_MEMBIND_NEXTTOUCH	For each page bound with this policy, by next time it is touched (and next time only), it is moved from its current location to the local NUMA node of the thread where the memory reference occurred (if it needs to be moved at all).
HWLOC_MEMBIND_MIXED	Returned by get_membind() functions when multiple threads or parts of a memory area have differing memory binding policies. Also returned when binding is unknown because binding hooks are empty when the topology is loaded from XML without HWLOC_THISSYSTEM=1, etc.

23.11.3 Function Documentation

23.11.3.1 hwloc_alloc()

Allocate some memory.

This is equivalent to malloc(), except that it tries to allocate page-aligned memory from the OS.

Returns

a pointer to the allocated area, or NULL on error.

Note

The allocated memory should be freed with hwloc_free().

23.11.3.2 hwloc_alloc_membind()

Allocate some memory on NUMA memory nodes specified by $\mathtt{set}.$

Returns

a pointer to the allocated area.

NULL with errno set to ENOSYS if the action is not supported and HWLOC MEMBIND STRICT is given.

NULL with errno set to EXDEV if the binding cannot be enforced and HWLOC_MEMBIND_STRICT is given.

NULL with errno set to ENOMEM if the memory allocation failed even before trying to bind.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Note

The allocated memory should be freed with hwloc free().

23.11.3.3 hwloc alloc membind policy()

```
static void * hwloc_alloc_membind_policy (
    hwloc_topology_t topology,
    size_t len,
    hwloc_const_bitmap_t set,
    hwloc_membind_policy_t policy,
    int flags ) [inline], [static]
```

Allocate some memory on NUMA memory nodes specified by set.

First, try to allocate properly with hwloc_alloc_membind(). On failure, the current process or thread memory binding policy is changed with hwloc_set_membind() before allocating memory. Thus this function works in more cases, at the expense of changing the current state (possibly affecting future allocations that would not specify any policy). If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

a pointer to the allocated area, or NULL on error.

23.11.3.4 hwloc_free()

Free memory that was previously allocated by hwloc_alloc() or hwloc_alloc_membind().

Returns

0 on success, -1 on error.

23.11.3.5 hwloc_get_area_membind()

Query the CPUs near the physical NUMA node(s) and binding policy of the memory identified by (addr, len). The bitmap set (previously allocated by the caller) is filled with the memory area binding.

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the memory binding policies and nodesets of the pages in the address range.

23.11 Memory binding 113

If HWLOC_MEMBIND_STRICT is specified, the target pages are first checked to see if they all have the same memory binding policy and nodeset. If they do not, -1 is returned and errno is set to EXDEV. If they are identical across all pages, the set and policy are returned in set and policy, respectively.

If HWLOC_MEMBIND_STRICT is not specified, the union of all NUMA node(s) containing pages in the address range is calculated. If all pages in the target have the same policy, it is returned in policy. Otherwise, policy is set to HWLOC MEMBIND MIXED.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

If any other flags are specified, -1 is returned and errno is set to EINVAL.

Returns

0 on success.

-1 with errno set to EINVAL if len is 0.

23.11.3.6 hwloc get area memlocation()

```
int hwloc_get_area_memlocation (
    hwloc_topology_t topology,
    const void * addr,
    size_t len,
    hwloc_bitmap_t set,
    int flags )
```

Get the NUMA nodes where memory identified by (addr, len) is physically allocated.

The bitmap set (previously allocated by the caller) is filled according to the NUMA nodes where the memory area pages are physically allocated. If no page is actually allocated yet, set may be empty.

If pages spread to multiple nodes, it is not specified whether they spread equitably, or whether most of them are on a single node, etc.

The operating system may move memory pages from one processor to another at any time according to their binding, so this function may return something that is already outdated.

If HWLOC_MEMBIND_BYNODESET is specified in flags, set is considered a nodeset. Otherwise it's a cpuset. If len is 0, set is emptied.

Returns

0 on success, -1 on error.

23.11.3.7 hwloc_get_membind()

```
int hwloc_get_membind (
          hwloc_topology_t topology,
          hwloc_bitmap_t set,
          hwloc_membind_policy_t * policy,
          int flags )
```

Query the default memory binding policy and physical locality of the current process or thread.

The bitmap set (previously allocated by the caller) is filled with the process or thread memory binding.

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the current memory binding policies and nodesets in the queried target.

Passing the HWLOC_MEMBIND_PROCESS flag specifies that the query target is the current policies and nodesets for all the threads in the current process. Passing HWLOC_MEMBIND_THREAD specifies that the query target is the current policy and nodeset for only the thread invoking this function.

If neither of these flags are passed (which is the most portable method), the process is assumed to be single threaded. This allows hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

HWLOC_MEMBIND_STRICT is only meaningful when HWLOC_MEMBIND_PROCESS is also specified. In this case, hwloc will check the default memory policies and nodesets for all threads in the process. If they are not identical, -1 is returned and errno is set to EXDEV. If they are identical, the values are returned in set and policy.

Otherwise, if HWLOC_MEMBIND_PROCESS is specified (and HWLOC_MEMBIND_STRICT is *not* specified), the default set from each thread is logically OR'ed together. If all threads' default policies are the same, policy is set to that policy. If they are different, policy is set to HWLOC MEMBIND MIXED.

In the HWLOC_MEMBIND_THREAD case (or when neither HWLOC_MEMBIND_PROCESS or HWLOC_MEMBIND_THREAD is specified), there is only one set and policy; they are returned in set and policy, respectively.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

If any other flags are specified, -1 is returned and errno is set to EINVAL.

Returns

0 on success, -1 on error.

23.11.3.8 hwloc get proc membind()

Query the default memory binding policy and physical locality of the specified process.

The bitmap set (previously allocated by the caller) is filled with the process memory binding.

This function has two output parameters: set and policy. The values returned in these parameters depend on both the flags passed in and the current memory binding policies and nodesets in the queried target.

Passing the HWLOC_MEMBIND_PROCESS flag specifies that the query target is the current policies and nodesets for all the threads in the specified process. If HWLOC_MEMBIND_PROCESS is not specified (which is the most portable method), the process is assumed to be single threaded. This allows hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

Note that it does not make sense to pass HWLOC MEMBIND THREAD to this function.

If HWLOC_MEMBIND_STRICT is specified, hwloc will check the default memory policies and nodesets for all threads in the specified process. If they are not identical, -1 is returned and errno is set to EXDEV. If they are identical, the values are returned in set and policy.

Otherwise, set is set to the logical OR of all threads' default set. If all threads' default policies are the same, policy is set to that policy. If they are different, policy is set to HWLOC_MEMBIND_MIXED.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset. If any other flags are specified, -1 is returned and errno is set to EINVAL.

Returns

0 on success, -1 on error.

Note

hwloc pid t is pid t on Unix platforms, and HANDLE on native Windows platforms.

23.11.3.9 hwloc_set_area_membind()

Bind the already-allocated memory identified by (addr, len) to the NUMA node(s) specified by set. If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

0 on success or if len is 0.

- -1 with errno set to ENOSYS if the action is not supported.
- -1 with errno set to EXDEV if the binding cannot be enforced.

23.11.3.10 hwloc_set_membind()

```
int hwloc_set_membind (
          hwloc_topology_t topology,
          hwloc_const_bitmap_t set,
          hwloc_membind_policy_t policy,
          int flags )
```

Set the default memory binding policy of the current process or thread to prefer the NUMA node(s) specified by set.

If neither HWLOC_MEMBIND_PROCESS nor HWLOC_MEMBIND_THREAD is specified, the current process is assumed to be single-threaded. This is the most portable form as it permits hwloc to use either process-based OS functions or thread-based OS functions, depending on which are available.

If HWLOC_MEMBIND_BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

0 on success.

- -1 with errno set to ENOSYS if the action is not supported.
- -1 with errno set to EXDEV if the binding cannot be enforced.

23.11.3.11 hwloc_set_proc_membind()

```
int hwloc_set_proc_membind (
          hwloc_topology_t topology,
          hwloc_pid_t pid,
          hwloc_const_bitmap_t set,
          hwloc_membind_policy_t policy,
          int flags )
```

Set the default memory binding policy of the specified process to prefer the NUMA node(s) specified by set. If HWLOC MEMBIND BYNODESET is specified, set is considered a nodeset. Otherwise it's a cpuset.

Returns

0 on success.

- -1 with errno set to ENOSYS if the action is not supported.
- -1 with errno set to EXDEV if the binding cannot be enforced.

Note

 $\verb|hwloc_pid_t| \textbf{ is } \verb|pid_t| \textbf{ on Unix platforms, and } \verb|HANDLE| \textbf{ on native Windows platforms.} \\$

23.12 Changing the Source of Topology Discovery

Enumerations

• enum hwloc_topology_components_flag_e { HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST }

Functions

- int hwloc_topology_set_pid (hwloc_topology_t restrict topology, hwloc_pid_t pid)
- int hwloc topology set synthetic (hwloc topology t restrict topology, const char *restrict description)
- int hwloc_topology_set_xml (hwloc_topology_t restrict topology, const char *restrict xmlpath)
- int hwloc_topology_set_xmlbuffer (hwloc_topology_t restrict topology, const char *restrict buffer, int size)
- int hwloc_topology_set_components (hwloc_topology_t restrict topology, unsigned long flags, const char *restrict name)

23.12.1 Detailed Description

These functions must be called between hwloc_topology_init() and hwloc_topology_load(). Otherwise, they will return -1 with errno set to EBUSY.

If none of the functions below is called, the default is to detect all the objects of the machine that the caller is allowed to access.

This default behavior may also be modified through environment variables if the application did not modify it already. Setting HWLOC_XMLFILE in the environment enforces the discovery from a XML file as if hwloc_topology_set_xml() had been called. Setting HWLOC_SYNTHETIC enforces a synthetic topology as if hwloc_topology_set_synthetic() had been called.

Finally, HWLOC THISSYSTEM enforces the return value of hwloc topology is thissystem().

23.12.2 Enumeration Type Documentation

23.12.2.1 hwloc_topology_components_flag_e

```
enum hwloc_topology_components_flag_e
Flags to be passed to hwloc_topology_set_components()
```

Enumerator

HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST Blacklist the target component from being used.

23.12.3 Function Documentation

23.12.3.1 hwloc_topology_set_components()

```
int hwloc_topology_set_components (
          hwloc_topology_t restrict topology,
          unsigned long flags,
          const char *restrict name )
```

Prevent a discovery component from being used for a topology.

name is the name of the discovery component that should not be used when loading topology topology. The name is a string such as "cuda".

For components with multiple phases, it may also be suffixed with the name of a phase, for instance "linux:io". flags should be HWLOC TOPOLOGY COMPONENTS FLAG BLACKLIST.

This may be used to avoid expensive parts of the discovery process. For instance, CUDA-specific discovery may be expensive and unneeded while generic I/O discovery could still be useful.

Returns

0 on success.

-1 on error, for instance if flags are invalid.

23.12.3.2 hwloc_topology_set_pid()

Change which process the topology is viewed from.

On some systems, processes may have different views of the machine, for instance the set of allowed CPUs. By default, hwloc exposes the view from the current process. Calling hwloc_topology_set_pid() permits to make it expose the topology of the machine from the point of view of another process.

Note

hwloc_pid_t is pid_t on Unix platforms, and HANDLE on native Windows platforms.

-1 is returned and errno is set to ENOSYS on platforms that do not support this feature.

Returns

0 on success, -1 on error.

23.12.3.3 hwloc_topology_set_synthetic()

Enable synthetic topology.

Gather topology information from the given description, a space-separated string of <type:number> describing the object type and arity at each level. All types may be omitted (space-separated string of numbers) so that hwloc chooses all types according to usual topologies. See also the Synthetic topologies.

Setting the environment variable HWLOC_SYNTHETIC may also result in this behavior.

If description was properly parsed and describes a valid topology configuration, this function returns 0. Otherwise -1 is returned and errno is set to EINVAL.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc topology load() to actually load the topology information.

Returns

0 on success.

-1 with errno set to ${\tt EINVAL}$ if the description was invalid.

Note

For convenience, this backend provides empty binding hooks which just return success.

On success, the synthetic component replaces the previously enabled component (if any), but the topology is not actually modified until <a href="https://hww.not.org/notes.com/hww.notes

23.12.3.4 hwloc_topology_set_xml()

Enable XML-file based topology.

Gather topology information from the XML file given at xmlpath. Setting the environment variable HWLOC_XMLFILE may also result in this behavior. This file may have been generated earlier with hwloc_topology_export_xml() in hwloc/export.h, or Istopo file.xml.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc topology load() to actually load the topology information.

Returns

0 on success.

-1 with errno set to EINVAL on failure to read the XML file.

Note

See also hwloc_topology_set_userdata_import_callback() for importing application-specific object userdata.

For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM has to be set to assert that the loaded file is really the underlying system.

On success, the XML component replaces the previously enabled component (if any), but the topology is not actually modified until hwloc_topology_load().

23.12.3.5 hwloc_topology_set_xmlbuffer()

```
int hwloc_topology_set_xmlbuffer (
          hwloc_topology_t restrict topology,
          const char *restrict buffer,
          int size )
```

Enable XML based topology using a memory buffer (instead of a file, as with hwloc_topology_set_xml()).

Gather topology information from the XML memory buffer given at buffer and of length size. This buffer may have been filled earlier with hwloc_topology_export_xmlbuffer() in hwloc/export.h.

Note that this function does not actually load topology information; it just tells hwloc where to load it from. You'll still need to invoke hwloc_topology_load() to actually load the topology information.

Returns

0 on success.

-1 with errno set to EINVAL on failure to read the XML buffer.

Note

See also hwloc_topology_set_userdata_import_callback() for importing application-specific object userdata.

For convenience, this backend provides empty binding hooks which just return success. To have hwloc still actually call OS-specific hooks, the HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM has to be set to assert that the loaded file is really the underlying system.

On success, the XML component replaces the previously enabled component (if any), but the topology is not actually modified until hwloc_topology_load().

23.13 Topology Detection Configuration and Query

Data Structures

- struct hwloc_topology_discovery_support
- · struct hwloc topology cpubind support
- struct hwloc_topology_membind_support
- struct hwloc_topology_misc_support
- · struct hwloc_topology_support

Enumerations

enum hwloc_topology_flags_e {
 HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED, HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM,
 HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES, HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT
 = (1UL<<3),

```
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING = (1UL < < 4), HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_M
= (1UL < < 5), HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_BINDING = (1UL < < 6), HWLOC_TOPOLOGY_FLAG_NO_DIS
= (1UL < < 7),
HWLOC_TOPOLOGY_FLAG_NO_MEMATTRS = (1UL < < 8), HWLOC_TOPOLOGY_FLAG_NO_CPUKINDS
= (1UL < < 9) }
• enum hwloc type filter e { HWLOC_TYPE FILTER KEEP ALL , HWLOC_TYPE FILTER KEEP NONE ,</pre>
```

Functions

- int hwloc_topology_set_flags (hwloc_topology_t topology, unsigned long flags)
- unsigned long hwloc_topology_get_flags (hwloc_topology_t topology)
- int hwloc topology is this system (hwloc topology t restrict topology)
- const struct hwloc topology support * hwloc topology get support (hwloc topology t restrict topology)

HWLOC TYPE FILTER KEEP STRUCTURE, HWLOC TYPE FILTER KEEP IMPORTANT }

- int hwloc_topology_set_type_filter (hwloc_topology_t topology, hwloc_obj_type_t type, enum hwloc_type_filter_e filter)
- int hwloc_topology_get_type_filter (hwloc_topology_t topology, hwloc_obj_type_t type, enum hwloc_type_filter_e *filter)
- int hwloc topology set all types filter (hwloc topology t topology, enum hwloc type filter e filter)
- int hwloc topology set cache types filter (hwloc topology t topology, enum hwloc type filter e filter)
- int hwloc topology set icache types filter (hwloc topology t topology, enum hwloc type filter e filter)
- int hwloc topology set io types filter (hwloc topology t topology, enum hwloc type filter e filter)
- void hwloc_topology_set_userdata (hwloc_topology_t topology, const void *userdata)
- void * hwloc_topology_get_userdata (hwloc_topology_t topology)

23.13.1 Detailed Description

Several functions can optionally be called between hwloc_topology_load()) to configure how the detection should be performed, e.g. to ignore some objects types, define a synthetic topology, etc.

23.13.2 Enumeration Type Documentation

23.13.2.1 hwloc_topology_flags_e

```
enum hwloc_topology_flags_e
```

Flags to be set onto a topology context before load.

Flags should be given to hwloc_topology_set_flags(). They may also be returned by hwloc_topology_get_flags().

Enumerator

HWLOC_TOPOLOGY_FLAG_INCLUDE_← DISALLOWED

Detect the whole system, ignore reservations, include disallowed objects. Gather all online resources, even if some were disabled by the administrator. For instance, ignore Linux Cgroup/Cpusets and gather all processors and memory nodes. However offline PUs and NUMA nodes are still ignored.

When this flag is not set, PUs and NUMA nodes that are disallowed are not added to the topology. Parent objects (package, core, cache, etc.) are added only if some of their children are allowed. All existing PUs and NUMA nodes in the topology are allowed. hwloc topology get allowed cpuset() and

hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset() are equal to the root object cpuset and nodeset.

When this flag is set, the actual sets of allowed PUs and NUMA nodes are given by

hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset(). They may be smaller than the root object cpuset and nodeset. If the current topology is exported to XML and reimported later, this flag should be set again in the reimported topology so that disallowed resources are reimported as well.

HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM

Assume that the selected backend provides the topology for the system on which we are running. This forces hwloc_topology_is_thissystem() to return 1, i.e. makes hwloc assume that the selected backend provides the topology for the system on which we are running, even if it is not the OS-specific backend but the XML backend for instance. This means making the binding functions actually call the OS-specific system calls and really do binding, while the XML backend would otherwise provide empty hooks just returning success.

Setting the environment variable

HWLOC_THISSYSTEM may also result in the same behavior.

This can be used for efficiency reasons to first detect the topology once, save it to an XML file, and quickly reload it later through the XML backend, but still having binding functions actually do bind.

Enumerator

$\begin{array}{c} \mathsf{HWLOC_TOPOLOGY_FLAG_THISSYSTEM_} \hookrightarrow \\ \mathsf{ALLOWED} \ \ \mathsf{RESOURCES} \end{array}$

Get the set of allowed resources from the local operating system even if the topology was loaded from XML or synthetic description. If the topology was loaded from XML or from a synthetic string, restrict it by applying the current process restrictions such as Linux Cgroup/Cpuset.

This is useful when the topology is not loaded directly from the local machine (e.g. for performance reason) and it comes with all resources, while the running process is restricted to only parts of the machine. This flag is ignored unless

HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM is also set since the loaded topology must match the underlying machine where restrictions will be gathered from.

Setting the environment variable HWLOC_THISSYSTEM_ALLOWED_RESOURCES would result in the same behavior.

HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT

Import support from the imported topology. When importing a XML topology from a remote machine, binding is disabled by default (see

HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM).

This disabling is also marked by putting zeroes in the corresponding supported feature bits reported by hwloc_topology_get_support().

The flag

HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT actually imports support bits from the remote machine. It also sets the flag imported_support in the struct hwloc_topology_misc_support array. If the imported XML did not contain any support information (exporter hwloc is too old), this flag is not set.

Note that these supported features are only relevant for the hwloc installation that actually exported the XML topology (it may vary with the operating system, or with how hwloc was compiled).

Note that setting this flag however does not enable binding for the locally imported hwloc topology, it only reports what the remote hwloc and machine support.

Enumerator

HWI OC TOPOLOGY ELAG DESTRICT TO	Do not consider resources outside of the present
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_← CPUBINDING	Do not consider resources outside of the process CPU binding. If the binding of the process is limited to
	a subset of cores, ignore the other cores during
	discovery.
	The resulting topology is identical to what a call to
	hwloc_topology_restrict() would generate, but this flag
	also prevents hwloc from ever touching other
	resources during the discovery.
	This flag especially tells the x86 backend to never
	temporarily rebind a thread on any excluded core.
	This is useful on Windows because such temporary
	rebinding can change the process binding. Another
	use-case is to avoid cores that would not be able to
	perform the hwloc discovery anytime soon because
	they are busy executing some high-priority real-time tasks.
	If process CPU binding is not supported, the thread CPU binding is considered instead if supported, or the
	flag is ignored.
	This flag requires
	HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM as
	well since binding support is required.
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_←	Do not consider resources outside of the process
MEMBINDING	memory binding. If the binding of the process is
	limited to a subset of NUMA nodes, ignore the other
	NUMA nodes during discovery.
	The resulting topology is identical to what a call to
	hwloc_topology_restrict() would generate, but this flag
	also prevents hwloc from ever touching other
	resources during the discovery. This flag is meant to be used together with
	HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING
	when both cores and NUMA nodes should be ignored outside of the process binding.
	If process memory binding is not supported, the
	thread memory binding is considered instead if
	supported, or the flag is ignored.
	This flag requires
	HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM as
	well since binding support is required.
HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_←	Do not ever modify the process or thread binding
BINDING	during discovery. This flag disables all hwloc
	discovery steps that require a change of the process
	or thread binding. This currently only affects the x86
	backend which gets entirely disabled.
	This is useful when hwloc_topology_load() is called while the application also creates additional threads
	or modifies the binding.
	or modiles the billulity.
	This flag is also a strict way to make sure the process
	This flag is also a strict way to make sure the process
	binding will not change to due thread binding changes
	binding will not change to due thread binding changes on Windows (see
HWLOC TOPOLOGY FLAG NO DISTANCES	binding will not change to due thread binding changes on Windows (see HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING
HWLOC_TOPOLOGY_FLAG_NO_DISTANCES	binding will not change to due thread binding changes on Windows (see

Enumerator

HWLOC_TOPOLOGY_FLAG_NO_MEMATTRS	Ignore memory attributes. Ignore memory attribues from the operating systems (and from XML).
HWLOC_TOPOLOGY_FLAG_NO_CPUKINDS	Ignore CPU Kinds. Ignore CPU kind information from the operating systems (and from XML).

23.13.2.2 hwloc_type_filter_e

enum hwloc_type_filter_e

Type filtering flags.

By default, most objects are kept (HWLOC_TYPE_FILTER_KEEP_ALL). Instruction caches, I/O and Misc objects are ignored by default (HWLOC_TYPE_FILTER_KEEP_NONE). Die and Group levels are ignored unless they bring structure (HWLOC_TYPE_FILTER_KEEP_STRUCTURE).

Note that group objects are also ignored individually (without the entire level) when they do not bring structure.

Enumerator

HWLOC_TYPE_FILTER_KEEP_ALL	Keep all objects of this type. Cannot be set for HWLOC_OBJ_GROUP (groups are designed only to add more structure to the topology).
HWLOC_TYPE_FILTER_KEEP_NONE	Ignore all objects of this type. The bottom-level type HWLOC_OBJ_PU, the HWLOC_OBJ_NUMANODE type, and the top-level type HWLOC_OBJ_MACHINE may not be ignored.
HWLOC_TYPE_FILTER_KEEP_STRUCTURE	Only ignore objects if their entire level does not bring any structure. Keep the entire level of objects if at least one of these objects adds structure to the topology. An object brings structure when it has multiple children and it is not the only child of its parent. If all objects in the level are the only child of their parent, and if none of them has multiple children, the entire level is removed. Cannot be set for I/O and Misc objects since the topology structure does not matter there.
HWLOC_TYPE_FILTER_KEEP_IMPORTANT	Only keep likely-important objects of the given type. It is only useful for I/O object types. For HWLOC_OBJ_PCI_DEVICE and HWLOC_OBJ_OS_DEVICE, it means that only objects of major/common kinds are kept (storage, network, OpenFabrics, CUDA, OpenCL, RSMI, NVML, and displays). Also, only OS devices directly attached on PCI (e.g. no USB) are reported. For HWLOC_OBJ_BRIDGE, it means that bridges are kept only if they have children. This flag equivalent to HWLOC_TYPE_FILTER_KEEP_ALL for Normal, Memory and Misc types since they are likely important.

23.13.3 Function Documentation

23.13.3.1 hwloc_topology_get_flags()

Get OR'ed flags of a topology.

Get the OR'ed set of hwloc_topology_flags_e of a topology.

If hwloc_topology_set_flags() was not called earlier, no flags are set (0 is returned).

Returns

the flags previously set with hwloc topology set flags().

Note

This function may also be called after hwloc_topology_load().

23.13.3.2 hwloc_topology_get_support()

Retrieve the topology support.

Each flag indicates whether a feature is supported. If set to 0, the feature is not supported. If set to 1, the feature is supported, but the corresponding call may still fail in some corner cases.

These features are also listed by hwloc-info --support

The reported features are what the current topology supports on the current machine. If the topology was exported to XML from another machine and later imported here, support still describes what is supported for this imported topology after import. By default, binding will be reported as unsupported in this case (see HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM).

Topology flag HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT may be used to report the supported features of the original remote machine instead. If it was successfully imported, imported_support will be set in the struct hwloc_topology_misc_support array.

Returns

A pointer to a support structure.

Note

The function cannot return NULL.

The returned pointer should not be freed, it belongs to the hwloc library.

This function may be called before or after hwloc_topology_load() but the support structure only contains valid information after.

23.13.3.3 hwloc_topology_get_type_filter()

```
int hwloc_topology_get_type_filter (
          hwloc_topology_t topology,
          hwloc_obj_type_t type,
          enum hwloc_type_filter_e * filter )
```

Get the current filtering for the given object type.

Returns

0 on success, -1 on error.

23.13.3.4 hwloc_topology_get_userdata()

Retrieve the topology-specific userdata pointer.

Retrieve the application-given private data pointer that was previously set with hwloc_topology_set_userdata().

Returns

A pointer to the private-data if any.

NULL if no private-data was previoulsy set.

23.13.3.5 hwloc_topology_is_thissystem()

Does the topology context come from this system?

Returns

1 if this topology context was built using the system running this program.

0 instead (for instance if using another file-system root, a XML topology file, or a synthetic topology).

Note

This function may also be called after hwloc topology load().

23.13.3.6 hwloc_topology_set_all_types_filter()

Set the filtering for all object types.

If some types do not support this filtering, they are silently ignored.

Returns

0 on success, -1 on error.

23.13.3.7 hwloc_topology_set_cache_types_filter()

Set the filtering for all CPU cache object types.

Memory-side caches are not involved since they are not CPU caches.

Returns

0 on success, -1 on error.

23.13.3.8 hwloc_topology_set_flags()

```
int hwloc_topology_set_flags (
          hwloc_topology_t topology,
          unsigned long flags)
```

Set OR'ed flags to non-yet-loaded topology.

Set a OR'ed set of hwloc_topology_flags_e onto a topology that was not yet loaded.

If this function is called multiple times, the last invocation will erase and replace the set of flags that was previously set

By default, no flags are set (0).

The flags set in a topology may be retrieved with hwloc topology get flags().

Returns

0 on success.

-1 on error, for instance if flags are invalid.

23.13.3.9 hwloc topology set icache types filter()

Set the filtering for all CPU instruction cache object types.

Memory-side caches are not involved since they are not CPU caches.

Returns

0 on success, -1 on error.

23.13.3.10 hwloc_topology_set_io_types_filter()

Set the filtering for all I/O object types.

Returns

0 on success, -1 on error.

23.13.3.11 hwloc_topology_set_type_filter()

Set the filtering for the given object type.

Returns

0 on success, -1 on error.

23.13.3.12 hwloc_topology_set_userdata()

Set the topology-specific userdata pointer.

Each topology may store one application-given private data pointer. It is initialized to NULL. hwloc will never modify it.

Use it as you wish, after hwloc_topology_init() and until hwloc_topolog_destroy().

This pointer is not exported to XML.

23.14 Modifying a loaded Topology

Enumerations

- enum hwloc_restrict_flags_e {
 HWLOC_RESTRICT_FLAG_REMOVE_CPULESS, HWLOC_RESTRICT_FLAG_BYNODESET = (1UL <<3)
 , HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS, HWLOC_RESTRICT_FLAG_ADAPT_MISC,
 HWLOC_RESTRICT_FLAG_ADAPT_IO }
- enum hwloc_allow_flags_e { HWLOC_ALLOW_FLAG_ALL , HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS , HWLOC_ALLOW_FLAG_CUSTOM }

Functions

- int hwloc_topology_restrict (hwloc_topology_t restrict topology, hwloc_const_bitmap_t set, unsigned long flags)
- int hwloc_topology_allow (hwloc_topology_t restrict topology, hwloc_const_cpuset_t cpuset, hwloc_const_nodeset_t nodeset, unsigned long flags)
- hwloc_obj_t hwloc_topology_insert_misc_object (hwloc_topology_t topology, hwloc_obj_t parent, const char *name)
- hwloc_obj_t hwloc_topology_alloc_group_object (hwloc_topology_t topology)
- hwloc obj t hwloc topology insert group object (hwloc topology t topology, hwloc obj t group)
- int hwloc obj add other obj sets (hwloc obj t dst, hwloc obj t src)
- int hwloc_topology_refresh (hwloc_topology_t topology)

23.14.1 Detailed Description

23.14.2 Enumeration Type Documentation

23.14.2.1 hwloc_allow_flags_e

```
enum hwloc_allow_flags_e
```

Flags to be given to hwloc_topology_allow().

Enumerator

HWLOC_ALLOW_FLAG_ALL	Mark all objects as allowed in the topology. cpuset and nodeset given to hwloc_topology_allow() must be NULL.
HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS	Only allow objects that are available to the current process. The topology must have HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM so that the set of available resources can actually be retrieved from the operating system. cpuset and nodeset given to hwloc_topology_allow() must be NULL.

Enumerator

HWLOC_ALLOW_FLAG_CUSTOM	Allow a custom set of objects, given to
	hwloc_topology_allow() as cpuset and/or
	nodeset parameters.

23.14.2.2 hwloc_restrict_flags_e

```
enum hwloc_restrict_flags_e
```

Flags to be given to hwloc_topology_restrict().

Enumerator

HWLOC_RESTRICT_FLAG_REMOVE_CPULESS	Remove all objects that became CPU-less. By default, only objects that contain no PU and no memory are removed. This flag may not be used with HWLOC_RESTRICT_FLAG_BYNODESET.
HWLOC_RESTRICT_FLAG_BYNODESET	Restrict by nodeset instead of CPU set. Only keep objects whose nodeset is included or partially included in the given set. This flag may not be used with HWLOC_RESTRICT_FLAG_REMOVE_CPULESS.
HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS	Remove all objects that became Memory-less. By default, only objects that contain no PU and no memory are removed. This flag may only be used with HWLOC_RESTRICT_FLAG_BYNODESET.
HWLOC_RESTRICT_FLAG_ADAPT_MISC	Move Misc objects to ancestors if their parents are removed during restriction. If this flag is not set, Misc objects are removed when their parents are removed.
HWLOC_RESTRICT_FLAG_ADAPT_IO	Move I/O objects to ancestors if their parents are removed during restriction. If this flag is not set, I/O devices and bridges are removed when their parents are removed.

23.14.3 Function Documentation

23.14.3.1 hwloc_obj_add_other_obj_sets()

```
int hwloc_obj_add_other_obj_sets (
          hwloc_obj_t dst,
          hwloc_obj_t src )
```

Setup object cpusets/nodesets by OR'ing another object's sets.

For each defined cpuset or nodeset in src, allocate the corresponding set in dst and add src to it by OR'ing sets.

This function is convenient between hwloc_topology_alloc_group_object() and hwloc_topology_insert_group_object(). It builds the sets of the new Group that will be inserted as a new intermediate parent of several objects.

Returns

0 on success.

-1 with errno set to ENOMEM if some internal reallocation failed.

23.14.3.2 hwloc_topology_alloc_group_object()

Allocate a Group object to insert later with hwloc_topology_insert_group_object().

This function returns a new Group object.

The caller should (at least) initialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its sets before inserting the object in the topology. See https://www.newload.nitialize its set of the object in the topology. The object in the topology insert in the object i

Returns

The allocated object on success.

NULL on error.

23.14.3.3 hwloc topology allow()

```
int hwloc_topology_allow (
                hwloc_topology_t restrict topology,
                hwloc_const_cpuset_t cpuset,
                 hwloc_const_nodeset_t nodeset,
                 unsigned long flags )
```

Change the sets of allowed PUs and NUMA nodes in the topology.

This function only works if the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was set on the topology. It does not modify any object, it only changes the sets returned by hwloc_topology_get_allowed_cpuset() and hwloc_topology_get_allowed_nodeset().

It is notably useful when importing a topology from another process running in a different Linux Cgroup. flags must be set to one flag among hwloc_allow_flags_e.

Returns

0 on success, -1 on error.

Note

Removing objects from a topology should rather be performed with hwloc_topology_restrict().

23.14.3.4 hwloc_topology_insert_group_object()

Add more structure to the topology by adding an intermediate Group.

The caller should first allocate a new Group object with hwloc_topology_alloc_group_object(). Then it must setup at least one of its CPU or node sets to specify the final location of the Group in the topology. Then the object can be passed to this function for actual insertion in the topology.

Either the cpuset or nodeset field (or both, if compatible) must be set to a non-empty bitmap. The complete_cpuset or complete_nodeset may be set instead if inserting with respect to the complete topology (including disallowed, offline or unknown objects). If grouping several objects, hwloc_obj_add_other_obj_sets() is an easy way to build the Group sets iteratively. These sets cannot be larger than the current topology, or they would get restricted silently. The core will setup the other sets after actual insertion.

The subtype object attribute may be defined (to a dynamically allocated string) to display something else than "Group" as the type name for this object in Istopo. Custom name-value info pairs may be added with $hwloc_obj_add_info()$ after insertion.

The group <code>dont_merge</code> attribute may be set to 1 to prevent the hwloc core from ever merging this object with another hierarchically-identical object. This is useful when the Group itself describes an important feature that cannot be exposed anywhere else in the hierarchy.

The group kind attribute may be set to a high value such as 0xffffffff to tell hwloc that this new Group should always be discarded in favor of any existing Group with the same locality.

Note

Inserting a group adds some locality information to the topology, hence the existing objects may get reordered (including PUs and NUMA nodes), and their logical indexes may change.

Returns

The inserted object if it was properly inserted.

An existing object if the Group was merged or discarded because the topology already contained an object at the same location (the Group did not add any hierarchy information).

NULL if the insertion failed because of conflicting sets in topology tree.

NULL if Group objects are filtered-out of the topology (HWLOC TYPE FILTER KEEP NONE).

 \mathtt{NULL} if the object was discarded because no set was initialized in the Group before insert, or all of them were empty.

23.14.3.5 hwloc_topology_insert_misc_object()

Add a MISC object as a leaf of the topology.

A new MISC object will be created and inserted into the topology at the position given by parent. It is appended to the list of existing Misc children, without ever adding any intermediate hierarchy level. This is useful for annotating the topology without actually changing the hierarchy.

name is supposed to be unique across all Misc objects in the topology. It will be duplicated to setup the new object attributes.

The new leaf object will not have any cpuset.

Returns

the newly-created object

NULL on error.

NULL if Misc objects are filtered-out of the topology (HWLOC_TYPE_FILTER_KEEP_NONE).

Note

23.14.3.6 hwloc topology refresh()

Refresh internal structures after topology modification.

Modifying the topology (by restricting, adding objects, modifying structures such as distances or memory attributes, etc.) may cause some internal caches to become invalid. These caches are automatically refreshed when accessed but this refreshing is not thread-safe.

This function is not thread-safe either, but it is a good way to end a non-thread-safe phase of topology modification. Once this refresh is done, multiple threads may concurrently consult the topology, objects, distances, attributes, etc. See also Thread Safety

Returns

0 on success.

-1 on error, for instance if some internal reallocation failed.

23.14.3.7 hwloc_topology_restrict()

```
int hwloc_topology_restrict (
                hwloc_topology_t restrict topology,
                hwloc_const_bitmap_t set,
                 unsigned long flags )
```

Restrict the topology to the given CPU set or nodeset.

Topology topology is modified so as to remove all objects that are not included (or partially included) in the CPU set set. All objects CPU and node sets are restricted accordingly.

By default, set is a CPU set. It means that the set of PUs in the topology is restricted. Once some PUs got removed, their parents may also get removed recursively if they became child-less.

If HWLOC_RESTRICT_FLAG_BYNODESET is passed in flags, set is considered a nodeset instead of a CPU set. It means that the set of NUMA nodes in the topology is restricted (instead of PUs). Once some NUMA nodes got removed, their parents may also get removed recursively if they became child-less.

flags is a OR'ed set of hwloc restrict flags e.

Note

Restricting the topology removes some locality information, hence the remaining objects may get reordered (including PUs and NUMA nodes), and their logical indexes may change.

This call may not be reverted by restricting back to a larger set. Once dropped during restriction, objects may not be brought back, except by loading another topology with https://www.noto.org/load().

Returns

0 on success.

- -1 with errno set to EINVAL if the input set is invalid. The topology is not modified in this case.
- -1 with errno set to ENOMEM on failure to allocate internal data. The topology is reinitialized in this case. It should be either destroyed with hwloc_topology_destroy() or configured and loaded again.

23.15 Finding Objects inside a CPU set

Functions

- static hwloc_obj_t hwloc_get_first_largest_obj_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- int hwloc_get_largest_objs_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc obj t *restrict objs, int max)
- static hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_obj_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, unsigned idx)
- static hwloc_obj_t hwloc_get_obj_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, unsigned idx)
- static unsigned hwloc_get_nbobjs_inside_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth)
- static int hwloc_get_nbobjs_inside_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type)
- static int hwloc_get_obj_index_inside_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc obj t obj)

23.15.1 Detailed Description

23.15.2 Function Documentation

23.15.2.1 hwloc_get_first_largest_obj_inside_cpuset()

Get the first largest object included in the given cpuset set.

Returns

the first object that is included in set and whose parent is not.

NULL if no such object exists.

This is convenient for iterating over all largest objects within a CPU set by doing a loop getting the first largest object and clearing its CPU set from the remaining CPU set.

23.15.2.2 hwloc get largest objs inside cpuset()

Get the set of largest objects covering exactly a given cpuset set.

Returns

the number of objects returned in objs.

-1 if no set of objects may cover that cpuset.

23.15.2.3 hwloc_get_nbobjs_inside_cpuset_by_depth()

```
static unsigned hwloc_get_nbobjs_inside_cpuset_by_depth (
    hwloc_topology_t topology,
    hwloc_const_cpuset_t set,
    int depth ) [inline], [static]
```

Return the number of objects at depth depth included in CPU set set.

Returns

the number of objects.

0 if the depth is invalid.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.15.2.4 hwloc_get_nbobjs_inside_cpuset_by_type()

Return the number of objects of type type included in CPU set set.

Returns

the number of objects.

0 if there are no objects of that type in the topology.

-1 if there are multiple levels of objects of that type, the caller should fallback to hwloc_get_nbobjs_inside_cpuset_by_depth().

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O objects).

23.15.2.5 hwloc_get_next_obj_inside_cpuset_by_depth()

Return the next object at depth depth included in CPU set set.

The next invokation should pass the previous return value in prev so as to obtain the next object in set.

Returns

the first object at depth depth included in set if prev is NULL.

the next object at depth depth included in set if prev is not NULL.

NULL if there is no next object.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.15.2.6 hwloc_get_next_obj_inside_cpuset_by_type()

Return the next object of type ${\tt type}$ included in CPU set ${\tt set}.$

The next invokation should pass the previous return value in prev so as to obtain the next object in set.

Returns

the first object of type type included in set if prev is NULL.

the next object of type type included in set if prev is not NULL.

NULL if there is no next object.

NULL if there is no depth for the given type.

NULL if there are multiple depths for the given type, the caller should fallback to hwloc_get_next_obj_inside_cpuset_by_depth().

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.15.2.7 hwloc_get_obj_index_inside_cpuset()

Return the logical index among the objects included in CPU set set.

Consult all objects in the same level as obj and inside CPU set set in the logical order, and return the index of obj within them. If set covers the entire topology, this is the logical index of obj. Otherwise, this is similar to a logical index within the part of the topology defined by CPU set set.

Returns

the logical index among the objects included in the set if any.

-1 if the object is not included in the set.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if obj does not have CPU sets (I/O objects).

23.15.2.8 hwloc_get_obj_inside_cpuset_by_depth()

Return the (logically) idx -th object at depth depth included in CPU set set.

Returns

the object if any, NULL otherwise.

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.15.2.9 hwloc_get_obj_inside_cpuset_by_type()

Return the idx -th object of type type included in CPU set set.

Returns

the object if any.

 ${\tt NULL}$ if there is no such object.

 \mathtt{NULL} if there is no depth for given type.

NULL if there are multiple depths for given type, the caller should fallback to hwloc_get_obj_inside_cpuset_by_depth().

Note

Objects with empty CPU sets are ignored (otherwise they would be considered included in any given set).

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.16 Finding Objects covering at least CPU set

Functions

- static hwloc_obj_t hwloc_get_child_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_t parent)
- static hwloc_obj_t hwloc_get_obj_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- static hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_depth (hwloc_topology_t topology, hwloc_const_cpuset_t set, int depth, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_type (hwloc_topology_t topology, hwloc_const_cpuset_t set, hwloc_obj_type_t type, hwloc_obj_t prev)

23.16.1 Detailed Description

23.16.2 Function Documentation

23.16.2.1 hwloc get child covering cpuset()

Get the child covering at least CPU set set.

Returns

the child that covers the set entirely.

NULL if no child matches or if set is empty.

Note

This function cannot work if parent does not have a CPU set (I/O or Misc objects).

23.16.2.2 hwloc_get_next_obj_covering_cpuset_by_depth()

```
static hwloc_obj_t hwloc_get_next_obj_covering_cpuset_by_depth (
          hwloc_topology_t topology,
          hwloc_const_cpuset_t set,
          int depth,
          hwloc_obj_t prev ) [inline], [static]
```

Iterate through same-depth objects covering at least CPU set set.

The next invokation should pass the previous return value in prev so as to obtain the next object covering at least another part of set.

Returns

```
the first object at depth depth covering at least part of CPU set set if object prev is NULL. the next one if prev is not NULL. NULL if there is no next object.
```

Note

This function cannot work if objects at the given depth do not have CPU sets (I/O or Misc objects).

23.16.2.3 hwloc_get_next_obj_covering_cpuset_by_type()

Iterate through same-type objects covering at least CPU set set.

The next invokation should pass the previous return value in prev so as to obtain the next object of type type covering at least another part of set.

Returns

the first object of type type covering at least part of CPU set set if object prev is NULL.

the next one if prev is not NULL.

NULL if there is no next object.

NULL if there is no depth for the given type.

NULL if there are multiple depths for the given type, the caller should fallback to hwloc_get_next_obj_covering_cpuset_by_depth

Note

This function cannot work if objects of the given type do not have CPU sets (I/O or Misc objects).

23.16.2.4 hwloc get obj covering cpuset()

Get the lowest object covering at least CPU set set.

Returns

the lowest object covering the set entirely.

NULL if no object matches or if set is empty.

23.17 Looking at Ancestor and Child Objects

Functions

- static hwloc_obj_t hwloc_get_ancestor_obj_by_depth (hwloc_topology_t topology, int depth, hwloc_obj_t obj)
- static hwloc_obj_t hwloc_get_ancestor_obj_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, hwloc obj t obj)
- static hwloc_obj_t hwloc_get_common_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t obj1, hwloc_obj_t obj2)
- static int hwloc_obj_is_in_subtree (hwloc_topology_t topology, hwloc_obj_t obj, hwloc_obj_t subtree_root)
- static hwloc_obj_t hwloc_get_next_child (hwloc_topology_t topology, hwloc_obj_t parent, hwloc_obj_t prev)

23.17.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.17.2 Function Documentation

23.17.2.1 hwloc_get_ancestor_obj_by_depth()

Returns the ancestor object of obj at depth depth.

Returns

the ancestor if any.

NULL if no such ancestor exists.

Note

depth should not be the depth of PU or NUMA objects since they are ancestors of no objects (except Misc or I/O). This function rather expects an intermediate level depth, such as the depth of Packages, Cores, or Caches.

23.17.2.2 hwloc_get_ancestor_obj_by_type()

Returns the ancestor object of obj with type type.

Returns

the ancestor if any.

NULL if no such ancestor exists.

Note

if multiple matching ancestors exist (e.g. multiple levels of HWLOC_OBJ_GROUP) the lowest one is returned. type should not be HWLOC_OBJ_PU or HWLOC_OBJ_NUMANODE since these objects are ancestors of no objects (except Misc or I/O). This function rather expects an intermediate object type, such as HWLOC_OBJ_PACKAGE, HWLOC_OBJ_CORE, etc.

23.17.2.3 hwloc_get_common_ancestor_obj()

Returns the common parent object to objects obj1 and obj2.

Returns

the common ancestor.

Note

This function cannot return NULL.

23.17.2.4 hwloc_get_next_child()

Return the next child.

Return the next child among the normal children list, then among the memory children list, then among the I/O children list, then among the Misc children list.

Returns

```
the first child if prev is NULL.
the next child if prev is not NULL.
NULL when there is no next child.
```

23.17.2.5 hwloc_obj_is_in_subtree()

```
static int hwloc_obj_is_in_subtree (
          hwloc_topology_t topology,
          hwloc_obj_t obj,
          hwloc_obj_t subtree_root ) [inline], [static]
```

Returns true if obj is inside the subtree beginning with ancestor object <code>subtree_root</code>.

Returns

1 is the object is in the subtree, 0 otherwise.

Note

This function cannot work if obj and subtree_root objects do not have CPU sets (I/O or Misc objects).

23.18 Kinds of object Type

Functions

- int hwloc_obj_type_is_normal (hwloc_obj_type_t type)
- int hwloc_obj_type_is_io (hwloc_obj_type_t type)
- int hwloc_obj_type_is_memory (hwloc_obj_type_t type)
- int hwloc_obj_type_is_cache (hwloc_obj_type_t type)
- int hwloc_obj_type_is_dcache (hwloc_obj_type_t type)
- int hwloc_obj_type_is_icache (hwloc_obj_type_t type)

23.18.1 Detailed Description

Each object type is either Normal (i.e. hwloc_obj_type_is_normal() returns 1), or Memory (i.e. hwloc_obj_type_is_memory() returns 1) or I/O (i.e. hwloc_obj_type_is_io() returns 1) or Misc (i.e. equal to HWLOC_OBJ_MISC). It cannot be of more than one of these kinds.

23.18.2 Function Documentation

23.18.2.1 hwloc_obj_type_is_cache()

Check whether an object type is a CPU Cache (Data, Unified or Instruction).

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a Cache, 0 otherwise.

23.18.2.2 hwloc_obj_type_is_dcache()

Check whether an object type is a CPU Data or Unified Cache.

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a CPU Data or Unified Cache, 0 otherwise.

23.18.2.3 hwloc_obj_type_is_icache()

Check whether an object type is a CPU Instruction Cache,.

Memory-side caches are not CPU caches.

Returns

1 if an object of type type is a CPU Instruction Cache, 0 otherwise.

23.18.2.4 hwloc_obj_type_is_io()

Check whether an object type is I/O.

I/O objects are objects attached to their parents in the I/O children list. This current includes Bridges, PCI and OS devices.

Returns

1 if an object of type type is a I/O object, 0 otherwise.

23.18.2.5 hwloc_obj_type_is_memory()

Check whether an object type is Memory.

Memory objects are objects attached to their parents in the Memory children list. This current includes NUMA nodes and Memory-side caches.

Returns

1 if an object of type type is a Memory object, 0 otherwise.

23.18.2.6 hwloc_obj_type_is_normal()

Check whether an object type is Normal.

Normal objects are objects of the main CPU hierarchy (Machine, Package, Core, PU, CPU caches, etc.), but they are not NUMA nodes, I/O devices or Misc objects.

They are attached to parent as Normal children, not as Memory, I/O or Misc children.

Returns

1 if an object of type type is a Normal object, 0 otherwise.

23.19 Looking at Cache Objects

Functions

- static int hwloc_get_cache_type_depth (hwloc_topology_t topology, unsigned cachelevel, hwloc_obj_cache_type_t cachetype)
- static hwloc_obj_t hwloc_get_cache_covering_cpuset (hwloc_topology_t topology, hwloc_const_cpuset_t set)
- static hwloc_obj_t hwloc_get_shared_cache_covering_obj (hwloc_topology_t topology, hwloc_obj_t obj)

23.19.1 Detailed Description

23.19.2 Function Documentation

23.19.2.1 hwloc get cache covering cpuset()

Get the first data (or unified) cache covering a cpuset set.

Returns

a covering cache, or \mathtt{NULL} if no cache matches.

23.19.2.2 hwloc get cache type depth()

```
static int hwloc_get_cache_type_depth (
          hwloc_topology_t topology,
          unsigned cachelevel,
          hwloc_obj_cache_type_t cachetype ) [inline], [static]
```

Find the depth of cache objects matching cache level and type.

Return the depth of the topology level that contains cache objects whose attributes match cachelevel and cachetype.

This function is identical to calling hwloc_get_type_depth() with the corresponding type such as HWLOC_OBJ_L1ICACHE, except that it may also return a Unified cache when looking for an instruction cache.

Returns

the depth of the unique matching unified cache level is returned if cachetype is HWLOC_OBJ_CACHE_UNIFIED. the depth of either a matching cache level or a unified cache level if cachetype is HWLOC_OBJ_CACHE_DATA or HWLOC_OBJ_CACHE_INSTRUCTION.

the depth of the matching level if cachetype is -1 but only one level matches.

HWLOC_TYPE_DEPTH_MULTIPLE if cachetype is -1 but multiple levels match.

HWLOC_TYPE_DEPTH_UNKNOWN if no cache level matches.

23.19.2.3 hwloc_get_shared_cache_covering_obj()

Get the first data (or unified) cache shared between an object and somebody else.

Returns

a shared cache.

NULL if no cache matches or if an invalid object is given (e.g. I/O object).

23.20 Finding objects, miscellaneous helpers

Functions

- int hwloc bitmap singlify per core (hwloc topology t topology, hwloc bitmap t cpuset, unsigned which)
- static hwloc_obj_t hwloc_get_pu_obj_by_os_index (hwloc_topology_t topology, unsigned os_index)
- static hwloc_obj_t hwloc_get_numanode_obj_by_os_index (hwloc_topology_t topology, unsigned os_index)
- unsigned hwloc_get_closest_objs (hwloc_topology_t topology, hwloc_obj_t src, hwloc_obj_t *restrict objs, unsigned max)
- static hwloc_obj_t hwloc_get_obj_below_by_type (hwloc_topology_t topology, hwloc_obj_type_t type1, unsigned idx1, hwloc_obj_type t type2, unsigned idx2)
- static hwloc_obj_t hwloc_get_obj_below_array_by_type (hwloc_topology_t topology, int nr, hwloc_obj_type_t *typev, unsigned *idxv)
- hwloc_obj_t hwloc_get_obj_with_same_locality (hwloc_topology_t topology, hwloc_obj_t src, hwloc_obj_type_t
 type, const char *subtype, const char *nameprefix, unsigned long flags)

23.20.1 Detailed Description

Be sure to see the figure in Terms and Definitions that shows a complete topology tree, including depths, child/sibling/cousin relationships, and an example of an asymmetric topology where one package has fewer caches than its peers.

23.20.2 Function Documentation

23.20.2.1 hwloc_bitmap_singlify_per_core()

Remove simultaneous multithreading PUs from a CPU set.

For each core in topology, if cpuset contains some PUs of that core, modify cpuset to only keep a single PU for that core.

which specifies which PU will be kept. PU are considered in physical index order. If 0, for each core, the function keeps the first PU that was originally set in <code>cpuset</code>.

If which is larger than the number of PUs in a core there were originally set in <code>cpuset</code>, no PU is kept for that core.

Returns

0.

Note

PUs that are not below a Core object are ignored (for instance if the topology does not contain any Core object). None of them is removed from cpuset.

23.20.2.2 hwloc get closest objs()

```
unsigned hwloc_get_closest_objs (
    hwloc_topology_t topology,
    hwloc_obj_t src,
    hwloc_obj_t *restrict objs,
    unsigned max )
```

Do a depth-first traversal of the topology to find and sort.

all objects that are at the same depth than src. Report in objs up to max physically closest ones to src.

Returns

the number of objects returned in objs.

0 if src is an I/O object.

Note

This function requires the src object to have a CPU set.

23.20.2.3 hwloc_get_numanode_obj_by_os_index()

Returns the object of type HWLOC_OBJ_NUMANODE with os_index.

This function is useful for converting a nodeset into the NUMA node objects it contains. When retrieving the current binding (e.g. with hwloc_get_membind() with HWLOC_MEMBIND_BYNODESET), one may iterate over the bits of the resulting nodeset with hwloc_bitmap_foreach_begin(), and find the corresponding NUMA nodes with this function.

Returns

the NUMA node object, or $\mathtt{NULL}\xspace$ if none matches.

23.20.2.4 hwloc get obj below array by type()

Find an object below a chain of objects specified by types and indexes.

This is a generalized version of hwloc_get_obj_below_by_type().

Arrays typev and idxv must contain nr types and indexes.

Start from the top system object and walk the arrays typev and idxv. For each type and logical index couple in the arrays, look under the previously found object to find the index-th object of the given type. Indexes are specified within the parent, not withing the entire system.

For instance, if nr is 3, typev contains NODE, PACKAGE and CORE, and idxv contains 0, 1 and 2, return the third core object below the second package below the first NUMA node.

Returns

a matching object if any, NULL otherwise.

Note

This function requires all these objects and the root object to have a CPU set.

23.20.2.5 hwloc_get_obj_below_by_type()

Find an object below another object, both specified by types and indexes.

Start from the top system object and find object of type type1 and logical index idx1. Then look below this object and find another object of type type2 and logical index idx2. Indexes are specified within the parent, not withing the entire system.

For instance, if type1 is PACKAGE, idx1 is 2, type2 is CORE and idx2 is 3, return the fourth core object below the third package.

Returns

a matching object if any, NULL otherwise.

Note

This function requires these objects to have a CPU set.

23.20.2.6 hwloc_get_obj_with_same_locality()

```
hwloc_obj_t hwloc_get_obj_with_same_locality (
    hwloc_topology_t topology,
    hwloc_obj_t src,
    hwloc_obj_type_t type,
    const char * subtype,
    const char * nameprefix,
    unsigned long flags )
```

Return an object of a different type with same locality.

If the source object src is a normal or memory type, this function returns an object of type type with same CPU and node sets, either below or above in the hierarchy.

If the source object src is a PCI or an OS device within a PCI device, the function may either return that PCI device, or another OS device in the same PCI parent. This may for instance be useful for converting between OS devices such as "nvml0" or "rsmi1" used in distance structures into the PCI device, or the CUDA or OpenCL OS device that correspond to the same physical card.

If not NULL, parameter subtype only select objects whose subtype attribute exists and is subtype (case-insensitively), for instance "OpenCL" or "CUDA".

If not NULL, parameter nameprefix only selects objects whose name attribute exists and starts with nameprefix (case-insensitively), for instance "rsmi" for matching "rsmi0".

If multiple objects match, the first one is returned.

This function will not walk the hierarchy across bridges since the PCI locality may become different. This function cannot also convert between normal/memory objects and I/O or Misc objects.

flags must be 0 for now.

Returns

An object with identical locality, matching subtype and nameprefix if any.

NULL if no matching object could be found, or if the source object and target type are incompatible, for instance if converting between CPU and I/O objects.

23.20.2.7 hwloc_get_pu_obj_by_os_index()

Returns the object of type HWLOC_OBJ_PU with os_index.

This function is useful for converting a CPU set into the PU objects it contains. When retrieving the current binding (e.g. with hwloc_get_cpubind()), one may iterate over the bits of the resulting CPU set with hwloc_bitmap_foreach_begin(), and find the corresponding PUs with this function.

Returns

the PU object, or NULL if none matches.

23.21 Distributing items over a topology

Enumerations

enum hwloc_distrib_flags_e { HWLOC_DISTRIB_FLAG_REVERSE }

Functions

static int hwloc_distrib (hwloc_topology_t topology, hwloc_obj_t *roots, unsigned n_roots, hwloc_cpuset_t *set, unsigned n, int until, unsigned long flags)

23.21.1 Detailed Description

23.21.2 Enumeration Type Documentation

23.21.2.1 hwloc distrib flags e

```
enum hwloc_distrib_flags_e
Flags to be given to hwloc_distrib().
```

Enumerator

```
HWLOC_DISTRIB_FLAG_REVERSE | Distrib in reverse order, starting from the last objects.
```

23.21.3 Function Documentation

23.21.3.1 hwloc distrib()

```
static int hwloc_distrib (
          hwloc_topology_t topology,
          hwloc_obj_t * roots,
          unsigned n_roots,
          hwloc_cpuset_t * set,
```

```
unsigned n, int until, unsigned long flags ) [inline], [static]
```

Distribute n items over the topology under roots.

Array set will be filled with n cpusets recursively distributed linearly over the topology under objects roots, down to depth until (which can be INT_MAX to distribute down to the finest level).

n_roots is usually 1 and roots only contains the topology root object so as to distribute over the entire topology. This is typically useful when an application wants to distribute n threads over a machine, giving each of them as much private cache as possible and keeping them locally in number order.

The caller may typically want to also call hwloc_bitmap_singlify() before binding a thread so that it does not move at all

flags should be 0 or a OR'ed set of hwloc_distrib_flags_e.

Returns

0 on success, -1 on error.

Note

This function requires the roots objects to have a CPU set.

23.22 CPU and node sets of entire topologies

Functions

- hwloc_const_cpuset_t hwloc_topology_get_complete_cpuset (hwloc_topology_t topology)
- hwloc_const_cpuset_t hwloc_topology_get_topology_cpuset (hwloc_topology_t topology)
- hwloc_const_cpuset_t hwloc_topology_get_allowed_cpuset (hwloc_topology_t topology)
- hwloc_const_nodeset_t hwloc_topology_get_complete_nodeset (hwloc_topology_t topology)
- hwloc_const_nodeset_t hwloc_topology_get_topology_nodeset (hwloc_topology_t topology)
- hwloc_const_nodeset_t hwloc_topology_get_allowed_nodeset (hwloc_topology_t topology)

23.22.1 Detailed Description

23.22.2 Function Documentation

23.22.2.1 hwloc_topology_get_allowed_cpuset()

Returns

the CPU set of allowed processors of the system.

Note

This function cannot return NULL.

If the topology flag HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was not set, this is identical to hwloc_topology_get_topology_cpuset(), which means all PUs are allowed.

If HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was set, applying hwloc_bitmap_intersects() on the result of this function and on an object cpuset checks whether there are allowed PUs inside that object. Applying hwloc_bitmap_and() returns the list of these allowed PUs.

The returned cpuset is not newly allocated and should thus not be changed or freed, hwloc_bitmap_dup() must be used to obtain a local copy.

23.22.2.2 hwloc_topology_get_allowed_nodeset()

```
\label{loc_const_nodeset_thwloc_topology_get_allowed_nodeset (} $$ hwloc_topology_t \ topology \ )
```

Get allowed node set.

Returns

the node set of allowed memory of the system.

Note

This function cannot return NULL.

If the topology flag HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was not set, this is identical to hwloc_topology_get_topology_nodeset(), which means all NUMA nodes are allowed.

If HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED was set, applying hwloc_bitmap_intersects() on the result of this function and on an object nodeset checks whether there are allowed NUMA nodes inside that object. Applying hwloc_bitmap_and() returns the list of these allowed NUMA nodes.

The returned nodeset is not newly allocated and should thus not be changed or freed, hwloc_bitmap_dup() must be used to obtain a local copy.

23.22.2.3 hwloc_topology_get_complete_cpuset()

```
\label{loc_const_cpuset_t} \begin{array}{c} \texttt{hwloc\_topology\_get\_complete\_cpuset} \ \ (\\ & \texttt{hwloc\_topology\_t} \ \ topology \ \ ) \\ \\ \textbf{Get complete CPU set.} \end{array}
```

Returns

the complete CPU set of processors of the system.

Note

This function cannot return NULL.

The returned cpuset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object complete CPU-set.

23.22.2.4 hwloc_topology_get_complete_nodeset()

Returns

the complete node set of memory of the system.

Note

This function cannot return NULL.

The returned nodeset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object complete nodeset.

23.22.2.5 hwloc_topology_get_topology_cpuset()

act topology of o

Returns

the CPU set of processors of the system for which hwloc provides topology information. This is equivalent to the cpuset of the system object.

Note

This function cannot return NULL.

The returned cpuset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object CPU-set.

23.22.2.6 hwloc_topology_get_topology_nodeset()

Returns

the node set of memory of the system for which hwloc provides topology information. This is equivalent to the nodeset of the system object.

Note

This function cannot return NULL.

The returned nodeset is not newly allocated and should thus not be changed or freed; hwloc_bitmap_dup() must be used to obtain a local copy.

This is equivalent to retrieving the root object nodeset.

23.23 Converting between CPU sets and node sets

Functions

- static int hwloc_cpuset_to_nodeset (hwloc_topology_t topology, hwloc_const_cpuset_t_cpuset, hwloc_nodeset_t nodeset)
- static int hwloc_cpuset_from_nodeset (hwloc_topology_t topology, hwloc_cpuset_t_cpuset, hwloc_const_nodeset_t nodeset)

23.23.1 Detailed Description

23.23.2 Function Documentation

23.23.2.1 hwloc cpuset from nodeset()

Convert a NUMA node set into a CPU set.

For each NUMA node included in the input nodeset, set the corresponding local PUs in the output _cpuset. If some CPUs have no local NUMA nodes, this function never sets their indexes in the output CPU set, even if a full node set is given in input.

Hence the entire topology node set is converted into the set of all CPUs that have some local NUMA nodes.

Returns

0 on success.

-1 with errno set to ENOMEM on internal reallocation failure.

23.23.2.2 hwloc cpuset to nodeset()

Convert a CPU set into a NUMA node set.

For each PU included in the input _cpuset, set the corresponding local NUMA node(s) in the output nodeset. If some NUMA nodes have no CPUs at all, this function never sets their indexes in the output node set, even if a full CPU set is given in input.

Hence the entire topology CPU set is converted into the set of all nodes that have some local CPUs.

Returns

0 on success.

-1 with errno set to ENOMEM on internal reallocation failure.

23.24 Finding I/O objects

Functions

- static hwloc_obj_t hwloc_get_non_io_ancestor_obj (hwloc_topology_t topology, hwloc_obj_t ioobj)
- static hwloc_obj_t hwloc_get_next_pcidev (hwloc_topology_t topology, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_pcidev_by_busid (hwloc_topology_t topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- static hwloc_obj_t hwloc_get_pcidev_by_busidstring (hwloc_topology_t topology, const char *busid)
- static hwloc_obj_t hwloc_get_next_osdev (hwloc_topology_t topology, hwloc_obj_t prev)
- static hwloc_obj_t hwloc_get_next_bridge (hwloc_topology_t topology, hwloc_obj_t prev)
- static int hwloc_bridge_covers_pcibus (hwloc_obj_t bridge, unsigned domain, unsigned bus)

23.24.1 Detailed Description

23.24.2 Function Documentation

23.24.2.1 hwloc bridge covers pcibus()

```
static int hwloc_bridge_covers_pcibus (
          hwloc_obj_t bridge,
          unsigned domain,
          unsigned bus ) [inline], [static]
```

23.24.2.2 hwloc_get_next_bridge()

Get the next bridge in the system.

Returns

```
the first bridge if prev is NULL.

the next bridge if prev is not NULL.

NULL if there is no next bridge.
```

23.24.2.3 hwloc_get_next_osdev()

Get the next OS device in the system.

Returns

```
the first OS device if prev is NULL.

the next OS device if prev is not NULL.

NULL if there is no next OS device.
```

23.24.2.4 hwloc_get_next_pcidev()

Get the next PCI device in the system.

Returns

```
the first PCI device if prev is NULL.

the next PCI device if prev is not NULL.

NULL if there is no next PCI device.
```

23.24.2.5 hwloc_get_non_io_ancestor_obj()

Get the first non-I/O ancestor object.

Given the I/O object ioobj, find the smallest non-I/O ancestor object. This object (normal or memory) may then be used for binding because it has non-NULL CPU and node sets and because its locality is the same as ioobj.

Returns

a non-I/O object.

Note

This function cannot return NULL.

The resulting object is usually a normal object but it could also be a memory object (e.g. NUMA node) in future platforms if I/O objects ever get attached to memory instead of CPUs.

23.24.2.6 hwloc_get_pcidev_by_busid()

Find the PCI device object matching the PCI bus id given domain, bus device and function PCI bus id.

Returns

a matching PCI device object if any, NULL otherwise.

23.24.2.7 hwloc_get_pcidev_by_busidstring()

Find the PCI device object matching the PCI bus id given as a string xxxx:yy:zz.t or yy:zz.t.

Returns

a matching PCI device object if any, NULL otherwise.

23.25 The bitmap API

Macros

- #define hwloc bitmap foreach begin(id, bitmap)
- · #define hwloc bitmap foreach end()

Typedefs

- typedef struct hwloc_bitmap_s * hwloc_bitmap_t
- typedef const struct hwloc_bitmap_s * hwloc_const_bitmap_t

Functions

- hwloc_bitmap_t hwloc_bitmap_alloc (void)
- hwloc_bitmap_t hwloc_bitmap_alloc_full (void)
- void hwloc_bitmap_free (hwloc_bitmap_t bitmap)
- hwloc bitmap t hwloc bitmap dup (hwloc const bitmap t bitmap)
- int hwloc bitmap copy (hwloc bitmap t dst, hwloc const bitmap t src)
- int hwloc bitmap snprintf (char *restrict buf, size t buflen, hwloc const bitmap t bitmap)
- int hwloc_bitmap_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- int hwloc_bitmap_list_snprintf (char *restrict buf, size_t buflen, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_list_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_list_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- int hwloc_bitmap_taskset_snprintf (char *restrict buf, size_t buflen, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_taskset_asprintf (char **strp, hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_taskset_sscanf (hwloc_bitmap_t bitmap, const char *restrict string)
- void hwloc bitmap zero (hwloc bitmap t bitmap)
- void hwloc bitmap fill (hwloc bitmap t bitmap)
- int hwloc bitmap only (hwloc bitmap t bitmap, unsigned id)
- int hwloc_bitmap_allbut (hwloc_bitmap_t bitmap, unsigned id)

23.25 The bitmap API 151

- int hwloc_bitmap_from_ulong (hwloc_bitmap_t bitmap, unsigned long mask)
- int hwloc bitmap from ith ulong (hwloc bitmap t bitmap, unsigned i, unsigned long mask)
- int hwloc_bitmap_from_ulongs (hwloc_bitmap_t bitmap, unsigned nr, const unsigned long *masks)
- int hwloc bitmap set (hwloc bitmap t bitmap, unsigned id)
- int hwloc_bitmap_set_range (hwloc_bitmap_t bitmap, unsigned begin, int end)
- int hwloc_bitmap_set_ith_ulong (hwloc_bitmap_t bitmap, unsigned i, unsigned long mask)
- int hwloc_bitmap_clr (hwloc_bitmap_t bitmap, unsigned id)
- int hwloc_bitmap_clr_range (hwloc_bitmap_t bitmap, unsigned begin, int end)
- int hwloc bitmap singlify (hwloc bitmap t bitmap)
- unsigned long hwloc_bitmap_to_ulong (hwloc_const_bitmap_t bitmap)
- unsigned long hwloc_bitmap_to_ith_ulong (hwloc_const_bitmap_t bitmap, unsigned i)
- int hwloc bitmap to ulongs (hwloc const bitmap t bitmap, unsigned nr, unsigned long *masks)
- int hwloc bitmap nr ulongs (hwloc const bitmap t bitmap)
- int hwloc_bitmap_isset (hwloc_const_bitmap_t bitmap, unsigned id)
- int hwloc_bitmap_iszero (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_isfull (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_first (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_next (hwloc_const_bitmap_t bitmap, int prev)
- int hwloc bitmap last (hwloc const bitmap t bitmap)
- int hwloc bitmap weight (hwloc const bitmap t bitmap)
- int hwloc bitmap first unset (hwloc const bitmap t bitmap)
- int hwloc_bitmap_next_unset (hwloc_const_bitmap_t bitmap, int prev)
- int hwloc_bitmap_last_unset (hwloc_const_bitmap_t bitmap)
- int hwloc_bitmap_or (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc_bitmap_and (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc_bitmap_andnot (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap_t bitmap2)
- int hwloc_bitmap_xor (hwloc_bitmap_t res, hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc bitmap not (hwloc bitmap t res, hwloc const bitmap t bitmap)
- int hwloc_bitmap_intersects (hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap_t bitmap2)
- int hwloc_bitmap_isincluded (hwloc_const_bitmap_t sub_bitmap, hwloc_const_bitmap_t super_bitmap)
- int hwloc_bitmap_isequal (hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc_bitmap_compare_first (hwloc_const_bitmap_t bitmap1, hwloc_const_bitmap2)
- int hwloc bitmap compare (hwloc const bitmap t bitmap1, hwloc const bitmap t bitmap2)

23.25.1 Detailed Description

The https://hww.nc_bitmap_t type represents a set of integers (positive or null). A bitmap may be of infinite size (all bits are set after some point). A bitmap may even be full if all bits are set.

Bitmaps are used by hwloc for sets of OS processors (which may actually be hardware threads) as by hwloc_cpuset_t (a typedef for hwloc_bitmap_t), or sets of NUMA memory nodes as hwloc_nodeset_t (also a typedef for hwloc_bitmap_t). Those are used for cpuset and nodeset fields in the hwloc_obj structure, see Object Sets (hwloc_cpuset_t and hwloc_nodeset_t).

Both CPU and node sets are always indexed by OS physical number. However users should usually not build CPU and node sets manually (e.g. with hww.number.to.

```
hwloc_obj_t corel = ... , core2 = ... ;
hwloc_bitmap_t set = hwloc_bitmap_alloc();
hwloc_bitmap_or(set, corel->cpuset, core2->cpuset);
hwloc_set_cpubind(topology, set, HWLOC_CPUBIND_THREAD);
hwloc_bitmap_free(set);
```

Note

Most functions below return 0 on success and -1 on error. The usual error case would be an internal failure to realloc/extend the storage of the bitmap (error would be set to ENOMEM). See also Error reporting in the API.

Several examples of using the bitmap API are available under the doc/examples/ directory in the source tree. Regression tests such as tests/hwloc/hwloc_bitmap*.c also make intensive use of this API.

23.25.2 Macro Definition Documentation

23.25.2.1 hwloc_bitmap_foreach_begin

Loop macro iterating on bitmap bitmap.

The loop must start with hwloc_bitmap_foreach_begin() and end with hwloc_bitmap_foreach_end() followed by a terminating ';'.

id is the loop variable; it should be an unsigned int. The first iteration will set id to the lowest index in the bitmap. Successive iterations will iterate through, in order, all remaining indexes set in the bitmap. To be specific: each iteration will return a value for id such that hwloc_bitmap_isset(bitmap, id) is true.

The assert prevents the loop from being infinite if the bitmap is infinitely set.

23.25.2.2 hwloc_bitmap_foreach_end

```
#define hwloc_bitmap_foreach_end()
End of loop macro iterating on a bitmap.
Needs a terminating ';'.
```

See also

hwloc_bitmap_foreach_begin()

23.25.3 Typedef Documentation

23.25.3.1 hwloc_bitmap_t

```
typedef struct hwloc_bitmap_s* hwloc_bitmap_t
Set of bits represented as an opaque pointer to an internal bitmap.
```

23.25.3.2 hwloc_const_bitmap_t

```
typedef const struct hwloc_bitmap_s* hwloc_const_bitmap_t
a non-modifiable hwloc_bitmap_t
```

23.25.4 Function Documentation

23.25.4.1 hwloc_bitmap_allbut()

Fill the bitmap and clear the index id.

23.25.4.2 hwloc_bitmap_alloc()

Allocate a new empty bitmap.

23.25 The bitmap API 153

Returns

A valid bitmap or NULL.

The bitmap should be freed by a corresponding call to hwloc_bitmap_free().

23.25.4.3 hwloc_bitmap_alloc_full()

Allocate a new full bitmap.

Returns

A valid bitmap or NULL.

The bitmap should be freed by a corresponding call to hwloc_bitmap_free().

23.25.4.4 hwloc_bitmap_and()

And bitmaps bitmap1 and bitmap2 and store the result in bitmap res.

res can be the same as bitmap1 or bitmap2

23.25.4.5 hwloc_bitmap_andnot()

And bitmap bitmap1 and the negation of bitmap2 and store the result in bitmap res. res can be the same as bitmap1 or bitmap2

23.25.4.6 hwloc_bitmap_asprintf()

Stringify a bitmap into a newly allocated string.

Returns

0 on success, -1 on error.

23.25.4.7 hwloc_bitmap_clr()

Remove index id from bitmap bitmap.

23.25.4.8 hwloc_bitmap_clr_range()

```
int hwloc_bitmap_clr_range (
          hwloc_bitmap_t bitmap,
          unsigned begin,
          int end )
```

Remove indexes from begin to end in bitmap bitmap.

If end is -1, the range is infinite.

23.25.4.9 hwloc_bitmap_compare()

Compare bitmaps bitmap1 and bitmap2 in lexicographic order.

Lexicographic comparison of bitmaps, starting for their highest indexes. Compare last indexes first, then second, etc. The empty bitmap is considered lower than anything.

Returns

- -1 if bitmap1 is considered smaller than bitmap2.
- 1 if bitmap1 is considered larger than bitmap2.
- 0 if bitmaps are equal (contrary to hwloc_bitmap_compare_first()).

For instance comparing binary bitmaps 0011 and 0110 returns -1 (hence 0011 is considered smaller than 0110). Comparing 00101 and 01010 returns -1 too.

Note

This is different from the non-existing hwloc_bitmap_compare_last() which would only compare the highest index of each bitmap.

23.25.4.10 hwloc_bitmap_compare_first()

Compare bitmaps bitmap1 and bitmap2 using their lowest index.

A bitmap is considered smaller if its least significant bit is smaller. The empty bitmap is considered higher than anything (because its least significant bit does not exist).

Returns

- -1 if bitmap1 is considered smaller than bitmap2.
- 1 if bitmap1 is considered larger than bitmap2.

For instance comparing binary bitmaps 0011 and 0110 returns -1 (hence 0011 is considered smaller than 0110) because least significant bit of 0011 (0001) is smaller than least significant bit of 0110 (0010). Comparing 01001 and 00110 would also return -1 for the same reason.

Returns

0 if bitmaps are considered equal, even if they are not strictly equal. They just need to have the same least significant bit. For instance, comparing binary bitmaps 0010 and 0110 returns 0 because they have the same least significant bit.

23.25.4.11 hwloc bitmap copy()

```
int hwloc_bitmap_copy (
          hwloc_bitmap_t dst,
          hwloc_const_bitmap_t src )
```

Copy the contents of bitmap src into the already allocated bitmap dst.

23.25.4.12 hwloc_bitmap_dup()

Duplicate bitmap bitmap by allocating a new bitmap and copying bitmap contents.

If bitmap is NULL, NULL is returned.

23.25 The bitmap API 155

23.25.4.13 hwloc_bitmap_fill()

```
void hwloc_bitmap_fill (
          hwloc_bitmap_t bitmap )
```

Fill bitmap bitmap with all possible indexes (even if those objects don't exist or are otherwise unavailable)

23.25.4.14 hwloc bitmap first()

Compute the first index (least significant bit) in bitmap bitmap.

Returns

the first index set in bitmap.

-1 if bitmap is empty.

23.25.4.15 hwloc_bitmap_first_unset()

Compute the first unset index (least significant bit) in bitmap bitmap.

Returns

the first unset index in bitmap.

-1 if bitmap is full.

23.25.4.16 hwloc_bitmap_free()

Free bitmap bitmap.

If bitmap is NULL, no operation is performed.

23.25.4.17 hwloc_bitmap_from_ith_ulong()

```
int hwloc_bitmap_from_ith_ulong (
          hwloc_bitmap_t bitmap,
          unsigned i,
          unsigned long mask )
```

Setup bitmap bitmap from unsigned long mask used as i -th subset.

23.25.4.18 hwloc_bitmap_from_ulong()

Setup bitmap bitmap from unsigned long mask.

23.25.4.19 hwloc_bitmap_from_ulongs()

```
int hwloc_bitmap_from_ulongs (
          hwloc_bitmap_t bitmap,
          unsigned nr,
          const unsigned long * masks )
```

Setup bitmap bitmap from unsigned longs masks used as first nr subsets.

23.25.4.20 hwloc_bitmap_intersects()

Test whether bitmaps bitmap1 and bitmap2 intersects.

Returns

1 if bitmaps intersect, 0 otherwise.

Note

The empty bitmap does not intersect any other bitmap.

23.25.4.21 hwloc_bitmap_isequal()

Test whether bitmap bitmap1 is equal to bitmap bitmap2.

Returns

1 if bitmaps are equal, 0 otherwise.

23.25.4.22 hwloc_bitmap_isfull()

Test whether bitmap bitmap is completely full.

Returns

1 if bitmap is full, 0 otherwise.

Note

A full bitmap is always infinitely set.

23.25.4.23 hwloc_bitmap_isincluded()

 $\textbf{Test whether bitmap } \verb|sub_bitmap| is part of bitmap \\ \verb|super_bitmap|.$

23.25 The bitmap API 157

Returns

1 if sub_bitmap is included in super_bitmap, 0 otherwise.

Note

The empty bitmap is considered included in any other bitmap.

23.25.4.24 hwloc_bitmap_isset()

Test whether index id is part of bitmap bitmap.

Returns

1 if the bit at index id is set in bitmap bitmap, 0 otherwise.

23.25.4.25 hwloc_bitmap_iszero()

Test whether bitmap bitmap is empty.

Returns

1 if bitmap is empty, 0 otherwise.

23.25.4.26 hwloc_bitmap_last()

Compute the last index (most significant bit) in bitmap bitmap.

Returns

the last index set in bitmap.

-1 if bitmap is empty, or if bitmap is infinitely set.

23.25.4.27 hwloc_bitmap_last_unset()

Compute the last unset index (most significant bit) in bitmap bitmap.

Returns

the last index unset in bitmap.

-1 if bitmap is full, or if bitmap is not infinitely set.

23.25.4.28 hwloc_bitmap_list_asprintf()

Stringify a bitmap into a newly allocated list string.

Returns

0 on success, -1 on error.

23.25.4.29 hwloc bitmap list snprintf()

Stringify a bitmap in the list format.

Lists are comma-separated indexes or ranges. Ranges are dash separated indexes. The last range may not have an ending indexes if the bitmap is infinitely set.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of characters that were actually written if not truncating, or that would have been written (not including the ending \0).

23.25.4.30 hwloc bitmap list sscanf()

```
int hwloc_bitmap_list_sscanf (
          hwloc_bitmap_t bitmap,
          const char *restrict string )
```

Parse a list string and stores it in bitmap bitmap.

Returns

0 on success, -1 on error.

23.25.4.31 hwloc_bitmap_next()

Compute the next index in bitmap bitmap which is after index prev.

Returns

```
the first index set in bitmap if prev is -1.

the next index set in bitmap if prev is not -1.

-1 if no index with higher index is set in bitmap.
```

23.25 The bitmap API 159

23.25.4.32 hwloc_bitmap_next_unset()

Compute the next unset index in bitmap bitmap which is after index prev.

Returns

```
the first index unset in bitmap if prev is -1.

the next index unset in bitmap if prev is not -1.

-1 if no index with higher index is unset in bitmap.
```

23.25.4.33 hwloc_bitmap_not()

```
int hwloc_bitmap_not (
          hwloc_bitmap_t res,
          hwloc_const_bitmap_t bitmap )
```

Negate bitmap bitmap and store the result in bitmap res.

res can be the same as bitmap

23.25.4.34 hwloc_bitmap_nr_ulongs()

Return the number of unsigned longs required for storing bitmap bitmap entirely.

This is the number of contiguous unsigned longs from the very first bit of the bitmap (even if unset) up to the last set bit. This is useful for knowing the nr parameter to pass to hwloc_bitmap_to_ulongs() (or which calls to hwloc_bitmap to ith ulong() are needed) to entirely convert a bitmap into multiple unsigned longs.

When called on the output of hwloc_topology_get_topology_cpuset(), the returned number is large enough for all cpusets of the topology.

Returns

the number of unsigned longs required.

-1 if bitmap is infinite.

23.25.4.35 hwloc bitmap only()

Empty the bitmap bitmap and add bit id.

23.25.4.36 hwloc_bitmap_or()

Or bitmaps $\mathtt{bitmap1}$ and $\mathtt{bitmap2}$ and store the result in bitmap $\mathtt{res}.$

res can be the same as bitmap1 or bitmap2

23.25.4.37 hwloc_bitmap_set()

23.25.4.38 hwloc bitmap set ith ulong()

```
int hwloc_bitmap_set_ith_ulong (
          hwloc_bitmap_t bitmap,
          unsigned i,
          unsigned long mask)
```

Replace i -th subset of bitmap bitmap with unsigned long mask.

23.25.4.39 hwloc_bitmap_set_range()

```
int hwloc_bitmap_set_range (
          hwloc_bitmap_t bitmap,
          unsigned begin,
          int end )
```

Add indexes from begin to end in bitmap bitmap.

If end is -1, the range is infinite.

23.25.4.40 hwloc_bitmap_singlify()

Keep a single index among those set in bitmap bitmap.

May be useful before binding so that the process does not have a chance of migrating between multiple processors in the original mask. Instead of running the task on any PU inside the given CPU set, the operating system scheduler will be forced to run it on a single of these PUs. It avoids a migration overhead and cache-line ping-pongs between PUs.

Note

This function is NOT meant to distribute multiple processes within a single CPU set. It always return the same single bit when called multiple times on the same input set. hwloc_distrib() may be used for generating CPU sets to distribute multiple tasks below a single multi-PU object.

23.25.4.41 hwloc_bitmap_snprintf()

Stringify a bitmap.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of characters that were actually written if not truncating, or that would have been written (not including the ending \0).

23.25 The bitmap API 161

23.25.4.42 hwloc_bitmap_sscanf()

Parse a bitmap string and stores it in bitmap bitmap.

Returns

0 on success, -1 on error.

23.25.4.43 hwloc bitmap taskset asprintf()

Stringify a bitmap into a newly allocated taskset-specific string.

Returns

0 on success, -1 on error.

23.25.4.44 hwloc_bitmap_taskset_snprintf()

Stringify a bitmap in the taskset-specific format.

The taskset command manipulates bitmap strings that contain a single (possible very long) hexadecimal number starting with 0x.

Up to buflen characters may be written in buffer buf.

If buflen is 0, buf may safely be NULL.

Returns

the number of characters that were actually written if not truncating, or that would have been written (not including the ending \0).

23.25.4.45 hwloc_bitmap_taskset_sscanf()

Parse a taskset-specific bitmap string and stores it in bitmap bitmap.

Returns

0 on success, -1 on error.

23.25.4.46 hwloc bitmap to ith ulong()

```
unsigned long hwloc_bitmap_to_ith_ulong ( \label{eq:hwloc_const_bitmap_tbitmap}  \mbox{$hw$loc_const_bitmap_t$ $bitmap$,}  unsigned i )
```

Convert the i -th subset of bitmap bitmap into unsigned long mask.

23.25.4.47 hwloc_bitmap_to_ulong()

Convert the beginning part of bitmap bitmap into unsigned long mask.

23.25.4.48 hwloc bitmap to ulongs()

```
int hwloc_bitmap_to_ulongs (
          hwloc_const_bitmap_t bitmap,
          unsigned nr,
          unsigned long * masks )
```

Convert the first nr subsets of bitmap bitmap into the array of nr unsigned long masks. nr may be determined earlier with hwloc bitmap nr ulongs().

Returns

0

23.25.4.49 hwloc bitmap weight()

Compute the "weight" of bitmap bitmap (i.e., number of indexes that are in the bitmap).

Returns

the number of indexes that are in the bitmap.

-1 if bitmap is infinitely set.

23.25.4.50 hwloc bitmap xor()

Xor bitmaps bitmap1 and bitmap2 and store the result in bitmap res.

 $\verb"res" \textbf{ can be the same as} \verb"bitmap" 1 \textbf{ or} \verb"bitmap" 2$

23.25.4.51 hwloc_bitmap_zero()

23.26 Exporting Topologies to XML

Enumerations

enum hwloc_topology_export_xml_flags_e { HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 }

Functions

- int hwloc topology export xml (hwloc topology t topology, const char *xmlpath, unsigned long flags)
- int hwloc_topology_export_xmlbuffer (hwloc_topology_t topology, char **xmlbuffer, int *buflen, unsigned long flags)

- void hwloc_free_xmlbuffer (hwloc_topology_t topology, char *xmlbuffer)
- void hwloc_topology_set_userdata_export_callback (hwloc_topology_t topology, void(*export_cb)(void *reserved, hwloc_topology_t topology, hwloc_obj_t obj))
- int hwloc_export_obj_userdata (void *reserved, hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size_t length)
- int hwloc_export_obj_userdata_base64 (void *reserved, hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size t length)
- void hwloc_topology_set_userdata_import_callback (hwloc_topology_t topology, void(*import_cb)(hwloc_topology_t topology, hwloc_obj_t obj, const char *name, const void *buffer, size_t length))

23.26.1 Detailed Description

23.26.2 Enumeration Type Documentation

23.26.2.1 hwloc_topology_export_xml_flags_e

```
enum hwloc_topology_export_xml_flags_e
```

Flags for exporting XML topologies.

Flags to be given as a OR'ed set to hwloc topology export xml().

Enumerator

HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1	Export XML that is loadable by hwloc v1.x. However,
	the export may miss some details about the topology.

23.26.3 Function Documentation

23.26.3.1 hwloc export obj userdata()

Export some object userdata to XML.

This function may only be called from within the export() callback passed to hwloc_topology_set_userdata_export_callback(). It may be invoked one of multiple times to export some userdata to XML. The buffer content of length length is stored with optional name name.

When importing this XML file, the import() callback (if set) will be called exactly as many times as hwloc_export_obj_userdata() was called during export(). It will receive the corresponding name, buffer and length arguments.

 ${\tt reserved, topology \ and \ obj \ must \ be \ the \ first \ three \ parameters \ that \ were \ given \ to \ the \ export \ callback.}$

Only printable characters may be exported to XML string attributes.

If exporting binary data, the application should first encode into printable characters only (or use https://www.nwincommons.org/buserdata_base64() It should also take care of portability issues if the export may be reimported on a different architecture.

Returns

0 on success.

-1 with errno set to EINVAL if a non-printable character is passed in name or buffer.

23.26.3.2 hwloc_export_obj_userdata_base64()

Encode and export some object userdata to XML.

This function is similar to hwloc_export_obj_userdata() but it encodes the input buffer into printable characters before exporting. On import, decoding is automatically performed before the data is given to the import() callback if any.

This function may only be called from within the export() callback passed to hwloc_topology_set_userdata_export_callback(). The name must be made of printable characters for export to XML string attributes.

The function does not take care of portability issues if the export may be reimported on a different architecture.

Returns

0 on success.

-1 with errno set to EINVAL if a non-printable character is passed in name.

23.26.3.3 hwloc_free_xmlbuffer()

Free a buffer allocated by hwloc_topology_export_xmlbuffer()

23.26.3.4 hwloc topology export xml()

```
int hwloc_topology_export_xml (
          hwloc_topology_t topology,
          const char * xmlpath,
          unsigned long flags )
```

Export the topology into an XML file.

This file may be loaded later through hwloc topology set xml().

By default, the latest export format is used, which means older hwloc releases (e.g. v1.x) will not be able to import it. Exporting to v1.x specific XML format is possible using flag HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 but it may miss some details about the topology. If there is any chance that the exported file may ever be imported back by a process using hwloc 1.x, one should consider detecting it at runtime and using the corresponding export format.

flags is a OR'ed set of hwloc_topology_export_xml_flags_e.

Returns

0 on success, or -1 on error.

Note

See also hwloc_topology_set_userdata_export_callback() for exporting application-specific object userdata.

The topology-specific userdata pointer is ignored when exporting to XML.

Only printable characters may be exported to XML string attributes. Any other character, especially any non-ASCII character, will be silently dropped.

If name is "-", the XML output is sent to the standard output.

23.26.3.5 hwloc_topology_export_xmlbuffer()

```
int hwloc_topology_export_xmlbuffer (
          hwloc_topology_t topology,
          char ** xmlbuffer,
          int * buflen,
          unsigned long flags )
```

Export the topology into a newly-allocated XML memory buffer.

xmlbuffer is allocated by the callee and should be freed with hwloc free xmlbuffer() later in the caller.

This memory buffer may be loaded later through hwloc_topology_set_xmlbuffer().

By default, the latest export format is used, which means older hwloc releases (e.g. v1.x) will not be able to import it. Exporting to v1.x specific XML format is possible using flag HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1 but it may miss some details about the topology. If there is any chance that the exported buffer may ever be imported back by a process using hwloc 1.x, one should consider detecting it at runtime and using the corresponding export format.

The returned buffer ends with a \0 that is included in the returned length.

flags is a OR'ed set of hwloc_topology_export_xml_flags_e.

Returns

0 on success, or -1 on error.

Note

See also hwloc topology set userdata export callback() for exporting application-specific object userdata.

The topology-specific userdata pointer is ignored when exporting to XML.

Only printable characters may be exported to XML string attributes. Any other character, especially any non-ASCII character, will be silently dropped.

23.26.3.6 hwloc_topology_set_userdata_export_callback()

Set the application-specific callback for exporting object userdata.

The object userdata pointer is not exported to XML by default because hwloc does not know what it contains.

This function lets applications set <code>export_cb</code> to a callback function that converts this opaque userdata into an exportable string.

export_cb is invoked during XML export for each object whose userdata pointer is not NULL. The callback should use hwloc_export_obj_userdata() or hwloc_export_obj_userdata_base64() to actually export something to XML (possibly multiple times per object).

export_cb may be set to NULL if userdata should not be exported to XML.

Note

The topology-specific userdata pointer is ignored when exporting to XML.

23.26.3.7 hwloc_topology_set_userdata_import_callback()

Set the application-specific callback for importing userdata.

On XML import, userdata is ignored by default because hwloc does not know how to store it in memory.

This function lets applications set import_cb to a callback function that will get the XML-stored userdata and store it in the object as expected by the application.

import_cb is called during hwloc_topology_load() as many times as hwloc_export_obj_userdata() was called during export. The topology is not entirely setup yet. Object attributes are ready to consult, but links between objects are not.

import_cb may be NULL if userdata should be ignored during import.

Note

buffer contains length characters followed by a null byte ('\0').

This function should be called before https://hww.topology_load().

The topology-specific userdata pointer is ignored when importing from XML.

23.27 Exporting Topologies to Synthetic

Enumerations

enum hwloc_topology_export_synthetic_flags_e { HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO_EXTENDED_TY
, HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO_ATTRS, HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_IGNORE_MEMORY }

Functions

int hwloc_topology_export_synthetic (hwloc_topology_t topology, char *buffer, size_t buflen, unsigned long flags)

23.27.1 Detailed Description

23.27.2 Enumeration Type Documentation

23.27.2.1 hwloc_topology_export_synthetic_flags_e

enum hwloc_topology_export_synthetic_flags_e

Flags for exporting synthetic topologies.

Flags to be given as a OR'ed set to hwloc_topology_export_synthetic().

Enumerator

HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_← FLAG_NO_EXTENDED_TYPES	Export extended types such as L2dcache as basic types such as Cache. This is required if loading the synthetic description with hwloc < 1.9.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_← FLAG_NO_ATTRS	Do not export level attributes. Ignore level attributes such as memory/cache sizes or PU indexes. This is required if loading the synthetic description with hwloc < 1.10.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_ FLAG_V1	Export the memory hierarchy as expected in hwloc 1.x. Instead of attaching memory children to levels, export single NUMA node child as normal intermediate levels, when possible. This is required if loading the synthetic description with hwloc 1.x. However this may fail if some objects have multiple local NUMA nodes.
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_← FLAG_IGNORE_MEMORY	Do not export memory information. Only export the actual hierarchy of normal CPU-side objects and ignore where memory is attached. This is useful for when the hierarchy of CPUs is what really matters, but it behaves as if there was a single machine-wide NUMA node.

23.27.3 Function Documentation

23.27.3.1 hwloc_topology_export_synthetic()

Export the topology as a synthetic string.

At most buflen characters will be written in buffer, including the terminating \0.

This exported string may be given back to hwloc_topology_set_synthetic().

flags is a OR'ed set of hwloc topology export synthetic flags e.

Returns

The number of characters that were written, not including the terminating \0.

-1 if the topology could not be exported, for instance if it is not symmetric.

Note

I/O and Misc children are ignored, the synthetic string only describes normal children.

A 1024-byte buffer should be large enough for exporting topologies in the vast majority of cases.

23.28 Retrieve distances between objects

Data Structures

• struct hwloc_distances_s

Enumerations

- enum hwloc_distances_kind_e {
 HWLOC_DISTANCES_KIND_FROM_OS, HWLOC_DISTANCES_KIND_FROM_USER, HWLOC_DISTANCES_KIND_MEAN
 , HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH,
 HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES }

Functions

- int hwloc_distances_get (hwloc_topology_t topology, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_depth (hwloc_topology_t topology, int depth, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_type (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned *nr, struct hwloc_distances_s **distances, unsigned long kind, unsigned long flags)
- int hwloc_distances_get_by_name (hwloc_topology_t topology, const char *name, unsigned *nr, struct hwloc_distances_s **distances, unsigned long flags)
- const char * hwloc_distances_get_name (hwloc_topology_t topology, struct hwloc_distances_s *distances)
- void hwloc_distances_release (hwloc_topology_t topology, struct hwloc_distances_s *distances)
- int hwloc_distances_transform (hwloc_topology_t topology, struct hwloc_distances_s *distances, enum hwloc_distances transform e transform, void *transform attr, unsigned long flags)

23.28.1 Detailed Description

23.28.2 Enumeration Type Documentation

23.28.2.1 hwloc_distances_kind_e

enum hwloc_distances_kind_e

Kinds of distance matrices.

The kind attribute of struct hwloc_distances_s is a OR'ed set of kinds.

A kind of format HWLOC_DISTANCES_KIND_FROM_* specifies where the distance information comes from, if known.

A kind of format HWLOC_DISTANCES_KIND_MEANS_* specifies whether values are latencies or bandwidths, if applicable.

Enumerator

HWLOC_DISTANCES_KIND_FROM_OS	These distances were obtained from the operating system or hardware.
HWLOC_DISTANCES_KIND_FROM_USER	These distances were provided by the user.
HWLOC_DISTANCES_KIND_MEANS_LATENCY	Distance values are similar to latencies between objects. Values are smaller for closer objects, hence minimal on the diagonal of the matrix (distance between an object and itself). It could also be the number of network hops between objects, etc.
HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH	Distance values are similar to bandwidths between objects. Values are higher for closer objects, hence maximal on the diagonal of the matrix (distance between an object and itself). Such values are currently ignored for distance-based grouping.
HWLOC_DISTANCES_KIND_HETEROGENEOUS↔ _TYPES	This distances structure covers objects of different types. This may apply to the "NVLinkBandwidth" structure in presence of a NVSwitch or POWER processor NVLink port.

23.28.2.2 hwloc_distances_transform_e

 $\verb"enum hwloc_distances_transform_e"$

Transformations of distances structures.

Enumerator

HWLOC_DISTANCES_TRANSFORM_REMOVE_←	Remove NULL objects from the distances structure.
NULL	Every object that was replaced with NULL in the
	objs array is removed and the values array is
	updated accordingly.
	At least 2 objects must remain, otherwise
	hwloc_distances_transform() will return -1 with
	errno set to EINVAL.
	kind will be updated with or without
	HWLOC_DISTANCES_KIND_HETEROGENEOUS_TYPES
	according to the remaining objects.

Enumerator

HWLOC_DISTANCES_TRANSFORM_LINKS	Replace bandwidth values with a number of links. Usually all values will be either 0 (no link) or 1 (one link). However some matrices could get larger values if some pairs of peers are connected by different numbers of links. Values on the diagonal are set to 0. This transformation only applies to bandwidth matrices.
HWLOC_DISTANCES_TRANSFORM_MERGE_← SWITCH_PORTS	Merge switches with multiple ports into a single object. This currently only applies to NVSwitches where GPUs seem connected to different separate switch ports in the NVLinkBandwidth matrix. This transformation will replace all of them with the same port connected to all GPUs. Other ports are removed by applying HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL internally.
HWLOC_DISTANCES_TRANSFORM_← TRANSITIVE_CLOSURE	Apply a transitive closure to the matrix to connect objects across switches. This currently only applies to GPUs and NVSwitches in the NVLinkBandwidth matrix. All pairs of GPUs will be reported as directly connected.

23.28.3 Function Documentation

23.28.3.1 hwloc distances get()

```
int hwloc_distances_get (
          hwloc_topology_t topology,
          unsigned * nr,
          struct hwloc_distances_s ** distances,
          unsigned long kind,
          unsigned long flags )
```

Retrieve distance matrices.

Retrieve distance matrices from the topology into the distances array.

flags is currently unused, should be 0.

kind serves as a filter. If 0, all distance matrices are returned. If it contains some HWLOC_DISTANCES_KIND \leftarrow _FROM_*, only distance matrices whose kind matches one of these are returned. If it contains some HWLOC_ \leftarrow DISTANCES_KIND_MEANS_*, only distance matrices whose kind matches one of these are returned.

On input, nr points to the number of distance matrices that may be stored in distances. On output, nr points to the number of distance matrices that were actually found, even if some of them couldn't be stored in distances. Distance matrices that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

Each distance matrix returned in the distances array should be released by the caller using hwloc_distances_release().

Returns

0 on success, -1 on error.

23.28.3.2 hwloc_distances_get_by_depth()

```
int depth,
unsigned * nr,
struct hwloc_distances_s ** distances,
unsigned long kind,
unsigned long flags )
```

Retrieve distance matrices for object at a specific depth in the topology. Identical to hwloc distances get() with the additional depth filter.

Returns

0 on success, -1 on error.

23.28.3.3 hwloc_distances_get_by_name()

```
int hwloc_distances_get_by_name (
    hwloc_topology_t topology,
    const char * name,
    unsigned * nr,
    struct hwloc_distances_s ** distances,
    unsigned long flags )
```

Retrieve a distance matrix with the given name.

Usually only one distances structure may match a given name.

The name of the most common structure is "NUMALatency". Others include "XGMIBandwidth", "XGMIHops", "← XeLinkBandwidth", and "NVLinkBandwidth".

Returns

0 on success, -1 on error.

23.28.3.4 hwloc_distances_get_by_type()

```
int hwloc_distances_get_by_type (
          hwloc_topology_t topology,
          hwloc_obj_type_t type,
          unsigned * nr,
          struct hwloc_distances_s ** distances,
          unsigned long kind,
          unsigned long flags )
```

Retrieve distance matrices for object of a specific type.

Identical to hwloc_distances_get() with the additional type filter.

Returns

0 on success, -1 on error.

23.28.3.5 hwloc_distances_get_name()

Get a description of what a distances structure contains.

For instance "NUMALatency" for hardware-provided NUMA distances (ACPI SLIT), or NULL if unknown.

Returns

the constant string with the name of the distance structure.

Note

The returned name should not be freed by the caller, it belongs to the hwloc library.

23.28.3.6 hwloc_distances_release()

Release a distance matrix structure previously returned by hwloc distances get().

Note

This function is not required if the structure is removed with hwloc_distances_release_remove().

23.28.3.7 hwloc_distances_transform()

Apply a transformation to a distances structure.

Modify a distances structure that was previously obtained with hwloc_distances_get() or one of its variants.

This modifies the local copy of the distances structures but does not modify the distances information stored inside the topology (retrieved by another call to <a href="https://www.hullon.com/hullon

transform must be one of the transformations listed in hwloc distances transform e.

These transformations may modify the contents of the objs or values arrays.

transform attr must be NULL for now.

flags must be 0 for now.

Returns

0 on success, -1 on error for instance if flags are invalid.

Note

Objects in distances array objs may be directly modified in place without using hwloc_distances_transform(). One may use hwloc_get_obj_with_same_locality() to easily convert between similar objects of different types.

23.29 Helpers for consulting distance matrices

Functions

- static int hwloc_distances_obj_index (struct hwloc_distances_s *distances, hwloc_obj_t obj)
- static int hwloc_distances_obj_pair_values (struct hwloc_distances_s *distances, hwloc_obj_t obj1, hwloc_obj_t obj2, hwloc_uint64_t *value1to2, hwloc_uint64_t *value2to1)

23.29.1 Detailed Description

23.29.2 Function Documentation

23.29.2.1 hwloc_distances_obj_index()

Find the index of an object in a distances structure.

Returns

the index of the object in the distances structure if any.

-1 if object obj is not involved in structure distances.

23.29.2.2 hwloc_distances_obj_pair_values()

Find the values between two objects in a distance matrices.

The distance from obj1 to obj2 is stored in the value pointed by value1to2 and reciprocally.

Returns

0 on success.

-1 if object obj1 or obj2 is not involved in structure distances.

23.30 Add distances between objects

Typedefs

typedef void * hwloc_distances_add_handle_t

Enumerations

enum hwloc_distances_add_flag_e { HWLOC_DISTANCES_ADD_FLAG_GROUP , HWLOC_DISTANCES_ADD_FLAG_GROUP }

Functions

- hwloc_distances_add_handle_t hwloc_distances_add_create (hwloc_topology_t topology, const char *name, unsigned long kind, unsigned long flags)
- int hwloc_distances_add_values (hwloc_topology_t topology, hwloc_distances_add_handle_t handle, unsigned nbobjs, hwloc_obj_t *objs, hwloc_uint64_t *values, unsigned long flags)
- int hwloc_distances_add_commit (hwloc_topology_t topology, hwloc_distances_add_handle_t handle, unsigned long flags)

23.30.1 Detailed Description

The usual way to add distances is:

```
hwloc_distances_add_handle_t handle;
int err = -1;
handle = hwloc_distances_add_create(topology, "name", kind, 0);
if (handle) {
  err = hwloc_distances_add_values(topology, handle, nbobjs, objs, values, 0);
  if (!err)
    err = hwloc_distances_add_commit(topology, handle, flags);
}
```

If err is 0 at the end, then addition was successful.

23.30.2 Typedef Documentation

23.30.2.1 hwloc_distances_add_handle_t

```
typedef void* hwloc_distances_add_handle_t
```

Handle to a new distances structure during its addition to the topology.

23.30.3 Enumeration Type Documentation

23.30.3.1 hwloc_distances_add_flag_e

```
enum hwloc_distances_add_flag_e
```

Flags for adding a new distances to a topology.

Enumerator

HWLOC_DISTANCES_ADD_FLAG_GROUP	Try to group objects based on the newly provided distance information. This is ignored for distances between objects of different types.
HWLOC_DISTANCES_ADD_FLAG_GROUP_↔ INACCURATE	If grouping, consider the distance values as inaccurate and relax the comparisons during the grouping algorithms. The actual accuracy may be modified through the HWLOC_GROUPING_ACCURACY environment variable (see Environment Variables).

23.30.4 Function Documentation

23.30.4.1 hwloc distances add commit()

Commit a new distances structure.

This function finalizes the distances structure and inserts in it the topology.

Parameter handle was previously returned by hwloc_distances_add_create(). Then objects and values were specified with hwloc_distances_add_values().

flags configures the behavior of the function using an optional OR'ed set of hwloc_distances_add_flag_e. It may be used to request the grouping of existing objects based on distances.

On error, the temporary distances structure and its content are destroyed.

Returns

0 on success.

-1 on error.

23.30.4.2 hwloc_distances_add_create()

```
const char * name,
unsigned long kind,
unsigned long flags )
```

Create a new empty distances structure.

Create an empty distances structure to be filled with hwloc_distances_add_values() and then committed with hwloc distances add commit().

Parameter name is optional, it may be NULL. Otherwise, it will be copied internally and may later be freed by the caller

kind specifies the kind of distance as a OR'ed set of hwloc_distances_kind_e. Kind HWLOC_DISTANCES_KIND_HETEROGENEOU will be automatically set according to objects having different types in hwloc_distances_add_values(). flags must be 0 for now.

Returns

A hwloc_distances_add_handle_t that should then be passed to $hwloc_distances_add_values()$ and $hwloc_distances_add_commit()$.

NULL on error.

23.30.4.3 hwloc_distances_add_values()

```
int hwloc_distances_add_values (
    hwloc_topology_t topology,
    hwloc_distances_add_handle_t handle,
    unsigned nbobjs,
    hwloc_obj_t * objs,
    hwloc_uint64_t * values,
    unsigned long flags)
```

Specify the objects and values in a new empty distances structure.

The structure must then be committed with hwloc distances add commit().

The number of objects is nbobjs and the array of objects is objs. Distance values are stored as a one-dimension array in values. The distance from object i to object j is in slot i*nbobjs+j.

nbobjs must be at least 2.

Arrays objs and values will be copied internally, they may later be freed by the caller.

On error, the temporary distances structure and its content are destroyed.

flags must be 0 for now.

Returns

0 on success.

-1 on error.

23.31 Remove distances between objects

Functions

- int hwloc_distances_remove (hwloc_topology_t topology)
- int hwloc_distances_remove_by_depth (hwloc_topology_t topology, int depth)
- static int hwloc_distances_remove_by_type (hwloc_topology_t topology, hwloc_obj_type_t type)
- int hwloc_distances_release_remove (hwloc_topology_t topology, struct hwloc_distances_s *distances)

23.31.1 Detailed Description

23.31.2 Function Documentation

23.31.2.1 hwloc_distances_release_remove()

Release and remove the given distance matrice from the topology.

This function includes a call to <a href="https://hww.nces.google

Returns

0 on success, -1 on error.

23.31.2.2 hwloc distances remove()

Remove all distance matrices from a topology.

Remove all distance matrices, either provided by the user or gathered through the OS.

If these distances were used to group objects, these additional Group objects are not removed from the topology.

Returns

0 on success, -1 on error.

23.31.2.3 hwloc_distances_remove_by_depth()

Remove distance matrices for objects at a specific depth in the topology.

Identical to hwloc_distances_remove() but only applies to one level of the topology.

Returns

0 on success, -1 on error.

23.31.2.4 hwloc_distances_remove_by_type()

Remove distance matrices for objects of a specific type in the topology.

Identical to hwloc distances remove() but only applies to one level of the topology.

Returns

0 on success, -1 on error.

23.32 Comparing memory node attributes for finding where to allocate on

Data Structures

· struct hwloc_location

Typedefs

• typedef unsigned hwloc_memattr_id_t

Enumerations

```
    enum hwloc_memattr_id_e {
        HWLOC_MEMATTR_ID_CAPACITY, HWLOC_MEMATTR_ID_LOCALITY, HWLOC_MEMATTR_ID_BANDWIDTH
        , HWLOC_MEMATTR_ID_READ_BANDWIDTH,
        HWLOC_MEMATTR_ID_WRITE_BANDWIDTH, HWLOC_MEMATTR_ID_LATENCY, HWLOC_MEMATTR_ID_READ_LATEN
        , HWLOC_MEMATTR_ID_WRITE_LATENCY,
        HWLOC_MEMATTR_ID_MAX }
    enum hwloc_location_type_e { HWLOC_LOCATION_TYPE_CPUSET, HWLOC_LOCATION_TYPE_OBJECT
        }

    enum hwloc_local_numanode_flag_e { HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY, HWLOC_LOCAL_NUMANODE_FLAG_ALL
        }
```

Functions

- int hwloc_memattr_get_by_name (hwloc_topology_t topology, const char *name, hwloc_memattr_id_t *id)
- int hwloc_get_local_numanode_objs (hwloc_topology_t topology, struct hwloc_location *location, unsigned *nr, hwloc_obj_t *nodes, unsigned long flags)
- int hwloc_memattr_get_value (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target node, struct hwloc location *initiator, unsigned long flags, hwloc uint64 t *value)
- int hwloc_memattr_get_best_target (hwloc_topology_t topology, hwloc_memattr_id_t attribute, struct hwloc_location *initiator, unsigned long flags, hwloc_obj_t *best_target, hwloc_uint64_t *value)
- int hwloc_memattr_get_best_initiator (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target, unsigned long flags, struct hwloc_location *best_initiator, hwloc_uint64_t *value)

23.32.1 Detailed Description

Platforms with heterogeneous memory require ways to decide whether a buffer should be allocated on "fast" memory (such as HBM), "normal" memory (DDR) or even "slow" but large-capacity memory (non-volatile memory). These memory nodes are called "Targets" while the CPU accessing them is called the "Initiator". Access performance depends on their locality (NUMA platforms) as well as the intrinsic performance of the targets (heterogeneous platforms).

The following attributes describe the performance of memory accesses from an Initiator to a memory Target, for instance their latency or bandwidth. Initiators performing these memory accesses are usually some PUs or Cores (described as a CPU set). Hence a Core may choose where to allocate a memory buffer by comparing the attributes of different target memory nodes nearby.

There are also some attributes that are system-wide. Their value does not depend on a specific initiator performing an access. The memory node Capacity is an example of such attribute without initiator.

One way to use this API is to start with a cpuset describing the Cores where a program is bound. The best target NUMA node for allocating memory in this program on these Cores may be obtained by passing this cpuset as an initiator to https://www.nemattr_get_best_target() with the relevant memory attribute. For instance, if the code is latency limited, use the Latency attribute.

A more flexible approach consists in getting the list of local NUMA nodes by passing this cpuset to hwloc_get_local_numanode_objs(). Attribute values for these nodes, if any, may then be obtained with hwloc memattr get value() and manually compared with the desired criteria.

See also

An example is available in doc/examples/memory-attributes.c in the source tree.

Note

The API also supports specific objects as initiator, but it is currently not used internally by hwloc. Users may for instance use it to provide custom performance values for host memory accesses performed by GPUs.

The interface actually also accepts targets that are not NUMA nodes.

23.32.2 Typedef Documentation

23.32.2.1 hwloc_memattr_id_t

typedef unsigned hwloc_memattr_id_t

A memory attribute identifier. May be either one of hwloc_memattr_id_e or a new id returned by hwloc_memattr_register().

23.32.3 Enumeration Type Documentation

23.32.3.1 hwloc_local_numanode_flag_e

enum hwloc_local_numanode_flag_e

Flags for selecting target NUMA nodes.

Enumerator

HWLOC_LOCAL_NUMANODE_FLAG_LARGER_↔ LOCALITY	Select NUMA nodes whose locality is larger than the given cpuset. For instance, if a single PU (or its cpuset) is given in initiator, select all nodes close to the package that contains this PU.
HWLOC_LOCAL_NUMANODE_FLAG_SMALLER↔ _LOCALITY	Select NUMA nodes whose locality is smaller than the given cpuset. For instance, if a package (or its cpuset) is given in initiator, also select nodes that are attached to only a half of that package.
HWLOC_LOCAL_NUMANODE_FLAG_ALL	Select all NUMA nodes in the topology. The initiator initiator is ignored.

23.32.3.2 hwloc_location_type_e

enum hwloc_location_type_e

Type of location.

Enumerator

HWLOC_LOCATION_TYPE_CPUSET	Location is given as a cpuset, in the location cpuset union field.
HWLOC_LOCATION_TYPE_OBJECT	Location is given as an object, in the location object union field.

23.32.3.3 hwloc_memattr_id_e

enum hwloc_memattr_id_e

Memory node attributes.

Enumerator

HWLOC_MEMATTR_ID_CAPACITY	, , , , , , , , , , , , , , , , , , , ,
	in objects). Best capacity nodes are nodes with higher
	capacity.
	No initiator is involved when looking at this attribute. The
	corresponding attribute flags are
	HWLOC MEMATTR FLAG HIGHER FIRST.

Enumerator

HWLOC_MEMATTR_ID_LOCALITY	The "Locality" is returned as the number of PUs in that
	locality (e.g. the weight of its cpuset). Best locality nodes
	are nodes with smaller locality (nodes that are local to
	very few PUs). Poor locality nodes are nodes with larger
	locality (nodes that are local to the entire machine). No initiator is involved when looking at this attribute. The
	corresponding attribute flags are
	HWLOC_MEMATTR_FLAG_HIGHER_FIRST.
HWLOC_MEMATTR_ID_BANDWIDTH	The "Bandwidth" is returned in MiB/s, as seen from the
	given initiator location. Best bandwidth nodes are nodes
	with higher bandwidth.
	The corresponding attribute flags are HWLOC_MEMATTR_FLAG_HIGHER_FIRST and
	HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
	This is the average bandwidth for read and write accesses.
	If the platform provides individual read and write bandwidths
	but no explicit average value, hwloc computes and returns
	the average.
HWLOC_MEMATTR_ID_READ_BANDWIDTH	The "ReadBandwidth" is returned in MiB/s, as seen from
	the given initiator location. Best bandwidth nodes are nodes
	with higher bandwidth.
	The corresponding attribute flags are HWLOC_MEMATTR_FLAG_HIGHER_FIRST and
	HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
HWLOC_MEMATTR_ID_WRITE_BANDWIDTH	The "WriteBandwidth" is returned in MiB/s, as seen from the
TIWEOO_MEMATTILID_WITTE_BANDWIDTT	given initiator location. Best bandwidth nodes are nodes
	with higher bandwidth.
	The corresponding attribute flags are
	HWLOC_MEMATTR_FLAG_HIGHER_FIRST and
	HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
HWLOC_MEMATTR_ID_LATENCY	The "Latency" is returned as nanoseconds, as seen from
	the given initiator location. Best latency nodes are nodes with smaller latency.
	The corresponding attribute flags are
	HWLOC MEMATTR FLAG LOWER FIRST and
	HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
	This is the average latency for read and write accesses. If
	the platform provides individual read and write latencies but
	no explicit average value, hwloc computes and returns the
LIMI OC MEMATTO ID DEAD LATENCY	average.
HWLOC_MEMATTR_ID_READ_LATENCY	The "ReadLatency" is returned as nanoseconds, as seen from the given initiator location. Best latency nodes are
	nodes with smaller latency .
	The corresponding attribute flags are
	HWLOC_MEMATTR_FLAG_LOWER_FIRST and
	HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
HWLOC_MEMATTR_ID_WRITE_LATENCY	The "WriteLatency" is returned as nanoseconds, as seen
	from the given initiator location. Best latency nodes are
	nodes with smaller latency .
	The corresponding attribute flags are
	HWLOC_MEMATTR_FLAG_LOWER_FIRST and HWLOC_MEMATTR_FLAG_NEED_INITIATOR.
	TIVELOU_IVIEIVIALITE_FLAG_NEED_INITIATOR.

23.32.4 Function Documentation

23.32.4.1 hwloc_get_local_numanode_objs()

```
int hwloc_get_local_numanode_objs (
    hwloc_topology_t topology,
    struct hwloc_location * location,
    unsigned * nr,
    hwloc_obj_t * nodes,
    unsigned long flags)
```

Return an array of local NUMA nodes.

By default only select the NUMA nodes whose locality is exactly the given location. More nodes may be selected if additional flags are given as a OR'ed set of hwloc_local_numanode_flag_e.

If location is given as an explicit object, its CPU set is used to find NUMA nodes with the corresponding locality. If the object does not have a CPU set (e.g. I/O object), the CPU parent (where the I/O object is attached) is used. On input, nr points to the number of nodes that may be stored in the nodes array. On output, nr will be changed to the number of stored nodes, or the number of nodes that would have been stored if there were enough room.

Returns

0 on success or -1 on error.

Note

Some of these NUMA nodes may not have any memory attribute values and hence not be reported as actual targets in other functions.

The number of NUMA nodes in the topology (obtained by hwloc_bitmap_weight() on the root object nodeset) may be used to allocate the nodes array.

When an object CPU set is given as locality, for instance a Package, and when flags contain both HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY and HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY the returned array corresponds to the nodeset of that object.

23.32.4.2 hwloc memattr get best initiator()

```
int hwloc_memattr_get_best_initiator (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    hwloc_obj_t target,
    unsigned long flags,
    struct hwloc_location * best_initiator,
    hwloc_uint64_t * value )
```

Return the best initiator for the given attribute and target NUMA node.

If ${\tt value}$ is non ${\tt NULL},$ the corresponding value is returned there.

If multiple initiators have the same attribute values, only one is returned (and there is no way to clarify how that one is chosen). Applications that want to detect initiators with identical/similar values, or that want to look at values for multiple attributes, should rather get all values using https://www.nemattr_get_value() and manually select the initiator they consider the best.

The returned initiator should not be modified or freed, it belongs to the topology.

flags must be 0 for now.

Returns

0 on success.

- -1 with errno set to ENOENT if there are no matching initiators.
- -1 with errno set to EINVAL if the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR).

23.32.4.3 hwloc_memattr_get_best_target()

Return the best target NUMA node for the given attribute and initiator.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

If value is non NULL, the corresponding value is returned there.

If multiple targets have the same attribute values, only one is returned (and there is no way to clarify how that one is chosen). Applications that want to detect targets with identical/similar values, or that want to look at values for multiple attributes, should rather get all values using https://www.nemattr_get_value() and manually select the target they consider the best.

flags must be 0 for now.

Returns

0 on success.

- -1 with errno set to ENOENT if there are no matching targets.
- -1 with errno set to EINVAL if flags are invalid, or no such attribute exists.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.32.4.4 hwloc_memattr_get_by_name()

Return the identifier of the memory attribute with the given name.

Returns

0 on success.

-1 with errno set to EINVAL if no such attribute exists.

23.32.4.5 hwloc_memattr_get_value()

Return an attribute value for a specific target NUMA node.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

flags must be 0 for now.

Returns

0 on success.

-1 on error, for instance with errno set to EINVAL if flags are invalid or no such attribute exists.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when refering to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.33 Managing memory attributes

Enumerations

enum hwloc_memattr_flag_e { HWLOC_MEMATTR_FLAG_HIGHER_FIRST = (1UL << 0) , HWLOC_MEMATTR_FLAG_LOWE
 = (1UL << 1) , HWLOC_MEMATTR_FLAG_NEED_INITIATOR = (1UL << 2) }

Functions

- int hwloc_memattr_get_name (hwloc_topology_t topology, hwloc_memattr_id_t attribute, const char **name)
- int hwloc_memattr_get_flags (hwloc_topology_t topology, hwloc_memattr_id_t attribute, unsigned long *flags)
- int hwloc_memattr_register (hwloc_topology_t topology, const char *name, unsigned long flags, hwloc memattr id t *id)
- int hwloc_memattr_set_value (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target_node, struct hwloc_location *initiator, unsigned long flags, hwloc_uint64_t value)
- int hwloc_memattr_get_targets (hwloc_topology_t topology, hwloc_memattr_id_t attribute, struct hwloc_location *initiator, unsigned long flags, unsigned *nr, hwloc_obj_t *targets, hwloc_uint64_t *values)
- int hwloc_memattr_get_initiators (hwloc_topology_t topology, hwloc_memattr_id_t attribute, hwloc_obj_t target_node, unsigned long flags, unsigned *nr, struct hwloc_location *initiators, hwloc_uint64_t *values)

23.33.1 Detailed Description

23.33.2 Enumeration Type Documentation

23.33.2.1 hwloc_memattr_flag_e

enum hwloc_memattr_flag_e

Memory attribute flags. Given to hwloc memattr register() and returned by hwloc memattr get flags().

Enumerator

HWLOC_MEMATTR_FLAG_HIGHER_FIRST	The best nodes for this memory attribute are those with the higher values. For instance Bandwidth.
HWLOC_MEMATTR_FLAG_LOWER_FIRST	The best nodes for this memory attribute are those with the lower values. For instance Latency.
HWLOC_MEMATTR_FLAG_NEED_INITIATOR	The value returned for this memory attribute depends on the given initiator. For instance Bandwidth and Latency, but not Capacity.

23.33.3 Function Documentation

23.33.3.1 hwloc_memattr_get_flags()

```
int hwloc_memattr_get_flags (
          hwloc_topology_t topology,
          hwloc_memattr_id_t attribute,
          unsigned long * flags )
```

Return the flags of the given attribute.

Flags are a OR'ed set of hwloc_memattr_flag_e.

Returns

0 on success.

-1 with errno set to EINVAL if the attribute does not exist.

23.33.3.2 hwloc_memattr_get_initiators()

```
int hwloc_memattr_get_initiators (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    hwloc_obj_t target_node,
    unsigned long flags,
    unsigned * nr,
    struct hwloc_location * initiators,
    hwloc_uint64_t * values )
```

Return the initiators that have values for a given attribute for a specific target NUMA node.

Return initiators for the given attribute and target node in the initiators array. If values is not NULL, the corresponding attribute values are stored in the array it points to.

On input, nr points to the number of initiators that may be stored in the array initiators (and values). On output, nr points to the number of initiators (and values) that were actually found, even if some of them couldn't be stored in the array. Initiators that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

The returned initiators should not be modified or freed, they belong to the topology.

flags must be 0 for now.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), no initiator is returned.

Returns

0 on success or -1 on error.

Note

This function is meant for tools and debugging (listing internal information) rather than for application queries. Applications should rather select useful NUMA nodes with hwloc_get_local_numanode_objs() and then look at their attribute values for some relevant initiators.

23.33.3.3 hwloc_memattr_get_name()

Return the name of a memory attribute.

Returns

0 on success.

-1 with errno set to EINVAL if the attribute does not exist.

23.33.3.4 hwloc_memattr_get_targets()

```
int hwloc_memattr_get_targets (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    struct hwloc_location * initiator,
    unsigned long flags,
    unsigned * nr,
    hwloc_obj_t * targets,
    hwloc_uint64_t * values )
```

Return the target NUMA nodes that have some values for a given attribute.

Return targets for the given attribute in the targets array (for the given initiator if any). If values is not NULL, the corresponding attribute values are stored in the array it points to.

On input, nr points to the number of targets that may be stored in the array targets (and values). On output, nr points to the number of targets (and values) that were actually found, even if some of them couldn't be stored in the array. Targets that couldn't be stored are ignored, but the function still returns success (0). The caller may find out by comparing the value pointed by nr before and after the function call.

The returned targets should not be modified or freed, they belong to the topology.

Argument initiator is ignored if the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR). Otherwise initiator may be non NULL to report only targets that have a value for that initiator.

flags must be 0 for now.

Note

This function is meant for tools and debugging (listing internal information) rather than for application queries. Applications should rather select useful NUMA nodes with hwloc_get_local_numanode_objs() and then look at their attribute values.

Returns

0 on success or -1 on error.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when referring to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

23.33.3.5 hwloc_memattr_register()

Register a new memory attribute.

Add a specific memory attribute that is not defined in hwloc_memattr_id_e. Flags are a OR'ed set of hwloc_memattr_flag_e. It must contain at least one of HWLOC_MEMATTR_FLAG_HIGHER_FIRST or HWLOC_MEMATTR_FLAG_LOWER_FIRST.

Returns

0 on success.

-1 with errno set to EBUSY if another attribute already uses this name.

23.33.3.6 hwloc_memattr_set_value()

```
int hwloc_memattr_set_value (
    hwloc_topology_t topology,
    hwloc_memattr_id_t attribute,
    hwloc_obj_t target_node,
    struct hwloc_location * initiator,
    unsigned long flags,
    hwloc_uint64_t value )
```

Set an attribute value for a specific target NUMA node.

If the attribute does not relate to a specific initiator (it does not have the flag HWLOC_MEMATTR_FLAG_NEED_INITIATOR), location initiator is ignored and may be NULL.

The initiator will be copied into the topology, the caller should free anything allocated to store the initiator, for instance the cpuset.

flags must be 0 for now.

Note

The initiator initiator should be of type HWLOC_LOCATION_TYPE_CPUSET when referring to accesses performed by CPU cores. HWLOC_LOCATION_TYPE_OBJECT is currently unused internally by hwloc, but users may for instance use it to provide custom information about host memory accesses performed by GPUs.

Returns

0 on success or -1 on error.

23.34 Kinds of CPU cores

Functions

- int hwloc_cpukinds_get_nr (hwloc_topology_t topology, unsigned long flags)
- int hwloc_cpukinds_get_by_cpuset (hwloc_topology_t topology, hwloc_const_bitmap_t cpuset, unsigned long flags)
- int hwloc_cpukinds_get_info (hwloc_topology_t topology, unsigned kind_index, hwloc_bitmap_t cpuset, int *efficiency, unsigned *nr_infos, struct hwloc_info_s **infos, unsigned long flags)
- int hwloc_cpukinds_register (hwloc_topology_t topology, hwloc_bitmap_t cpuset, int forced_efficiency, unsigned nr_infos, struct hwloc_info_s *infos, unsigned long flags)

23.34.1 Detailed Description

Platforms with heterogeneous CPUs may have some cores with different features or frequencies. This API exposes identical PUs in sets called CPU kinds. Each PU of the topology may only be in a single kind.

The number of kinds may be obtained with hwloc_cpukinds_get_nr(). If the platform is homogeneous, there may be a single kind with all PUs. If the platform or operating system does not expose any information about CPU cores, there may be no kind at all.

The index of the kind that describes a given CPU set (if any, and not partially) may be obtained with hwloc_cpukinds_get_by_cpuset().

From the index of a kind, it is possible to retrieve information with hwloc_cpukinds_get_info(): an abstracted efficiency value, and an array of info attributes (for instance the "CoreType" and "FrequencyMaxMHz", see CPU Kinds). A higher efficiency value means greater intrinsic performance (and possibly less performance/power efficiency). Kinds with lower efficiency values are ranked first: Passing 0 as kind_index to hwloc_cpukinds_get_info() will return information about the CPU kind with lower performance but higher energy-efficiency. Higher kind_index values would rather return information about power-hungry high-performance cores.

When available, efficiency values are gathered from the operating system. If so, <code>cpukind_efficiency</code> is set in the struct <a href="https://documents.org/nc/hull/hull/contents.org/linearing-nc/hull/contents.org/linear

If the operating system does not expose core efficiencies natively, hwloc tries to compute efficiencies by comparing CPU kinds using frequencies (on ARM), or core types and frequencies (on other architectures). The environment variable HWLOC_CPUKINDS_RANKING may be used to change this heuristics, see Environment Variables.

23.34 Kinds of CPU cores 185

If hwloc fails to rank any kind, for instance because the operating system does not expose efficiencies and core frequencies, all kinds will have an unknown efficiency (-1), and they are not indexed/ordered in any specific way.

23.34.2 Function Documentation

23.34.2.1 hwloc cpukinds get by cpuset()

```
int hwloc_cpukinds_get_by_cpuset (
                hwloc_topology_t topology,
                 hwloc_const_bitmap_t cpuset,
                 unsigned long flags )
```

Get the index of the CPU kind that contains CPUs listed in cpuset.

flags must be 0 for now.

Returns

The index of the CPU kind (positive integer or 0) on success.

- -1 with errno set to EXDEV if cpuset is only partially included in the some kind.
- -1 with errno set to ENOENT if cpuset is not included in any kind, even partially.
- -1 with errno set to EINVAL if parameters are invalid.

23.34.2.2 hwloc_cpukinds_get_info()

```
int hwloc_cpukinds_get_info (
    hwloc_topology_t topology,
    unsigned kind_index,
    hwloc_bitmap_t cpuset,
    int * efficiency,
    unsigned * nr_infos,
    struct hwloc_info_s ** infos,
    unsigned long flags )
```

Get the CPU set and infos about a CPU kind in the topology.

kind_index identifies one kind of CPU between 0 and the number of kinds returned by hwloc_cpukinds_get_nr() minus 1.

If not $\mathtt{NULL},$ the bitmap <code>cpuset</code> will be filled with the set of PUs of this kind.

The integer pointed by efficiency, if not NULL will, be filled with the ranking of this kind of CPU in term of efficiency (see above). It ranges from 0 to the number of kinds (as reported by hwloc_cpukinds_get_nr()) minus 1. Kinds with lower efficiency are reported first.

If there is a single kind in the topology, its efficiency 0. If the efficiency of some kinds of cores is unknown, the efficiency of all kinds is set to -1, and kinds are reported in no specific order.

The array of info attributes (for instance the "CoreType", "FrequencyMaxMHz" or "FrequencyBaseMHz", see CPU Kinds) and its length are returned in infos or nr_infos. The array belongs to the topology, it should not be freed or modified.

If nr_infos or infos is NULL, no info is returned.

flags must be 0 for now.

Returns

0 on success.

- -1 with errno set to ENOENT if kind_index does not match any CPU kind.
- -1 with errno set to EINVAL if parameters are invalid.

23.34.2.3 hwloc_cpukinds_get_nr()

Get the number of different kinds of CPU cores in the topology.

flags must be 0 for now.

Returns

The number of CPU kinds (positive integer) on success.

0 if no information about kinds was found.

-1 with errno set to EINVAL if flags is invalid.

23.34.2.4 hwloc_cpukinds_register()

```
int hwloc_cpukinds_register (
    hwloc_topology_t topology,
    hwloc_bitmap_t cpuset,
    int forced_efficiency,
    unsigned nr_infos,
    struct hwloc_info_s * infos,
    unsigned long flags)
```

Register a kind of CPU in the topology.

Mark the PUs listed in cpuset as being of the same kind with respect to the given attributes.

forced_efficiency should be -1 if unknown. Otherwise it is an abstracted efficiency value to enforce the ranking of all kinds if all of them have valid (and different) efficiencies.

The array infos of size nr_infos may be used to provide info names and values describing this kind of PUs. flags must be 0 for now.

Parameters cpuset and infos will be duplicated internally, the caller is responsible for freeing them.

If cpuset overlaps with some existing kinds, those might get modified or split. For instance if existing kind A contains PUs 0 and 1, and one registers another kind for PU 1 and 2, there will be 3 resulting kinds: existing kind A is restricted to only PU 0; new kind B contains only PU 1 and combines information from A and from the newly-registered kind; new kind C contains only PU 2 and only gets information from the newly-registered kind.

Note

The efficiency forced_efficiency provided to this function may be different from the one reported later by hwloc_cpukinds_get_info() because hwloc will scale efficiency values down to between 0 and the number of kinds minus 1.

Returns

0 on success.

-1 with errno set to EINVAL if some parameters are invalid, for instance if cpuset is NULL or empty.

23.35 Linux-specific helpers

Functions

- int hwloc_linux_set_tid_cpubind (hwloc_topology_t topology, pid_t tid, hwloc_const_cpuset_t set)
- int hwloc_linux_get_tid_cpubind (hwloc_topology_t topology, pid_t tid, hwloc_cpuset_t set)
- int hwloc linux get tid last cpu location (hwloc topology t topology, pid t tid, hwloc bitmap t set)
- int hwloc_linux_read_path_as_cpumask (const char *path, hwloc_bitmap_t set)

23.35.1 Detailed Description

This includes helpers for manipulating Linux kernel cpumap files, and hwloc equivalents of the Linux sched_← setaffinity and sched_getaffinity system calls.

23.35.2 Function Documentation

23.35.2.1 hwloc_linux_get_tid_cpubind()

Get the current binding of thread tid.

The CPU-set set (previously allocated by the caller) is filled with the list of PUs which the thread was last bound to.

The behavior is exactly the same as the Linux sched getaffinity system call, but uses a hwloc cpuset.

Returns

0 on success, -1 on error.

Note

This is equivalent to calling hwloc_get_proc_cpubind() with HWLOC_CPUBIND_THREAD as flags.

23.35.2.2 hwloc_linux_get_tid_last_cpu_location()

Get the last physical CPU where thread tid ran.

The CPU-set set (previously allocated by the caller) is filled with the PU which the thread last ran on.

Returns

0 on success, -1 on error.

Note

This is equivalent to calling hwloc_get_proc_last_cpu_location() with HWLOC_CPUBIND_THREAD as flags.

23.35.2.3 hwloc_linux_read_path_as_cpumask()

Convert a linux kernel cpumask file path into a hwloc bitmap set.

Might be used when reading CPU set from sysfs attributes such as topology and caches for processors, or local ← _cpus for devices.

Returns

0 on success, -1 on error.

Note

This function ignores the HWLOC_FSROOT environment variable.

23.35.2.4 hwloc_linux_set_tid_cpubind()

Bind a thread tid on cpus given in cpuset set.

The behavior is exactly the same as the Linux sched_setaffinity system call, but uses a hwloc cpuset.

Returns

0 on success, -1 on error.

Note

This is equivalent to calling hwloc_set_proc_cpubind() with HWLOC_CPUBIND_THREAD as flags.

23.36 Interoperability with Linux libnuma unsigned long masks

Functions

- static int hwloc_cpuset_to_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_const_cpuset_t cpuset, unsigned long *mask, unsigned long *maxnode)
- static int hwloc_nodeset_to_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_const_nodeset_t nodeset, unsigned long *mask, unsigned long *maxnode)
- static int hwloc_cpuset_from_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_cpuset_t cpuset, const unsigned long *mask, unsigned long maxnode)
- static int hwloc_nodeset_from_linux_libnuma_ulongs (hwloc_topology_t topology, hwloc_nodeset_t nodeset, const unsigned long *mask, unsigned long maxnode)

23.36.1 Detailed Description

This interface helps converting between Linux libnuma unsigned long masks and hwloc cpusets and nodesets.

Note

Topology topology must match the current machine.

The behavior of libnuma is undefined if the kernel is not NUMA-aware. (when CONFIG_NUMA is not set in the kernel configuration). This helper and libnuma may thus not be strictly compatible in this case, which may be detected by checking whether numa_available() returns -1.

23.36.2 Function Documentation

23.36.2.1 hwloc cpuset from linux libnuma ulongs()

Convert the array of unsigned long mask into hwloc CPU set.

mask is a array of unsigned long that will be read. maxnode contains the maximal node number that may be read in mask.

This function may be used after calling get_mempolicy or any other function that takes an array of unsigned long as output parameter (and possibly a maximal node number as input parameter).

Returns

0 on success.

-1 on error, for instance if failing an internal reallocation.

23.36.2.2 hwloc_cpuset_to_linux_libnuma_ulongs()

```
static int hwloc_cpuset_to_linux_libnuma_ulongs (
    hwloc_topology_t topology,
    hwloc_const_cpuset_t cpuset,
    unsigned long * mask,
    unsigned long * maxnode ) [inline], [static]
```

Convert hwloc CPU set cpuset into the array of unsigned long mask.

mask is the array of unsigned long that will be filled. maxnode contains the maximal node number that may be stored in mask. maxnode will be set to the maximal node number that was found, plus one.

This function may be used before calling set_mempolicy, mbind, migrate_pages or any other function that takes an array of unsigned long and a maximal node number as input parameter.

Returns

0.

23.36.2.3 hwloc nodeset from linux libnuma ulongs()

Convert the array of unsigned long mask into hwloc NUMA node set.

mask is a array of unsigned long that will be read. maxnode contains the maximal node number that may be read in mask.

This function may be used after calling get_mempolicy or any other function that takes an array of unsigned long as output parameter (and possibly a maximal node number as input parameter).

Returns

0 on success.

-1 with errno set to ENOMEM if some internal reallocation failed.

23.36.2.4 hwloc nodeset to linux libnuma ulongs()

Convert hwloc NUMA node set nodeset into the array of unsigned long mask.

mask is the array of unsigned long that will be filled. maxnode contains the maximal node number that may be stored in mask. maxnode will be set to the maximal node number that was found, plus one.

This function may be used before calling set_mempolicy, mbind, migrate_pages or any other function that takes an array of unsigned long and a maximal node number as input parameter.

Returns

0.

23.37 Interoperability with Linux libnuma bitmask

Functions

- static struct bitmask * hwloc_cpuset_to_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_const_cpuset_t cpuset)
- static struct bitmask * hwloc_nodeset_to_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_const_nodeset_t nodeset)
- static int hwloc_cpuset_from_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_cpuset_t cpuset, const struct bitmask *bitmask)
- static int hwloc_nodeset_from_linux_libnuma_bitmask (hwloc_topology_t topology, hwloc_nodeset_t nodeset, const struct bitmask *bitmask)

23.37.1 Detailed Description

This interface helps converting between Linux libnuma bitmasks and hwloc cpusets and nodesets.

Note

Topology topology must match the current machine.

The behavior of libnuma is undefined if the kernel is not NUMA-aware. (when CONFIG_NUMA is not set in the kernel configuration). This helper and libnuma may thus not be strictly compatible in this case, which may be detected by checking whether numa_available() returns -1.

23.37.2 Function Documentation

23.37.2.1 hwloc_cpuset_from_linux_libnuma_bitmask()

Convert libnuma bitmask bitmask into hwloc CPU set cpuset.

This function may be used after calling many numa functions that use a struct bitmask as an output parameter.

Returns

0 on success.

-1 with errno set to ENOMEM if some internal reallocation failed.

23.37.2.2 hwloc_cpuset_to_linux_libnuma_bitmask()

Convert hwloc CPU set cpuset into the returned libnuma bitmask.

The returned bitmask should later be freed with numa_bitmask_free.

This function may be used before calling many numa_functions that use a struct bitmask as an input parameter.

Returns

newly allocated struct bitmask, or NULL on error.

23.37.2.3 hwloc_nodeset_from_linux_libnuma_bitmask()

Convert libnuma bitmask bitmask into hwloc NUMA node set nodeset.

This function may be used after calling many numa_functions that use a struct bitmask as an output parameter.

Returns

0 on success.

-1 with errno set to ENOMEM if some internal reallocation failed.

23.37.2.4 hwloc nodeset to linux libnuma bitmask()

Convert hwloc NUMA node set nodeset into the returned libnuma bitmask.

The returned bitmask should later be freed with numa bitmask free.

This function may be used before calling many numa_functions that use a struct bitmask as an input parameter.

Returns

newly allocated struct bitmask, or NULL on error.

23.38 Windows-specific helpers

Functions

- int hwloc_windows_get_nr_processor_groups (hwloc_topology_t topology, unsigned long flags)
- int hwloc_windows_get_processor_group_cpuset (hwloc_topology_t topology, unsigned pg_index, hwloc cpuset t cpuset, unsigned long flags)

23.38.1 Detailed Description

These functions query Windows processor groups. These groups partition the operating system into virtual sets of up to 64 neighbor PUs. Threads and processes may only be bound inside a single group. Although Windows processor groups may be exposed in the hwloc hierarchy as hwloc Groups, they are also often merged into existing hwloc objects such as NUMA nodes or Packages. This API provides explicit information about Windows processor groups so that applications know whether binding to a large set of PUs may fail because it spans over multiple Windows processor groups.

23.38.2 Function Documentation

23.38.2.1 hwloc_windows_get_nr_processor_groups()

Get the number of Windows processor groups.

flags must be 0 for now.

Returns

at least 1 on success.

-1 on error, for instance if the topology does not match the current system (e.g. loaded from another machine through XML).

23.38.2.2 hwloc_windows_get_processor_group_cpuset()

```
int hwloc_windows_get_processor_group_cpuset (
    hwloc_topology_t topology,
    unsigned pg_index,
    hwloc_cpuset_t cpuset,
    unsigned long flags )
```

Get the CPU-set of a Windows processor group.

Get the set of PU included in the processor group specified by pg_index . pg_index must be between 0 and the value returned by hwloc_windows_get_nr_processor_groups() minus 1.

 $\verb|flags| must be 0 for now.$

Returns

0 on success.

-1 on error, for instance if pg_index is invalid, or if the topology does not match the current system (e.g. loaded from another machine through XML).

23.39 Interoperability with glibc sched affinity

Functions

- static int hwloc_cpuset_to_glibc_sched_affinity (hwloc_topology_t topology, hwloc_const_cpuset_t hwlocset, cpu_set_t *schedsets, size_t schedsetsize)
- static int hwloc_cpuset_from_glibc_sched_affinity (hwloc_topology_t topology, hwloc_cpuset_t hwlocset, const cpu_set_t *schedset, size_t schedsetsize)

23.39.1 Detailed Description

This interface offers ways to convert between hwloc cpusets and glibc cpusets such as those manipulated by sched getaffinity() or pthread attr setaffinity np().

Note

Topology topology must match the current machine.

23.39.2 Function Documentation

23.39.2.1 hwloc_cpuset_from_glibc_sched_affinity()

Convert glibc sched affinity CPU set schedset into hwloc CPU set.

This function may be used before calling sched_setaffinity or any other function that takes a cpu_set_t as input parameter.

schedsetsize should be sizeof(cpu set t) unless schedset was dynamically allocated with CPU ALLOC

Returns

0 on success.

-1 with errno set to ENOMEM if some internal reallocation failed.

23.39.2.2 hwloc_cpuset_to_glibc_sched_affinity()

Convert hwloc CPU set toposet into glibc sched affinity CPU set schedset.

This function may be used before calling sched_setaffinity or any other function that takes a cpu_set_t as input parameter.

schedsetsize should be sizeof(cpu set t) unless schedset was dynamically allocated with CPU ALLOC

Returns

0.

23.40 Interoperability with OpenCL

Functions

- static int hwloc_opencl_get_device_pci_busid (cl_device_id device, unsigned *domain, unsigned *bus, unsigned *dev, unsigned *func)
- static int hwloc_opencl_get_device_cpuset (hwloc_topology_t topology, cl_device_id device, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_opencl_get_device_osdev_by_index (hwloc_topology_t topology, unsigned platform_index, unsigned device_index)
- static hwloc_obj_t hwloc_opencl_get_device_osdev (hwloc_topology_t topology, cl_device_id device)

23.40.1 Detailed Description

This interface offers ways to retrieve topology information about OpenCL devices.

Only AMD and NVIDIA OpenCL implementations currently offer useful locality information about their devices.

23.40.2 Function Documentation

23.40.2.1 hwloc_opencl_get_device_cpuset()

mentation; other systems will simply get a full cpuset.

Get the CPU set of processors that are physically close to OpenCL device device.

Store in set the CPU-set describing the locality of the OpenCL device device .

Topology topology and device device must match the local machine. I/O devices detection and the OpenCL component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_opencl_get_device_osdev_by_index(). This function is currently only implemented in a meaningful way for Linux with the AMD or NVIDIA OpenCL imple-

Returns

0 on success.

-1 on error, for instance if the device could not be found.

23.40.2.2 hwloc_opencl_get_device_osdev()

Get the hwloc OS device object corresponding to OpenCL device deviceX.

Returns

The hwloc OS device object corresponding to the given OpenCL device device.

NULL if none could be found, for instance if required OpenCL attributes are not available.

This function currently only works on AMD and NVIDIA OpenCL devices that support relevant OpenCL extensions. hwloc_opencl_get_device_osdev_by_index() should be preferred whenever possible, i.e. when platform and device index are known.

Topology topology and device device must match the local machine. I/O devices detection and the Open \leftarrow CL component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_opencl_get_device_cpuset().

Note

This function cannot work if PCI devices are filtered out.

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.40.2.3 hwloc_opencl_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the OpenCL device for the given indexes.

Returns

The hwloc OS device object describing the OpenCL device whose platform index is $platform_index$, and whose device index within this platform if $device_index$.

NULL if there is none.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the OpenCL component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.40.2.4 hwloc_opencl_get_device_pci_busid()

Return the domain, bus and device IDs of the OpenCL device device.

Device device must match the local machine.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.41 Interoperability with the CUDA Driver API

Functions

- static int hwloc_cuda_get_device_pci_ids (hwloc_topology_t topology, CUdevice cudevice, int *domain, int *bus, int *dev)
- static int hwloc_cuda_get_device_cpuset (hwloc_topology_t topology, CUdevice cudevice, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_cuda_get_device_pcidev (hwloc_topology_t topology, CUdevice cudevice)
- static hwloc_obj_t hwloc_cuda_get_device_osdev (hwloc_topology_t topology, CUdevice cudevice)
- static hwloc_obj_t hwloc_cuda_get_device_osdev_by_index (hwloc_topology_t topology, unsigned idx)

23.41.1 Detailed Description

This interface offers ways to retrieve topology information about CUDA devices when using the CUDA Driver API.

23.41.2 Function Documentation

23.41.2.1 hwloc_cuda_get_device_cpuset()

Get the CPU set of processors that are physically close to device cudevice.

Store in set the CPU-set describing the locality of the CUDA device cudevice.

Topology topology and device cudevice must match the local machine. I/O devices detection and the CUDA component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_cuda_get_device_osdev, and hwloc_cuda_get_device_osdev, by index().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.41.2.2 hwloc_cuda_get_device_osdev()

Get the hwloc OS device object corresponding to CUDA device cudevice.

Returns

The hwloc OS device object that describes the given CUDA device cudevice.

NULL if none could be found.

Topology topology and device cudevice must match the local machine. I/O devices detection and the CUDA component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_cuda_get_device_cpuset().

Note

This function cannot work if PCI devices are filtered out.

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.41.2.3 hwloc_cuda_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the CUDA device whose index is idx.

Returns

The hwloc OS device object describing the CUDA device whose index is idx.

 \mathtt{NULL} if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the CUDA component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

This function is identical to hwloc_cudart_get_device_osdev_by_index().

23.41.2.4 hwloc_cuda_get_device_pci_ids()

Return the domain, bus and device IDs of the CUDA device cudevice.

Device cudevice must match the local machine.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.41.2.5 hwloc_cuda_get_device_pcidev()

Get the hwloc PCI device object corresponding to the CUDA device cudevice.

Returns

The hwloc PCI device object describing the CUDA device cudevice.

NULL if none could be found.

Topology topology and device cudevice must match the local machine. I/O devices detection must be enabled in topology topology. The CUDA component is not needed in the topology.

23.42 Interoperability with the CUDA Runtime API

Functions

- static int hwloc_cudart_get_device_pci_ids (hwloc_topology_t topology, int idx, int *domain, int *bus, int *dev)
- static int hwloc_cudart_get_device_cpuset (hwloc_topology_t topology, int idx, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_cudart_get_device_pcidev (hwloc_topology_t topology, int idx)
- static hwloc_obj_t hwloc_cudart_get_device_osdev_by_index (hwloc_topology_t topology, unsigned idx)

23.42.1 Detailed Description

This interface offers ways to retrieve topology information about CUDA devices when using the CUDA Runtime API.

23.42.2 Function Documentation

23.42.2.1 hwloc_cudart_get_device_cpuset()

Get the CPU set of processors that are physically close to device idx.

Store in set the CPU-set describing the locality of the CUDA device whose index is idx.

Topology topology and device idx must match the local machine. I/O devices detection and the CUDA component are not needed in the topology.

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.42.2.2 hwloc cudart get device osdev by index()

Get the hwloc OS device object corresponding to the CUDA device whose index is idx.

Returns

The hwloc OS device object describing the CUDA device whose index is idx.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the CUDA component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_cudart_get_device_cpuset().

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

This function is identical to hwloc cuda get device osdev by index().

23.42.2.3 hwloc_cudart_get_device_pci_ids()

```
static int hwloc_cudart_get_device_pci_ids (
    hwloc_topology_t topology,
    int idx,
    int * domain,
    int * bus,
    int * dev ) [inline], [static]
```

Return the domain, bus and device IDs of the CUDA device whose index is idx.

Device index idx must match the local machine.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.42.2.4 hwloc cudart get device pcidev()

Get the hwloc PCI device object corresponding to the CUDA device whose index is idx.

Returns

The hwloc PCI device object describing the CUDA device whose index is idx.

NULL if none could be found.

Topology topology and device idx must match the local machine. I/O devices detection must be enabled in topology topology. The CUDA component is not needed in the topology.

23.43 Interoperability with the NVIDIA Management Library

Functions

- static int hwloc_nvml_get_device_cpuset (hwloc_topology_t topology, nvmlDevice_t device, hwloc_cpuset_t set)
- static hwloc obj t hwloc nyml get device osdev by index (hwloc topology t topology, unsigned idx)
- static hwloc_obj_t hwloc_nvml_get_device_osdev (hwloc_topology_t topology, nvmlDevice_t device)

23.43.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the NVIDIA Management Library (NVML).

23.43.2 Function Documentation

23.43.2.1 hwloc_nvml_get_device_cpuset()

Get the CPU set of processors that are physically close to NVML device device.

Store in set the CPU-set describing the locality of the NVML device device.

Topology topology and device device must match the local machine. I/O devices detection and the NVML component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_nvml_get_device_osdev () and hwloc_nvml_get_device_osdev ().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.43.2.2 hwloc_nvml_get_device_osdev()

Get the hwloc OS device object corresponding to NVML device device.

Returns

The hwloc OS device object that describes the given NVML device device.

NULL if none could be found.

Topology topology and device device must match the local machine. I/O devices detection and the NVML component must be enabled in the topology. If not, the locality of the object may still be found using hwloc nvml get device cpuset().

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.43.2.3 hwloc_nvml_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the NVML device whose index is idx.

Returns

The hwloc OS device object describing the NVML device whose index is idx.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the NVML component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.44 Interoperability with the ROCm SMI Management Library

Functions

- static int hwloc rsmi get device cpuset (hwloc topology t topology, uint32 t dv ind, hwloc cpuset t set)
- static hwloc_obj_t hwloc_rsmi_get_device_osdev_by_index (hwloc_topology_t topology, uint32_t dv_ind)
- · static hwloc obj t hwloc rsmi get device osdev (hwloc topology t topology, uint32 t dv ind)

23.44.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the ROCm SMI Management Library.

23.44.2 Function Documentation

23.44.2.1 hwloc_rsmi_get_device_cpuset()

Get the CPU set of logical processors that are physically close to AMD GPU device whose index is ${\tt dv_ind}$.

Store in set the CPU-set describing the locality of the AMD GPU device whose index is dv_ind.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the ROCm SMI component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc rsmi get device osdev() and hwloc rsmi get device osdev by index().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.44.2.2 hwloc_rsmi_get_device_osdev()

Get the hwloc OS device object corresponding to AMD GPU device, whose index is dv_ind.

Returns

The hwloc OS device object that describes the given AMD GPU, whose index is dv_ind . NULL if none could be found.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the ROCm SMI component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_rsmi_get_device_cpuset().

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.44.2.3 hwloc_rsmi_get_device_osdev_by_index()

Get the hwloc OS device object corresponding to the AMD GPU device whose index is dv_ind.

Returns

The hwloc OS device object describing the AMD GPU device whose index is dv_ind.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the ROCm SMI component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.45 Interoperability with the oneAPI Level Zero interface.

Functions

- static int hwloc_levelzero_get_device_cpuset (hwloc_topology_t topology, ze_device_handle_t device, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_levelzero_get_device_osdev (hwloc_topology_t topology, ze_device_handle_t device)

23.45.1 Detailed Description

This interface offers ways to retrieve topology information about devices managed by the Level Zero API.

23.45.2 Function Documentation

23.45.2.1 hwloc_levelzero_get_device_cpuset()

Get the CPU set of logical processors that are physically close to the Level Zero device device.

Store in set the CPU-set describing the locality of the Level Zero device device.

Topology topology and device device must match the local machine. The Level Zero must have been initialized with Sysman enabled (ZES_ENABLE_SYSMAN=1 in the environment). I/O devices detection and the Level Zero component are not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_levelzero_get_device_osdev().

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.45.2.2 hwloc_levelzero_get_device_osdev()

Get the hwloc OS device object corresponding to Level Zero device device.

Returns

The hwloc OS device object that describes the given Level Zero device device.

NULL if none could be found.

Topology topology and device dv_ind must match the local machine. I/O devices detection and the Level Zero component must be enabled in the topology. If not, the locality of the object may still be found using hwloc_levelzero_get_device_cpuset().

Note

The corresponding hwloc PCI device may be found by looking at the result parent pointer (unless PCI devices are filtered out).

23.46 Interoperability with OpenGL displays

Functions

- static hwloc_obj_t hwloc_gl_get_display_osdev_by_port_device (hwloc_topology_t topology, unsigned port, unsigned device)
- static hwloc_obj_t hwloc_gl_get_display_osdev_by_name (hwloc_topology_t topology, const char *name)
- static int hwloc_gl_get_display_by_osdev (hwloc_topology_t topology, hwloc_obj_t osdev, unsigned *port, unsigned *device)

23.46.1 Detailed Description

This interface offers ways to retrieve topology information about OpenGL displays.

Only the NVIDIA display locality information is currently available, using the NV-CONTROL X11 extension and the NVCtrl library.

23.46.2 Function Documentation

23.46.2.1 hwloc_gl_get_display_by_osdev()

Get the OpenGL display port and device corresponding to the given hwloc OS object.

Retrieves the OpenGL display port (server) in port and device (screen) in screen that correspond to the given hwloc OS device object.

Returns

0 on success.

-1 if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology.

23.46.2.2 hwloc_gl_get_display_osdev_by_name()

Get the hwloc OS device object corresponding to the OpenGL display given by name.

Returns

The hwloc OS device object describing the OpenGL display whose name is name, built as ":port.device" such as ":0.0".

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.46.2.3 hwloc gl get display osdev by port device()

Get the hwloc OS device object corresponding to the OpenGL display given by port and device index.

Returns

The hwloc OS device object describing the OpenGL display whose port (server) is port and device (screen) is device.

NULL if none could be found.

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection and the GL component must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object (unless PCI devices are filtered out).

23.47 Interoperability with OpenFabrics

Functions

- static int hwloc_ibv_get_device_cpuset (hwloc_topology_t topology, struct ibv_device *ibdev, hwloc_cpuset_t set)
- static hwloc_obj_t hwloc_ibv_get_device_osdev_by_name (hwloc_topology_t topology, const char *ibname)
- static hwloc_obj_t hwloc_ibv_get_device_osdev (hwloc_topology_t topology, struct ibv_device *ibdev)

23.47.1 Detailed Description

This interface offers ways to retrieve topology information about OpenFabrics devices (InfiniBand, Omni-Path, us⇔ NIC, etc).

23.47.2 Function Documentation

23.47.2.1 hwloc ibv get device cpuset()

Get the CPU set of processors that are physically close to device ibdev.

Store in set the CPU-set describing the locality of the OpenFabrics device ibdev (InfiniBand, etc).

Topology topology and device ibdev must match the local machine. I/O devices detection is not needed in the topology.

The function only returns the locality of the device. If more information about the device is needed, OS objects should be used instead, see hwloc_ibv_get_device_osdev, and hwloc_ibv_get_device_osdev, and hwloc_ibv_get_device_osdev, and hwloc_ibv_get_device_osdev.

This function is currently only implemented in a meaningful way for Linux; other systems will simply get a full cpuset.

Returns

0 on success.

-1 on error, for instance if device information could not be found.

23.47.2.2 hwloc_ibv_get_device_osdev()

Get the hwloc OS device object corresponding to the OpenFabrics device ibdev.

Returns

The hwloc OS device object describing the OpenFabrics device ibdev (InfiniBand, etc).

NULL if none could be found.

Topology topology and device ibdev must match the local machine. I/O devices detection must be enabled in the topology. If not, the locality of the object may still be found using $hwloc_ibv_get_device_cpuset()$.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object.

23.47.2.3 hwloc_ibv_get_device_osdev_by_name()

Get the hwloc OS device object corresponding to the OpenFabrics device named ibname.

Returns

The hwloc OS device object describing the OpenFabrics device (InfiniBand, Omni-Path, usNIC, etc) whose name is ibname (mlx5_0, hfi1_0, usnic_0, qib0, etc).

NULL if none could be found.

The name ibname is usually obtained from ibv get device name().

The topology topology does not necessarily have to match the current machine. For instance the topology may be an XML import of a remote host. I/O devices detection must be enabled in the topology.

Note

The corresponding PCI device object can be obtained by looking at the OS device parent object.

23.48 Topology differences

Data Structures

- union hwloc_topology_diff_obj_attr_u
- union hwloc_topology_diff_u

Typedefs

- typedef enum hwloc_topology_diff_obj_attr_type_e hwloc_topology_diff_obj_attr_type_t
- typedef enum hwloc_topology_diff_type_e hwloc_topology_diff_type_t
- typedef union hwloc topology diff u * hwloc topology diff t

Enumerations

- enum hwloc_topology_diff_obj_attr_type_e { HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE , HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO }
- enum hwloc_topology_diff_type_e { HWLOC_TOPOLOGY_DIFF_OBJ_ATTR , HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX }
- enum hwloc_topology_diff_apply_flags_e { HWLOC_TOPOLOGY_DIFF_APPLY_REVERSE }

Functions

- int hwloc_topology_diff_build (hwloc_topology_t topology, hwloc_topology_t newtopology, unsigned long flags, hwloc_topology_diff_t *diff)
- int hwloc_topology_diff_apply (hwloc_topology_t topology, hwloc_topology_diff_t diff, unsigned long flags)
- int hwloc_topology_diff_destroy (hwloc_topology_diff_t diff)
- int hwloc_topology_diff_load_xml (const char *xmlpath, hwloc_topology_diff_t *diff, char **refname)
- int hwloc_topology_diff_export_xml (hwloc_topology_diff_t diff, const char *refname, const char *xmlpath)
- int hwloc_topology_diff_load_xmlbuffer (const char *xmlbuffer, int buflen, hwloc_topology_diff_t *diff, char *xrefname)
- int hwloc_topology_diff_export_xmlbuffer (hwloc_topology_diff_t diff, const char *refname, char **xmlbuffer, int *buflen)

23.48.1 Detailed Description

Applications that manipulate many similar topologies, for instance one for each node of a homogeneous cluster, may want to compress topologies to reduce the memory footprint.

This file offers a way to manipulate the difference between topologies and export/import it to/from XML. Compression may therefore be achieved by storing one topology entirely while the others are only described by their differences with the former. The actual topology can be reconstructed when actually needed by applying the precomputed difference to the reference topology.

This interface targets very similar nodes. Only very simple differences between topologies are actually supported, for instance a change in the memory size, the name of the object, or some info attribute. More complex differences

such as adding or removing objects cannot be represented in the difference structures and therefore return errors. Differences between object sets or topology-wide allowed sets, cannot be represented either.

It means that there is no need to apply the difference when looking at the tree organization (how many levels, how many objects per level, what kind of objects, CPU and node sets, etc) and when binding to objects. However the difference must be applied when looking at object attributes such as the name, the memory size or info attributes.

23.48.2 Typedef Documentation

23.48.2.1 hwloc_topology_diff_obj_attr_type_t

typedef enum hwloc_topology_diff_obj_attr_type_e hwloc_topology_diff_obj_attr_type_t Type of one object attribute difference.

23.48.2.2 hwloc_topology_diff_t

 $\label{typedefunionhyloc_topology_diff_u * hwloc_topology_diff_t} \\ One element of a difference list between two topologies. \\$

23.48.2.3 hwloc_topology_diff_type_t

typedef enum hwloc_topology_diff_type_e hwloc_topology_diff_type_t Type of one element of a difference list.

23.48.3 Enumeration Type Documentation

23.48.3.1 hwloc_topology_diff_apply_flags_e

enum hwloc_topology_diff_apply_flags_e
Flags to be given to hwloc_topology_diff_apply().

Enumerator

HWLOC_TOPOLOGY_DIFF_APPLY_REVERSE	Apply topology diff in reverse direction.
-----------------------------------	---

23.48.3.2 hwloc_topology_diff_obj_attr_type_e

enum hwloc_topology_diff_obj_attr_type_e

Type of one object attribute difference.

Enumerator

HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE	The object local memory is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s (and the index field is ignored).
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_NAME	The object name is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s (and the name field is ignored).
HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO	the value of an info attribute is modified. The union is a hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s.

23.48.3.3 hwloc_topology_diff_type_e

```
enum hwloc_topology_diff_type_e
Type of one element of a difference list.
```

Enumerator

HWLOC_TOPOLOGY_DIFF_OBJ_ATTR	An object attribute was changed. The union is a hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s.
HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX	The difference is too complex, it cannot be represented. The difference below this object has not been checked. hwloc_topology_diff_build() will return 1. The union is a hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s.

23.48.4 Function Documentation

23.48.4.1 hwloc_topology_diff_apply()

Apply a topology diff to an existing topology.

flags is an OR'ed set of hwloc_topology_diff_apply_flags_e.

The new topology is modified in place. hwloc_topology_dup() may be used to duplicate it before patching. If the difference cannot be applied entirely, all previous applied elements are unapplied before returning.

Returns

0 on success.

-N if applying the difference failed while trying to apply the N-th part of the difference. For instance -1 is returned if the very first difference element could not be applied.

23.48.4.2 hwloc_topology_diff_build()

Compute the difference between 2 topologies.

The difference is stored as a list of https://

If the difference between 2 objects is too complex to be represented (for instance if some objects have different types, or different numbers of children), a special diff entry of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX is queued. The computation of the diff does not continue below these objects. So each such diff entry means that the difference between two subtrees could not be computed.

Returns

0 if the difference can be represented properly.

0 with diff pointing to NULL if there is no difference between the topologies.

1 if the difference is too complex (see above). Some entries in the list will be of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLE

-1 on any other error.

Note

flags is currently not used. It should be 0.

The output diff has to be freed with hwloc_topology_diff_destroy().

The output diff can only be exported to XML or passed to hwloc_topology_diff_apply() if 0 was returned, i.e. if no entry of type HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX is listed.

The output diff may be modified by removing some entries from the list. The removed entries should be freed by passing them to to hwloc_topology_diff_destroy() (possible as another list).

23.48.4.3 hwloc_topology_diff_destroy()

Destroy a list of topology differences.

Returns

0.

23.48.4.4 hwloc topology diff export xml()

```
int hwloc_topology_diff_export_xml (
          hwloc_topology_diff_t diff,
          const char * refname,
          const char * xmlpath )
```

Export a list of topology differences to a XML file.

If not NULL, refname defines an identifier string for the reference topology which was used as a base when computing this difference. This identifier is usually the name of the other XML file that contains the reference topology. This attribute is given back when reading the diff from XML.

Returns

0 on success, -1 on error.

23.48.4.5 hwloc_topology_diff_export_xmlbuffer()

Export a list of topology differences to a XML buffer.

If not <code>NULL</code>, <code>refname</code> defines an identifier string for the reference topology which was used as a base when computing this difference. This identifier is usually the name of the other XML file that contains the reference topology. This attribute is given back when reading the diff from XML.

The returned buffer ends with a \0 that is included in the returned length.

Returns

0 on success, -1 on error.

Note

The XML buffer should later be freed with hwloc free xmlbuffer().

23.48.4.6 hwloc_topology_diff_load_xml()

Load a list of topology differences from a XML file.

If not NULL, refname will be filled with the identifier string of the reference topology for the difference file, if any was specified in the XML file. This identifier is usually the name of the other XML file that contains the reference topology.

Returns

0 on success, -1 on error.

Note

the pointer returned in refname should later be freed by the caller.

23.48.4.7 hwloc_topology_diff_load_xmlbuffer()

Load a list of topology differences from a XML buffer.

If not NULL, refname will be filled with the identifier string of the reference topology for the difference file, if any was specified in the XML file. This identifier is usually the name of the other XML file that contains the reference topology.

Returns

0 on success, -1 on error.

Note

the pointer returned in refname should later be freed by the caller.

23.49 Sharing topologies between processes

Functions

- int hwloc_shmem_topology_get_length (hwloc_topology_t topology, size_t *lengthp, unsigned long flags)
- int hwloc_shmem_topology_write (hwloc_topology_t topology, int fd, hwloc_uint64_t fileoffset, void *mmap
 —address, size_t length, unsigned long flags)
- int hwloc_shmem_topology_adopt (hwloc_topology_t *topologyp, int fd, hwloc_uint64_t fileoffset, void *mmap_address, size_t length, unsigned long flags)

23.49.1 Detailed Description

These functions are used to share a topology between processes by duplicating it into a file-backed shared-memory buffer.

The master process must first get the required shared-memory size for storing this topology with hwloc_shmem_topology_get_length() Then it must find a virtual memory area of that size that is available in all processes (identical virtual addresses in all processes). On Linux, this can be done by comparing holes found in /proc/<pid>/maps for each process.

Once found, it must open a destination file for storing the buffer, and pass it to hwloc_shmem_topology_write()

together with virtual memory address and length obtained above.

Other processes may then adopt this shared topology by opening the same file and passing it to

hwloc shmem topology adopt() with the exact same virtual memory address and length.

23.49.2.1 hwloc_shmem_topology_adopt()

23.49.2 Function Documentation

```
int hwloc_shmem_topology_adopt (
    hwloc_topology_t * topologyp,
    int fd,
    hwloc_uint64_t fileoffset,
    void * mmap_address,
    size_t length,
    unsigned long flags)
```

Adopt a shared memory topology stored in a file.

Map a file in virtual memory and adopt the topology that was previously stored there with hwloc_shmem_topology_write(). The returned adopted topology in topology can be used just like any topology. And it must be destroyed with hwloc topology destroy() as usual.

However the topology is read-only. For instance, it cannot be modified with hwloc_topology_restrict() and object userdata pointers cannot be changed.

The segment of the file pointed by descriptor fd, starting at offset fileoffset, and of length length (in bytes), will be mapped at virtual address mmap_address.

The file pointed by descriptor fd, the offset fileoffset, the requested mapping virtual address $mmap_\leftarrow address$ and the length length must be identical to what was given to hwloc_shmem_topology_write() earlier.

Note

Flags flags are currently unused, must be 0.

The object userdata pointer should not be used unless the process that created the shared topology also placed userdata-pointed buffers in shared memory.

This function takes care of calling hwloc_topology_abi_check().

Returns

0 on success.

- -1 with errno set to <code>EBUSY</code> if the virtual memory mapping defined by $mmap_address$ and <code>length</code> isn't available in the process.
- -1 with errno set to EINVAL if fileoffset, mmap_address or length aren't page-aligned, or do not match what was given to hwloc_shmem_topology_write() earlier.
- -1 with errno set to ${\tt EINVAL}$ if the layout of the topology structure is different between the writer process and the adopter process.

23.49.2.2 hwloc_shmem_topology_get_length()

```
size_t * lengthp,
unsigned long flags )
```

Get the required shared memory length for storing a topology.

This length (in bytes) must be used in hwloc_shmem_topology_write() and hwloc_shmem_topology_adopt() later.

Returns

the length, or -1 on error, for instance if flags are invalid.

Note

Flags flags are currently unused, must be 0.

23.49.2.3 hwloc_shmem_topology_write()

```
int hwloc_shmem_topology_write (
    hwloc_topology_t topology,
    int fd,
    hwloc_uint64_t fileoffset,
    void * mmap_address,
    size_t length,
    unsigned long flags)
```

Duplicate a topology to a shared memory file.

Temporarily map a file in virtual memory and duplicate the topology topology by allocating duplicates in there.

The segment of the file pointed by descriptor fd, starting at offset fileoffset, and of length length (in bytes), will be temporarily mapped at virtual address mmap_address during the duplication.

The mapping length length must have been previously obtained with hwloc_shmem_topology_get_length() and the topology must not have been modified in the meantime.

Note

Flags flags are currently unused, must be 0.

The object userdata pointer is duplicated but the pointed buffer is not. However the caller may also allocate it manually in shared memory to share it as well.

Returns

0 on success.

- -1 with errno set to EBUSY if the virtual memory mapping defined by mmap_address and length isn't available in the process.
- -1 with errno set to EINVAL if fileoffset, mmap_address or length aren't page-aligned.

23.50 Components and Plugins: Discovery components

Data Structures

struct hwloc_disc_component

23.50.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.51 Components and Plugins: Discovery backends

Data Structures

- struct hwloc_disc_status
- struct hwloc_backend

Typedefs

• typedef enum hwloc_disc_phase_e hwloc_disc_phase_t

Enumerations

```
    enum hwloc_disc_phase_e {
        HWLOC_DISC_PHASE_GLOBAL , HWLOC_DISC_PHASE_CPU , HWLOC_DISC_PHASE_MEMORY ,
        HWLOC_DISC_PHASE_PCI ,
        HWLOC_DISC_PHASE_IO , HWLOC_DISC_PHASE_MISC , HWLOC_DISC_PHASE_ANNOTATE ,
        HWLOC_DISC_PHASE_TWEAK }
```

• enum hwloc_disc_status_flag_e { HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_RESOURCES }

Functions

- struct hwloc_backend * hwloc_backend_alloc (struct hwloc_topology *topology, struct hwloc_disc_component *component)
- int hwloc_backend_enable (struct hwloc_backend *backend)

23.51.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.51.2 Typedef Documentation

23.51.2.1 hwloc_disc_phase_t

typedef enum hwloc_disc_phase_e hwloc_disc_phase_t Discovery phase.

23.51.3 Enumeration Type Documentation

23.51.3.1 hwloc_disc_phase_e

enum hwloc_disc_phase_e

Discovery phase.

Enumerator

HWLOC_DISC_PHASE_GLOBAL	xml or synthetic, platform-specific components such as bgq. Discovers everything including CPU, memory, I/O and everything else. A component with a Global phase usually excludes all other phases.
HWLOC_DISC_PHASE_CPU	CPU discovery.
HWLOC_DISC_PHASE_MEMORY	Attach memory to existing CPU objects.
HWLOC_DISC_PHASE_PCI	Attach PCI devices and bridges to existing CPU objects.
HWLOC_DISC_PHASE_IO	I/O discovery that requires PCI devices (OS devices such as OpenCL, CUDA, etc.).
HWLOC_DISC_PHASE_MISC	Misc objects that gets added below anything else.
HWLOC_DISC_PHASE_ANNOTATE	Annotating existing objects, adding distances, etc.
HWLOC_DISC_PHASE_TWEAK	Final tweaks to a ready-to-use topology. This phase runs once the topology is loaded, before it is returned to the topology. Hence it may only use the main hwloc API for modifying the topology, for instance by restricting it, adding info attributes, etc.

23.51.3.2 hwloc_disc_status_flag_e

```
enum hwloc_disc_status_flag_e
Discovery status flags.
```

Enumerator

HWL	LOC_DISC_STATUS_FLAG_GOT_ALLOWED↔	The sets of allowed resources were already retrieved.
_RESOURCES		

23.51.4 Function Documentation

23.51.4.1 hwloc_backend_alloc()

Allocate a backend structure, set good default values, initialize backend->component and topology, etc. The caller will then modify whatever needed, and call hwloc backend enable().

23.51.4.2 hwloc_backend_enable()

Enable a previously allocated and setup backend.

23.52 Components and Plugins: Generic components

Data Structures

· struct hwloc_component

Typedefs

• typedef enum hwloc_component_type_e hwloc_component_type_t

Enumerations

enum hwloc_component_type_e { HWLOC_COMPONENT_TYPE_DISC , HWLOC_COMPONENT_TYPE_XML }

23.52.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.52.2 Typedef Documentation

23.52.2.1 hwloc_component_type_t

typedef enum hwloc_component_type_e hwloc_component_type_t Generic component type.

23.52.3 Enumeration Type Documentation

23.52.3.1 hwloc component type e

enum hwloc_component_type_e
Generic component type.

Enumerator

HWLOC_COMPONENT_TYPE_DISC	The data field must point to a struct hwloc_disc_component.
HWLOC_COMPONENT_TYPE_XML	The data field must point to a struct hwloc_xml_component.

23.53 Components and Plugins: Core functions to be used by components

Macros

- #define HWLOC_SHOW_CRITICAL_ERRORS() (hwloc_hide_errors() < 2)
- #define HWLOC_SHOW_ALL_ERRORS() (hwloc_hide_errors() == 0)

Functions

- int hwloc_hide_errors (void)
- hwloc_obj_t hwloc_insert_object_by_cpuset (struct hwloc_topology *topology, hwloc_obj_t root, hwloc_obj_t obj, const char *reason)
- void hwloc insert object by parent (struct hwloc topology *topology, hwloc obj t parent, hwloc obj t obj)
- hwloc_obj_t hwloc_alloc_setup_object (hwloc_topology_t topology, hwloc_obj_type_t type, unsigned os_
 index)
- int hwloc_obj_add_children_sets (hwloc_obj_t obj)
- int hwloc_topology_reconnect (hwloc_topology_t topology, unsigned long flags)
- static int hwloc_plugin_check_namespace (const char *pluginname, const char *symbol)

23.53.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.53.2 Macro Definition Documentation

23.53.2.1 HWLOC SHOW ALL ERRORS

```
#define HWLOC_SHOW_ALL_ERRORS( ) (hwloc_hide_errors() == 0)
```

23.53.2.2 HWLOC_SHOW_CRITICAL_ERRORS

```
\#define HWLOC\_SHOW\_CRITICAL\_ERRORS() (hwloc_hide_errors() < 2)
```

23.53.3 Function Documentation

23.53.3.1 hwloc__insert_object_by_cpuset()

Add an object to the topology.

Insert new object obj in the topology starting under existing object root (if NULL, the topology root object is used).

It is sorted along the tree of other objects according to the inclusion of cpusets, to eventually be added as a child of the smallest object including this object.

If the cpuset is empty, the type of the object (and maybe some attributes) must be enough to find where to insert the object. This is especially true for NUMA nodes with memory and no CPUs.

The given object should not have children.

This shall only be called before levels are built.

The caller should check whether the object type is filtered-out before calling this function.

The topology cpuset/nodesets will be enlarged to include the object sets.

reason is a unique string identifying where and why this insertion call was performed (it will be displayed in case of internal insertion error).

Returns the object on success. Returns NULL and frees obj on error. Returns another object and frees obj if it was merged with an identical pre-existing object.

23.53.3.2 hwloc_alloc_setup_object()

Allocate and initialize an object of the given type and physical index.

If os_index is unknown or irrelevant, use $\verb|HWLOC_UNKNOWN_INDEX|$.

23.53.3.3 hwloc_hide_errors()

Check whether error messages are hidden.

Callers should print critical error messages (e.g. invalid hw topo info, invalid config) only if this function returns strictly less than 2.

Callers should print non-critical error messages (e.g. failure to initialize CUDA) if this function returns 0.

This function return 1 by default (show critical only), 0 in Istopo (show all), or anything set in HWLOC_HIDE_← ERRORS in the environment.

Use macros HWLOC_SHOW_CRITICAL_ERRORS() and HWLOC_SHOW_ALL_ERRORS() for clarity.

23.53.3.4 hwloc insert object by parent()

Insert an object somewhere in the topology.

It is added as the last child of the given parent. The cpuset is completely ignored, so strange objects such as I/O devices should preferably be inserted with this.

When used for "normal" children with cpusets (when importing from XML when duplicating a topology), the caller should make sure that:

- · children are inserted in order,
- · children cpusets do not intersect.

The given object may have normal, I/O or Misc children, as long as they are in order as well. These children must have valid parent and next_sibling pointers.

The caller should check whether the object type is filtered-out before calling this function.

23.53.3.5 hwloc_obj_add_children_sets()

```
int hwloc_obj_add_children_sets (
    hwloc_obj_t obj )
```

Setup object cpusets/nodesets by OR'ing its children.

Used when adding an object late in the topology. Will update the new object by OR'ing all its new children sets. Used when PCI backend adds a hostbridge parent, when distances add a new Group, etc.

23.53.3.6 hwloc_plugin_check_namespace()

Make sure that plugins can lookup core symbols.

This is a sanity check to avoid lazy-lookup failures when libhwloc is loaded within a plugin, and later tries to load its own plugins. This may fail (and abort the program) if libhwloc symbols are in a private namespace.

Returns

0 on success.

-1 if the plugin cannot be successfully loaded. The caller plugin init() callback should return a negative error code as well.

Plugins should call this function in their init() callback to avoid later crashes if lazy symbol resolution is used by the upper layer that loaded hwloc (e.g. OpenCL implementations using dlopen with RTLD_LAZY).

Note

The build system must define HWLOC INSIDE PLUGIN if and only if building the caller as a plugin.

This function should remain inline so plugins can call it even when they cannot find libhwloc symbols.

23.53.3.7 hwloc topology reconnect()

Request a reconnection of children and levels in the topology.

May be used by backends during discovery if they need arrays or lists of object within levels or children to be fully connected.

flags is currently unused, must 0.

23.54 Components and Plugins: Filtering objects

Functions

- static int hwloc_filter_check_pcidev_subtype_important (unsigned classid)
- static int hwloc_filter_check_osdev_subtype_important (hwloc_obj_osdev_type_t subtype)
- static int hwloc_filter_check_keep_object_type (hwloc_topology_t topology, hwloc_obj_type_t type)
- static int hwloc filter check keep object (hwloc topology t topology, hwloc obj t obj)

23.54.1 Detailed Description

Note

These structures and functions may change when HWLOC_COMPONENT_ABI is modified.

23.54.2 Function Documentation

23.54.2.1 hwloc filter check keep object()

Check whether the given object should be filtered-out.

Returns

1 if the object type should be kept, 0 otherwise.

23.54.2.2 hwloc_filter_check_keep_object_type()

Check whether a non-I/O object type should be filtered-out.

Cannot be used for I/O objects.

Returns

1 if the object type should be kept, 0 otherwise.

23.54.2.3 hwloc_filter_check_osdev_subtype_important()

Check whether the given OS device subtype is important.

Returns

1 if important, 0 otherwise.

23.54.2.4 hwloc_filter_check_pcidev_subtype_important()

Check whether the given PCI device classid is important.

Returns

1 if important, 0 otherwise.

23.55 Components and Plugins: helpers for PCI discovery

Functions

• unsigned hwloc_pcidisc_find_cap (const unsigned char *config, unsigned cap)

- int hwloc_pcidisc_find_linkspeed (const unsigned char *config, unsigned offset, float *linkspeed)
- hwloc_obj_type_t hwloc_pcidisc_check_bridge_type (unsigned device_class, const unsigned char *config)
- int hwloc_pcidisc_find_bridge_buses (unsigned domain, unsigned bus, unsigned dev, unsigned func, unsigned *secondary busp, unsigned *subordinate busp, const unsigned char *config)
- void hwloc pcidisc tree insert by busid (struct hwloc obj **treep, struct hwloc obj *obj)
- int hwloc_pcidisc_tree_attach (struct hwloc_topology *topology, struct hwloc_obj *tree)

23.55.1 Detailed Description

Note

These structures and functions may change when HWLOC COMPONENT ABI is modified.

23.55.2 Function Documentation

23.55.2.1 hwloc pcidisc check bridge type()

Return the hwloc object type (PCI device or Bridge) for the given class and configuration space. This function requires 16 bytes of common configuration header at the beginning of config.

23.55.2.2 hwloc_pcidisc_find_bridge_buses()

```
int hwloc_pcidisc_find_bridge_buses (
    unsigned domain,
    unsigned bus,
    unsigned dev,
    unsigned func,
    unsigned * secondary_busp,
    unsigned * subordinate_busp,
    const unsigned char * config )
```

Fills the attributes of the given PCI bridge using the given PCI config space.

This function requires 32 bytes of common configuration header at the beginning of config.

Returns -1 and destroys /p obj if bridge fields are invalid.

23.55.2.3 hwloc_pcidisc_find_cap()

Return the offset of the given capability in the PCI config space buffer.

This function requires a 256-bytes config space. Unknown/unavailable bytes should be set to 0xff.

23.55.2.4 hwloc_pcidisc_find_linkspeed()

Fill linkspeed by reading the PCI config space where PCI CAP ID EXP is at position offset.

Needs 20 bytes of EXP capability block starting at offset in the config space for registers up to link status.

23.55.2.5 hwloc_pcidisc_tree_attach()

Add some hostbridges on top of the given tree of PCI objects and attach them to the topology. Other backends may lookup PCI objects or localities (for instance to attach OS devices) by using hwloc_pcidisc_cifind_by_busid() or hwloc_pcidisc_find_busid_parent().

23.55.2.6 hwloc_pcidisc_tree_insert_by_busid()

Insert a PCI object in the given PCI tree by looking at PCI bus IDs.

If treep points to NULL, the new object is inserted there.

23.56 Components and Plugins: finding PCI objects during other discoveries

Typedefs

• typedef void * hwloc backend distances add handle t

Functions

- struct hwloc_obj * hwloc_pci_find_parent_by_busid (struct hwloc_topology *topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- struct hwloc_obj * hwloc_pci_find_by_busid (struct hwloc_topology *topology, unsigned domain, unsigned bus, unsigned dev, unsigned func)
- hwloc_backend_distances_add_handle_t hwloc_backend_distances_add_create (hwloc_topology_t topology, const char *name, unsigned long kind, unsigned long flags)
- int hwloc_backend_distances_add_values (hwloc_topology_t topology, hwloc_backend_distances_add_handle_t handle, unsigned nbobjs, hwloc_obj_t *objs, hwloc_uint64_t *values, unsigned long flags)
- int hwloc_backend_distances_add_commit (hwloc_topology_t topology, hwloc_backend_distances_add_handle_t handle, unsigned long flags)

23.56.1 Detailed Description

Note

These structures and functions may change when HWLOC COMPONENT ABI is modified.

23.56.2 Typedef Documentation

23.56.2.1 hwloc backend distances add handle t

```
typedef void* hwloc_backend_distances_add_handle_t
```

Handle to a new distances structure during its addition to the topology.

23.56.3 Function Documentation

23.56.3.1 hwloc_backend_distances_add_commit()

Commit a new distances structure.

This is similar to hwloc_distances_add_commit() but this variant is designed for backend inserting distances during topology discovery.

23.56.3.2 hwloc_backend_distances_add_create()

```
hwloc_backend_distances_add_handle_t hwloc_backend_distances_add_create (
    hwloc_topology_t topology,
    const char * name,
    unsigned long kind,
    unsigned long flags)
```

Create a new empty distances structure.

23.56.3.3 hwloc backend distances add values()

```
int hwloc_backend_distances_add_values (
    hwloc_topology_t topology,
    hwloc_backend_distances_add_handle_t handle,
    unsigned nbobjs,
    hwloc_obj_t * objs,
    hwloc_uint64_t * values,
    unsigned long flags )
```

Specify the objects and values in a new empty distances structure.

This is similar to hwloc_distances_add_values() but this variant is designed for backend inserting distances during topology discovery.

The only semantical difference is that objs and values are not duplicated, but directly attached to the topology. On success, these arrays are given to the core and should not ever be freed by the caller anymore.

23.56.3.4 hwloc_pci_find_by_busid()

Find the PCI device or bridge matching a PCI bus ID exactly.

This is useful for adding specific information about some objects based on their PCI id. When it comes to attaching objects based on PCI locality, hwloc_pci_find_parent_by_busid() should be preferred.

23.56.3.5 hwloc pci find parent by busid()

```
struct hwloc_obj * hwloc_pci_find_parent_by_busid (
    struct hwloc_topology * topology,
    unsigned domain,
    unsigned bus,
    unsigned dev,
    unsigned func )
```

Find the object or a parent of a PCI bus ID.

When attaching a new object (typically an OS device) whose locality is specified by PCI bus ID, this function returns the PCI object to use as a parent for attaching.

23.57 Netloc API 221

If the exact PCI device with this bus ID exists, it is returned. Otherwise (for instance if it was filtered out), the function returns another object with similar locality (for instance a parent bridge, or the local CPU Package).

23.57 Netloc API

Enumerations

```
    enum {
        NETLOC_SUCCESS = 0, NETLOC_ERROR = -1, NETLOC_ERROR_NOTDIR = -2, NETLOC_ERROR_NOENT
        = -3,
        NETLOC_ERROR_EMPTY = -4, NETLOC_ERROR_MULTIPLE = -5, NETLOC_ERROR_NOT_IMPL = -6,
        NETLOC_ERROR_EXISTS = -7,
        NETLOC_ERROR_NOT_FOUND = -8, NETLOC_ERROR_MAX = -9 }
```

23.57.1 Detailed Description

23.57.2 Enumeration Type Documentation

23.57.2.1 anonymous enum

anonymous enum

Return codes

Enumerator

NETLOC_SUCCESS	Success
NETLOC_ERROR	Error: General condition
NETLOC_ERROR_NOTDIR	Error: URI is not a directory
NETLOC_ERROR_NOENT	Error: URI is invalid, no such entry
NETLOC_ERROR_EMPTY	Error: No networks found
NETLOC_ERROR_MULTIPLE	Error: Multiple matching networks found
NETLOC_ERROR_NOT_IMPL	Error: Interface not implemented
NETLOC_ERROR_EXISTS	Error: If the entry already exists when trying to add to a lookup table
NETLOC_ERROR_NOT_FOUND	Error: No path found
NETLOC_ERROR_MAX	Error: Enum upper bound marker. No errors less than this number Will not be returned externally.

Chapter 24

Data Structure Documentation

24.1 hwloc backend Struct Reference

#include <plugins.h>

Data Fields

- · unsigned phases
- · unsigned long flags
- · int is thissystem
- void * private data
- void(* disable)(struct hwloc_backend *backend)
- int(* discover)(struct hwloc_backend *backend, struct hwloc_disc_status *status)
- int(* get_pci_busid_cpuset)(struct hwloc_backend *backend, struct hwloc_pcidev_attr_s *busid, hwloc_bitmap_t cpuset)

24.1.1 Detailed Description

Discovery backend structure.

A backend is the instantiation of a discovery component. When a component gets enabled for a topology, its instantiate() callback creates a backend.

hwloc_backend_alloc() initializes all fields to default values that the component may change (except "component" and "next") before enabling the backend with hwloc backend enable().

Most backends assume that the topology is_thissystem flag is set because they talk to the underlying operating system. However they may still be used in topologies without the is_thissystem flag for debugging reasons. In practice, they are usually auto-disabled in such cases (excluded by xml or synthetic backends, or by environment variables when changing the Linux fsroot or the x86 cpuid path).

24.1.2 Field Documentation

24.1.2.1 disable

void(* hwloc_backend::disable) (struct hwloc_backend *backend)
Callback for freeing the private_data. May be NULL.

24.1.2.2 discover

int (* hwloc_backend::discover) (struct hwloc_backend *backend, struct hwloc_disc_status *status) Main discovery callback. returns -1 on error, either because it couldn't add its objects of the existing topology, or because of an actual discovery/gathering failure. May be NULL.

24.1.2.3 flags

```
unsigned long hwloc_backend::flags Backend flags, currently always 0.
```

24.1.2.4 get_pci_busid_cpuset

```
int(* hwloc_backend::get_pci_busid_cpuset) (struct hwloc_backend *backend, struct hwloc_←
pcidev_attr_s *busid, hwloc_bitmap_t cpuset)
```

Callback to retrieve the locality of a PCI object. Called by the PCI core when attaching PCI hierarchy to CPU objects. May be NULL.

24.1.2.5 is_thissystem

```
int hwloc_backend::is_thissystem
```

Backend-specific 'is_thissystem' property. Set to 0 if the backend disables the thissystem flag for this topology (e.g. loading from xml or synthetic string, or using a different fsroot on Linux, or a x86 CPUID dump). Set to -1 if the backend doesn't care (default).

24.1.2.6 phases

```
unsigned hwloc_backend::phases
```

Discovery phases performed by this component, possibly without some of them if excluded by other components. OR'ed set of hwloc_disc_phase_t.

24.1.2.7 private data

```
void* hwloc_backend::private_data
```

Backend private data, or NULL if none.

The documentation for this struct was generated from the following file:

· plugins.h

24.2 hwloc obj attr u::hwloc bridge attr s Struct Reference

```
#include <hwloc.h>
```

Data Fields

```
    union {
        struct hwloc_pcidev_attr_s pci
    } upstream
    hwloc_obj_bridge_type_t upstream_type
    union {
        struct {
            unsigned short domain
            unsigned char secondary_bus
            unsigned char subordinate_bus
        } pci
    } downstream
```

- hwloc_obj_bridge_type_t downstream_type
- · unsigned depth

24.2.1 Detailed Description

Bridge specific Object Attributes.

24.2.2 Field Documentation

24.2.2.1 depth

unsigned hwloc_obj_attr_u::hwloc_bridge_attr_s::depth

24.2.2.2 domain

unsigned short hwloc_obj_attr_u::hwloc_bridge_attr_s::domain

24.2.2.3

union { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::downstream

24.2.2.4 downstream_type

hwloc_obj_bridge_type_t hwloc_obj_attr_u::hwloc_bridge_attr_s::downstream_type

24.2.2.5 pci [1/2]

struct hwloc_pcidev_attr_s hwloc_obj_attr_u::hwloc_bridge_attr_s::pci

24.2.2.6 [2/2]

struct { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::pci

24.2.2.7 secondary_bus

 ${\tt unsigned \ char \ hwloc_obj_attr_u::hwloc_bridge_attr_s::secondary_bus}$

24.2.2.8 subordinate_bus

unsigned char hwloc_obj_attr_u::hwloc_bridge_attr_s::subordinate_bus

24.2.2.9

union { ... } hwloc_obj_attr_u::hwloc_bridge_attr_s::upstream

24.2.2.10 upstream type

hwloc_obj_bridge_type_t hwloc_obj_attr_u::hwloc_bridge_attr_s::upstream_type
The documentation for this struct was generated from the following file:

· hwloc.h

24.3 hwloc_obj_attr_u::hwloc_cache_attr_s Struct Reference

#include <hwloc.h>

Data Fields

- · hwloc uint64 t size
- · unsigned depth
- unsigned linesize
- · int associativity
- hwloc_obj_cache_type_t type

24.3.1 Detailed Description

Cache-specific Object Attributes.

24.3.2 Field Documentation

24.3.2.1 associativity

int hwloc_obj_attr_u::hwloc_cache_attr_s::associativity
Ways of associativity, -1 if fully associative, 0 if unknown.

24.3.2.2 depth

unsigned hwloc_obj_attr_u::hwloc_cache_attr_s::depth
Depth of cache (e.g., L1, L2, ...etc.)

24.3.2.3 linesize

unsigned hwloc_obj_attr_u::hwloc_cache_attr_s::linesize Cache-line size in bytes. 0 if unknown.

24.3.2.4 size

hwloc_uint64_t hwloc_obj_attr_u::hwloc_cache_attr_s::size Size of cache in bytes.

24.3.2.5 type

hwloc_obj_cache_type_t hwloc_obj_attr_u::hwloc_cache_attr_s::type
Cache type.

The documentation for this struct was generated from the following file:

· hwloc.h

24.4 hwloc_cl_device_topology_amd Union Reference

#include <opencl.h>

Data Fields

```
    struct {
        cl_uint type
        cl_uint data [5]
    } raw
    struct {
        cl_uint type
        cl_char unused [17]
        cl_char bus
        cl_char device
        cl_char function
    } pcie
```

24.4.1 Field Documentation

24.4.1.1 bus

```
cl_char hwloc_cl_device_topology_amd::bus
```

24.4.1.2 data

```
cl_uint hwloc_cl_device_topology_amd::data[5]
```

24.4.1.3 device

```
cl_char hwloc_cl_device_topology_amd::device
```

24.4.1.4 function

```
cl_char hwloc_cl_device_topology_amd::function
```

24.4.1.5

```
\verb|struct { ... } hwloc_cl_device_topology_amd::pcie|\\
```

24.4.1.6

```
struct { ... } hwloc_cl_device_topology_amd::raw
```

24.4.1.7 type

```
cl_uint hwloc_cl_device_topology_amd::type
```

24.4.1.8 unused

```
cl_char hwloc_cl_device_topology_amd::unused[17]
```

The documentation for this union was generated from the following file:

opencl.h

24.5 hwloc component Struct Reference

#include <plugins.h>

Data Fields

- · unsigned abi
- int(* init)(unsigned long flags)
- void(* finalize)(unsigned long flags)
- · hwloc_component_type_t type
- unsigned long flags
- void * data

24.5.1 Detailed Description

Generic component structure.

Generic components structure, either statically listed by configure in static-components.h or dynamically loaded as a plugin.

24.5.2 Field Documentation

24.5.2.1 abi

unsigned hwloc_component::abi

Component ABI version, set to HWLOC_COMPONENT_ABI.

24.5.2.2 data

void* hwloc_component::data

Component data, pointing to a struct hwloc_disc_component or struct hwloc_xml_component.

24.5.2.3 finalize

void(* hwloc_component::finalize) (unsigned long flags)

Process-wide component termination callback.

This optional callback is called after unregistering the component from the hwloc core (before unloading the plugin). flags is always 0 for now.

Note

If the component uses Itdl for loading its own plugins, it should load/unload them only in init() and finalize(), to avoid race conditions with hwloc's use of Itdl.

24.5.2.4 flags

unsigned long hwloc_component::flags

Component flags, unused for now.

24.5.2.5 init

```
int(* hwloc_component::init) (unsigned long flags)
```

Process-wide component initialization callback.

This optional callback is called when the component is registered to the hwloc core (after loading the plugin).

When the component is built as a plugin, this callback should call hwloc_check_plugin_namespace() and return an negative error code on error.

flags is always 0 for now.

Returns

0 on success, or a negative code on error.

Note

If the component uses Itdl for loading its own plugins, it should load/unload them only in init() and finalize(), to avoid race conditions with hwloc's use of Itdl.

24.5.2.6 type

```
hwloc_component_type_t hwloc_component::type
```

Component type.

The documentation for this struct was generated from the following file:

· plugins.h

24.6 hwloc_disc_component Struct Reference

#include <plugins.h>

Data Fields

- · const char * name
- · unsigned phases
- unsigned excluded_phases
- struct hwloc_backend *(* instantiate)(struct hwloc_topology *topology, struct hwloc_disc_component *component, unsigned excluded_phases, const void *data1, const void *data2, const void *data3)
- · unsigned priority
- · unsigned enabled by default

24.6.1 Detailed Description

Discovery component structure.

This is the major kind of components, taking care of the discovery. They are registered by generic components, either statically-built or as plugins.

24.6.2 Field Documentation

24.6.2.1 enabled_by_default

unsigned hwloc_disc_component::enabled_by_default

Enabled by default. If unset, if will be disabled unless explicitly requested.

24.6.2.2 excluded_phases

unsigned hwloc_disc_component::excluded_phases

Component phases to exclude, as an OR'ed set of hwloc_disc_phase_t.

For a GLOBAL component, this usually includes all other phases (~UL).

Other components only exclude types that may bring conflicting topology information. MISC components should likely not be excluded since they usually bring non-primary additional information.

24.6.2.3 instantiate

```
struct hwloc_backend *(* hwloc_disc_component::instantiate) (struct hwloc_topology *topology,
struct hwloc_disc_component *component, unsigned excluded_phases, const void *data1, const void
*data2, const void *data3)
```

Instantiate callback to create a backend from the component. Parameters data1, data2, data3 are NULL except for components that have special enabling routines such as hwloc topology set xml().

24.6.2.4 name

```
const char* hwloc_disc_component::name
```

Name. If this component is built as a plugin, this name does not have to match the plugin filename.

24.6.2.5 phases

unsigned hwloc_disc_component::phases

Discovery phases performed by this component. OR'ed set of hwloc_disc_phase_t.

24.6.2.6 priority

unsigned hwloc_disc_component::priority

Component priority. Used to sort topology->components, higher priority first. Also used to decide between two components with the same name.

Usual values are 50 for native OS (or platform) components, 45 for x86, 40 for no-OS fallback, 30 for global components (xml, synthetic), 20 for pci, 10 for other misc components (opencl etc.).

The documentation for this struct was generated from the following file:

· plugins.h

24.7 hwloc disc status Struct Reference

#include <plugins.h>

Data Fields

- · hwloc disc phase t phase
- · unsigned excluded phases
- unsigned long flags

24.7.1 Detailed Description

Discovery status structure.

Used by the core and backends to inform about what has been/is being done during the discovery process.

24.7.2 Field Documentation

24.7.2.1 excluded_phases

unsigned hwloc_disc_status::excluded_phases

Dynamically excluded phases. If a component decides during discovery that some phases are no longer needed.

24.7.2.2 flags

unsigned long hwloc_disc_status::flags OR'ed set of hwloc_disc_status_flag_e.

24.7.2.3 phase

hwloc_disc_phase_t hwloc_disc_status::phase

The current discovery phase that is performed. Must match one of the phases in the component phases field. The documentation for this struct was generated from the following file:

· plugins.h

24.8 hwloc_distances_s Struct Reference

#include <distances.h>

Data Fields

- unsigned nbobjs
- hwloc_obj_t * objs
- unsigned long kind
- hwloc_uint64_t * values

24.8.1 Detailed Description

Matrix of distances between a set of objects.

This matrix often contains latencies between NUMA nodes (as reported in the System Locality Distance Information Table (SLIT) in the ACPI specification), which may or may not be physically accurate. It corresponds to the latency for accessing the memory of one node from a core in another node. The corresponding kind is HWLOC_DISTANCES_KIND_FROM_OS | HWLOC_DISTANCES_KIND_FROM_USER. The name of this distances structure is "NUMALatency". Others distance structures include and "XGMIBandwidth", "XGMIHops", "Xe-LinkBandwidth" and "NVLinkBandwidth".

The matrix may also contain bandwidths between random sets of objects, possibly provided by the user, as specified in the kind attribute.

Pointers objs and values should not be replaced, reallocated, freed, etc. However callers are allowed to modify kind as well as the contents of objs and values arrays. For instance, if there is a single NUMA node per Package, hwloc_get_obj_with_same_locality() may be used to convert between them and replace NUMA nodes in the objs array with the corresponding Packages. See also hwloc_distances_transform() for applying some transformations to the structure.

24.8.2 Field Documentation

24.8.2.1 kind

unsigned long hwloc_distances_s::kind OR'ed set of hwloc_distances_kind_e.

24.8.2.2 nbobjs

unsigned hwloc_distances_s::nbobjs

Number of objects described by the distance matrix.

24.8.2.3 objs

hwloc_obj_t* hwloc_distances_s::objs

Array of objects described by the distance matrix. These objects are not in any particular order, see https://hww.color.org/buller.nd/ the distances_obj_pair_values() for easy ways to find objects in this array and their corresponding values.

24.8.2.4 values

hwloc_uint64_t* hwloc_distances_s::values

Matrix of distances between objects, stored as a one-dimension array.

Distance from i-th to j-th object is stored in slot i*nbobjs+j. The meaning of the value depends on the kind attribute. The documentation for this struct was generated from the following file:

· distances.h

24.9 hwloc_obj_attr_u::hwloc_group_attr_s Struct Reference

#include <hwloc.h>

Data Fields

- unsigned depth
- · unsigned kind
- · unsigned subkind
- · unsigned char dont merge

24.9.1 Detailed Description

Group-specific Object Attributes.

24.9.2 Field Documentation

24.9.2.1 depth

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::depth

Depth of group object. It may change if intermediate Group objects are added.

24.9.2.2 dont_merge

unsigned char hwloc_obj_attr_u::hwloc_group_attr_s::dont_merge

Flag preventing groups from being automatically merged with identical parent or children.

24.9.2.3 kind

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::kind Internally-used kind of group.

24.9.2.4 subkind

unsigned hwloc_obj_attr_u::hwloc_group_attr_s::subkind Internally-used subkind to distinguish different levels of groups with same kind. The documentation for this struct was generated from the following file:

· hwloc.h

24.10 hwloc_info_s Struct Reference

#include <hwloc.h>

Data Fields

- char * name
- · char * value

24.10.1 Detailed Description

Object info attribute (name and value strings)

See also

Consulting and Adding Info Attributes

24.10.2 Field Documentation

24.10.2.1 name

char* hwloc_info_s::name
Info name.

24.10.2.2 value

char* hwloc_info_s::value

Info value.

The documentation for this struct was generated from the following file:

· hwloc.h

24.11 hwloc_location Struct Reference

#include <memattrs.h>

Data Structures

· union hwloc_location_u

Data Fields

- enum hwloc_location_type_e type
- union hwloc_location::hwloc_location_u location

24.11.1 Detailed Description

Where to measure attributes from.

24.11.2 Field Documentation

24.11.2.1 location

union hwloc_location::hwloc_location_u hwloc_location::location

24.11.2.2 type

enum hwloc_location_type_e hwloc_location::type

Type of location.

The documentation for this struct was generated from the following file:

· memattrs.h

24.12 hwloc_location::hwloc_location_u Union Reference

#include <memattrs.h>

Data Fields

- · hwloc_cpuset_t cpuset
- · hwloc_obj_t object

24.12.1 Detailed Description

Actual location.

24.12.2 Field Documentation

24.12.2.1 cpuset

hwloc_cpuset_t hwloc_location::hwloc_location_u::cpuset Location as a cpuset, when the location type is HWLOC_LOCATION_TYPE_CPUSET.

24.12.2.2 object

hwloc_obj_t hwloc_location::hwloc_location_u::object Location as an object, when the location type is HWLOC_LOCATION_TYPE_OBJECT. The documentation for this union was generated from the following file:

· memattrs.h

24.13 hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_ page_type_s Struct Reference

#include <hwloc.h>

Data Fields

- hwloc_uint64_t size
- hwloc_uint64_t count

24.13.1 Detailed Description

Array of local memory page types, NULL if no local memory and page_types is 0. The array is sorted by increasing size fields. It contains page_types_len slots.

24.13.2 Field Documentation

24.13.2.1 count

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s::count Number of pages of this size.

24.13.2.2 size

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s::size Size of pages.

The documentation for this struct was generated from the following file:

· hwloc.h

24.14 hwloc obj attr u::hwloc numanode attr s Struct Reference

#include <hwloc.h>

Data Structures

• struct hwloc_memory_page_type_s

Data Fields

- hwloc_uint64_t local_memory
- unsigned page_types_len
- struct hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s * page_types

24.14.1 Detailed Description

NUMA node-specific Object Attributes.

24.14.2 Field Documentation

24.14.2.1 local memory

hwloc_uint64_t hwloc_obj_attr_u::hwloc_numanode_attr_s::local_memory
Local memory (in bytes)

24.14.2.2 page_types

 $struct\ hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s\ *\ hwloc_obj_attr_u \leftrightarrow ::hwloc_numanode_attr_s::page_types$

24.14.2.3 page_types_len

```
unsigned hwloc_obj_attr_u::hwloc_numanode_attr_s::page_types_len Size of array page_types.
```

The documentation for this struct was generated from the following file:

· hwloc.h

24.15 hwloc_obj Struct Reference

#include <hwloc.h>

Data Fields

- · hwloc_obj_type_t type
- char * subtype
- · unsigned os_index
- char * name
- · hwloc uint64 t total memory
- union hwloc_obj_attr_u * attr
- · int depth
- unsigned logical_index
- struct hwloc_obj * next_cousin
- struct hwloc obj * prev cousin
- struct hwloc_obj * parent
- unsigned sibling_rank
- struct hwloc_obj * next_sibling
- struct hwloc_obj * prev_sibling
- int symmetric_subtree
- hwloc_cpuset_t cpuset
- hwloc_cpuset_t complete_cpuset
- hwloc_nodeset_t nodeset
- · hwloc nodeset t complete nodeset
- struct hwloc info s * infos
- unsigned infos_count
- void * userdata
- hwloc_uint64_t gp_index

List and array of normal children below this object (except Memory, I/O and Misc children).

- · unsigned arity
- struct hwloc obj ** children
- struct hwloc_obj * first_child
- struct hwloc_obj * last_child

List of Memory children below this object.

- · unsigned memory arity
- struct hwloc_obj * memory_first_child

List of I/O children below this object.

- unsigned io_arity
- struct hwloc_obj * io_first_child

List of Misc children below this object.

- · unsigned misc_arity
- struct hwloc_obj * misc_first_child

24.15.1 Detailed Description

Structure of a topology object.

Applications must not modify any field except hwloc_obj.userdata.

24.15.2 Field Documentation

24.15.2.1 arity

unsigned hwloc_obj::arity

Number of normal children. Memory, Misc and I/O children are not listed here but rather in their dedicated children list

24.15.2.2 attr

union hwloc_obj_attr_u* hwloc_obj::attr

Object type-specific Attributes, may be NULL if no attribute value was found.

24.15.2.3 children

```
struct hwloc_obj** hwloc_obj::children
Normal children, children[0 .. arity -1].
```

24.15.2.4 complete_cpuset

hwloc_cpuset_t hwloc_obj::complete_cpuset

The complete CPU set of processors of this object,.

This may include not only the same as the cpuset field, but also some CPUs for which topology information is unknown or incomplete, some offlines CPUs, and the CPUs that are ignored when the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED flag is not set. Thus no corresponding PU object may be found in the topology, because the precise position is undefined. It is however known that it would be somewhere under this object.

Note

Its value must not be changed, hwloc_bitmap_dup() must be used instead.

24.15.2.5 complete nodeset

hwloc_nodeset_t hwloc_obj::complete_nodeset

The complete NUMA node set of this object,.

This may include not only the same as the nodeset field, but also some NUMA nodes for which topology information is unknown or incomplete, some offlines nodes, and the nodes that are ignored when the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED flag is not set. Thus no corresponding NUMA node object may be found in the topology, because the precise position is undefined. It is however known that it would be somewhere under this object.

If there are no NUMA nodes in the machine, all the memory is close to this object, so only the first bit is set in complete_nodeset.

Note

Its value must not be changed, hwloc bitmap dup() must be used instead.

24.15.2.6 cpuset

hwloc_cpuset_t hwloc_obj::cpuset

CPUs covered by this object.

This is the set of CPUs for which there are PU objects in the topology under this object, i.e. which are known to be physically contained in this object and known how (the children path between this object and the PU objects). If the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED configuration flag is set, some of these CPUs may be online but not allowed for binding, see <a href="https://hwloc.google.googl

Note

All objects have non-NULL CPU and node sets except Misc and I/O objects.

Its value must not be changed, hwloc_bitmap_dup() must be used instead.

24.15.2.7 depth

int hwloc_obj::depth

Vertical index in the hierarchy.

For normal objects, this is the depth of the horizontal level that contains this object and its cousins of the same type. If the topology is symmetric, this is equal to the parent depth plus one, and also equal to the number of parent/child links from the root object to here.

For special objects (NUMA nodes, I/O and Misc) that are not in the main tree, this is a special negative value that corresponds to their dedicated level, see hwloc_get_type_depth() and <a href="https://hww.number.nd/misc) that are not in the main tree, this is a special negative value that corresponds to their dedicated level, see hwloc_get_type_depth() and <a href="https://hww.number.nd/misc) hwloc_get_type_depth() as usual.

24.15.2.8 first_child

struct hwloc_obj* hwloc_obj::first_child
First normal child.

24.15.2.9 gp_index

hwloc_uint64_t hwloc_obj::gp_index

Global persistent index. Generated by hwloc, unique across the topology (contrary to os_index) and persistent across topology changes (contrary to logical_index). Mostly used internally, but could also be used by application to identify objects.

24.15.2.10 infos

struct hwloc_info_s* hwloc_obj::infos

Array of info attributes (name and value strings).

24.15.2.11 infos count

unsigned hwloc_obj::infos_count Size of infos array.

24.15.2.12 io_arity

unsigned hwloc_obj::io_arity

Number of I/O children. These children are listed in io first child.

24.15.2.13 io_first_child

```
struct hwloc_obj* hwloc_obj::io_first_child
```

First I/O child. Bridges, PCI and OS devices are listed here (io_arity and io_first_child) instead of in the normal children list. See also hwloc_obj_type_is_io().

24.15.2.14 last child

```
struct hwloc_obj* hwloc_obj::last_child
Last normal child.
```

24.15.2.15 logical index

```
unsigned hwloc_obj::logical_index
```

Horizontal index in the whole list of similar objects, hence guaranteed unique across the entire machine. Could be a "cousin_rank" since it's the rank within the "cousin" list below Note that this index may change when restricting the topology or when inserting a group.

24.15.2.16 memory_arity

```
unsigned hwloc_obj::memory_arity
```

Number of Memory children. These children are listed in memory_first_child.

24.15.2.17 memory_first_child

```
struct hwloc_obj* hwloc_obj::memory_first_child
```

First Memory child. NUMA nodes and Memory-side caches are listed here (memory_arity and memory_ child) instead of in the normal children list. See also hwloc_obj_type_is_memory().

A memory hierarchy starts from a normal CPU-side object (e.g. Package) and ends with NUMA nodes as leaves. There might exist some memory-side caches between them in the middle of the memory subtree.

24.15.2.18 misc arity

```
unsigned hwloc_obj::misc_arity
```

Number of Misc children. These children are listed in misc_first_child.

24.15.2.19 misc first child

```
struct hwloc_obj* hwloc_obj::misc_first_child
```

First Misc child. Misc objects are listed here (misc_arity and misc_first_child) instead of in the normal children list.

24.15.2.20 name

```
char* hwloc_obj::name
```

Object-specific name if any. Mostly used for identifying OS devices and Misc objects where a name string is more useful than numerical indexes.

24.15.2.21 next_cousin

```
struct hwloc_obj* hwloc_obj::next_cousin
```

Next object of same type and depth.

24.15.2.22 next_sibling

```
struct hwloc_obj* hwloc_obj::next_sibling
```

Next object below the same parent (inside the same list of children).

24.15.2.23 nodeset

hwloc_nodeset_t hwloc_obj::nodeset

NUMA nodes covered by this object or containing this object.

This is the set of NUMA nodes for which there are NUMA node objects in the topology under or above this object, i.e. which are known to be physically contained in this object or containing it and known how (the children path between this object and the NUMA node objects).

In the end, these nodes are those that are close to the current object. Function hwloc_get_local_numanode_objs() may be used to list those NUMA nodes more precisely.

If the HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED configuration flag is set, some of these nodes may be online but not allowed for allocation, see hwloc_topology_get_allowed_nodeset().

If there are no NUMA nodes in the machine, all the memory is close to this object, so only the first bit may be set in nodeset.

Note

All objects have non-NULL CPU and node sets except Misc and I/O objects.

Its value must not be changed, hwloc_bitmap_dup() must be used instead.

24.15.2.24 os index

unsigned hwloc_obj::os_index

OS-provided physical index number. It is not guaranteed unique across the entire machine, except for PUs and NUMA nodes. Set to HWLOC_UNKNOWN_INDEX if unknown or irrelevant for this object.

24.15.2.25 parent

```
struct hwloc_obj* hwloc_obj::parent
Parent, NULL if root (Machine object)
```

24.15.2.26 prev_cousin

```
struct hwloc_obj* hwloc_obj::prev_cousin
```

Previous object of same type and depth.

24.15.2.27 prev_sibling

```
struct hwloc_obj* hwloc_obj::prev_sibling
```

Previous object below the same parent (inside the same list of children).

24.15.2.28 sibling rank

```
unsigned hwloc_obj::sibling_rank
```

Index in parent's children[] array. Or the index in parent's Memory, I/O or Misc children list.

24.15.2.29 subtype

```
char* hwloc_obj::subtype
```

Subtype string to better describe the type field.

24.15.2.30 symmetric_subtree

```
int hwloc_obj::symmetric_subtree
```

Set if the subtree of normal objects below this object is symmetric, which means all normal children and their children have identical subtrees.

Memory, I/O and Misc children are ignored.

If set in the topology root object, Istopo may export the topology as a synthetic string.

24.15.2.31 total memory

```
hwloc_uint64_t hwloc_obj::total_memory
```

Total memory (in bytes) in NUMA nodes below this object.

24.15.2.32 type

```
hwloc_obj_type_t hwloc_obj::type
```

Type of object.

24.15.2.33 userdata

```
void* hwloc_obj::userdata
```

The documentation for this struct was generated from the following file:

· hwloc.h

24.16 hwloc_obj_attr_u Union Reference

#include <hwloc.h>

Data Structures

- struct hwloc_bridge_attr_s
- struct hwloc_cache_attr_s
- struct hwloc_group_attr_s
- struct hwloc_numanode_attr_s
- struct hwloc_osdev_attr_s
- struct hwloc_pcidev_attr_s

Data Fields

- · struct hwloc obj attr u::hwloc numanode attr s numanode
- struct hwloc_obj_attr_u::hwloc_cache_attr_s cache
- struct hwloc_obj_attr_u::hwloc_group_attr_s group
- struct hwloc_obj_attr_u::hwloc_pcidev_attr_s pcidev
- · struct hwloc obj attr u::hwloc bridge attr s bridge
- struct hwloc_obj_attr_u::hwloc_osdev_attr_s osdev

24.16.1 Detailed Description

Object type-specific Attributes.

24.16.2 Field Documentation

24.16.2.1 bridge

struct hwloc_obj_attr_u::hwloc_bridge_attr_s hwloc_obj_attr_u::bridge

24.16.2.2 cache

struct hwloc_obj_attr_u::hwloc_cache_attr_s hwloc_obj_attr_u::cache

24.16.2.3 group

struct hwloc_obj_attr_u::hwloc_group_attr_s hwloc_obj_attr_u::group

24.16.2.4 numanode

struct hwloc_obj_attr_u::hwloc_numanode_attr_s hwloc_obj_attr_u::numanode

24.16.2.5 osdev

struct hwloc_obj_attr_u::hwloc_osdev_attr_s hwloc_obj_attr_u::osdev

24.16.2.6 pcidev

struct hwloc_obj_attr_u::hwloc_pcidev_attr_s hwloc_obj_attr_u::pcidev The documentation for this union was generated from the following file:

· hwloc.h

24.17 hwloc_obj_attr_u::hwloc_osdev_attr_s Struct Reference

#include <hwloc.h>

Data Fields

· hwloc_obj_osdev_type_t type

24.17.1 Detailed Description

OS Device specific Object Attributes.

24.17.2 Field Documentation

24.17.2.1 type

hwloc_obj_osdev_type_t hwloc_obj_attr_u::hwloc_osdev_attr_s::type

The documentation for this struct was generated from the following file:

· hwloc.h

24.18 hwloc_obj_attr_u::hwloc_pcidev_attr_s Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned short domain
- · unsigned char bus
- · unsigned char dev
- · unsigned char func
- unsigned short class_id
- unsigned short vendor_id
- · unsigned short device_id
- · unsigned short subvendor_id
- · unsigned short subdevice_id
- unsigned char revision
- · float linkspeed

24.18.1 Detailed Description

PCI Device specific Object Attributes.

24.18.2 Field Documentation

24.18.2.1 bus

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::bus

24.18.2.2 class_id

 ${\tt unsigned \ short \ hwloc_obj_attr_u::hwloc_pcidev_attr_s::class_id}$

24.18.2.3 dev

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::dev

24.18.2.4 device_id

 $\verb"unsigned" short hwloc_obj_attr_u::hwloc_pcidev_attr_s::device_id"$

24.18.2.5 domain

 ${\tt unsigned \ short \ hwloc_obj_attr_u::hwloc_pcidev_attr_s::domain}$

24.18.2.6 func

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::func

24.18.2.7 linkspeed

float hwloc_obj_attr_u::hwloc_pcidev_attr_s::linkspeed

24.18.2.8 revision

unsigned char hwloc_obj_attr_u::hwloc_pcidev_attr_s::revision

24.18.2.9 subdevice_id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::subdevice_id

24.18.2.10 subvendor_id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::subvendor_id

24.18.2.11 vendor id

unsigned short hwloc_obj_attr_u::hwloc_pcidev_attr_s::vendor_id The documentation for this struct was generated from the following file:

· hwloc.h

24.19 hwloc_topology_cpubind_support Struct Reference

#include <hwloc.h>

Data Fields

- unsigned char set_thisproc_cpubind
- unsigned char get_thisproc_cpubind
- unsigned char set_proc_cpubind
- · unsigned char get_proc_cpubind
- · unsigned char set_thisthread_cpubind
- unsigned char get_thisthread_cpubind
- · unsigned char set_thread_cpubind
- unsigned char get_thread_cpubind
- unsigned char get_thisproc_last_cpu_location
- unsigned char get_proc_last_cpu_location
- unsigned char get_thisthread_last_cpu_location

24.19.1 Detailed Description

Flags describing actual PU binding support for this topology.

A flag may be set even if the feature isn't supported in all cases (e.g. binding to random sets of non-contiguous objects).

24.19.2 Field Documentation

24.19.2.1 get_proc_cpubind

unsigned char hwloc_topology_cpubind_support::get_proc_cpubind Getting the binding of a whole given process is supported.

24.19.2.2 get_proc_last_cpu_location

unsigned char hwloc_topology_cpubind_support::get_proc_last_cpu_location Getting the last processors where a whole process ran is supported

24.19.2.3 get thisproc cpubind

unsigned char hwloc_topology_cpubind_support::get_thisproc_cpubind Getting the binding of the whole current process is supported.

24.19.2.4 get thisproc last cpu location

unsigned char hwloc_topology_cpubind_support::get_thisproc_last_cpu_location Getting the last processors where the whole current process ran is supported

24.19.2.5 get_thisthread_cpubind

unsigned char hwloc_topology_cpubind_support::get_thisthread_cpubind Getting the binding of the current thread only is supported.

24.19.2.6 get thisthread last cpu location

 $\label{lem:constraint} \begin{tabular}{ll} unsigned char $hwloc_topology_cpubind_support::get_thisthread_last_cpu_location \\ \begin{tabular}{ll} Getting the last processors where the current thread ran is supported \\ \begin{tabular}{ll} class constraints (a) & constraints (b) & constraints (c) & c$

24.19.2.7 get_thread_cpubind

unsigned char hwloc_topology_cpubind_support::get_thread_cpubind Getting the binding of a given thread only is supported.

24.19.2.8 set_proc_cpubind

unsigned char hwloc_topology_cpubind_support::set_proc_cpubind Binding a whole given process is supported.

24.19.2.9 set_thisproc_cpubind

unsigned char hwloc_topology_cpubind_support::set_thisproc_cpubind Binding the whole current process is supported.

24.19.2.10 set_thisthread_cpubind

unsigned char hwloc_topology_cpubind_support::set_thisthread_cpubind Binding the current thread only is supported.

24.19.2.11 set thread cpubind

unsigned char hwloc_topology_cpubind_support::set_thread_cpubind Binding a given thread only is supported.

The documentation for this struct was generated from the following file:

· hwloc.h

24.20 hwloc_topology_diff_u::hwloc_topology_diff_generic_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next

24.20.1 Field Documentation

24.20.1.1 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_generic_s::next

24.20.1.2 type

 $\label{loc_topology_diff_type_t} $$ hwloc_topology_diff_u::hwloc_topology_diff_generic_s::type $$ The documentation for this struct was generated from the following file:$

· diff.h

24.21 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_⊸ generic_s Struct Reference

#include <diff.h>

Data Fields

hwloc_topology_diff_obj_attr_type_t type

24.21.1 Field Documentation

24.21.1.1 type

The documentation for this struct was generated from the following file:

• diff.h

24.22 hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next
- int obj_depth
- unsigned obj_index
- union hwloc_topology_diff_obj_attr_u diff

24.22.1 Field Documentation

24.22.1.1 diff

 $\label{local_constraint} union \ hwloc_topology_diff_obj_attr_u \ hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s \\ \mbox{$::$diff}$

24.22.1.2 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::next

24.22.1.3 obj_depth

int hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::obj_depth

24.22.1.4 obj_index

unsigned hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::obj_index

24.22.1.5 type

hwloc_topology_diff_type_t hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s::type
The documentation for this struct was generated from the following file:

· diff.h

24.23 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_⊸ string_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_obj_attr_type_t type
- char * name
- char * oldvalue
- char * newvalue

24.23.1 Detailed Description

String attribute modification with an optional name.

24.23.2 Field Documentation

24.23.2.1 name

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::name

24.23.2.2 newvalue

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::newvalue

24.23.2.3 oldvalue

char* hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s::oldvalue

24.23.2.4 type

 $\label{loc_topology_diff_obj_attr_type_t} $$ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_$$ attr_string_s::type $$ for each of the context of$

The documentation for this struct was generated from the following file:

· diff.h

24.24 hwloc_topology_diff_obj_attr_u Union Reference

#include <diff.h>

Data Structures

- struct hwloc_topology_diff_obj_attr_generic_s
- struct hwloc_topology_diff_obj_attr_string_s
- struct hwloc_topology_diff_obj_attr_uint64_s

Data Fields

- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s generic
- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s uint64
- struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s string

24.24.1 Detailed Description

One object attribute difference.

24.24.2 Field Documentation

24.24.2.1 generic

struct hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s hwloc_topology← _diff_obj_attr_u::generic

24.24.2.2 string

 $struct\ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s\ hwloc_topology_\leftrightarrow diff_obj_attr_u::string$

24.24.2.3 uint64

 $struct\ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s\ hwloc_topology_\leftrightarrow\ diff_obj_attr_u::uint64$

The documentation for this union was generated from the following file:

· diff.h

24.25 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_⇔ uint64 s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_obj_attr_type_t type
- hwloc_uint64_t index
- hwloc_uint64_t oldvalue
- hwloc_uint64_t newvalue

24.25.1 Detailed Description

Integer attribute modification with an optional index.

24.25.2 Field Documentation

24.25.2.1 index

hwloc_uint64_t hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s::index

24.25.2.2 newvalue

hwloc_uint64_t hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s::newvalue

24.25.2.3 oldvalue

 $\verb|hwloc_uint64_t| hwloc_topology_diff_obj_attr_u:: \verb|hwloc_topology_diff_obj_attr_uint64_s:: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s:: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s: oldvalue| | hwloc_topology_diff_obj_attr_uint64_s$

24.25.2.4 type

 $\label{loc_topology_diff_obj_attr_type_t} $$ hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_$$ attr_uint64_s::type $$ for each of the context of$

The documentation for this struct was generated from the following file:

• diff.h

24.26 hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s Struct Reference

#include <diff.h>

Data Fields

- hwloc_topology_diff_type_t type
- union hwloc_topology_diff_u * next
- int obj_depth
- unsigned obj_index

24.26.1 Field Documentation

24.26.1.1 next

union hwloc_topology_diff_u* hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::next

24.26.1.2 obj_depth

int hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::obj_depth

24.26.1.3 obj index

unsigned hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::obj_index

24.26.1.4 type

hwloc_topology_diff_type_t hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s::type
The documentation for this struct was generated from the following file:

• diff.h

24.27 hwloc_topology_diff_u Union Reference

#include <diff.h>

Data Structures

- struct hwloc_topology_diff_generic_s
- struct hwloc_topology_diff_obj_attr_s
- struct hwloc_topology_diff_too_complex_s

Data Fields

- struct hwloc_topology_diff_u::hwloc_topology_diff_generic_s generic
- struct hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s obj_attr
- struct hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s too_complex

24.27.1 Detailed Description

One element of a difference list between two topologies.

24.27.2 Field Documentation

24.27.2.1 generic

struct hwloc_topology_diff_u::hwloc_topology_diff_generic_s hwloc_topology_diff_u::generic

24.27.2.2 obj_attr

 $\verb|struct| hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s| hwloc_topology_diff_u::obj_attr_s| hwloc_topology_diff$

24.27.2.3 too_complex

 $struct\ hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s\ hwloc_topology_diff_u::too_{\hookleftarrow}\ complex$

The documentation for this union was generated from the following file:

· diff.h

24.28 hwloc_topology_discovery_support Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned char pu
- · unsigned char numa
- unsigned char numa_memory
- · unsigned char disallowed pu
- · unsigned char disallowed_numa
- · unsigned char cpukind_efficiency

24.28.1 Detailed Description

Flags describing actual discovery support for this topology.

24.28.2 Field Documentation

24.28.2.1 cpukind_efficiency

unsigned char hwloc_topology_discovery_support::cpukind_efficiency Detecting the efficiency of CPU kinds is supported, see Kinds of CPU cores.

24.28.2.2 disallowed numa

unsigned char hwloc_topology_discovery_support::disallowed_numa

Detecting and identifying NUMA nodes that are not available to the current process is supported.

24.28.2.3 disallowed pu

 $unsigned \ char \ hwloc_topology_discovery_support:: disallowed_pu$

Detecting and identifying PU objects that are not available to the current process is supported.

24.28.2.4 numa

unsigned char hwloc_topology_discovery_support::numa Detecting the number of NUMA nodes is supported.

24.28.2.5 numa_memory

unsigned char hwloc_topology_discovery_support::numa_memory Detecting the amount of memory in NUMA nodes is supported.

24.28.2.6 pu

unsigned char hwloc_topology_discovery_support::pu

Detecting the number of PU objects is supported.

The documentation for this struct was generated from the following file:

· hwloc.h

24.29 hwloc_topology_membind_support Struct Reference

#include <hwloc.h>

Data Fields

- · unsigned char set_thisproc_membind
- · unsigned char get_thisproc_membind
- unsigned char set_proc_membind
- unsigned char get_proc_membind
- · unsigned char set thisthread membind
- · unsigned char get_thisthread_membind
- unsigned char set_area_membind
- · unsigned char get_area_membind
- unsigned char alloc_membind
- · unsigned char firsttouch_membind
- unsigned char bind_membind
- · unsigned char interleave_membind
- unsigned char nexttouch_membind
- unsigned char migrate_membind
- unsigned char get_area_memlocation

24.29.1 Detailed Description

Flags describing actual memory binding support for this topology.

A flag may be set even if the feature isn't supported in all cases (e.g. binding to random sets of non-contiguous objects).

24.29.2 Field Documentation

24.29.2.1 alloc_membind

unsigned char hwloc_topology_membind_support::alloc_membind Allocating a bound memory area is supported.

24.29.2.2 bind membind

unsigned char hwloc_topology_membind_support::bind_membind Bind policy is supported.

24.29.2.3 firsttouch_membind

 $\label{lem:constraint} unsigned \ char \ hwloc_topology_membind_support:: firsttouch_membind \\ \textbf{First-touch policy is supported}.$

24.29.2.4 get area membind

unsigned char hwloc_topology_membind_support::get_area_membind Getting the binding of a given memory area is supported.

24.29.2.5 get area memlocation

unsigned char hwloc_topology_membind_support::get_area_memlocation Getting the last NUMA nodes where a memory area was allocated is supported

24.29.2.6 get_proc_membind

unsigned char hwloc_topology_membind_support::get_proc_membind Getting the binding of a whole given process is supported.

24.29.2.7 get thisproc membind

unsigned char hwloc_topology_membind_support::get_thisproc_membind Getting the binding of the whole current process is supported.

24.29.2.8 get_thisthread_membind

unsigned char hwloc_topology_membind_support::get_thisthread_membind Getting the binding of the current thread only is supported.

24.29.2.9 interleave membind

unsigned char hwloc_topology_membind_support::interleave_membind Interleave policy is supported.

24.29.2.10 migrate membind

unsigned char hwloc_topology_membind_support::migrate_membind Migration flags is supported.

24.29.2.11 nexttouch_membind

unsigned char hwloc_topology_membind_support::nexttouch_membind Next-touch migration policy is supported.

24.29.2.12 set area membind

unsigned char hwloc_topology_membind_support::set_area_membind Binding a given memory area is supported.

24.29.2.13 set_proc_membind

unsigned char hwloc_topology_membind_support::set_proc_membind Binding a whole given process is supported.

24.29.2.14 set_thisproc_membind

unsigned char hwloc_topology_membind_support::set_thisproc_membind Binding the whole current process is supported.

24.29.2.15 set_thisthread_membind

 $\label{lem:unsigned_char_hwloc_topology_membind_support::set_this thread_membind} \\ \textbf{Binding the current thread only is supported}.$

The documentation for this struct was generated from the following file:

· hwloc.h

24.30 hwloc topology misc support Struct Reference

#include <hwloc.h>

Data Fields

· unsigned char imported support

24.30.1 Detailed Description

Flags describing miscellaneous features.

24.30.2 Field Documentation

24.30.2.1 imported_support

unsigned char hwloc_topology_misc_support::imported_support
Support was imported when importing another topology, see HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT.
The documentation for this struct was generated from the following file:

· hwloc.h

24.31 hwloc topology support Struct Reference

#include <hwloc.h>

Data Fields

- struct hwloc_topology_discovery_support * discovery
- struct hwloc topology cpubind support * cpubind
- struct hwloc_topology_membind_support * membind
- struct hwloc_topology_misc_support * misc

24.31.1 Detailed Description

Set of flags describing actual support for this topology.

This is retrieved with hwloc_topology_get_support()) and will be valid until the topology object is destroyed. Note: the values are correct only after discovery.

24.31.2 Field Documentation

24.31.2.1 cpubind

struct hwloc_topology_cpubind_support* hwloc_topology_support::cpubind

24.31.2.2 discovery

24.31.2.3 membind

struct hwloc_topology_membind_support* hwloc_topology_support::membind

24.31.2.4 misc

struct hwloc_topology_support::misc The documentation for this struct was generated from the following file:

· hwloc.h

Index

```
ahi
                                                      HWLOC LOCAL NUMANODE FLAG ALL, 177
    hwloc component, 228
                                                      hwloc local numanode flag e, 177
Add distances between objects, 172
                                                      HWLOC LOCAL NUMANODE FLAG LARGER LOCALITY,
    hwloc distances add commit, 173
                                                          177
                                                      HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY,
    hwloc_distances_add_create, 173
    hwloc distances add flag e, 173
                                                          177
    HWLOC DISTANCES ADD FLAG GROUP, 173
                                                      HWLOC LOCATION TYPE CPUSET, 177
    HWLOC_DISTANCES_ADD_FLAG_GROUP_INACCURATE/ploc_location_type_e, 177
                                                      HWLOC_LOCATION_TYPE_OBJECT, 177
    hwloc_distances_add_handle_t, 173
                                                      hwloc memattr get best initiator, 179
    hwloc distances add values, 174
                                                      hwloc memattr get best target, 179
alloc membind
                                                      hwloc memattr get by name, 180
    hwloc_topology_membind_support, 252
                                                      hwloc_memattr_get_value, 180
                                                      HWLOC_MEMATTR_ID_BANDWIDTH, 178
API version, 87
    HWLOC API VERSION, 87
                                                      HWLOC MEMATTR ID CAPACITY, 177
    HWLOC COMPONENT ABI, 87
                                                      hwloc memattr id e, 177
                                                      HWLOC_MEMATTR_ID_LATENCY, 178
    hwloc_get_api_version, 88
arity
                                                      HWLOC_MEMATTR_ID_LOCALITY, 178
    hwloc_obj, 237
                                                      HWLOC_MEMATTR_ID_READ_BANDWIDTH,
associativity
                                                          178
    hwloc obj attr u::hwloc cache attr s, 226
                                                      HWLOC MEMATTR ID READ LATENCY, 178
attr
                                                      hwloc memattr id t, 176
    hwloc obj, 237
                                                      HWLOC MEMATTR ID WRITE BANDWIDTH,
bind membind
                                                      HWLOC_MEMATTR_ID_WRITE_LATENCY, 178
    hwloc_topology_membind_support, 252
                                                 complete cpuset
bridge
                                                      hwloc obj, 237
    hwloc_obj_attr_u, 242
                                                 complete_nodeset
bus
                                                      hwloc obj, 237
    hwloc cl device topology amd, 227
                                                 Components and Plugins: Core functions to be used by
    hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
                                                          components, 214
                                                      hwloc__insert_object_by_cpuset, 215
cache
                                                      hwloc alloc setup object, 215
    hwloc_obj_attr_u, 242
                                                      hwloc hide errors, 215
Changing the Source of Topology Discovery, 115
                                                      hwloc_insert_object_by_parent, 215
    HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLIST wloc_obj_add_children_sets, 216
        116
                                                      hwloc_plugin_check_namespace, 216
    hwloc topology components flag e, 116
                                                      HWLOC SHOW ALL ERRORS, 214
    hwloc topology set components, 116
                                                      HWLOC_SHOW_CRITICAL_ERRORS, 214
    hwloc topology set pid, 116
                                                      hwloc_topology_reconnect, 216
    hwloc_topology_set_synthetic, 117
                                                 Components and Plugins: Discovery backends, 211
    hwloc_topology_set_xml, 117
                                                      hwloc backend alloc, 213
    hwloc_topology_set_xmlbuffer, 118
                                                      hwloc backend enable, 213
children
                                                      HWLOC DISC PHASE ANNOTATE, 212
    hwloc_obj, 237
                                                      HWLOC DISC PHASE CPU, 212
class id
                                                      hwloc disc phase e, 212
    hwloc obj attr u::hwloc pcidev attr s, 243
                                                      HWLOC_DISC_PHASE_GLOBAL, 212
Comparing memory node attributes for finding where to
                                                      HWLOC DISC PHASE IO, 212
        allocate on, 175
                                                      HWLOC DISC PHASE MEMORY, 212
    hwloc_get_local_numanode_objs, 179
```

HWLOC_DISC_PHASE_MISC, 212 HWLOC_DISC_PHASE_PCI, 212 hwloc_disc_phase_t, 212 HWLOC_DISC_PHASE_TWEAK, 212 hwloc_disc_status_flag_e, 213	hwloc_cpubind_flags_t, 104 HWLOC_CPUBIND_NOMEMBIND, 105 HWLOC_CPUBIND_PROCESS, 105 HWLOC_CPUBIND_STRICT, 105 HWLOC_CPUBIND_THREAD, 105
HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_F	_ -
213 Components and Plugins: Discovery components, 211 Components and Plugins: Filtering objects, 216	hwloc_get_last_cpu_location, 105 hwloc_get_proc_cpubind, 106 hwloc_get_proc_last_cpu_location, 106
hwloc_filter_check_keep_object, 217 hwloc_filter_check_keep_object_type, 217	hwloc_get_thread_cpubind, 107 hwloc_set_cpubind, 107
hwloc_filter_check_osdev_subtype_important, 217	hwloc_set_proc_cpubind, 107
hwloc_filter_check_pcidev_subtype_important,	hwloc_set_thread_cpubind, 108 cpubind
Components and Plugins: finding PCI objects during	hwloc_topology_support, 254
other discoveries, 219	cpukind_efficiency
hwloc_backend_distances_add_commit, 219	hwloc_topology_discovery_support, 251
hwloc_backend_distances_add_create, 220	cpuset
hwloc_backend_distances_add_handle_t, 219 hwloc_backend_distances_add_values, 220	hwloc_location::hwloc_location_u, 234 hwloc_obj, 237
hwloc_pci_find_by_busid, 220	-1-1-
hwloc_pci_find_parent_by_busid, 220	data
Components and Plugins: Generic components, 213 HWLOC_COMPONENT_TYPE_DISC, 214	hwloc_cl_device_topology_amd, 227 hwloc_component, 228
hwloc_component_type_e, 214	depth
hwloc_component_type_t, 213	hwloc_obj, 238
HWLOC_COMPONENT_TYPE_XML, 214	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225 hwloc_obj_attr_u::hwloc_cache_attr_s, 226
Components and Plugins: helpers for PCI discovery, 217	hwloc_obj_attr_u::hwloc_group_attr_s, 232
hwloc_pcidisc_check_bridge_type, 218	dev
hwloc_pcidisc_find_bridge_buses, 218	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
hwloc_pcidisc_find_cap, 218 hwloc_pcidisc_find_linkspeed, 218	device
hwloc pcidisc tree attach, 218	hwloc_cl_device_topology_amd, 227
hwloc_pcidisc_tree_insert_by_busid, 219	device_id
Consulting and Adding Info Attributes, 102	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
hwloc_obj_add_info, 103	diff
hwloc_obj_get_info_by_name, 103	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s
Converting between CPU sets and node sets, 147	247
hwloc_cpuset_from_nodeset, 147	disable
hwloc cpuset to nodeset, 148	hwloc_backend, 223
Converting between Object Types and Attributes, and	disallowed_numa
Strings, 100	hwloc_topology_discovery_support, 251
hwloc_obj_attr_snprintf, 101	disallowed_pu
hwloc_obj_type_snprintf, 101	hwloc_topology_discovery_support, 251
hwloc_obj_type_string, 101	discover
hwloc_type_sscanf, 102	hwloc_backend, 223
hwloc_type_sscanf_as_depth, 102	discovery
count	hwloc_topology_support, 255
hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_n	riwioc_distrib, 144
CPU and node sets of entire topologies, 145	HWLOC_DISTRIB_FLAG_REVERSE, 144
hwloc_topology_get_allowed_cpuset, 145	hwloc_distrib_flags_e, 144
hwloc_topology_get_allowed_nodeset, 145	domain
hwloc_topology_get_complete_cpuset, 146	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225
hwloc_topology_get_complete_nodeset, 146	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
hwloc_topology_get_topology_cpuset, 146	dont_merge hwloc_obj_attr_u::hwloc_group_attr_s, 232
hwloc_topology_get_topology_nodeset, 147	downstream
CPU binding, 103	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225

downstream_type	hwloc_get_obj_inside_cpuset_by_depth, 134
hwloc_obj_attr_u::hwloc_bridge_attr_s, 225	hwloc_get_obj_inside_cpuset_by_type, 134
	Finding objects, miscellaneous helpers, 141
enabled_by_default	hwloc_bitmap_singlify_per_core, 141
hwloc_disc_component, 229	hwloc_get_closest_objs, 142
Error reporting in the API, 87	hwloc_get_numanode_obj_by_os_index, 142
excluded_phases	hwloc_get_obj_below_array_by_type, 142
hwloc_disc_component, 229	hwloc_get_obj_below_by_type, 143
hwloc_disc_status, 230	hwloc get obj with same locality, 143
Exporting Topologies to Synthetic, 166	hwloc get pu obj by os index, 144
hwloc_topology_export_synthetic, 167	first child
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLA	G IGNORE MEMORY
166	
	firsttouch_membind
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLA	
	flags
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLA	
166	hwloc_component, 228
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLA	G_V1,hwloc_disc_status, 231
166	func
hwloc_topology_export_synthetic_flags_e, 166	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
Exporting Topologies to XML, 162	function
hwloc_export_obj_userdata, 163	hwloc_cl_device_topology_amd, 227
hwloc_export_obj_userdata_base64, 163	
hwloc_free_xmlbuffer, 164	generic
hwloc_topology_export_xml, 164	hwloc_topology_diff_obj_attr_u, 248
HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1,	hwloc_topology_diff_u, 250
163	get area membind
hwloc_topology_export_xml_flags_e, 163	hwloc_topology_membind_support, 253
hwloc_topology_export_xmlbuffer, 164	get_area_memlocation
hwloc_topology_set_userdata_export_callback,	hwloc_topology_membind_support, 253
165	get_pci_busid_cpuset
hwloc_topology_set_userdata_import_callback,	hwloc_backend, 224
165	get_proc_cpubind
100	
finalize	hwloc_topology_cpubind_support, 244
hwloc_component, 228	get_proc_last_cpu_location
Finding I/O objects, 148	hwloc_topology_cpubind_support, 245
	get_proc_membind
hwloc_bridge_covers_pcibus, 148	hwloc_topology_membind_support, 253
hwloc_get_next_bridge, 148	get_thisproc_cpubind
hwloc_get_next_osdev, 149	hwloc_topology_cpubind_support, 245
hwloc_get_next_pcidev, 149	get_thisproc_last_cpu_location
hwloc_get_non_io_ancestor_obj, 149	hwloc_topology_cpubind_support, 245
hwloc_get_pcidev_by_busid, 149	get_thisproc_membind
hwloc_get_pcidev_by_busidstring, 150	hwloc_topology_membind_support, 253
Finding Objects covering at least CPU set, 135	get_thisthread_cpubind
hwloc_get_child_covering_cpuset, 135	hwloc topology cpubind support, 245
hwloc_get_next_obj_covering_cpuset_by_depth,	get_thisthread_last_cpu_location
135	hwloc_topology_cpubind_support, 245
hwloc_get_next_obj_covering_cpuset_by_type,	get_thisthread_membind
135	hwloc_topology_membind_support, 253
hwloc_get_obj_covering_cpuset, 136	get_thread_cpubind
Finding Objects inside a CPU set, 131	hwloc_topology_cpubind_support, 245
hwloc_get_first_largest_obj_inside_cpuset, 131	gp_index
hwloc_get_largest_objs_inside_cpuset, 132	
hwloc_get_nbobjs_inside_cpuset_by_depth, 132	hwloc_obj, 238
hwloc_get_nbobjs_inside_cpuset_by_type, 132	group
	hwloc_obj_attr_u, 242
hwloc_get_next_obj_inside_cpuset_by_depth, 133	Holpora for consulting distance matrices 474
hwloc_get_next_obj_inside_cpuset_by_type, 133	Helpers for consulting distance matrices, 171
hwloc_get_obj_index_inside_cpuset, 133	hwloc_distances_obj_index, 171

hwloc_distances_obj_pair_values, 172	The bitmap API, 153
hwloc insert object by cpuset	hwloc_bitmap_asprintf
Components and Plugins: Core functions to be	The bitmap API, 153
used by components, 215	hwloc_bitmap_clr
hwloc alloc	The bitmap API, 153
Memory binding, 111	hwloc_bitmap_clr_range
hwloc_alloc_membind	The bitmap API, 153
	•
Memory binding, 111	hwloc_bitmap_compare
hwloc_alloc_membind_policy	The bitmap API, 153
Memory binding, 112	hwloc_bitmap_compare_first
hwloc_alloc_setup_object	The bitmap API, 154
Components and Plugins: Core functions to be	hwloc_bitmap_copy
used by components, 215	The bitmap API, 154
HWLOC_ALLOW_FLAG_ALL	hwloc_bitmap_dup
Modifying a loaded Topology, 127	The bitmap API, 154
HWLOC_ALLOW_FLAG_CUSTOM	hwloc_bitmap_fill
Modifying a loaded Topology, 128	The bitmap API, 154
HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS	hwloc_bitmap_first
Modifying a loaded Topology, 127	The bitmap API, 155
hwloc_allow_flags_e	hwloc_bitmap_first_unset
Modifying a loaded Topology, 127	The bitmap API, 155
HWLOC_API_VERSION	hwloc_bitmap_foreach_begin
API version, 87	The bitmap API, 152
hwloc_backend, 223	hwloc_bitmap_foreach_end
disable, 223	The bitmap API, 152
discover, 223	hwloc_bitmap_free
flags, 223	The bitmap API, 155
	hwloc_bitmap_from_ith_ulong
get_pci_busid_cpuset, 224	_ · ·
is_thissystem, 224	The bitmap API, 155
phases, 224	hwloc_bitmap_from_ulong
private_data, 224	The bitmap API, 155
hwloc_backend_alloc	hwloc_bitmap_from_ulongs
Components and Plugins: Discovery backends,	The bitmap API, 155
213	hwloc_bitmap_intersects
hwloc_backend_distances_add_commit	The bitmap API, 156
Components and Plugins: finding PCI objects dur-	hwloc_bitmap_isequal
ing other discoveries, 219	The bitmap API, 156
hwloc_backend_distances_add_create	hwloc_bitmap_isfull
Components and Plugins: finding PCI objects dur-	The bitmap API, 156
ing other discoveries, 220	hwloc_bitmap_isincluded
hwloc_backend_distances_add_handle_t	The bitmap API, 156
Components and Plugins: finding PCI objects dur-	hwloc_bitmap_isset
ing other discoveries, 219	The bitmap API, 157
hwloc_backend_distances_add_values	hwloc_bitmap_iszero
Components and Plugins: finding PCI objects dur-	The bitmap API, 157
ing other discoveries, 220	hwloc_bitmap_last
hwloc_backend_enable	The bitmap API, 157
Components and Plugins: Discovery backends,	hwloc_bitmap_last_unset
213	The bitmap API, 157
hwloc_bitmap_allbut	hwloc_bitmap_list_asprintf
The bitmap API, 152	The bitmap API, 157
hwloc_bitmap_alloc	hwloc_bitmap_list_snprintf
The bitmap API, 152	The bitmap API, 158
hwloc_bitmap_alloc_full	hwloc_bitmap_list_sscanf
The bitmap API, 153	The bitmap API, 158
•	•
hwloc_bitmap_and The bitmap_APL 152	hwloc_bitmap_next
The bitmap API, 153	The bitmap API, 158
hwloc_bitmap_andnot	hwloc_bitmap_next_unset

The bitmap API, 158	data, 228
hwloc_bitmap_not	finalize, 228
The bitmap API, 159	flags, 228
hwloc_bitmap_nr_ulongs	init, 228
The bitmap API, 159	type, 229
hwloc_bitmap_only	HWLOC_COMPONENT_ABI
The bitmap API, 159	API version, 87
hwloc_bitmap_or	HWLOC_COMPONENT_TYPE_DISC
The bitmap API, 159	Components and Plugins: Generic components,
hwloc_bitmap_set	214
The bitmap API, 159	hwloc_component_type_e
hwloc_bitmap_set_ith_ulong	Components and Plugins: Generic components,
The bitmap API, 160	214
hwloc_bitmap_set_range	hwloc_component_type_t
The bitmap API, 160	Components and Plugins: Generic components,
hwloc_bitmap_singlify	213
The bitmap API, 160	HWLOC_COMPONENT_TYPE_XML
hwloc_bitmap_singlify_per_core	Components and Plugins: Generic components,
Finding objects, miscellaneous helpers, 141	214
hwloc_bitmap_snprintf	hwloc_const_bitmap_t
The bitmap API, 160	The bitmap API, 152
hwloc_bitmap_sscanf	hwloc_const_cpuset_t
The bitmap API, 160	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
hwloc_bitmap_t	88
The bitmap API, 152	hwloc_const_nodeset_t
	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
hwloc_bitmap_taskset_asprintf	88
The bitmap API, 161	
hwloc_bitmap_taskset_snprintf	hwloc_cpubind_flags_t
The bitmap API, 161	CPU binding, 104
hwloc_bitmap_taskset_sscanf	HWLOC_CPUBIND_NOMEMBIND
The bitmap API, 161	CPU binding, 105
hwloc_bitmap_to_ith_ulong	HWLOC_CPUBIND_PROCESS
The bitmap API, 161	CPU binding, 105
hwloc_bitmap_to_ulong	HWLOC_CPUBIND_STRICT
The bitmap API, 161	CPU binding, 105
hwloc_bitmap_to_ulongs	HWLOC_CPUBIND_THREAD
The bitmap API, 162	CPU binding, 105
hwloc_bitmap_weight	hwloc_cpukinds_get_by_cpuset
The bitmap API, 162	Kinds of CPU cores, 185
hwloc_bitmap_xor	hwloc_cpukinds_get_info
The bitmap API, 162	Kinds of CPU cores, 185
hwloc_bitmap_zero	hwloc_cpukinds_get_nr
The bitmap API, 162	Kinds of CPU cores, 185
hwloc_bridge_covers_pcibus	hwloc cpukinds register
Finding I/O objects, 148	Kinds of CPU cores, 186
hwloc_cl_device_topology_amd, 226	hwloc cpuset from glibc sched affinity
bus, 227	Interoperability with glibc sched affinity, 192
data, 227	hwloc_cpuset_from_linux_libnuma_bitmask
device, 227	Interoperability with Linux libnuma bitmask, 190
function, 227	hwloc_cpuset_from_linux_libnuma_ulongs
pcie, 227	Interoperability with Linux libnuma unsigned long
raw, 227	masks, 188
type, 227	hwloc_cpuset_from_nodeset
unused, 227	Converting between CPU sets and node sets, 147
hwloc_compare_types	hwloc_cpuset_t
Object Types, 92	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
hwloc_component, 228	88
abi, 228	hwloc_cpuset_to_glibc_sched_affinity

Interoperability with glibc sched affinity, 193	Components and Plugins: Discovery backends,
hwloc_cpuset_to_linux_libnuma_bitmask	212
Interoperability with Linux libnuma bitmask, 190	HWLOC_DISC_PHASE_TWEAK
hwloc_cpuset_to_linux_libnuma_ulongs	Components and Plugins: Discovery backends,
Interoperability with Linux libnuma unsigned long	212
masks, 189	hwloc_disc_status, 230
hwloc_cpuset_to_nodeset	excluded_phases, 230
Converting between CPU sets and node sets, 148	flags, 231
hwloc_cuda_get_device_cpuset	phase, 231
Interoperability with the CUDA Driver API, 195	hwloc_disc_status_flag_e
hwloc cuda get device osdev	Components and Plugins: Discovery backends,
Interoperability with the CUDA Driver API, 195	213
hwloc_cuda_get_device_osdev_by_index	HWLOC_DISC_STATUS_FLAG_GOT_ALLOWED_RESOURCES
Interoperability with the CUDA Driver API, 196	Components and Plugins: Discovery backends,
hwloc_cuda_get_device_pci_ids	213
Interoperability with the CUDA Driver API, 196	hwloc_distances_add_commit
hwloc_cuda_get_device_pcidev	Add distances between objects, 173
Interoperability with the CUDA Driver API, 196	hwloc_distances_add_create
hwloc cudart get device cpuset	Add distances between objects, 173
Interoperability with the CUDA Runtime API, 197	hwloc_distances_add_flag_e
hwloc_cudart_get_device_osdev_by_index	Add distances between objects, 173
Interoperability with the CUDA Runtime API, 197	HWLOC_DISTANCES_ADD_FLAG_GROUP
hwloc_cudart_get_device_pci_ids	Add distances between objects, 173
Interoperability with the CUDA Runtime API, 198	HWLOC DISTANCES ADD FLAG GROUP INACCURATE
hwloc_cudart_get_device_pcidev	Add distances between objects, 173
Interoperability with the CUDA Runtime API, 198	hwloc_distances_add_handle_t
hwloc_disc_component, 229	Add distances between objects, 173
enabled_by_default, 229	hwloc_distances_add_values
excluded_phases, 229	Add distances between objects, 174
instantiate, 230	hwloc_distances_get
name, 230	Retrieve distances between objects, 169
phases, 230	hwloc_distances_get_by_depth
priority, 230	Retrieve distances between objects, 169
HWLOC DISC PHASE ANNOTATE	hwloc_distances_get_by_name
Components and Plugins: Discovery backends,	Retrieve distances between objects, 170
212	hwloc_distances_get_by_type
HWLOC_DISC_PHASE_CPU	Retrieve distances between objects, 170
Components and Plugins: Discovery backends,	
212	Retrieve distances between objects, 170
hwloc_disc_phase_e	hwloc_distances_kind_e
Components and Plugins: Discovery backends,	Retrieve distances between objects, 168
212	HWLOC_DISTANCES_KIND_FROM_OS
HWLOC_DISC_PHASE_GLOBAL	Retrieve distances between objects, 168
Components and Plugins: Discovery backends,	HWLOC_DISTANCES_KIND_FROM_USER
212	Retrieve distances between objects, 168
HWLOC_DISC_PHASE_IO	HWLOC DISTANCES KIND HETEROGENEOUS TYPES
Components and Plugins: Discovery backends,	Retrieve distances between objects, 168
212	HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH
HWLOC_DISC_PHASE_MEMORY	Retrieve distances between objects, 168
Components and Plugins: Discovery backends,	HWLOC_DISTANCES_KIND_MEANS_LATENCY
212	Retrieve distances between objects, 168
HWLOC_DISC_PHASE_MISC	hwloc_distances_obj_index
Components and Plugins: Discovery backends,	Helpers for consulting distance matrices, 171
212	hwloc_distances_obj_pair_values
HWLOC_DISC_PHASE_PCI	Helpers for consulting distance matrices, 172
Components and Plugins: Discovery backends,	hwloc_distances_release
212	Retrieve distances between objects, 171
hwloc disc phase t	hwloc distances release remove

Pamaya diatanasa batwaan abiasta 174	hulos ast sashs tups donth
Remove distances between objects, 174	hwloc_get_cache_type_depth
hwloc_distances_remove	Looking at Cache Objects, 140
Remove distances between objects, 175	hwloc_get_child_covering_cpuset
hwloc_distances_remove_by_depth	Finding Objects covering at least CPU set, 135
Remove distances between objects, 175	hwloc_get_closest_objs
hwloc_distances_remove_by_type	Finding objects, miscellaneous helpers, 142
Remove distances between objects, 175	hwloc_get_common_ancestor_obj
hwloc_distances_s, 231	Looking at Ancestor and Child Objects, 137
kind, 231	hwloc_get_cpubind
nbobjs, 231	CPU binding, 105
objs, 232	hwloc_get_depth_type
values, 232	Object levels, depths and types, 97
hwloc_distances_transform	hwloc_get_first_largest_obj_inside_cpuset
Retrieve distances between objects, 171	Finding Objects inside a CPU set, 131
hwloc_distances_transform_e	hwloc_get_largest_objs_inside_cpuset
Retrieve distances between objects, 168	Finding Objects inside a CPU set, 132
HWLOC_DISTANCES_TRANSFORM_LINKS	hwloc_get_last_cpu_location
Retrieve distances between objects, 169	CPU binding, 105
HWLOC_DISTANCES_TRANSFORM_MERGE_SWITCH	I_MROGETSjet_local_numanode_objs
Retrieve distances between objects, 169	Comparing memory node attributes for finding
HWLOC_DISTANCES_TRANSFORM_REMOVE_NULL	where to allocate on, 179
Retrieve distances between objects, 168	hwloc_get_membind
HWLOC_DISTANCES_TRANSFORM_TRANSITIVE_CLO	— -
Retrieve distances between objects, 169	hwloc_get_memory_parents_depth
hwloc_distrib	Object levels, depths and types, 97
Distributing items over a topology, 144	hwloc_get_nbobjs_by_depth
HWLOC_DISTRIB_FLAG_REVERSE	Object levels, depths and types, 97
Distributing items over a topology, 144	hwloc_get_nbobjs_by_type
hwloc_distrib_flags_e	Object levels, depths and types, 98
Distributing items over a topology, 144	hwloc_get_nbobjs_inside_cpuset_by_depth
hwloc_export_obj_userdata	Finding Objects inside a CPU set, 132
Exporting Topologies to XML, 163	hwloc_get_nbobjs_inside_cpuset_by_type
hwloc_export_obj_userdata_base64	Finding Objects inside a CPU set, 132
Exporting Topologies to XML, 163	hwloc_get_next_bridge
hwloc filter check keep object	Finding I/O objects, 148
Components and Plugins: Filtering objects, 217	hwloc_get_next_child
hwloc filter check keep object type	Looking at Ancestor and Child Objects, 137
Components and Plugins: Filtering objects, 217	hwloc get next obj by depth
hwloc_filter_check_osdev_subtype_important Components and Plugins: Filtering objects, 217	Object levels, depths and types, 98 hwloc get next obj by type
hwloc_filter_check_pcidev_subtype_important	Object levels, depths and types, 98
Components and Plugins: Filtering objects, 217	
	hwloc_get_next_obj_covering_cpuset_by_depth Finding Objects covering at least CPU set, 135
hwloc_free	
Memory binding, 112	hwloc_get_next_obj_covering_cpuset_by_type
hwloc_free_xmlbuffer	Finding Objects covering at least CPU set, 135
Exporting Topologies to XML, 164	hwloc_get_next_obj_inside_cpuset_by_depth
hwloc_get_ancestor_obj_by_depth	Finding Objects inside a CPU set, 133
Looking at Ancestor and Child Objects, 136	hwloc_get_next_obj_inside_cpuset_by_type
hwloc_get_ancestor_obj_by_type	Finding Objects inside a CPU set, 133
Looking at Ancestor and Child Objects, 137	hwloc_get_next_osdev
hwloc_get_api_version	Finding I/O objects, 149
API version, 88	hwloc_get_next_pcidev
hwloc_get_area_membind	Finding I/O objects, 149
Memory binding, 112	hwloc_get_non_io_ancestor_obj
hwloc_get_area_memlocation	Finding I/O objects, 149
Memory binding, 113	hwloc_get_numanode_obj_by_os_index
hwloc_get_cache_covering_cpuset Looking at Cache Objects, 140	Finding objects, miscellaneous helpers, 142 hwloc_get_obj_below_array_by_type

Finding objects, miscellaneous helpers, 142	hwloc_info_s, 233
hwloc_get_obj_below_by_type	name, 233
Finding objects, miscellaneous helpers, 143	value, 233
hwloc_get_obj_by_depth	hwloc_insert_object_by_parent
Object levels, depths and types, 98	Components and Plugins: Core functions to be
hwloc_get_obj_by_type	used by components, 215
Object levels, depths and types, 99	hwloc_levelzero_get_device_cpuset
hwloc_get_obj_covering_cpuset	Interoperability with the oneAPI Level Zero inter-
Finding Objects covering at least CPU set, 136	face., 201
hwloc get obj index inside cpuset	hwloc_levelzero_get_device_osdev
Finding Objects inside a CPU set, 133	Interoperability with the oneAPI Level Zero inter-
hwloc_get_obj_inside_cpuset_by_depth	face., 202
Finding Objects inside a CPU set, 134	hwloc_linux_get_tid_cpubind
hwloc_get_obj_inside_cpuset_by_type	Linux-specific helpers, 187
Finding Objects inside a CPU set, 134	hwloc_linux_get_tid_last_cpu_location
hwloc_get_obj_with_same_locality	Linux-specific helpers, 187
Finding objects, miscellaneous helpers, 143	hwloc_linux_read_path_as_cpumask
hwloc_get_pcidev_by_busid	Linux-specific helpers, 187
Finding I/O objects, 149	·
3 , ,	hwloc_linux_set_tid_cpubind
hwloc_get_pcidev_by_busidstring	Linux-specific helpers, 187
Finding I/O objects, 150	HWLOC_LOCAL_NUMANODE_FLAG_ALL
hwloc_get_proc_cpubind	Comparing memory node attributes for finding
CPU binding, 106	where to allocate on, 177
hwloc_get_proc_last_cpu_location	hwloc_local_numanode_flag_e
CPU binding, 106	Comparing memory node attributes for finding
hwloc_get_proc_membind	where to allocate on, 177
Memory binding, 114	HWLOC_LOCAL_NUMANODE_FLAG_LARGER_LOCALITY
hwloc_get_pu_obj_by_os_index	Comparing memory node attributes for finding
Finding objects, miscellaneous helpers, 144	where to allocate on, 177
hwloc_get_root_obj	HWLOC_LOCAL_NUMANODE_FLAG_SMALLER_LOCALITY
Object levels, depths and types, 99	Comparing memory node attributes for finding
hwloc_get_shared_cache_covering_obj	where to allocate on, 177
Looking at Cache Objects, 141	hwloc_location, 233
hwloc_get_thread_cpubind	location, 234
CPU binding, 107	type, 234
hwloc_get_type_depth	hwloc_location::hwloc_location_u, 234
Object levels, depths and types, 99	cpuset, 234
hwloc_get_type_depth_e	object, 234
Object levels, depths and types, 97	HWLOC_LOCATION_TYPE_CPUSET
hwloc_get_type_or_above_depth	Comparing memory node attributes for finding
Object levels, depths and types, 100	where to allocate on, 177
hwloc_get_type_or_below_depth	hwloc_location_type_e
Object levels, depths and types, 100	Comparing memory node attributes for finding
hwloc_gl_get_display_by_osdev	where to allocate on, 177
Interoperability with OpenGL displays, 202	HWLOC_LOCATION_TYPE_OBJECT
hwloc_gl_get_display_osdev_by_name	Comparing memory node attributes for finding
Interoperability with OpenGL displays, 203	where to allocate on, 177
hwloc_gl_get_display_osdev_by_port_device	hwloc memattr flag e
Interoperability with OpenGL displays, 203	
	Managing memory attributes, 181
hwloc_hide_errors	HWLOC_MEMATTR_FLAG_HIGHER_FIRST
Components and Plugins: Core functions to be	Managing memory attributes, 181
used by components, 215	HWLOC_MEMATTR_FLAG_LOWER_FIRST
hwloc_ibv_get_device_cpuset	Managing memory attributes, 181
Interoperability with OpenFabrics, 204	HWLOC_MEMATTR_FLAG_NEED_INITIATOR
hwloc_ibv_get_device_osdev	Managing memory attributes, 181
Interoperability with OpenFabrics, 204	hwloc_memattr_get_best_initiator
hwloc_ibv_get_device_osdev_by_name	Comparing memory node attributes for finding
Interoperability with OpenFabrics 204	where to allocate on 179

hwloc_memattr_get_best_target	Memory binding, 110
Comparing memory node attributes for finding	hwloc_membind_flags_t
where to allocate on, 179	Memory binding, 109
hwloc_memattr_get_by_name	HWLOC_MEMBIND_INTERLEAVE
Comparing memory node attributes for finding	Memory binding, 111
where to allocate on, 180	HWLOC_MEMBIND_MIGRATE
hwloc_memattr_get_flags	Memory binding, 110
Managing memory attributes, 181	HWLOC_MEMBIND_MIXED
hwloc_memattr_get_initiators	Memory binding, 111
Managing memory attributes, 182	HWLOC_MEMBIND_NEXTTOUCH
hwloc_memattr_get_name	Memory binding, 111
Managing memory attributes, 182	HWLOC_MEMBIND_NOCPUBIND
hwloc_memattr_get_targets	Memory binding, 110
Managing memory attributes, 182	hwloc_membind_policy_t
hwloc_memattr_get_value	Memory binding, 110
Comparing memory node attributes for finding	HWLOC_MEMBIND_PROCESS
where to allocate on, 180	Memory binding, 110
HWLOC_MEMATTR_ID_BANDWIDTH	HWLOC_MEMBIND_STRICT
Comparing memory node attributes for finding	Memory binding, 110
where to allocate on, 178	HWLOC_MEMBIND_THREAD
HWLOC_MEMATTR_ID_CAPACITY	Memory binding, 110
Comparing memory node attributes for finding	hwloc_nodeset_from_linux_libnuma_bitmask
where to allocate on, 177	Interoperability with Linux libnuma bitmask, 190
hwloc_memattr_id_e	hwloc_nodeset_from_linux_libnuma_ulongs
Comparing memory node attributes for finding	Interoperability with Linux libnuma unsigned long
where to allocate on, 177	masks, 189
HWLOC_MEMATTR_ID_LATENCY	hwloc_nodeset_t
Comparing memory node attributes for finding	Object Sets (hwloc_cpuset_t and hwloc_nodeset_t),
where to allocate on, 178	88
HWLOC_MEMATTR_ID_LOCALITY	hwloc_nodeset_to_linux_libnuma_bitmask
Comparing memory node attributes for finding	Interoperability with Linux libnuma bitmask, 191
where to allocate on, 178	hwloc_nodeset_to_linux_libnuma_ulongs
HWLOC_MEMATTR_ID_READ_BANDWIDTH	Interoperability with Linux libnuma unsigned long
Comparing memory node attributes for finding	masks, 189
where to allocate on, 178	hwloc_nvml_get_device_cpuset
HWLOC_MEMATTR_ID_READ_LATENCY	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for finding	brary, 199
where to allocate on, 178	hwloc_nvml_get_device_osdev
hwloc_memattr_id_t	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for finding	brary, 199
where to allocate on, 176	hwloc_nvml_get_device_osdev_by_index
HWLOC_MEMATTR_ID_WRITE_BANDWIDTH	Interoperability with the NVIDIA Management Li-
Comparing memory node attributes for finding	brary, 199
where to allocate on, 178	hwloc_obj, 236
HWLOC_MEMATTR_ID_WRITE_LATENCY	arity, 237
Comparing memory node attributes for finding	attr, 237
where to allocate on, 178	children, 237
hwloc_memattr_register	complete_cpuset, 237
Managing memory attributes, 183	complete_nodeset, 237
hwloc_memattr_set_value	cpuset, 237
Managing memory attributes, 183	depth, 238
HWLOC_MEMBIND_BIND	first_child, 238
Memory binding, 111	gp_index, 238
HWLOC_MEMBIND_BYNODESET	infos, 238
Memory binding, 110	infos_count, 238
HWLOC_MEMBIND_DEFAULT	io_arity, 238
Memory binding, 110	io_first_child, 238
HWLOC MEMBIND FIRSTTOUCH	last_child, 239

logical_index, 239	local_memory, 235
memory_arity, 239	page_types, 235
memory_first_child, 239	page_types_len, 235
misc_arity, 239	hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_memory_page_type_s
misc_first_child, 239	234
name, 239	count, 235
next_cousin, 239	size, 235
next_sibling, 239	hwloc_obj_attr_u::hwloc_osdev_attr_s, 242
nodeset, 240	type, 242
os_index, 240	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 243
parent, 240	bus, 243
prev_cousin, 240	class_id, 243
prev_sibling, 240	dev, 243
sibling_rank, 240	device_id, 243
subtype, 240	domain, 243
symmetric_subtree, 241	func, 243
total_memory, 241	linkspeed, 244
type, 241	revision, 244
userdata, 241	subdevice_id, 244
hwloc_obj_add_children_sets	subvendor_id, 244
Components and Plugins: Core functions to be	vendor_id, 244
used by components, 216	HWLOC_OBJ_BRIDGE
hwloc_obj_add_info	Object Types, 92
Consulting and Adding Info Attributes, 103	HWLOC_OBJ_BRIDGE_HOST
hwloc_obj_add_other_obj_sets	Object Types, 90
Modifying a loaded Topology, 128	HWLOC_OBJ_BRIDGE_PCI
hwloc_obj_attr_snprintf	Object Types, 90
Converting between Object Types and Attributes,	hwloc_obj_bridge_type_e
and Strings, 101	Object Types, 90
hwloc_obj_attr_u, 241	hwloc_obj_bridge_type_t
bridge, 242	Object Types, 90
cache, 242	HWLOC_OBJ_CACHE_DATA
group, 242	Object Types, 90
numanode, 242	HWLOC_OBJ_CACHE_INSTRUCTION
osdev, 242	Object Types, 90
pcidev, 242	hwloc_obj_cache_type_e
hwloc_obj_attr_u::hwloc_bridge_attr_s, 224	Object Types, 90
depth, 225	hwloc_obj_cache_type_t
domain, 225	Object Types, 90
downstream, 225	HWLOC_OBJ_CACHE_UNIFIED
downstream_type, 225	Object Types, 90
pci, 225	HWLOC_OBJ_CORE
secondary_bus, 225	Object Types, 91
subordinate_bus, 225	HWLOC_OBJ_DIE
upstream, 225	Object Types, 92
upstream_type, 225	hwloc_obj_get_info_by_name
hwloc_obj_attr_u::hwloc_cache_attr_s, 226	Consulting and Adding Info Attributes, 103
associativity, 226	HWLOC_OBJ_GROUP
depth, 226	Object Types, 91
linesize, 226	hwloc_obj_is_in_subtree
size, 226	Looking at Ancestor and Child Objects, 138
type, 226	HWLOC_OBJ_L1CACHE
hwloc_obj_attr_u::hwloc_group_attr_s, 232	Object Types, 91
depth, 232	HWLOC_OBJ_L1ICACHE
dont_merge, 232	Object Types, 91
kind, 232	HWLOC_OBJ_L2CACHE
subkind, 232	Object Types, 91
hwloc_obj_attr_u::hwloc_numanode_attr_s, 235	HWLOC_OBJ_L2ICACHE

Object Times 04	leader and the second states
Object Types, 91	hwloc_obj_type_string
HWLOC_OBJ_L3CACHE	Converting between Object Types and Attributes,
Object Types, 91	and Strings, 101
HWLOC_OBJ_L3ICACHE	hwloc_obj_type_t
Object Types, 91	Object Types, 91
HWLOC_OBJ_L4CACHE	hwloc_opencl_get_device_cpuset
Object Types, 91	Interoperability with OpenCL, 193
HWLOC_OBJ_L5CACHE	hwloc_opencl_get_device_osdev
Object Types, 91	
, , , , , , , , , , , , , , , , , , ,	Interoperability with OpenCL, 194
HWLOC_OBJ_MACHINE	hwloc_opencl_get_device_osdev_by_index
Object Types, 91	Interoperability with OpenCL, 194
HWLOC_OBJ_MEMCACHE	hwloc_opencl_get_device_pci_busid
Object Types, 92	Interoperability with OpenCL, 194
HWLOC_OBJ_MISC	hwloc_pci_find_by_busid
Object Types, 92	Components and Plugins: finding PCI objects dur-
HWLOC_OBJ_NUMANODE	ing other discoveries, 220
Object Types, 92	hwloc_pci_find_parent_by_busid
, , , , , , , , , , , , , , , , , , ,	Components and Plugins: finding PCI objects dur-
HWLOC_OBJ_OS_DEVICE	
Object Types, 92	ing other discoveries, 220
HWLOC_OBJ_OSDEV_BLOCK	hwloc_pcidisc_check_bridge_type
Object Types, 90	Components and Plugins: helpers for PCI discov-
HWLOC_OBJ_OSDEV_COPROC	ery, 218
Object Types, 91	hwloc_pcidisc_find_bridge_buses
HWLOC_OBJ_OSDEV_DMA	Components and Plugins: helpers for PCI discov-
Object Types, 91	ery, 218
HWLOC_OBJ_OSDEV_GPU	hwloc_pcidisc_find_cap
Object Types, 91	Components and Plugins: helpers for PCI discov-
HWLOC_OBJ_OSDEV_NETWORK	ery, 218
Object Types, 91	hwloc_pcidisc_find_linkspeed
HWLOC_OBJ_OSDEV_OPENFABRICS	Components and Plugins: helpers for PCI discov-
Object Types, 91	ery, 218
hwloc_obj_osdev_type_e	hwloc_pcidisc_tree_attach
Object Types, 90	Components and Plugins: helpers for PCI discov-
hwloc_obj_osdev_type_t	ery, 218
Object Types, 90	hwloc_pcidisc_tree_insert_by_busid
HWLOC_OBJ_PACKAGE	Components and Plugins: helpers for PCI discov-
Object Types, 91	ery, 219
HWLOC_OBJ_PCI_DEVICE	hwloc_plugin_check_namespace
Object Types, 92	Components and Plugins: Core functions to be
HWLOC_OBJ_PU	used by components, 216
Object Types, 91	HWLOC_RESTRICT_FLAG_ADAPT_IO
hwloc_obj_t	Modifying a loaded Topology, 128
Object Structure and Attributes, 93	HWLOC_RESTRICT_FLAG_ADAPT_MISC
hwloc_obj_type_is_cache	Modifying a loaded Topology, 128
Kinds of object Type, 138	HWLOC_RESTRICT_FLAG_BYNODESET
hwloc_obj_type_is_dcache	Modifying a loaded Topology, 128
Kinds of object Type, 139	HWLOC_RESTRICT_FLAG_REMOVE_CPULESS
hwloc_obj_type_is_icache	Modifying a loaded Topology, 128
	HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS
Kinds of object Type, 139	
hwloc_obj_type_is_io	Modifying a loaded Topology, 128
Kinds of object Type, 139	hwloc_restrict_flags_e
hwloc_obj_type_is_memory	Modifying a loaded Topology, 128
Kinds of object Type, 139	hwloc_rsmi_get_device_cpuset
hwloc_obj_type_is_normal	Interoperability with the ROCm SMI Management
Kinds of object Type, 139	Library, 200
hwloc_obj_type_snprintf	hwloc_rsmi_get_device_osdev
Converting between Object Types and Attributes,	Interoperability with the ROCm SMI Management
and Strings, 101	Library, 200
U ,	• •

hwloc_rsmi_get_device_osdev_by_index	Topology differences, 206
Interoperability with the ROCm SMI Management	hwloc_topology_diff_build
Library, 201	Topology differences, 207
hwloc_set_area_membind	hwloc_topology_diff_destroy
Memory binding, 114	Topology differences, 208
hwloc_set_cpubind	hwloc_topology_diff_export_xml
CPU binding, 107	Topology differences, 208
hwloc_set_membind	hwloc_topology_diff_export_xmlbuffer
Memory binding, 115	Topology differences, 208
hwloc_set_proc_cpubind	hwloc_topology_diff_load_xml
CPU binding, 107	Topology differences, 209
hwloc_set_proc_membind	hwloc_topology_diff_load_xmlbuffer
Memory binding, 115	Topology differences, 209
hwloc_set_thread_cpubind	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR Topology_differences_207
CPU binding, 108	Topology differences, 207 HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO
hwloc_shmem_topology_adopt Sharing topologies between processes, 210	Topology differences, 206
hwloc_shmem_topology_get_length	HWLOC TOPOLOGY DIFF OBJ ATTR NAME
Sharing topologies between processes, 210	Topology differences, 206
hwloc shmem topology write	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE
Sharing topologies between processes, 211	Topology differences, 206
HWLOC_SHOW_ALL_ERRORS	hwloc_topology_diff_obj_attr_type_e
Components and Plugins: Core functions to be	Topology differences, 206
used by components, 214	hwloc_topology_diff_obj_attr_type_t
HWLOC_SHOW_CRITICAL_ERRORS	Topology differences, 206
Components and Plugins: Core functions to be	hwloc_topology_diff_obj_attr_u, 248
used by components, 214	generic, 248
hwloc_topology_abi_check	string, 248
Topology Creation and Destruction, 94	uint64, 248
hwloc_topology_alloc_group_object	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generic_s,
Madifying a loaded Tapalogy, 100	246
Modifying a loaded Topology, 128	246
hwloc_topology_allow	type, 246
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247 name, 247
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247 name, 247 ST newvalue, 248 oldvalue, 248 type, 248 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247 name, 247 ST newvalue, 248 oldvalue, 248 type, 248 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s, 249
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247 name, 247 ST newvalue, 248 oldvalue, 248 type, 248 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s, 249 index, 249
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 get_thread_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_cpubind, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_proc_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_last_cpu_location, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_proc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thread_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 hwloc_topology_destroy	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thisproc_cpubind, 245 s	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_cpubind, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thread_cpubind, 245 set_thisproc_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 hwloc_topology_destroy Topology Creation and Destruction, 95 hwloc_topology_diff_apply	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_cpubind, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thread_cpubind, 245 set_thisproc_cpubind, 245 set_thisproc_cpubind, 245 set_thisthread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 hwloc_topology_destroy Topology Creation and Destruction, 95 hwloc_topology_diff_apply Topology differences, 207	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s, 247 name, 247 ST newvalue, 248 oldvalue, 248 type, 248 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64_s, 249 index, 249 newvalue, 249 oldvalue, 249 type, 249 hwloc_topology_diff_t Topology_differences, 206 HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX Topology_differences, 207 hwloc_topology_diff_type_e Topology_diff_type_t Topology_diff_type_t Topology_diff_type_t Topology_diff_u, 250 generic, 250 obj_attr, 251
hwloc_topology_allow Modifying a loaded Topology, 129 hwloc_topology_check Topology Creation and Destruction, 94 HWLOC_TOPOLOGY_COMPONENTS_FLAG_BLACKLI Changing the Source of Topology Discovery, 116 hwloc_topology_components_flag_e Changing the Source of Topology Discovery, 116 hwloc_topology_cpubind_support, 244 get_proc_cpubind, 244 get_proc_last_cpu_location, 245 get_thisproc_cpubind, 245 get_thisproc_last_cpu_location, 245 get_thisthread_cpubind, 245 get_thisthread_last_cpu_location, 245 get_thread_cpubind, 245 set_proc_cpubind, 245 set_thread_cpubind, 245 set_thisproc_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245 set_thisthread_cpubind, 245 set_thread_cpubind, 245 set_thread_cpubind, 245 hwloc_topology_destroy Topology Creation and Destruction, 95 hwloc_topology_diff_apply	type, 246 hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_s,

next, 246	HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUBINDING
type, 246	Topology Detection Configuration and Query, 122
hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,	HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_MEMBINDING
246	Topology Detection Configuration and Query, 122
diff, 247	HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLOWED_RESOURCES
next, 247	Topology Detection Configuration and Query, 121
obj_depth, 247	hwloc_topology_flags_e
obj_index, 247	Topology Detection Configuration and Query, 119
type, 247	hwloc_topology_get_allowed_cpuset
hwloc_topology_diff_u::hwloc_topology_diff_too_complex	s, CPU and node sets of entire topologies, 145
249	hwloc_topology_get_allowed_nodeset
next, 250	CPU and node sets of entire topologies, 145
obj_depth, 250	hwloc_topology_get_complete_cpuset
obj_index, 250	CPU and node sets of entire topologies, 146
type, 250	hwloc_topology_get_complete_nodeset
hwloc_topology_discovery_support, 251	CPU and node sets of entire topologies, 146
cpukind_efficiency, 251	hwloc_topology_get_depth
disallowed_numa, 251	Object levels, depths and types, 100
disallowed_pu, 251	hwloc_topology_get_flags
numa, 251	Topology Detection Configuration and Query, 123
numa_memory, 252	hwloc_topology_get_support
pu, 252	Topology Detection Configuration and Query, 124
hwloc_topology_dup	hwloc_topology_get_topology_cpuset
Topology Creation and Destruction, 95	CPU and node sets of entire topologies, 146
hwloc_topology_export_synthetic	hwloc_topology_get_topology_nodeset
Exporting Topologies to Synthetic, 167	CPU and node sets of entire topologies, 147
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_IG	N rowRrE_Mopology Yget_type_filter
Exporting Topologies to Synthetic, 166	Topology Detection Configuration and Query, 124
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO	Dh wliot Ropology_get_userdata
Exporting Topologies to Synthetic, 166	Topology Detection Configuration and Query, 124
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_NO	
Exporting Topologies to Synthetic, 166	Topology Creation and Destruction, 95
HWLOC_TOPOLOGY_EXPORT_SYNTHETIC_FLAG_V1	- · · · · · · · ·
Exporting Topologies to Synthetic, 166	Modifying a loaded Topology, 129
hwloc_topology_export_synthetic_flags_e	hwloc_topology_insert_misc_object
Exporting Topologies to Synthetic, 166	Modifying a loaded Topology, 130
hwloc_topology_export_xml	hwloc_topology_is_thissystem
Exporting Topologies to XML, 164	Topology Detection Configuration and Query, 125
HWLOC_TOPOLOGY_EXPORT_XML_FLAG_V1	hwloc_topology_load
Exporting Topologies to XML, 163	Topology Creation and Destruction, 95
hwloc_topology_export_xml_flags_e	hwloc_topology_membind_support, 252
Exporting Topologies to XML, 163	alloc_membind, 252
hwloc_topology_export_xmlbuffer	bind_membind, 252
Exporting Topologies to XML, 164	firsttouch_membind, 253
HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_BINDING	y — — ·
Topology Detection Configuration and Query, 122	get_area_memlocation, 253
HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT	get_proc_membind, 253
Topology Detection Configuration and Query, 121	get_thisproc_membind, 253
HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOWED	get_thisthread_membind, 253
Topology Detection Configuration and Query, 120	interleave_membind, 253
HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM	migrate_membind, 253
Topology Detection Configuration and Query, 120	nexttouch_membind, 253
HWLOC_TOPOLOGY_FLAG_NO_CPUKINDS	set_area_membind, 253
Topology Detection Configuration and Query, 123	set_proc_membind, 253
HWLOC_TOPOLOGY_FLAG_NO_DISTANCES	set_thisproc_membind, 253
Topology Detection Configuration and Query, 122	set_thisthread_membind, 254
HWLOC_TOPOLOGY_FLAG_NO_MEMATTRS	hwloc_topology_misc_support, 254
Topology Detection Configuration and Query, 123	imported_support, 254

hwloc_topology_reconnect	hwloc_type_filter_e
Components and Plugins: Core functions to be	Topology Detection Configuration and Query, 123
used by components, 216	HWLOC_TYPE_FILTER_KEEP_ALL
hwloc_topology_refresh	Topology Detection Configuration and Query, 123
Modifying a loaded Topology, 130	HWLOC_TYPE_FILTER_KEEP_IMPORTANT
hwloc_topology_restrict	Topology Detection Configuration and Query, 123
Modifying a loaded Topology, 130	HWLOC_TYPE_FILTER_KEEP_NONE
hwloc_topology_set_all_types_filter	Topology Detection Configuration and Query, 123
Topology Detection Configuration and Query, 125	HWLOC_TYPE_FILTER_KEEP_STRUCTURE
hwloc_topology_set_cache_types_filter	Topology Detection Configuration and Query, 123
Topology Detection Configuration and Query, 125	hwloc type sscanf
hwloc_topology_set_components	Converting between Object Types and Attributes,
Changing the Source of Topology Discovery, 116	and Strings, 102
hwloc_topology_set_flags	hwloc_type_sscanf_as_depth
Topology Detection Configuration and Query, 125	Converting between Object Types and Attributes,
hwloc_topology_set_icache_types_filter	and Strings, 102
Topology Detection Configuration and Query, 126	HWLOC_TYPE_UNORDERED
hwloc_topology_set_io_types_filter	Object Types, 89
Topology Detection Configuration and Query, 126	hwloc_windows_get_nr_processor_groups
hwloc_topology_set_pid	Windows-specific helpers, 191
Changing the Source of Topology Discovery, 116	hwloc_windows_get_processor_group_cpuset
hwloc_topology_set_synthetic	Windows-specific helpers, 192
Changing the Source of Topology Discovery, 117	William openio Helpere, 182
hwloc_topology_set_type_filter	imported_support
Topology Detection Configuration and Query, 126	hwloc_topology_misc_support, 254
hwloc_topology_set_userdata	index
Topology Detection Configuration and Query, 126	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64
hwloc_topology_set_userdata_export_callback	249
Exporting Topologies to XML, 165	infos
	hwloc_obj, 238
hwloc_topology_set_userdata_import_callback	infos_count
Exporting Topologies to XML, 165	hwloc_obj, 238
hwloc_topology_set_xml Chapping the Source of Tapplagy Discovery 117	init
Changing the Source of Topology Discovery, 117	hwloc component, 228
hwloc_topology_set_xmlbuffer Chapping the Source of Tapplage Discovery 118	instantiate
Changing the Source of Topology Discovery, 118	hwloc_disc_component, 230
hwloc_topology_support, 254	interleave_membind
cpubind, 254	hwloc topology membind support, 253
discovery, 255	Interoperability with glibc sched affinity, 192
membind, 255	hwloc_cpuset_from_glibc_sched_affinity, 192
misc, 255	hwloc_cpuset_to_glibc_sched_affinity, 193
hwloc_topology_t	Interoperability with Linux libnuma bitmask, 190
Topology Creation and Destruction, 94	hwloc cpuset from linux libnuma bitmask, 190
HWLOC_TYPE_DEPTH_BRIDGE	hwloc cpuset to linux libnuma bitmask, 190
Object levels, depths and types, 97	hwloc_nodeset_from_linux_libnuma_bitmask, 190
HWLOC_TYPE_DEPTH_MEMCACHE	hwloc_nodeset_to_linux_libnuma_bitmask, 191
Object levels, depths and types, 97	Interoperability with Linux libnuma unsigned long masks,
HWLOC_TYPE_DEPTH_MISC	188
Object levels, depths and types, 97	
HWLOC_TYPE_DEPTH_MULTIPLE	hwloc_cpuset_from_linux_libnuma_ulongs, 188
Object levels, depths and types, 97	hwloc_cpuset_to_linux_libnuma_ulongs, 189
HWLOC_TYPE_DEPTH_NUMANODE	hwloc_nodeset_from_linux_libnuma_ulongs, 189
Object levels, depths and types, 97	hwloc_nodeset_to_linux_libnuma_ulongs, 189
HWLOC_TYPE_DEPTH_OS_DEVICE	Interoperability with OpenCL, 193
Object levels, depths and types, 97	hwloc_opencl_get_device_cpuset, 193
HWLOC_TYPE_DEPTH_PCI_DEVICE	hwloc_opencl_get_device_osdev, 194
Object levels, depths and types, 97	hwloc_opencl_get_device_osdev_by_index, 194
HWLOC_TYPE_DEPTH_UNKNOWN	hwloc_opencl_get_device_pci_busid, 194
Object levels, depths and types, 97	Interoperability with OpenFabrics, 203
	hwloc iby get device couset, 204

hwloc_ibv_get_device_osdev, 204 hwloc_ibv_get_device_osdev_by_name, 204 Interoperability with OpenGL displays, 202 hwloc_gl_get_display_by_osdev, 202 hwloc_gl_get_display_osdev_by_name, 203 hwloc_gl_get_display_osdev_by_port_device, 203 Interoperability with the CUDA Driver API, 195 hwloc_cuda_get_device_cpuset, 195 hwloc_cuda_get_device_osdev, 195 hwloc_cuda_get_device_osdev_by_index, 196 hwloc_cuda_get_device_pci_ids, 196	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 244 Linux-specific helpers, 186 hwloc_linux_get_tid_cpubind, 187 hwloc_linux_get_tid_last_cpu_location, 187 hwloc_linux_read_path_as_cpumask, 187 hwloc_linux_set_tid_cpubind, 187 local_memory hwloc_obj_attr_u::hwloc_numanode_attr_s, 235 location hwloc_location, 234 logical_index
hwloc_cuda_get_device_pci_ds, 196 Interoperability with the CUDA Runtime API, 197 hwloc_cudart_get_device_cpuset, 197 hwloc_cudart_get_device_osdev_by_index, 197	hwloc_obj, 239 Looking at Ancestor and Child Objects, 136 hwloc_get_ancestor_obj_by_depth, 136 hwloc_get_ancestor_obj_by_type, 137
hwloc_cudart_get_device_pci_ids, 198 hwloc_cudart_get_device_pcidev, 198	hwloc_get_common_ancestor_obj, 137 hwloc_get_next_child, 137
Interoperability with the NVIDIA Management Library, 198	hwloc_obj_is_in_subtree, 138 Looking at Cache Objects, 140
hwloc nvml get device cpuset, 199	hwloc_get_cache_covering_cpuset, 140
hwloc_nvml_get_device_osdev, 199	hwloc_get_cache_type_depth, 140
hwloc_nvml_get_device_osdev_by_index, 199	hwloc_get_shared_cache_covering_obj, 141
Interoperability with the oneAPI Level Zero interface.,	<u>ggot_</u> _oaoaoaoooorogooj,
201	Managing memory attributes, 181
hwloc_levelzero_get_device_cpuset, 201	hwloc_memattr_flag_e, 181
hwloc_levelzero_get_device_osdev, 202	HWLOC_MEMATTR_FLAG_HIGHER_FIRST, 181
Interoperability with the ROCm SMI Management Li-	HWLOC_MEMATTR_FLAG_LOWER_FIRST, 181
brary, 200	HWLOC_MEMATTR_FLAG_NEED_INITIATOR,
hwloc_rsmi_get_device_cpuset, 200	181
hwloc_rsmi_get_device_osdev, 200	hwloc_memattr_get_flags, 181
hwloc_rsmi_get_device_osdev_by_index, 201	hwloc_memattr_get_initiators, 182
io_arity	hwloc_memattr_get_name, 182
hwloc_obj, 238	hwloc_memattr_get_targets, 182
io_first_child	hwloc_memattr_register, 183
hwloc_obj, 238	hwloc_memattr_set_value, 183 membind
is_thissystem	hwloc_topology_support, 255
hwloc_backend, 224	Memory binding, 108
kind	hwloc_alloc, 111
hwloc_distances_s, 231	hwloc_alloc_membind, 111
hwloc_obj_attr_u::hwloc_group_attr_s, 232	hwloc_alloc_membind_policy, 112
Kinds of CPU cores, 184	hwloc_free, 112
hwloc_cpukinds_get_by_cpuset, 185	hwloc get area membind, 112
hwloc_cpukinds_get_info, 185	hwloc_get_area_memlocation, 113
hwloc_cpukinds_get_nr, 185	hwloc_get_membind, 113
hwloc_cpukinds_register, 186	hwloc_get_proc_membind, 114
Kinds of object Type, 138	HWLOC_MEMBIND_BIND, 111
hwloc_obj_type_is_cache, 138	HWLOC_MEMBIND_BYNODESET, 110
hwloc_obj_type_is_dcache, 139	HWLOC_MEMBIND_DEFAULT, 110
hwloc_obj_type_is_icache, 139	HWLOC_MEMBIND_FIRSTTOUCH, 110
hwloc_obj_type_is_io, 139	hwloc_membind_flags_t, 109
hwloc_obj_type_is_memory, 139	HWLOC_MEMBIND_INTERLEAVE, 111
hwloc_obj_type_is_normal, 139	HWLOC_MEMBIND_MIGRATE, 110
1	HWLOC_MEMBIND_MIXED, 111
last_child	HWLOC_MEMBIND_NEXTTOUCH, 1111
hwloc_obj, 239	HWLOC_MEMBIND_NOCPUBIND, 110
linesize	hwloc_membind_policy_t, 110
hwloc_obj_attr_u::hwloc_cache_attr_s, 226	HWLOC_MEMBIND_PROCESS, 110
linkspeed	HWLOC_MEMBIND_STRICT, 110

HWLOC_MEMBIND_THREAD, 110	NETLOC_ERROR_EMPTY
hwloc_set_area_membind, 114	Netloc API, 221
hwloc_set_membind, 115	NETLOC_ERROR_EXISTS
hwloc_set_proc_membind, 115	Netloc API, 221
memory_arity	NETLOC_ERROR_MAX
hwloc_obj, 239	Netloc API, 221
memory_first_child	NETLOC_ERROR_MULTIPLE
hwloc_obj, 239	Netloc API, 221
migrate_membind	NETLOC_ERROR_NOENT
hwloc_topology_membind_support, 253	Netloc API, 221
misc	NETLOC_ERROR_NOT_FOUND
hwloc_topology_support, 255	Netloc API, 221
misc_arity	NETLOC_ERROR_NOT_IMPL
hwloc_obj, 239	Netloc API, 221
misc_first_child	NETLOC_ERROR_NOTDIR
hwloc_obj, 239	Netloc API, 221
Modifying a loaded Topology, 127	NETLOC_SUCCESS
HWLOC_ALLOW_FLAG_ALL, 127	Netloc API, 221
HWLOC_ALLOW_FLAG_CUSTOM, 128	newvalue
HWLOC_ALLOW_FLAG_LOCAL_RESTRICTIONS,	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_
127	248
hwloc_allow_flags_e, 127	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64
hwloc_obj_add_other_obj_sets, 128	249
HWLOC_RESTRICT_FLAG_ADAPT_IO, 128	next
HWLOC_RESTRICT_FLAG_ADAPT_MISC, 128	hwloc_topology_diff_u::hwloc_topology_diff_generic_s,
HWLOC_RESTRICT_FLAG_BYNODESET, 128	246
HWLOC_RESTRICT_FLAG_REMOVE_CPULESS,	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
128	247
HWLOC_RESTRICT_FLAG_REMOVE_MEMLESS,	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
128	250
hwloc_restrict_flags_e, 128	next_cousin
hwloc_topology_alloc_group_object, 128	hwloc_obj, 239
hwloc_topology_allow, 129	next_sibling
hwloc_topology_insert_group_object, 129	hwloc_obj, 239
hwloc_topology_insert_misc_object, 130	nexttouch_membind
hwloc_topology_refresh, 130	hwloc_topology_membind_support, 253
hwloc_topology_restrict, 130	nodeset
name	hwloc_obj, 240
hwloc_disc_component, 230	numa
hwloc info s, 233	hwloc_topology_discovery_support, 251
hwloc_obj, 239	numa_memory
hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_	hwloc_topology_discovery_support, 252
247	
nbobjs	hwloc_obj_attr_u, 242
hwloc distances s, 231	obj_attr
Netloc API, 221	hwloc_topology_diff_u, 251
NETLOC ERROR, 221	obj_depth
NETLOC_ERROR_EMPTY, 221	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
NETLOC_ERROR_EXISTS, 221	247
NETLOC_ERROR_MAX, 221	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
NETLOC_ERROR_MULTIPLE, 221	250
NETLOC ERROR NOENT, 221	obj_index
NETLOC_ERROR_NOT_FOUND, 221	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
NETLOC_ERROR_NOT_IMPL, 221	247
NETLOC_ERROR_NOTDIR, 221	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
NETLOC_SUCCESS, 221	250
NETLOC_ERROR	object
Netloc API, 221	hwloc_location::hwloc_location_u, 234

Object levels, depths and types, 96	HWLOC_OBJ_OSDEV_BLOCK, 90
hwloc get depth type, 97	HWLOC OBJ OSDEV COPROC, 91
hwloc_get_memory_parents_depth, 97	HWLOC_OBJ_OSDEV_DMA, 91
hwloc_get_nbobjs_by_depth, 97	HWLOC_OBJ_OSDEV_GPU, 91
hwloc_get_nbobjs_by_type, 98	HWLOC_OBJ_OSDEV_NETWORK, 91
hwloc_get_next_obj_by_depth, 98	HWLOC OBJ OSDEV OPENFABRICS, 91
hwloc_get_next_obj_by_type, 98	hwloc_obj_osdev_type_e, 90
hwloc_get_obj_by_depth, 98	hwloc_obj_osdev_type_t, 90
hwloc_get_obj_by_type, 99	HWLOC_OBJ_PACKAGE, 91
hwloc get root obj, 99	HWLOC_OBJ_PCI_DEVICE, 92
hwloc_get_type_depth, 99	HWLOC_OBJ_PU, 91
hwloc_get_type_depth_e, 97	hwloc_obj_type_t, 91
hwloc_get_type_or_above_depth, 100	HWLOC_TYPE_UNORDERED, 89
hwloc_get_type_or_below_depth, 100	
hwloc_topology_get_depth, 100	objs
	hwloc_distances_s, 232
HWLOC_TYPE_DEPTH_BRIDGE, 97	oldvalue
HWLOC_TYPE_DEPTH_MEMCACHE, 97	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_
HWLOC_TYPE_DEPTH_MISC, 97	248
HWLOC_TYPE_DEPTH_MULTIPLE, 97	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64
HWLOC_TYPE_DEPTH_NUMANODE, 97	249
HWLOC_TYPE_DEPTH_OS_DEVICE, 97	os_index
HWLOC_TYPE_DEPTH_PCI_DEVICE, 97	hwloc_obj, 240
HWLOC_TYPE_DEPTH_UNKNOWN, 97	osdev
Object Sets (hwloc_cpuset_t and hwloc_nodeset_t), 88	hwloc_obj_attr_u, 242
hwloc_const_cpuset_t, 88	
hwloc_const_nodeset_t, 88	page_types
hwloc_cpuset_t, 88	hwloc_obj_attr_u::hwloc_numanode_attr_s, 235
hwloc_nodeset_t, 88	page_types_len
Object Structure and Attributes, 93	hwloc_obj_attr_u::hwloc_numanode_attr_s, 235
hwloc_obj_t, 93	parent
Object Types, 89	hwloc_obj, 240
hwloc_compare_types, 92	pci
HWLOC OBJ BRIDGE, 92	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225
HWLOC_OBJ_BRIDGE_HOST, 90	pcidev
HWLOC OBJ BRIDGE PCI, 90	hwloc_obj_attr_u, 242
hwloc_obj_bridge_type_e, 90	pcie
hwloc_obj_bridge_type_t, 90	hwloc_cl_device_topology_amd, 227
HWLOC_OBJ_CACHE_DATA, 90	phase
HWLOC OBJ CACHE INSTRUCTION, 90	hwloc disc status, 231
hwloc obj cache type e, 90	phases
— — — ·	hwloc_backend, 224
hwloc_obj_cache_type_t, 90	hwloc disc component, 230
HWLOC_OBJ_CACHE_UNIFIED, 90	prev cousin
HWLOC_OBJ_CORE, 91	• —
HWLOC_OBJ_DIE, 92	hwloc_obj, 240
HWLOC_OBJ_GROUP, 91	prev_sibling
HWLOC_OBJ_L1CACHE, 91	hwloc_obj, 240
HWLOC_OBJ_L1ICACHE, 91	priority
HWLOC_OBJ_L2CACHE, 91	hwloc_disc_component, 230
HWLOC_OBJ_L2ICACHE, 91	private_data
HWLOC_OBJ_L3CACHE, 91	hwloc_backend, 224
HWLOC_OBJ_L3ICACHE, 91	pu
HWLOC_OBJ_L4CACHE, 91	hwloc_topology_discovery_support, 252
HWLOC_OBJ_L5CACHE, 91	
HWLOC_OBJ_MACHINE, 91	raw
HWLOC_OBJ_MEMCACHE, 92	hwloc_cl_device_topology_amd, 227
HWLOC OBJ MISC, 92	Remove distances between objects, 174
HWLOC OBJ NUMANODE, 92	hwloc_distances_release_remove, 174
HWLOC_OBJ_OS_DEVICE, 92	hwloc_distances_remove, 175
200_050_00_52 1102, 02	hwloc_distances_remove_by_depth, 175

hwloc_distances_remove_by_type, 175	subdevice_id
Retrieve distances between objects, 167	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 244
hwloc_distances_get, 169	subkind
hwloc_distances_get_by_depth, 169	hwloc_obj_attr_u::hwloc_group_attr_s, 232
hwloc_distances_get_by_name, 170	subordinate_bus
hwloc_distances_get_by_type, 170	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225
hwloc_distances_get_name, 170	subtype
hwloc_distances_kind_e, 168	hwloc_obj, 240
HWLOC_DISTANCES_KIND_FROM_OS, 168	subvendor_id
HWLOC_DISTANCES_KIND_FROM_USER, 168	hwloc_obj_attr_u::hwloc_pcidev_attr_s, 244
HWLOC_DISTANCES_KIND_HETEROGENEOUS_	· · · · —
168	hwloc_obj, 241
HWLOC_DISTANCES_KIND_MEANS_BANDWIDTH	I, The bitmap API, 150
168	hwloc_bitmap_allbut, 152
HWLOC_DISTANCES_KIND_MEANS_LATENCY,	hwloc_bitmap_alloc, 152
168	hwloc_bitmap_alloc_full, 153
hwloc_distances_release, 171	hwloc_bitmap_and, 153
hwloc_distances_transform, 171	hwloc_bitmap_andnot, 153
hwloc_distances_transform_e, 168	hwloc_bitmap_asprintf, 153
HWLOC_DISTANCES_TRANSFORM_LINKS, 169	1 1 12 1 450
HWLOC_DISTANCES_TRANSFORM_MERGE_SW	hwloc_bitmap_clr_range, 153
169	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
HWLOC_DISTANCES_TRANSFORM_REMOVE_NU	hwloc_bitmap_compare_first, 154
168	
HWLOC_DISTANCES_TRANSFORM_TRANSITIVE	hwloc_bitmap_dup, 154
169	hwloc_bitmap_fill, 154
revision	hwloc_bitmap_first, 155
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 244	hwloc_bitmap_first_unset, 155
secondary_bus	hwloc_bitmap_foreach_begin, 152
hwloc_obj_attr_u::hwloc_bridge_attr_s, 225	hwloc_bitmap_foreach_end, 152
set_area_membind	hwloc_bitmap_free, 155
hwloc_topology_membind_support, 253	hwloc_bitmap_from_ith_ulong, 155
set_proc_cpubind	hwloc_bitmap_from_ulong, 155
hwloc_topology_cpubind_support, 245	hwloc_bitmap_from_ulongs, 155
set_proc_membind	hwloc_bitmap_intersects, 156
hwloc_topology_membind_support, 253	hwloc_bitmap_isequal, 156
set_thisproc_cpubind	hwloc_bitmap_isfull, 156
hwloc_topology_cpubind_support, 245	hwloc_bitmap_isincluded, 156
set_thisproc_membind	hwloc_bitmap_isset, 157
hwloc_topology_membind_support, 253	hwloc_bitmap_iszero, 157
set_thisthread_cpubind	hwloc_bitmap_last, 157
hwloc_topology_cpubind_support, 245	hwloc_bitmap_last_unset, 157
set_thisthread_membind	hwloc_bitmap_list_asprintf, 157
hwloc_topology_membind_support, 254	hwloc_bitmap_list_snprintf, 158
set_thread_cpubind	hwloc_bitmap_list_sscanf, 158
hwloc_topology_cpubind_support, 245	hwloc_bitmap_next, 158
Sharing topologies between processes, 209	hwloc_bitmap_next_unset, 158
hwloc_shmem_topology_adopt, 210	hwloc_bitmap_not, 159
hwloc_shmem_topology_get_length, 210	hwloc_bitmap_nr_ulongs, 159
hwloc_shmem_topology_write, 211	hwloc_bitmap_only, 159
sibling_rank	hwloc_bitmap_or, 159
hwloc_obj, 240	hwloc_bitmap_set, 159
size	hwloc_bitmap_set_ith_ulong, 160
hwloc_obj_attr_u::hwloc_cache_attr_s, 226	hwloc_bitmap_set_range, 160
hwloc_obj_attr_u::hwloc_numanode_attr_s::hwloc_n	
235	hwloc_bitmap_snprintf, 160
string	hwloc_bitmap_sscanf, 160
hwloc_topology_diff_obj_attr_u, 248	hwloc_bitmap_t, 152

hwloc_bitmap_taskset_asprintf, 161	HWLOC_TYPE_FILTER_KEEP_STRUCTURE,
hwloc_bitmap_taskset_snprintf, 161	123
hwloc_bitmap_taskset_sscanf, 161	Topology differences, 205
hwloc_bitmap_to_ith_ulong, 161	hwloc_topology_diff_apply, 207
hwloc_bitmap_to_ulong, 161	hwloc_topology_diff_apply_flags_e, 206
hwloc_bitmap_to_ulongs, 162	HWLOC_TOPOLOGY_DIFF_APPLY_REVERSE,
hwloc_bitmap_weight, 162	206
hwloc_bitmap_xor, 162	hwloc_topology_diff_build, 207
hwloc_bitmap_zero, 162	hwloc_topology_diff_destroy, 208
hwloc_const_bitmap_t, 152	hwloc_topology_diff_export_xml, 208
too_complex	hwloc_topology_diff_export_xmlbuffer, 208
hwloc_topology_diff_u, 251	hwloc_topology_diff_load_xml, 209
Topology Creation and Destruction, 93	hwloc_topology_diff_load_xmlbuffer, 209
hwloc_topology_abi_check, 94	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR, 207
hwloc_topology_check, 94	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_INFO,
hwloc_topology_destroy, 95	206
hwloc_topology_dup, 95	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_NAME,
hwloc_topology_init, 95	206
hwloc_topology_load, 95	HWLOC_TOPOLOGY_DIFF_OBJ_ATTR_SIZE,
hwloc_topology_t, 94	206
Topology Detection Configuration and Query, 118	hwloc_topology_diff_obj_attr_type_e, 206
HWLOC_TOPOLOGY_FLAG_DONT_CHANGE_BIN	
122	hwloc_topology_diff_t, 206
HWLOC_TOPOLOGY_FLAG_IMPORT_SUPPORT, 121	HWLOC_TOPOLOGY_DIFF_TOO_COMPLEX, 207
HWLOC_TOPOLOGY_FLAG_INCLUDE_DISALLOW	VED, hwloc_topology_diff_type_e, 207
120	hwloc_topology_diff_type_t, 206
HWLOC_TOPOLOGY_FLAG_IS_THISSYSTEM,	total_memory
120	hwloc_obj, 241
HWLOC_TOPOLOGY_FLAG_NO_CPUKINDS,	type
123	hwloc_cl_device_topology_amd, 227
HWLOC_TOPOLOGY_FLAG_NO_DISTANCES,	hwloc_component, 229
122	hwloc_location, 234
HWLOC_TOPOLOGY_FLAG_NO_MEMATTRS,	hwloc_obj, 241
123	hwloc_obj_attr_u::hwloc_cache_attr_s, 226
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_CPUI	
122	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_generi
HWLOC_TOPOLOGY_FLAG_RESTRICT_TO_MEM	
122	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_string_
HWLOC_TOPOLOGY_FLAG_THISSYSTEM_ALLO\	-
121	hwloc_topology_diff_obj_attr_u::hwloc_topology_diff_obj_attr_uint64
hwloc_topology_flags_e, 119	249
hwloc_topology_get_flags, 123	hwloc_topology_diff_u::hwloc_topology_diff_generic_s,
hwloc_topology_get_support, 124	246
hwloc_topology_get_type_filter, 124	hwloc_topology_diff_u::hwloc_topology_diff_obj_attr_s,
hwloc_topology_get_userdata, 124	247
hwloc_topology_is_thissystem, 125	hwloc_topology_diff_u::hwloc_topology_diff_too_complex_s,
hwloc_topology_set_all_types_filter, 125	250
hwloc_topology_set_cache_types_filter, 125	uint64
hwloc_topology_set_flags, 125	hwloc_topology_diff_obj_attr_u, 248
hwloc_topology_set_icache_types_filter, 126	unused
hwloc_topology_set_io_types_filter, 126 hwloc_topology_set_type_filter, 126	hwloc_cl_device_topology_amd, 227
hwloc_topology_set_type_filter, 126 hwloc_topology_set_userdata, 126	upstream
hwloc_type_filter_e, 123	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225
HWLOC_TYPE_FILTER_KEEP_ALL, 123	upstream_type
HWLOC_TYPE_FILTER_KEEP_IMPORTANT, 123	hwloc_obj_attr_u::hwloc_bridge_attr_s, 225
HWLOC_TYPE_FILTER_KEEP_NONE, 123	userdata
200 =	hwloc_obj, 241

```
value
hwloc_info_s, 233
values
hwloc_distances_s, 232
vendor_id
hwloc_obj_attr_u::hwloc_pcidev_attr_s, 244

Windows-specific helpers, 191
hwloc_windows_get_nr_processor_groups, 191
hwloc_windows_get_processor_group_cpuset,
192
```