

Complex Analysis of Askaryan Radiation: Towards UHE- ν energy Reconstruction via the Hilbert Envelope of Observed Signals

Jordan C. Hanson* and Raymond Hartig
Department of Physics and Astronomy, Whittier College
 (Dated: July 10, 2025)

This is a work in progress.

Keywords: Ultra-high energy neutrino; Askaryan radiation; Mathematical physics

I. INTRODUCTION

The introduction.

II. UNITS, DEFINITIONS, AND CONVENTIONS

The units.

III. COLLECTION OF MAIN RESULTS

Here is a list of the basic results and ideas for this paper.

- Let the signal model $s(t)$ be

$$s(t) = -E_0 t e^{-\frac{1}{2}(t/\sigma_t)^2} \quad (1)$$

This is the off-cone field equation from [1]. The parameter σ_t is the pulse width, and it depends two quantities: the longitudinal length of the UHE- ν -induced cascade, and the angle at which the cascade is observed relative to the Cherenkov angle. The parameter E_0 is the amplitude normalization, and it depends on two parameters: σ_t , and ω_0 , the cutoff frequency from the cascade form factor. In Sec. III, E_0 and σ_t will be treated as constants, since neither depends on time. In Sec. IV, the implications of these dependencies will be explored.

- Let $\widehat{s}(t)$ represent the Hilbert transform of $s(t)$. The *analytic signal* of $s(t)$ is

$$s_a(t) = s(t) + j\widehat{s}(t) \quad (2)$$

The magnitude of the analytic signal, $|s_a(t)|$, is the *envelope* of the signal. The Hilbert transform $\widehat{s}(t)$ is equivalent to the convolution of $s(t)$ and the tempered distribution $h(t) = 1/(\pi t)$.

- Let $S(f)$ be the Fourier transform of $s(t)$. The Fourier transform of the analytic signal is

$$\mathcal{F}\{s_a(t)\}_f = S_a(f) = S(f)(1 + \text{sgn } f) \quad (3)$$

The sign function, sgn gives -1 if $f < 0$, 0 if $f = 0$, and 1 if $f > 0$.

- Taking the inverse Fourier transform of Eq. 3, the analytic signal may be written in terms of $S(f)$:

$$s_a(t) = 2 \int_0^\infty S(f) e^{2\pi j f t} df \quad (4)$$

- The Fourier transform of Eq. 1 is

$$S(f) = E_0 \sigma_t^3 (2\pi)^{3/2} j f e^{-2\pi^2 f^2 \sigma_t^2} \quad (5)$$

- Using the gaussian spectral width σ_f from [2], and the gaussian width of $s(t)$ from [1], it was shown in [1] that the uncertainty principle holds for off-cone signals:

$$\sigma_t \sigma_f \geq \frac{1}{2\pi} \quad (6)$$

The equality is reached in the limit the far-field parameter limits to zero: $\eta \rightarrow 0$. This makes the signal spectrum

$$S(f) = E_0 \sigma_t^3 (2\pi)^{3/2} j f e^{-\frac{1}{2}(f/\sigma_f)^2} \quad (7)$$

Inserting $S(f)$ into Eq. 4, $s_a(t)$ is

$$s_a(t) = \frac{E_0 \sigma_t^3 (2\pi)^{3/2}}{\pi} \frac{d}{dt} \int_0^\infty e^{-\frac{1}{2}(f/\sigma_f)^2} e^{2\pi j f t} df \quad (8)$$

- Let $k^2/4 = \frac{1}{2}(f/\sigma_f)^2$, and $x = t/(\sqrt{2}\sigma_t)$. Equation 8 can be broken into real and imaginary parts:

$$s_a(t) = \frac{E_0 \sigma_t}{\sqrt{2\pi}} \frac{dI}{dx} \quad (9)$$

$$\Re\{I\} = \int_0^\infty e^{-k^2/4} \cos(kx) dk \quad (10)$$

$$\Im\{I\} = \int_0^\infty e^{-k^2/4} \sin(kx) dk \quad (11)$$

The real part of I is even, so it can be extended to $(-\infty, \infty)$ if it is multiplied by $1/2$. The result is

$$\Re\{I\} = \sqrt{\pi} e^{-x^2} \quad (12)$$

The imaginary part of I is proportional to *Dawson's integral*, $D(x)$ [3]:

$$\Im\{I\} = 2D(x) \quad (13)$$

*Electronic address: jhanson2@whittier.edu

- The overall analytic signal, $s_a(t)$, is

$$s_a(t) = -E_0 \left(t e^{-\frac{1}{2}(t/\sigma_t)^2} - \frac{2j\sigma_t}{\sqrt{2\pi}} \frac{dD(x)}{dx} \right) \quad (14)$$

The signal envelope is $|s_a(t)|$. It is important to note that, though $D(x)$ is not evaluated analytically, a high-precision algorithm for computing $D(x)$ was given in [4]. Note that $s_a(0) \neq 0$, since $dD(x)/dx = 1 - 2xD(x)$.

- Signal data in detectors designed to observe Askaryan pulses is equivalent to the convolution of the signal and detector response functions. Signal models are convolved with measured detector responses to create *signal templates*. Signal templates are cross-correlated with observed data to identify UHE- ν signals. The oscillations of signal templates and observed data can introduce various uncertainties when cross-correlated. This problem intensifies when the signal-to-noise ratio between Askaryan pulse data and thermal noise decreases. To reduce these uncertainties, the Hilbert envelope of observed signals is used in cross-correlations instead of the original signals. We seek an analytic equation for the Hilbert envelope of the data. That is, we seek the envelope of the convolution of the analytic signal model with a typical detector response. The RLC damped oscillator is a standard circuit model for the RF dipole antennas used in RNO-G and the proposed IceCube Gen2 [5–7].
- There are two paths to calculating the final result. The first option involves three steps. First, the detector response, $r(t)$ is convolved with $s(t)$. Second, the analytic signal of the result is found. Third, the magnitude of the analytic signal is computed, which can be compared to envelopes of observed signals. The second option involves computing the envelope of the convolution of $r(t)$ with $s(t)$ directly from $s_a(t)$ and $r_a(t)$.
- Let $s(t) * r(t)$ represent the convolution of $s(t)$ and $r(t)$. Let the envelope of the convolution be $\mathcal{E}_{s*r}(t)$. $\mathcal{E}_{s*r}(t)$, $s_a(t)$, and $r_a(t)$ are related by

$$\mathcal{E}_{s*r}(t) = \frac{1}{2} |s_a(t) * r_a(t)| \quad (15)$$

The proof of Eq. 15 is based on two ideas. First, the Hilbert transform of a function $s(t)$ is equivalent to convolving it with the “tempered distribution” $h(t) = 1/(\pi t)$. Second, computing the Hilbert transform twice yields the original function, multiplied by -1 : $h * h * s = -s$. Given the definitions of the analytic signal and the Hilbert transform,

$$(s * r)_a(t) = s * r + j \widehat{s * r} \quad (16)$$

$$\mathcal{E}_{s*r}(t) = |s * r + j s * r * h| \quad (17)$$

However,

$$r_a * s_a = (r + j\hat{r}) * (s + j\hat{s}) \quad (18)$$

$$r_a * s_a = r * s + j r * \hat{s} + j \hat{r} * s - \hat{r} * \hat{s} \quad (19)$$

$$r_a * s_a = r * s - r * h * s * h + 2jh * r * s \quad (20)$$

$$r_a * s_a = r * s - h * h * r * s + 2jh * r * s \quad (21)$$

$$r_a * s_a = 2r * s + 2jh * r * s \quad (22)$$

Multiplying both sides 1/2 and taking the magnitude completes the proof:

$$\frac{1}{2} |r_a * s_a| = |r * s + jh * r * s| = \mathcal{E}_{s*r}(t) \quad (23)$$

- Assume that a signal arrives in an RLC damped oscillator at $t = 0$. For $t \geq 0$, the impulse response and corresponding analytic signal are

$$r(t) = R_0 e^{-2\pi\gamma_f t} \cos(2\pi f_0 t) \quad (24)$$

$$r_a(t) = R_0 e^{-2\pi\gamma_f t} e^{2\pi j f_0 t} \quad (25)$$

The parameters γ_f and f_0 are the *decay constant* that corresponds to the *fall time* of the output signal, and the resonance frequency. Note that the envelope of $r(t)$, $|r_a(t)|$, is $R_0 \exp(-2\pi\gamma_f t)$, as expected. To prove Eq. 25, first compute the Fourier transform of $r(t)$:

$$R(f) = \frac{R_0}{4\pi j} \left(\frac{1}{f - z_+} + \frac{1}{1 - z_-} \right) \quad (26)$$

$$z_+ = f_0 + j\gamma_f \quad (27)$$

$$z_- = -f_0 + j\gamma_f \quad (28)$$

Given Eq. 4, the procedure to find $r_a(t)$ is to multiply the *negative* frequency components by 0 and the *positive* frequency components by 2, and take the inverse Fourier transform. The inverse Fourier transform may be completed by extension to the complex plane using the upper infinite semi-circle as a contour, and applying Jordan’s lemma. The residue from the pole at z_+ drives the final result.

- The goal is now to apply Eq. 15 by convolving $s_a(t)$ with $r_a(t)$. The calculation may be split into two parts: $r_a(t) * \Re\{s_a(t)\}$, and $r_a(t) * \Im\{s_a(t)\}$. Let $u(t)$ represent the Heaviside step function. Starting with $r_a(t) * \Re\{s_a(t)\}$:

$$r_a(t) * \Re\{s_a(t)\} = R_0 e^{2\pi j f_0 t} e^{-2\pi\gamma_f t} u(t) * \left(-E_0 t e^{-\frac{1}{2}(t/\sigma_t)^2} \right) \quad (29)$$

Let $x = t/(\sqrt{2}\sigma_t)$, $y = \tau/(\sqrt{2}\sigma_t)$, and $z = (2\pi j f_0 - 2\pi\gamma)\sqrt{2}\sigma_t$. Changing variables while accounting for the relationship between $u(t)$, x , and y , gives

$$r_a(t) * \Re\{s_a(t)\} = -2R_0 E_0 \sigma_t^2 \int_{-\infty}^x e^{z(x-y)} y e^{-y^2} dy \quad (30)$$

Note that the units for the convolution of $r(t)$ and $s(t)$ correspond to $R_0 E_0 \sigma_t^2$. Let $u = x - y$, so that $du = -dy$. The result is

$$r_a(t) * \Re\{s_a(t)\} = 2R_0 E_0 \sigma_t^2 \left(\frac{dI(x, z)}{dz} - xI(x, z) \right) \quad (31)$$

where

$$I(x, z) = \int_0^\infty e^{zu} e^{-(u-x)^2} du \quad (32)$$

Let $b = x + \frac{1}{2}z$. Completing the square in the exponent and substituting $k = u - b$ gives

$$\begin{aligned} I(x, z) &= e^{-x^2} e^{b^2} \int_{-b}^\infty e^{-k^2} dk \\ &= \frac{\sqrt{\pi}}{2} e^{-x^2} e^{b^2} \operatorname{erfc}(-b) \end{aligned} \quad (33)$$

Let $b = jq$, and $w(q)$ be the *Faddeeva function* [3]. The integral becomes

$$I(x, z) = \frac{\sqrt{\pi}}{2} e^{-x^2} w(q) \quad (34)$$

The chain rule is required to find dI/dz :

$$\frac{dI}{dz} = \frac{dI}{dq} \frac{dq}{dz} = - \left(\frac{j}{2} \right) \frac{dI}{dq} \quad (35)$$

The final result is

$$\begin{aligned} r_a(t) * \Re\{s_a(t)\} &= \\ &- \sqrt{\pi} R_0 E_0 \sigma_t^2 \left(x e^{-x^2} w(q) + \left(\frac{j}{2} \right) e^{-x^2} \frac{dw(q)}{dq} \right) \end{aligned} \quad (36)$$

- Turning to the convolution of $r_a(t)$ with $\Im(s_a)$,

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &(R_0 e^{2\pi j f_0 t} e^{-2\pi \gamma t} u(t)) * \left(\frac{2E_0 \sigma_t^2}{\sqrt{\pi}} \frac{dD(t/\sqrt{2}\sigma_t)}{dt} \right) \end{aligned} \quad (37)$$

Note that $f'(t) * g(t) = f(t) * g'(t) = (f(t) * g(t))'$. Thus,

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &\frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 \frac{d}{dt} \left(e^{2\pi j f_0 t} e^{-2\pi \gamma t} u(t) * D(t/\sqrt{2}\sigma_t) \right) \end{aligned} \quad (38)$$

Accounting for the step function in the convolution gives

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &\frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 \frac{d}{dt} \int_{-\infty}^t e^{(2\pi j f_0 - 2\pi \gamma)(t-\tau)} D(\tau/\sqrt{2}\sigma_t) d\tau \end{aligned} \quad (39)$$

Adopting the earlier definitions of x , y , and z gives

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &\frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 \frac{d}{dx} \int_{-\infty}^x e^{z(x-y)} D(y) dy \end{aligned} \quad (40)$$

Using the fundamental theorem of calculus, and the limiting cases of $D(x)$,

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &\frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 \left(D(x) + z \int_{-\infty}^x e^{z(x-y)} D(y) dy \right) \end{aligned} \quad (41)$$

Let $u = x - y$, $z = -k$, and note that $D(x)$ is an odd function. These substitutions give

$$\begin{aligned} r_a(t) * \Im\{s_a(t)\} &= \\ &\frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 \left(D(x) + k \int_0^\infty e^{-ku} D(u-x) du \right) \end{aligned} \quad (42)$$

The remaining integral is the Laplace transform of the shifted Dawson function, $\mathcal{L}\{D(u-x)\}_k$. The final result is

$$r_a(t) * \Im\{s_a(t)\} = \frac{2}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 (D(x) + k \mathcal{L}\{D(u-x)\}_k) \quad (43)$$

Though a closed analytic form for $\mathcal{L}\{D(u-x)\}_k$ is elusive, finishing this calculation through numerical integration is straightforward.

- Combining Eq. 36 and Eq. 43 gives $r_a(t) * s_a(t)$, since

$$r_a(t) * s_a(t) = r_a(t) * \Re\{s_a(t)\} + j r_a(t) * \Im\{s_a(t)\} \quad (44)$$

which yields

$$\begin{aligned} r_a(t) * s_a(t) &= \\ &- \sqrt{\pi} R_0 E_0 \sigma_t^2 \left(x e^{-x^2} w(q) + \left(\frac{j}{2} \right) e^{-x^2} \frac{dw(q)}{dq} \right) + \\ &\frac{2j}{\sqrt{\pi}} R_0 E_0 \sigma_t^2 (D(x) + k \mathcal{L}\{D(u-x)\}_k) \end{aligned} \quad (45)$$

The units of convolution should be $R_0 E_0 \sigma_t^2$, and each term in Eq. 45 has these units. Remember that the relationship between q and x is given by

$$q = -jb = -j \left(x + \frac{z}{2} \right) \quad (46)$$

Taking the magnitude of Eq. 45, and multiplying by $1/2$, yields the **Hilbert envelope of the convolution of $s(t)$ with $r(t)$** :

$$\mathcal{E}_{r*s}(t) = \frac{1}{2} |r_a(t) * s_a(t)| \quad (47)$$

- It is important to note that the convolution of $s(t)$ and $r(t)$ may be done analytically in the time-domain:

$$s * r = \int_{-\infty}^{\infty} s(t - \tau)r(\tau)d\tau \quad (48)$$

Inserting the definitions of $s(t)$ and $r(t)$,

$$s * r = -E_0 R_0 \int_{-\infty}^{\infty} (t - \tau) e^{-\frac{1}{2} \left(\frac{t - \tau}{\sigma_t} \right)^2} \Re \{ e^{2\pi j f_0 \tau} e^{-2\pi \gamma \tau} \} u(\tau) d\tau \quad (49)$$

Using the previous definitions of x , y , and z gives

$$s * r = -2R_0 E_0 \sigma_t^2 \int_0^{\infty} (x - y) e^{-(x - y)^2} \Re \{ e^{zy} \} dy \quad (50)$$

Note that the $\Re\{\}$ operator can encompass the whole integral, since $s(t)$ is real. Splitting the integral and employing differentiation under the equals sign yields

$$s * r = -2R_0 E_0 \sigma_t^2 \Re \left\{ x e^{-x^2} I(x, z) - \frac{1}{2} e^{-x^2} \frac{dI(x, z)}{dx} \right\} \quad (51)$$

with

$$I(x, z) = \int_0^{\infty} e^{-y^2 + (2x + z)y} dy \quad (52)$$

As above, let $b = x + \frac{1}{2}z$, and $b = jq$. In a procedure resembling the calculation for $r_a(t) * \Re\{s_a(t)\}$, the result for $I(x, z)$ is

$$I(x, z) = \frac{\sqrt{\pi}}{2} w(q) \quad (53)$$

where $w(q)$ is the Faddeeva function. Note that the Faddeeva function is *entire*, meaning the $\Re\{\}$ operator and differentiation commute. Inserting this result into Eq. 51, and distributing the $\Re\{\}$ operator to the instances of $I(x, z)$, gives

$$s * r = -\sqrt{\pi} R_0 E_0 \sigma_t^2 \left(x e^{-x^2} \Re \{ w(q) \} - \frac{1}{2} e^{-x^2} \frac{d\Re \{ w(q) \}}{dx} \right) \quad (54)$$

From the definition of q and the chain rule, $dw(q)/dx = -j dw(q)/dq$, and $dw(q)/dq = -2qw(q) + 2j/\sqrt{\pi}$ [3]. The final result is left in terms of the real part of the Faddeeva function, which may be computed using the *Voigt function* $U(x, t)$ [1, 3].

$$s * r = -\sqrt{\pi} R_0 E_0 \sigma_t^2 \left(x e^{-x^2} \Re \{ w(q) \} + \left(\frac{j}{2} \right) e^{-x^2} \frac{d\Re \{ w(q) \}}{dq} \right) \quad (55)$$

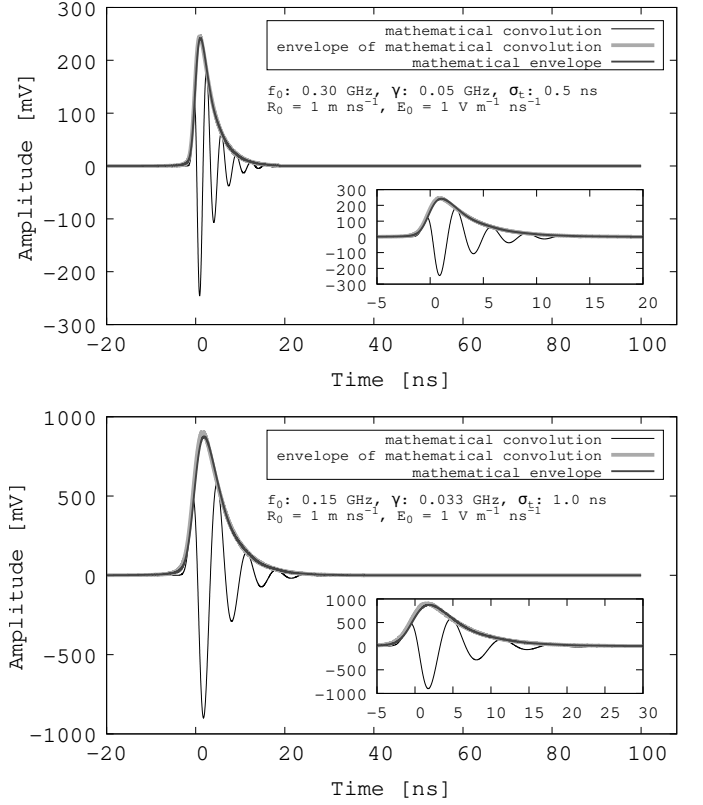


FIG. 1: (Top) The thin black line represents $s(t) * r(t)$. The light gray envelope represents the envelope of $s(t) * r(t)$ computed with the Python3 SciPy function `scipy.special.hilbert`. The dark gray envelope represents Eqs. 45-47. (Bottom) Same as top, for different parameter values.

- To illustrate the accuracy and efficiency of the model, Eq. 45-47 and 55, are shown in Fig. 1.
- To demonstrate that *numerical convolution* of $s(t)$ and $r(t)$ produces the same results as the *mathematical convolution* of $s(t)$ and $r(t)$ (Eq. 55), the corresponding waveforms are shown in Fig. 2.

IV. THE AMPLITUDE OF THE SIGNAL MODEL, $s(t)$

- The result for $\mathcal{E}_{r*s}(t)$, Eqs. 45 and 47, depends on the model for $s(t)$, Eq. 1. The parameters E_0 and σ_t in Eq. 1 were held constant in Sec. III, because neither depends on time. The full expression for $s(t)$ was first derived by the authors of [1]:

$$s(t) = -\frac{E_0 \omega_0 \sin(\theta)}{8\pi p} t e^{-\frac{t^2}{4p} + p \omega_0^2} \operatorname{erfc}(\sqrt{p} \omega_0) \quad (56)$$

The parameters of Eq. 56 are defined in Tab. I. There is a deep connection between $s(t)$, Eqs. 45-

Variable	Definition	Units	Typical Value
c	speed of light	meter GHz	0.299792458
θ_C	Cherenkov angle	radians	0.9739
θ	viewing angle from cascade axis	radians	$ \theta - \theta_C = \mathcal{O}(1)$ degree
a	longitudinal length of cascade (see [8])	meter	≈ 4.2 at $\approx 10^{16}$ eV
n_{max}	peak excess charged cascade particles (see [8])	none	$\mathcal{O}(10^6)$ at $\approx 10^{16}$ eV
E_0	$\propto n_{max}a$ (see [8])	$\text{V m}^{-1} \text{ GHz}^{-2}$	≈ 1.2 at $\approx 10^{16}$ eV
p	$\frac{1}{2}(a/c)^2 (\cos \theta - \cos \theta_C)^2$ (see [1])	ns^2	depends on θ , $\sqrt{2p} \approx 1$ ns
ω_0	$\sqrt{\frac{2}{3}}(c\sqrt{2\pi}\rho_0)/(n \sin \theta)$ (see [2])	GHz	depends on θ , $\omega_0/(2\pi)$ is $\mathcal{O}(1)$ GHz
$\sqrt{2\pi}\rho_0$	lateral ICD width (see [2])	m^{-1}	$\approx 20 \text{ m}^{-1}$ at $\approx 10^{17}$ eV
n	index of refraction, ice	none	1.778 ± 0.006 for RF bandwidth

TABLE I: things.

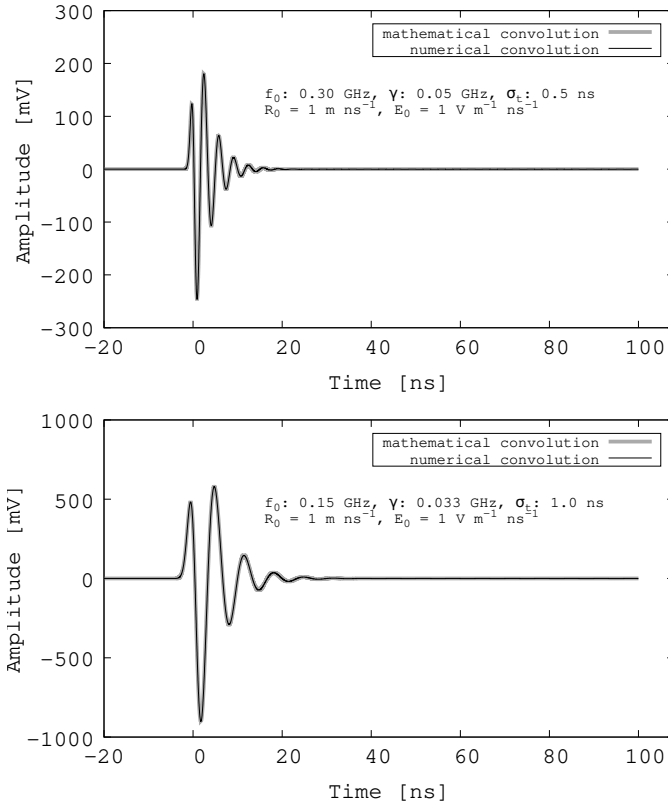


FIG. 2: (Top) The thin black line represents $s(t) * r(t)$, produced using the Python3 SciPy function `scipy.signal.convolve`. The dark gray line represents Eq. 55. (Bottom) Same as top, for different parameter values.

47, and the natural logarithm of the UHE- ν cascade energy, $\ln(E_C/E_{\text{crit}})$. The authors of [1] have shown that

$$a\Delta\theta = \frac{c\sigma_t}{\sin \theta_C} \quad (57)$$

V. CONCLUSION

The conclusion.

Appendix A: Details

The details.

-
- [1] J. C. Hanson and R. Hartig, Phys. Rev. D **105**, 123019 (2022), URL <https://link.aps.org/doi/10.1103/PhysRevD.105.123019>.
[2] J. C. Hanson and A. L. Connolly, Astroparticle Physics **91**, 75 (2017), ISSN 0927-6505.
[3] DLMF, *NIST Digital Library of Mathematical Functions*, <http://dlmf.nist.gov/>, Release 1.1.1 of 2021-03-15, f. W. J.

- Olver, A. B. Olde Daalhuis, D. W. Lozier, B. I. Schneider, R. F. Boisvert, C. W. Clark, B. R. Miller, B. V. Saunders, H. S. Cohl, and M. A. McClain, eds., URL <http://dlmf.nist.gov/>.
[4] G. B. Rybicki, Computers in Physics **3**, 85 (1989), ISSN 0894-1866.
[5] I. Kravchenko et al, Physical Review D **85**, 062004 (2012),

- ISSN 2470-0029, 1106.1164.
- [6] J. A. Aguilar, P. Allison, J. J. Beatty, H. Bernhoff, D. Besson, N. Bingenfors, O. Botner, S. Buitink, K. Carter, B. A. Clark, et al., *Journal of Instrumentation* **16**, P03025 (2021), 2010.12279.
- [7] The IceCube-Gen2 Collaboration, *arXiv* (2020), 2008.04323.
- [8] R. V. Buniy and J. P. Ralston, *Physical Review D* **65** (2001), ISSN 2470-0029.